MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY: 10547240
(TARGET COUNTER, MEMORY AND READOUT - A4)

This amendment forms a part of Military Specification MIL-C-60579(MU) dated 18 June 1970.

Paragraph 3.7.2: Third line, delete: "Pin K" and substitute "Pin k".

Paragraph 3.7.2.1.1: Second and third line, delete: "DC ground potential (+0.1 ± 0.1V)" and substitute "DC potential (less than 0.3V)".

Paragraph 3.7.2.1.2a: Delete: "a ground potential (0.1 ± 0.1V)" and substitute "a potential (less than 0.3V)"; delete "135 ± 5 microsec and substitute "125 ± 25 microsec"; delete "+3.1 ± 0.1V" and substitute "3.2 ± .5V".

Paragraph 3.7.2.1.2b: Delete paragraph and substitute "b. Pin T shall rise from its initial state of less than 0.3VDC to the following levels:

1.4 ± .35VDC at 70°F
1.2 ± .40VDC at 155°F
1.65 ± .32VDC at -65°F"

Paragraph 3.7.2.1.3, third line, delete: "0.1 ± 0.1V" and substitute "less than 0.3V".

Paragraph 3.7.2.1.4: Delete paragraph and substitute:

"3.7.2.1.4 Test start input.- Application of a positive 1.1V ± 0.1V pulse of 2.0 ± 0.5 microsec duration to pin R shall cause pin T to rise to the DC level specified in 3.7.2.1.2b from its initial state less than 0.3V and pin N to fall from its initial DC level of +4V ± 0.2V to a level less than 0.3VDC."

Paragraph 3.7.2.2: Delete paragraph and substitute:

"3.7.2.2 Range mono. disable input.- Application of a DC level of +1.2V ± 0.1V to Pin X shall cause pin j to take on a DC level less than 0.3V."

Paragraph 3.7.2.3, third line, delete: "(+0.1 ± 0.1V)" and substitute "(less than 0.3V)"; sixth line, delete: "pulse of similar duration (100 nanosec)" and substitute "pulse duration (55 ± 10 nanosec)"; seventh line, delete: "1.1 ± 0.1V" and substitute "1 ± .4V".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

Paragraph 3.7.2.4, first line: insert the following words in front of the words "this assembly": "with pin X maintained at a DC level of 1.2 ± 0.2V"; fourteenth line, delete: "potential of 1.2V ± 0.2V" and substitute "potential of 70°F: 1.64 ± .4V, 155°F: 1.4 ± .4V, -65°F: 1.8 ± .4V"; fifteenth line, delete: "1.2V ± 0.2V and substitute "2.9 ± .4V; seventeenth line, delete: "1.2 ± 0.2V and a negative pulse of 1.4V ± 0.2V amplitude", and substitute "70°F: 1.8 ± .4V, 155°F: 1.6 ± .35V, -65°F: 1.9 ± .35V and a negative pulse of 1.7V ± .5V amplitude"; eighteenth line, delete: "30 microsec" and substitute "10 ± 5 microseconds"; twenty first line, delete: "1.2V ± 0.2V" and substitute "1.7 ± .5V; twenty second line, delete" 30 microsec", and substitute "10 ± 5 microseconds".

Paragraph 4.3.4, delete paragraph and substitute:

"4.3.4 Certification.- Certification shall include test data and results for the characteristics specified below. Certification shall be provided prior to performing final acceptance inspection, and remain in effect throughout the performance of the contract. This does not relieve the contractor from inspection throughout the contract production, including recording data and results therefrom. Recorded data and results shall be made available to the Government upon request. A new certification shall be required whenever any change(s) occur in materials, manufacturing processes and techniques previously certified. Exception to the above may be provided by certificate of compliance (COC) for those items for which the contractor cannot obtain recorded data, i.e., off the shelf items. This exception shall not apply without prior approval by Frankford Arsenal. Request for approval shall include item name, part number, identification of supplier, and justification for exception; and shall be forwarded to Commander, Frankford Arsenal, ATTN: SARFA-QAF."

* Paragraph 4.6.2, second sentence: Delete "Procedure II" and substitute "Procedure I".

* Paragraph 4.6.3: Delete fourth sentence and substitute "The vibration Test shall be performed in accordance with Figure 514-1, Curve C of MIL-STD-810, except double amplitude shall not exceed .036 inch".

Paragraph 4.6.5.1: Second and third line, delete: DC ground potential (0.1 ± 0.1V)" and substitute "DC potential less than 0.3V".

Paragraph 4.6.5.2: Delete paragraph and substitute:

"4.6.5.2 Start input.- Apply a positive 1.7 ± 0.1V pulse of 1 ± 0.5 microsec duration to pin b. Pin j shall take on a potential less than 0.3V for a period of 125 ± 25 microsec and then return to a DC level of 3.2 ± 0.5V. Pin T shall rise to a DC level of 1.4 ± .35V at 70°F; 1.2 ± .40V at 155°F; 1.65 ± .32V at 65°F; Pin N shall fall to a DC potential less than 0.3V."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

Paragraph 4.6.5.3, second and third line, delete: "DC potential of +0.1 ± 0.1V" and substitute "DC potential less than 0.3V".

Paragraph 4.6.5.4, delete paragraph and substitute:

"4.6.5.4 Test start input.- Apply a positive 1.1V ± 0.1V pulse of 2.0 ± 0.5 microsec duration to pin R. Pin T shall assume a DC level of 1.4 ± .35V at 70°F; 1.2 ± .40V at 155°F; and 1.65 ± .32V at -65°F, and Pin N shall assume a DC level less than 0.3V."

Paragraph 4.6.5.5: Second line, delete "DC ground level (+0.1 ± 0.1V)" and substitute "DC level less than 0.3V".

Paragraph 4.6.5.6: Delete paragraph and substitute:


"4.6.5.6 Stop pulse detection.- Apply the +1.2 ± 0.1V DC level to pin X and a DC level of +2.5 ± 0.2V to pin 0. Apply a 100 nsec negative pulse falling from 5V to ground to pin c. A positive pulse 55 ± 10 nsec wide and 1.0 ± .4V in amplitude shall appear at pin M. Pin T shall be at a DC level less than 0.3V and pin N shall have a DC potential of +4V ± 0.2V. Remove the positive potential from pin 0 and connect pin 0 to ground. Apply a pulse of 1.7 ± 0.1V amplitude and 1 ± 0.1 microsec duration to pin b. Pin T goes to 1.4 ± .35V at 70°F; 1.2 ± .40V at 155°F and 1.65 ± .32V at -65°F and N goes to less than 0.3V. Apply a 100 ns negative pulse to pin c. Pin M shall maintain a DC level of 0.6 ± 0.4V and there shall be no pulses appearing at pin M. Pin T shall maintain a DC level 1.4 ± .35V at 70°F; 1.2 ± .40V at 155°F and 1.65 ± .32V at -65°F and pin N shall maintain a DC level less than 0.3V."

Paragraph 4.6.5.7: Seventh and eight line, delete: "DC level of 1.2V ± 0.2" and substitute "DC level of 1.64 ± .4V at 70°F; 1.4 ± .4V at 155°F; and 1.8 ± .4V at -65°F; twelfth line, delete: "1.2V ± 0.2V", and substitute "2.9 ± .4V"; fifteenth line, delete: "Pulse 1.4V ± 0.2V in amplitude and 30 microsec duration" and substitute "Pulse 1.7 ± .5V in amplitude and 10 ± 5 microsecond duration"; seventeenth line, delete: "DC level of 1.2V ± 0.2V", and substitute "DC level of 1.8 ± .4V at 70°F; 1.6 ± .35V at 155°F; and 1.9 ± .35V at -65°F; thirty-first and thirty-second lines, delete: "pulse 1.2V ± 0.2V in amplitude and 30 microsec in duration" and substitute "pulse 1.7 ± .5V in amplitude and 10 ± 5 microseconds duration".

Page 16, Figure 2: Delete and substitute new figure.

* The margins of this amendment are marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

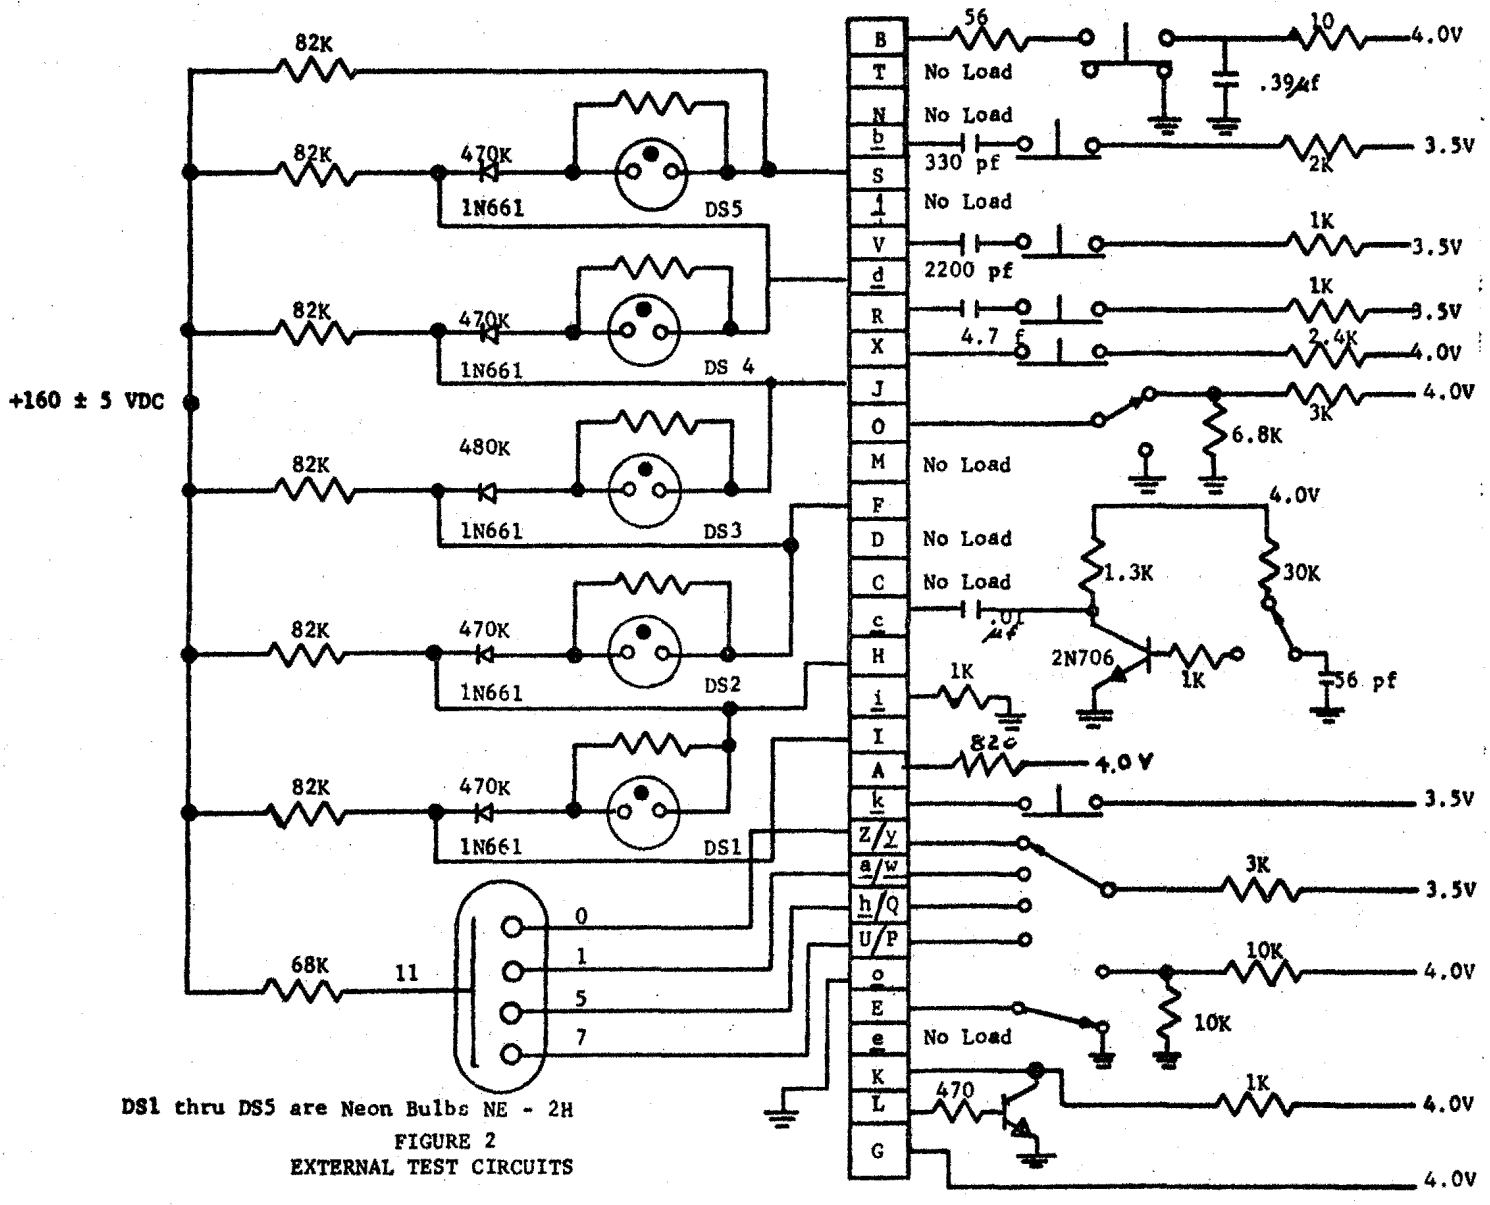

DS1 thru DS5 are Neon Bulbs NE - 2H

FIGURE 2
EXTERNAL TEST CIRCUITS

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1240-A571

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.