INCH-POUND

MIL-C-70532 (AR)
AMENDMENT 5
13 February 1995
SUPERSEDES
AMENDMENT 4
20 December 1994

MILITARY SPECIFICATION

CARTRIDGES, 105MM, HE, RA, XM913 AND XM927
(WITH WARHEAD AND MOTOR BODY)
LOADING, ASSEMBLING AND PACKING

This amendment forms a part of Military Specification MIL-C-70532 (AR), dated 29 October 1990, and is approved for use by the US Army Armament Research, Development and Engineering Center, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* Title: Change "XM913" to "M913" (and wherever it appears). Change "XM927" to "M927" (and wherever it appears).

PAGE 2

2.1.2:

Change "9290990" to "9390990".

Dwg. 12624495 Add: "PA111," after "assembly".

Dwg. 12624496 Change: "Ammunition" to "Ammo".

Dwg. 12624903 Change: "XM912" to "M913".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:38Z
Check the source to verify that this is the current version before use.

Drawing 19-48-4231/45-20PM1006: Add "and" after "Ammunitions" and delete "Cyclindrical" and substitute "Cylindrical".

PAGE 3

3.1.1 Change "operation" to "operations".

PAGE 4

3.2.3 Delete in its entirety.

3.2.4 Delete in its entirety.

PAGE 5

3.3.5 Change: "thousands" to "thousandths".

PAGE 7

3.6 Capitalize: "proving" in title.

PAGE 9

3.10.5 Change title from "Flash Reducer" to "Bag, Loading Assembly" (and wherever it appears).

PAGE 11

Table I. Change the paragraph reference in note a. from "4.4.2.1" to "4.4.2.2".

Add new inspection:

"Body, Flash Reducer (Drawing 12630696) Examination for defects	10	3.2	4.4.2.18"

Change the inspection method paragraph for flash reducer from "4.4.2.18" to "4.4.2.19".

PAGE 13

4.4.1.f: Delete "up to four (4) consecutively produced lots of".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:38Z
Check the source to verify that this is the current version before use.

4.4.1.h: Delete in its entirety and substitute the following new paragraph:

"h. Delay assemblies from one manufacturer, with constituent chemicals from one lot each, and having the same fuel/oxidizer ratio."

PAGE 22

* 4.4.2.8: Delete in its entirety without substitution.

PAGE 25

4.4.2.11 Add the following Special defect: "1 Weight zone punch marks missing or incorrect 100% 3.2 Scale/Visual"

PAGE 28

4.4.2.14 Critical defect #1 Add: "/scale" after "Gage"

PAGE 31

4.4.2.17 Majors 101, 102, 103 Add: "/SMTE" after "Gage"

PAGE 35

4.4.2.21 Delete drawing number "12630699" and substitute "12624496"

PAGE 37

4.4.2.23 Delete drawing Number "12934900" Substitute: "12624496"

Add to "Next Higher Assembly" "12934900"

Change title to "Packing and Marking of Sealed Fiber Container and Metal Container Components (prior to sealing of Metal Container)".

PAGE 38

4.4.2.24 "Next Higher Assembly" Delete Drawing Numbers entirely and substitute: "12929177/12929178"

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:38Z
Check the source to verify that this is the current version before use.

Add the following Major defects:

"106 Insufficient fillers for tight pack	Level III	3.1	Visual
107 Filler Size (min.)	Level III	3.1	Gage
108 Filler not present under-neath cloth strap	Level III	3.1	Visual"

Minor defect 202 delete in its entirety and substitute the following:

"202, Evidence of poor workmanship, Level V 3.10 Visual"

PAGE 42

4.4.3.4 Change "4.5.3" to "4.5.7".

4.4.3.4.1 Change "4.5.8.1" to "4.5.7.1".

PAGE 43

4.4.3.4.2 Change "4.5.3.2" to "4.5.7.2".

4.4.3.5 In the second sentence, add a "," after the word "change"

PAGE 48

4.5.4 Change "4.4.3.6" to "4.4.3.5"

PAGE 49

* 4.5.7 Change "M557" to "M739 series".

4.5.7 b. Add the following new subparagraphs:

"6. Chamber pressure (+145 degree firing)
7. Range and deflection of impacts
8. Rocket motor ignition delay time"

PAGE 50

4.5.7 Delete subparagraph c in its entirety without substitution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:38Z
Check the source to verify that this is the current version before use.

4.5.7.1 Delete in its entirety and substitute the following new paragraph:

"4.5.7.1 Functioning/precision/muzzle velocity. Cartridges for this test shall be conditioned at 70 +/- 2 1/2 degrees F for 16 hours (minimum) prior to testing. The M913 test cartridges shall be fired with a sufficient number of M760 master calibration cartridges (interspersed approximately one for every six test cartridges) to establish a muzzle velocity correction. At least three warmer/spotter cartridges shall be fired prior to firing calibration/test cartridges. Time lapses of more than 15 minutes between consecutive firings shall not be permitted without firing additional warmer cartridges. The test shall be fired at 700 to 800 MILS QE. Range probable error shall be calculated for the test cartridges."

PAGE 51

4.5.7.2 Delete in its entirety and substitute the following new paragraph:

"4.5.7.2 Safety. Cartridges for this test shall be divided into two equal groups and temperature conditioned for 16 hours (minimum) prior to testing. Group 1 shall be conditioned and fired at -50 +5 degrees F. Group 2 shall be conditioned and fired at +145 -5 degrees F. The two groups shall be fired at a convenient elevation selected by the proving ground."

5.4.1 Change "19048-4231" to "19-48-4231".

PAGE 54

6.10 Delete in its entirety and substitute the following new paragraph:


"6.10 Ballistic test projectiles. All projectiles tested by a Government Proving Ground for Ballistic Acceptance Test shall have three markings 120 degrees apart, painted at the LAP manufacturing facility across the warhead/motor body joint. See figure 3.

Add new Figure 3 as included page 54.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:38Z
Check the source to verify that this is the current version before use.

Figure 3.

Ballistic Test Projectile Marking

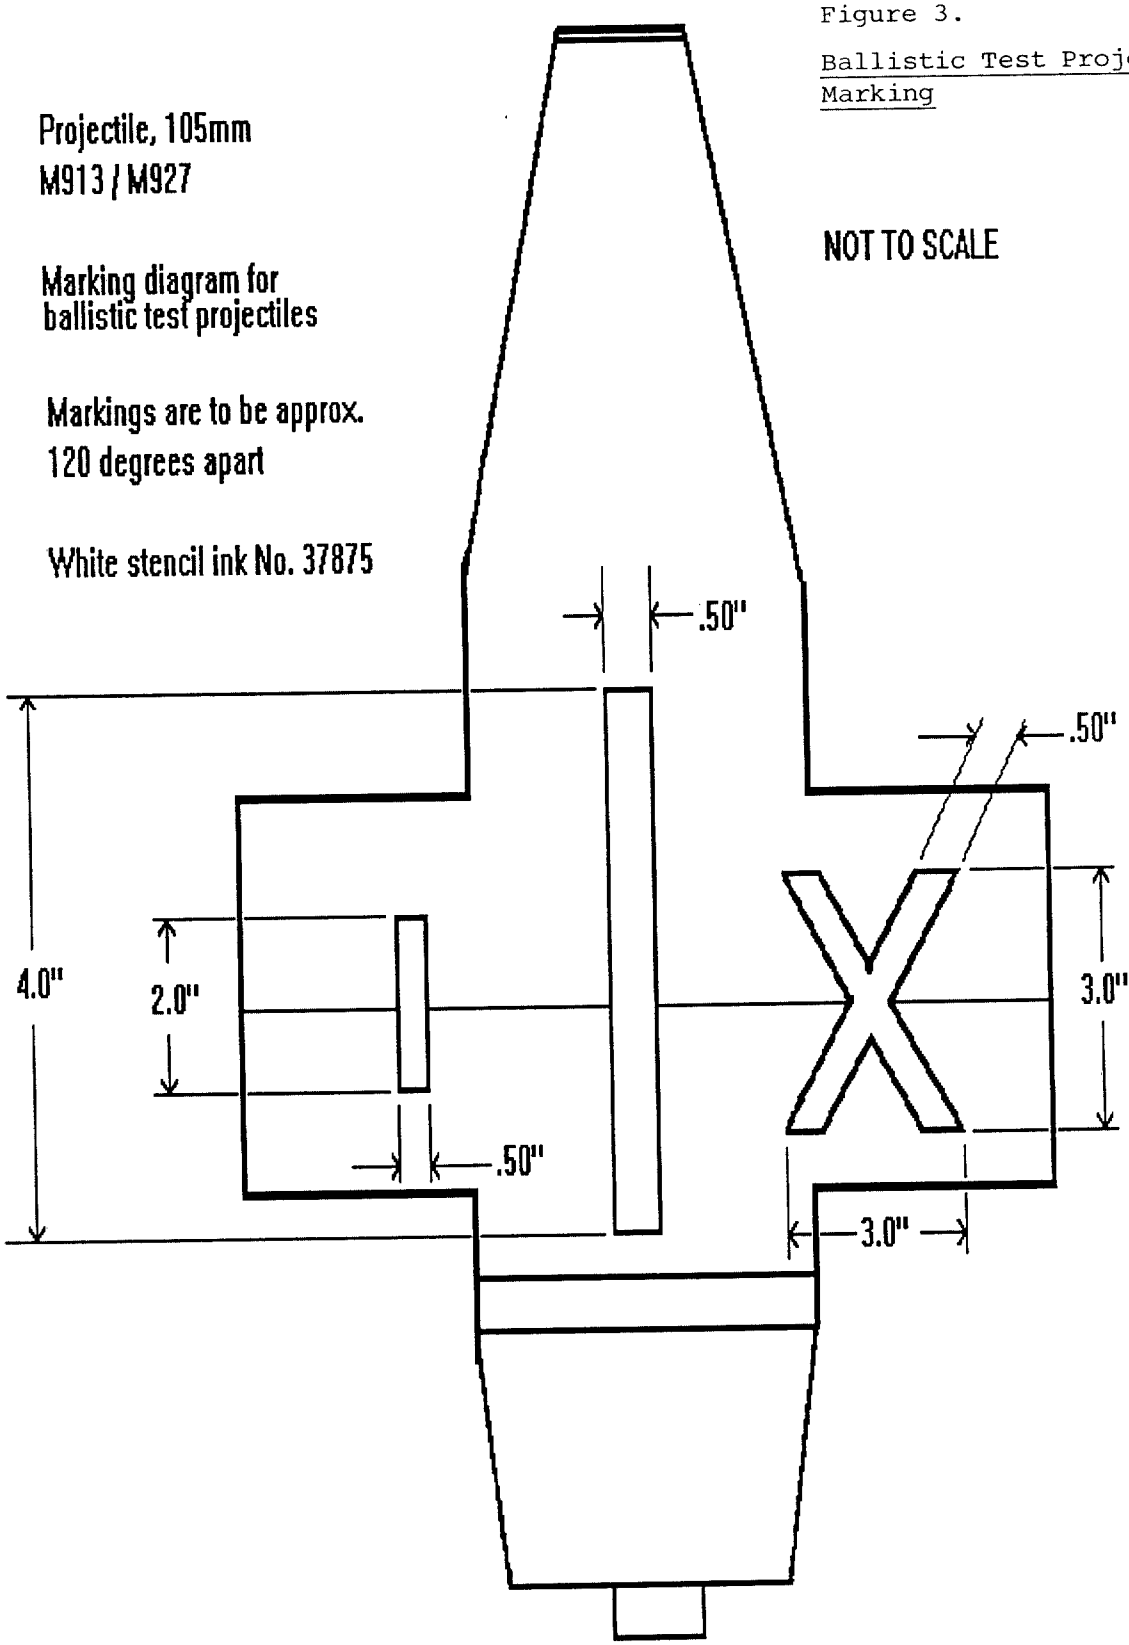

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:38Z
Check the source to verify that this is the current version before use.

MIL-C-70532 (AR)
AMENDMENT 5

The margins of this amendment are marked with an asterisk or vertical line to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as convienence only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing Activity:
Army-AR

(Project 1320-0010)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:38Z
Check the source to verify that this is the current version before use.