
METRIC
DOD-C-55302/160B(CR)
18 July 1985
SUPERSEDING
DOD-C-55302/160A(CR)
30 July 1982

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES RECEPTACLE 72, 84, 96, AND 120 CONTACT POSITIONS FOR PRINTED WIRING BOARDS 2.54 MM X 1.27 MM OFFSET GRID, METRIC

This specification is approved for use by US Army Communications Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification sheet and the latest issue of MIL-C-55302.

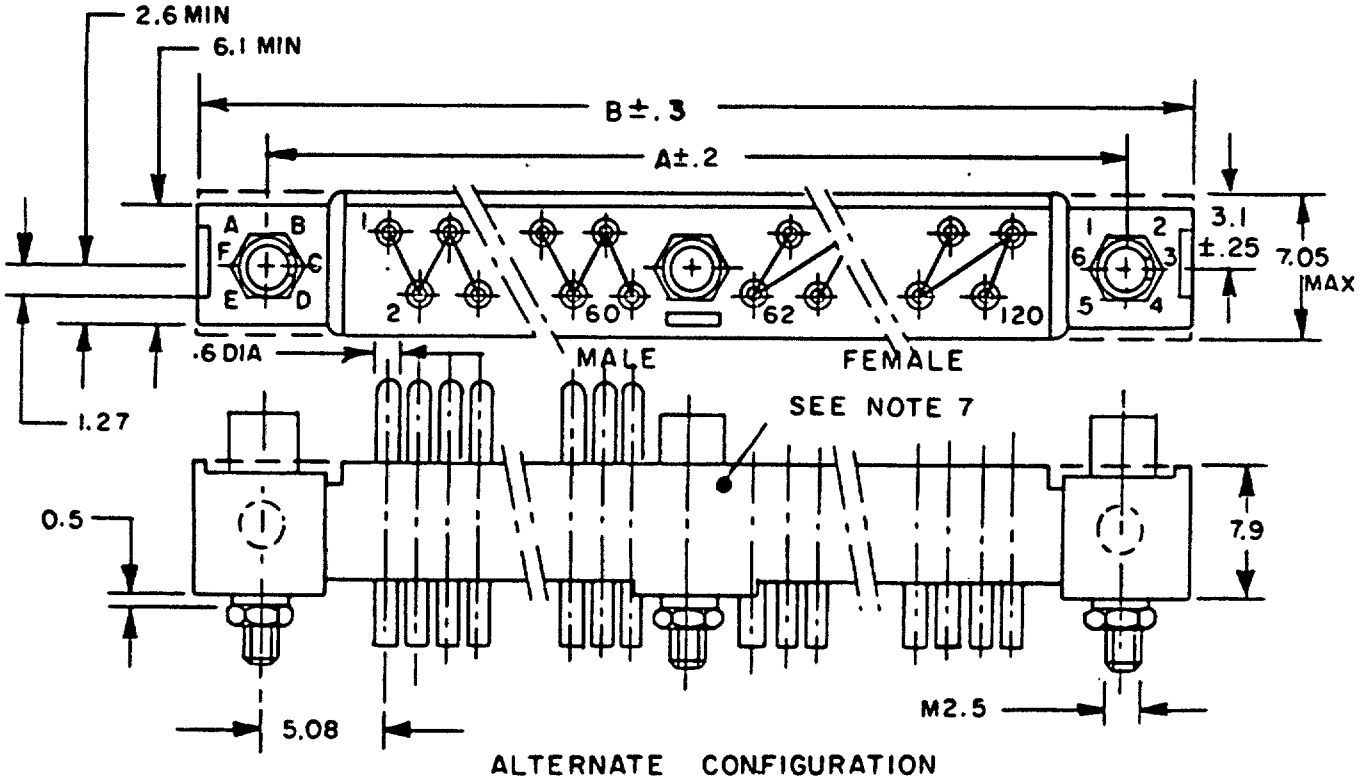

ALTERNATE CONFIGURATION

TABLE I. Contacts

Number of contacts	A	B
72	106.7	114.7
84	121.9	129.9
96	137.2	145.2
120	167.6	175.5

MM	INCHES	MM	INCHES
0.2	.008	6.1	.240
0.25	.010	7.05	.277
0.3	.012	7.9	.311
0.5	.020	106.7	4.200
0.6	.023	114.7	4.515
1.27	.050	121.9	4.799
2.5	.098	129.9	5.114
2.6	.102	137.2	5.401
3.1	.122	145.2	5.716
5.08	.200	167.6	6.598
		175.5	6.909

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.

FIGURE 1. Connector receptacle.

Ⓑ denotes changes

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-01-22 22:06:32
Check the source to verify that this is the current version before use.

TERMINAL STYLES


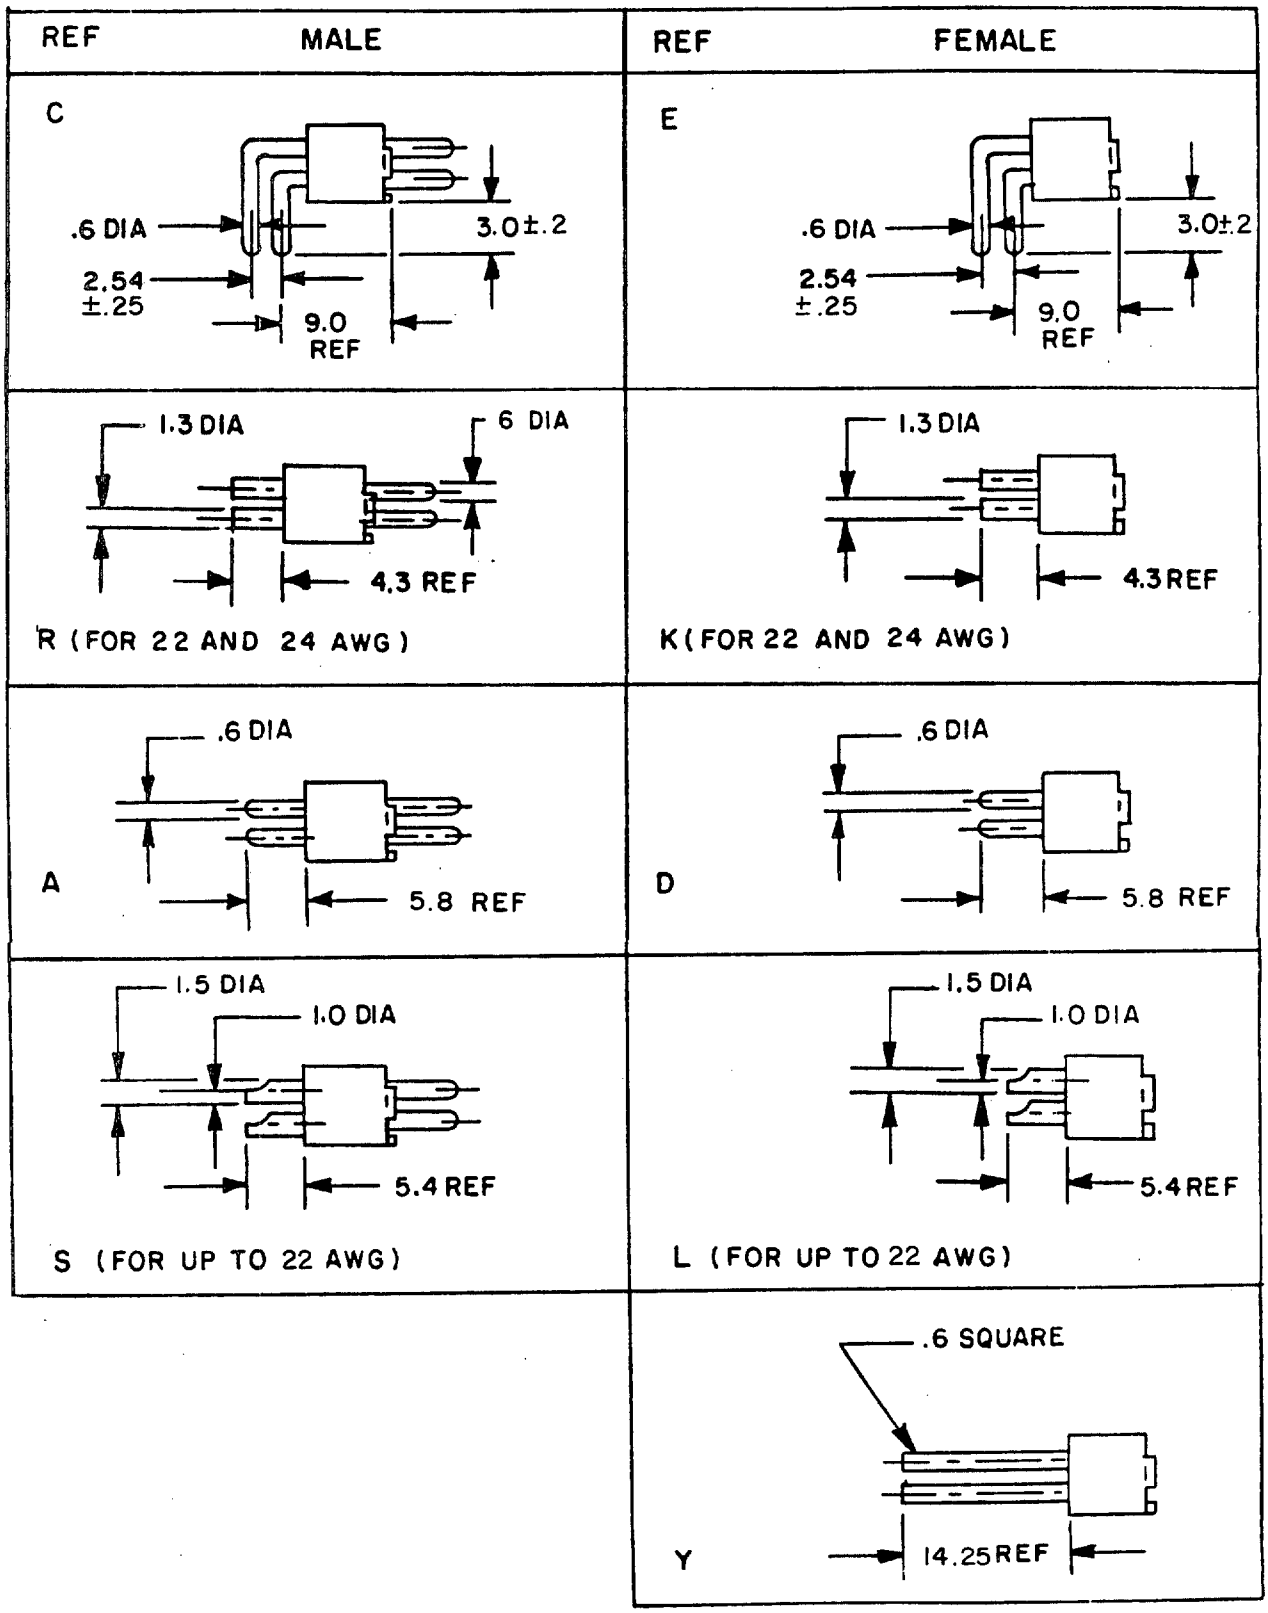


FIGURE 2. Connector termination styles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

TERMINAL STYLES

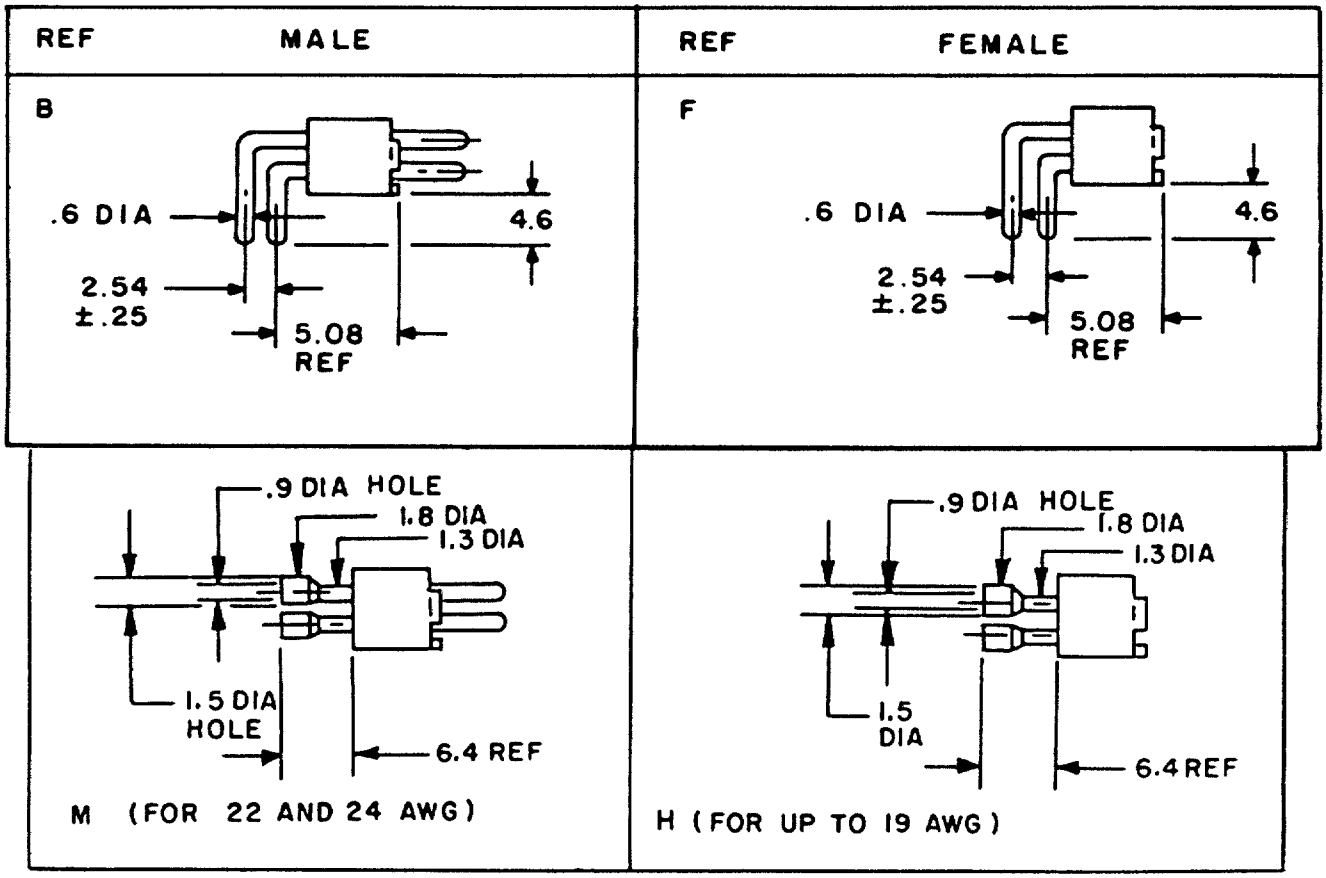

MM	INCHES
0.2	.008
0.25	.010
0.6	.023
0.9	.035
1.0	.039
1.3	.051
1.5	.059
1.8	.071
2.54	.100
3.0	.118
4.3	.169
5.4	.212
5.8	.228
6.25	.246
6.4	.252
9.0	.354
14.25	.561

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.

FIGURE 2. Connector termination styles - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

RECEPTACLES MOUNTING STYLES


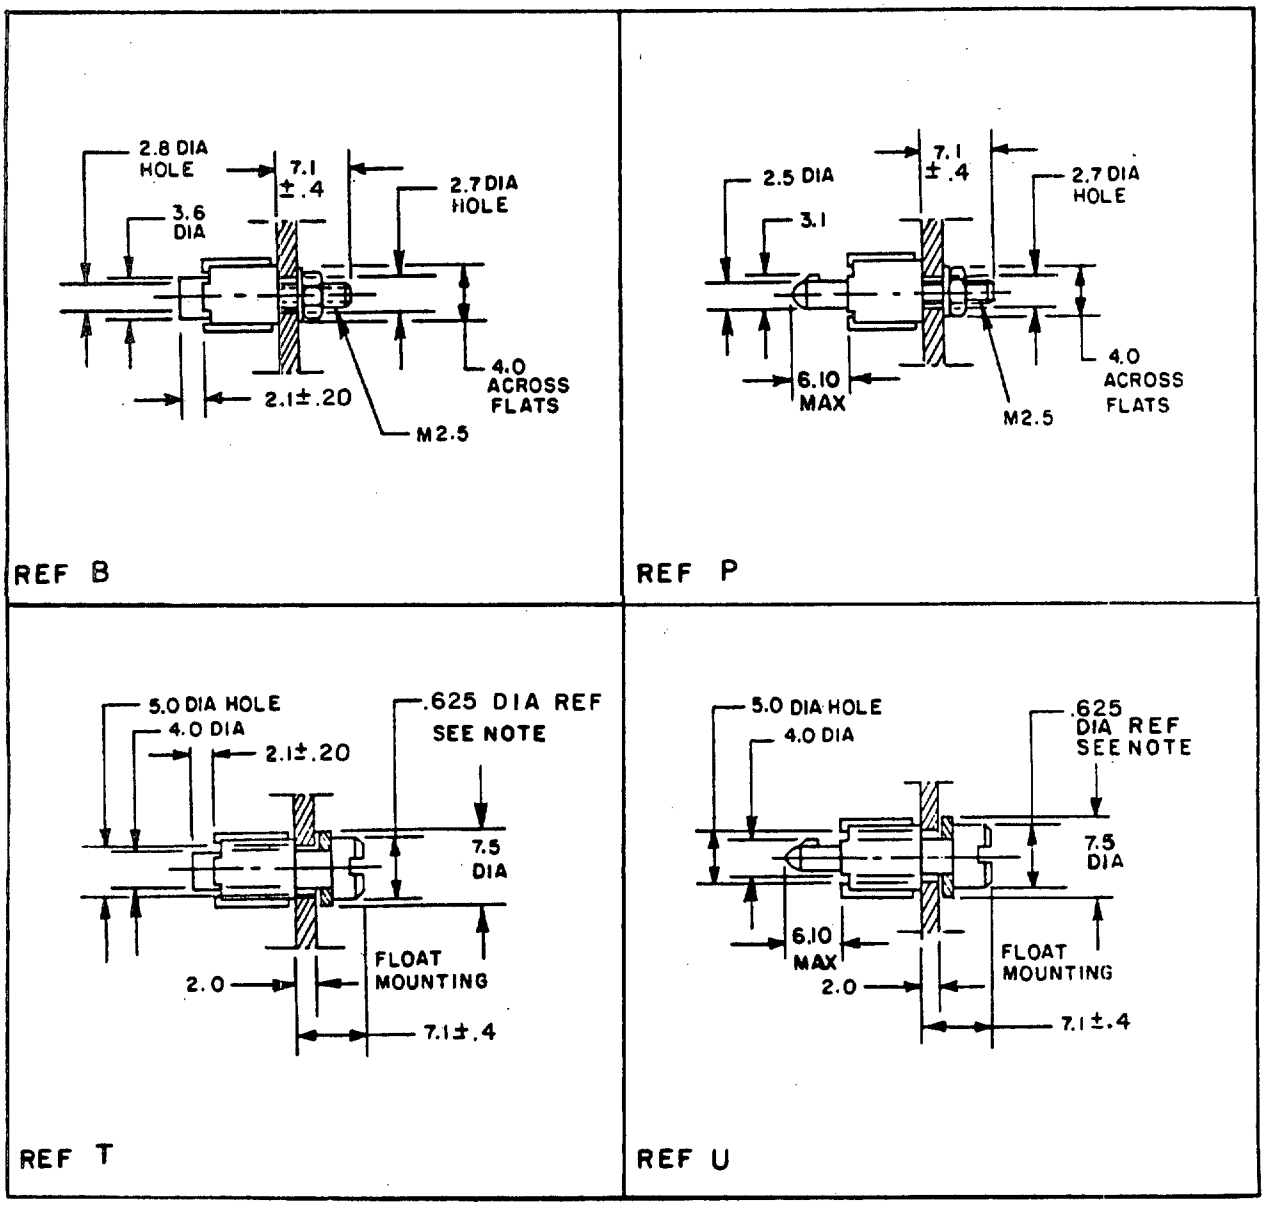


FIGURE 3. Mounting styles.

Source: https://assist.dla.mil - Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

RECEPTACLES

MOUNTING STYLES

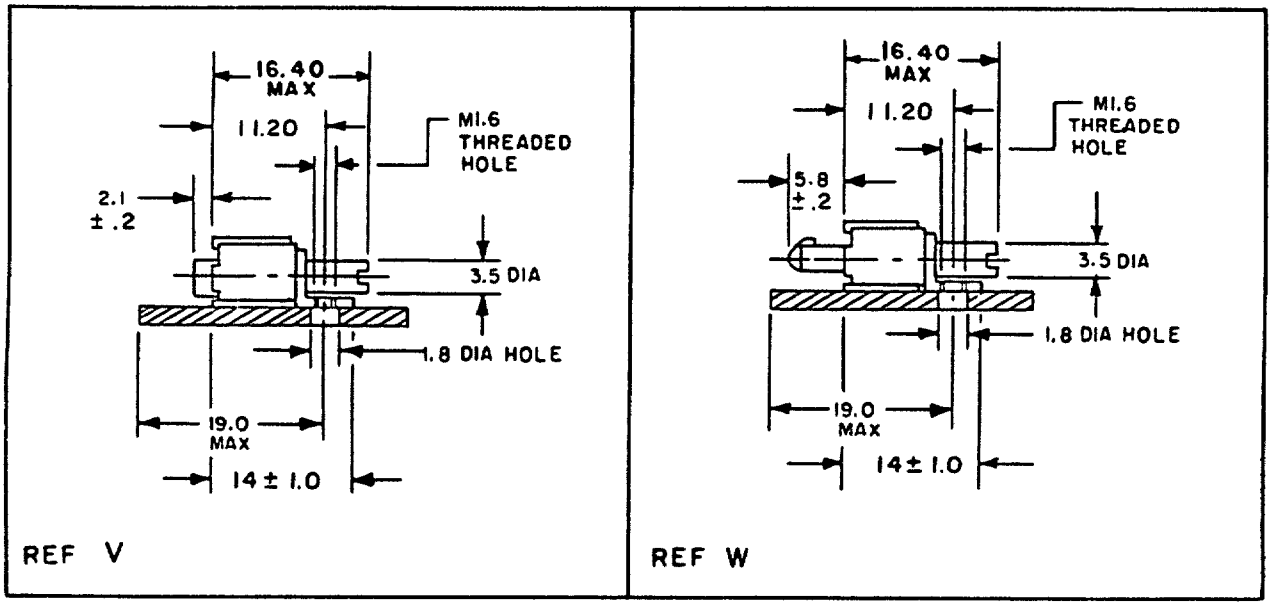

MM	INCHES	MM	INCHES
0.2	.008	4.0	.157
0.4	.016	5.0	.197
1.0	.039	5.8	.228
1.8	.071	6.10	.238
2.0	.078	6.25	.246
2.1	.082	7.1	.279
2.5	.098	7.5	.295
2.7	.106	11.20	.441
2.8	.110	14.0	.551
3.1	.122	16.40	.646
3.5	.137	19.0	.748
3.6	.141		

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.


FIGURE 3. Mounting styles - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

RECEPTACLES


LOCKING HARDWARE

DASH AND 1/4 TURN LOCK

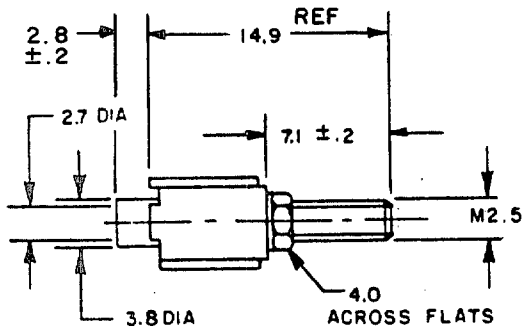


REF G


SCREW LOCK

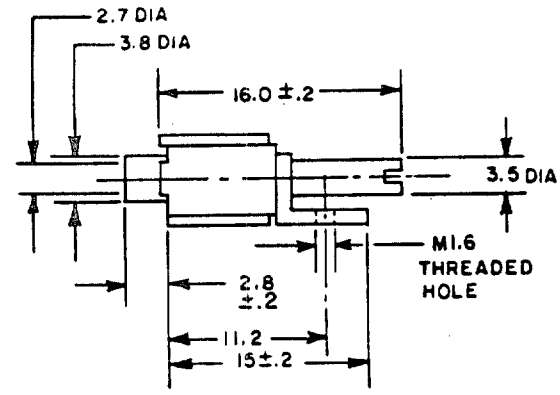


REF F

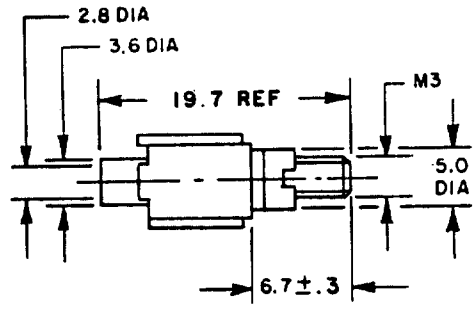

REF X

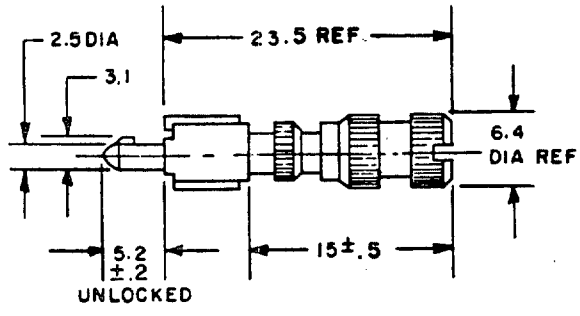

REF J

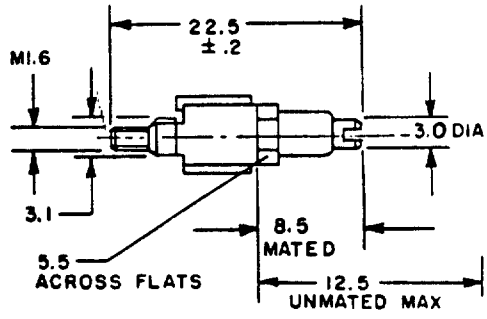

REF Z

FIGURE 4. Locking hardware.

Source: https://assist.dla.mil - Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

TABLE II. MATING REFERENCES

TYPE	WILL ONLY MATE WITH	LOCKING METHOD
B	P,U,W	NONE
F	J,K	PUSH, 1/4 TURN
G	J,K	PUSH, 1/4 TURN
J	F,G	PUSH, 1/4 TURN
K	F,G	PUSH, 1/4 TURN
P	B,T,V	NONE
T	P,U,W	NONE
U	B,T,V	NONE
V	P,U,W	NONE
W	B,T,V	NONE
X	Z	SCREW
Y	Z	SCREW
Z	X,Y	SCREW

MM	INCHES	MM	INCHES
0.2	.008	5.2	.204
0.3	.012	5.5	.216
0.5	.020	6.4	.252
1.6	.063	6.7	.263
2.5	.098	7.1	.279
2.7	.106	8.5	.334
2.8	.110	11.2	.441
3.0	.118	12.5	.492
3.1	.122	14.9	.586
3.5	.137	15.0	.590
3.6	.141	16.0	.630
3.8	.149	19.7	.775
4.0	.157	22.5	.886
5.0	.197	23.5	.925

NOTES:
1. Dimensions are in millimeters.
2. This is a metric design. Inches are to the closest .001.
3. Unless otherwise specified, tolerance is ±.1 (.004 inch).
4. These connectors mate with DOD-C-55302/163.
5. Inch equivalents are given for general information only.
6. See table for mating.
7. Contact identification may be located adjacent to contact cavity on surface indicated.

FIGURE 4. Locking hardware - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figures 1 through 4.

Material:

Insulators: Diallyl phthalate per MIL-M-14.

(B) Guides and hardware: Brass per QQ-B-626, nickel plated per QQ-N-290, or A151 303 stainless steel or equivalent per QQ-S-764, passivated per QQ-P-35.

Contact identification: See figure 1.

(B) Contact engagement and separation forces:

Minimum force .6 ounce with a .0220 ±.0001 ø pin.
Maximum force 1.5 ounces with a .0230 ±.0001 ø pin.

Note: Pin roughness to be .25 - 2.5 microns surface.

Mating and unmating: The maximum force shall not exceed 2 ounces (56 grams) multiplied by the number of positions.

Contact retention minimum: 8 pounds (3.6 kg) minimum.

Current rating: 5 amperes per line.

Durability: 1,000 cycles minimum.


Dielectric withstanding voltage:

Sea level: 1,400 Vac (rms) test, or equivalent dc voltage (2,000 volts).

(B) High altitude: 300 Vac (rms) test.

Keying: Rotation of guides - 6 positions each, 216 possible combinations.

Connector part number:

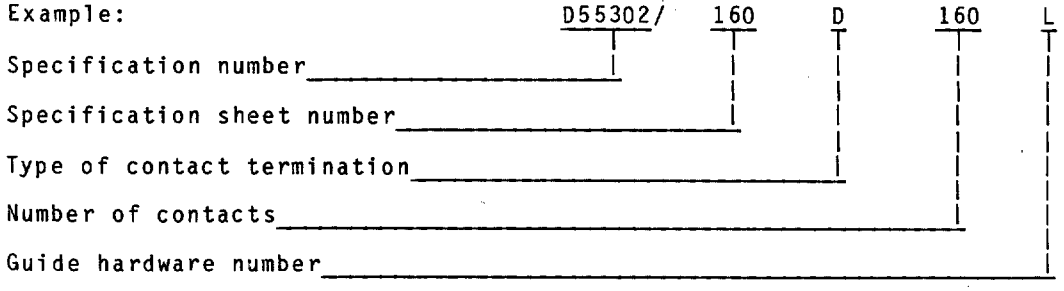

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Custodian:
Army - CR

Review activities:
Army - AR, MI
DLA - ES

User activities:
Army - ME, AT, AV

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-A256-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.