
MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES PLUG 72, 84, 96, AND 120 CONTACT POSITIONS FOR PRINTED WIRING BOARDS 2.54 MM X 1.27 MM OFFSET GRID, METRIC

This specification is approved for use by US Army Communications Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification sheet and the latest issue of MIL-C-55302.

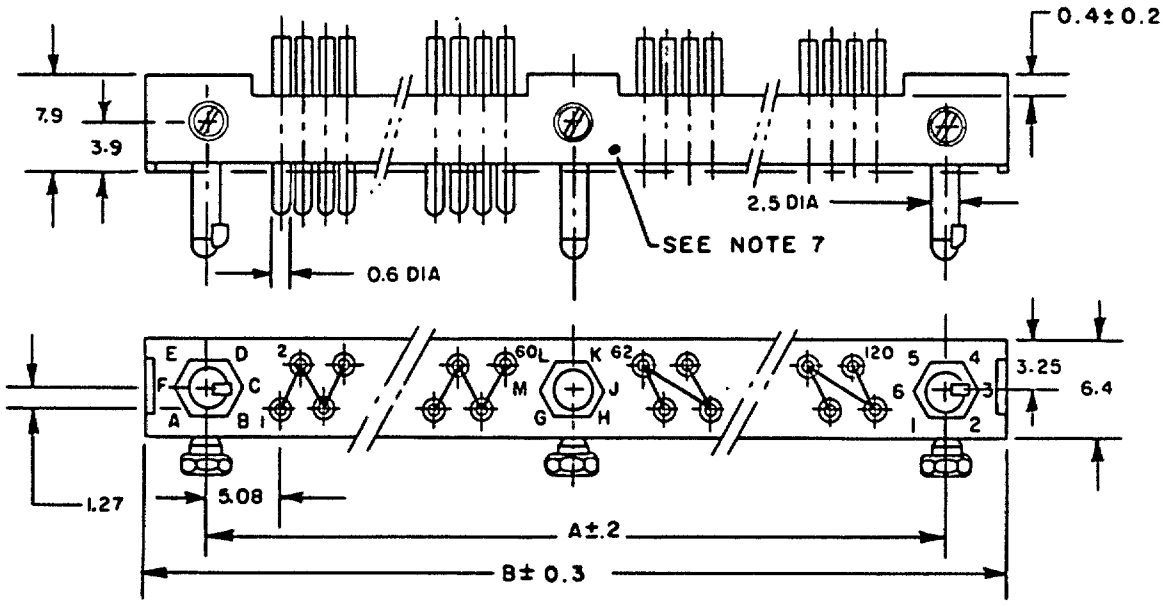

ALTERNATE CONFIGURATION

TABLE I. Contacts

Number of contacts	A	B
72	106.7	114.7
84	121.9	129.9
96	137.2	145.2
120	167.6	175.5

MM	INCHES	MM	INCHES
0.2	.008	6.4	.252
0.3	.012	7.9	.311
0.4	.016	106.7	4.200
0.6	.023	114.7	4.515
1.27	.050	121.9	4.799
2.5	.098	129.9	5.114
3.25	.128	137.2	5.401
3.9	.153	145.2	5.716
5.08	.200	167.6	6.598
		175.5	6.909

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.

FIGURE 1. Connector plug.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

TERMINAL STYLES


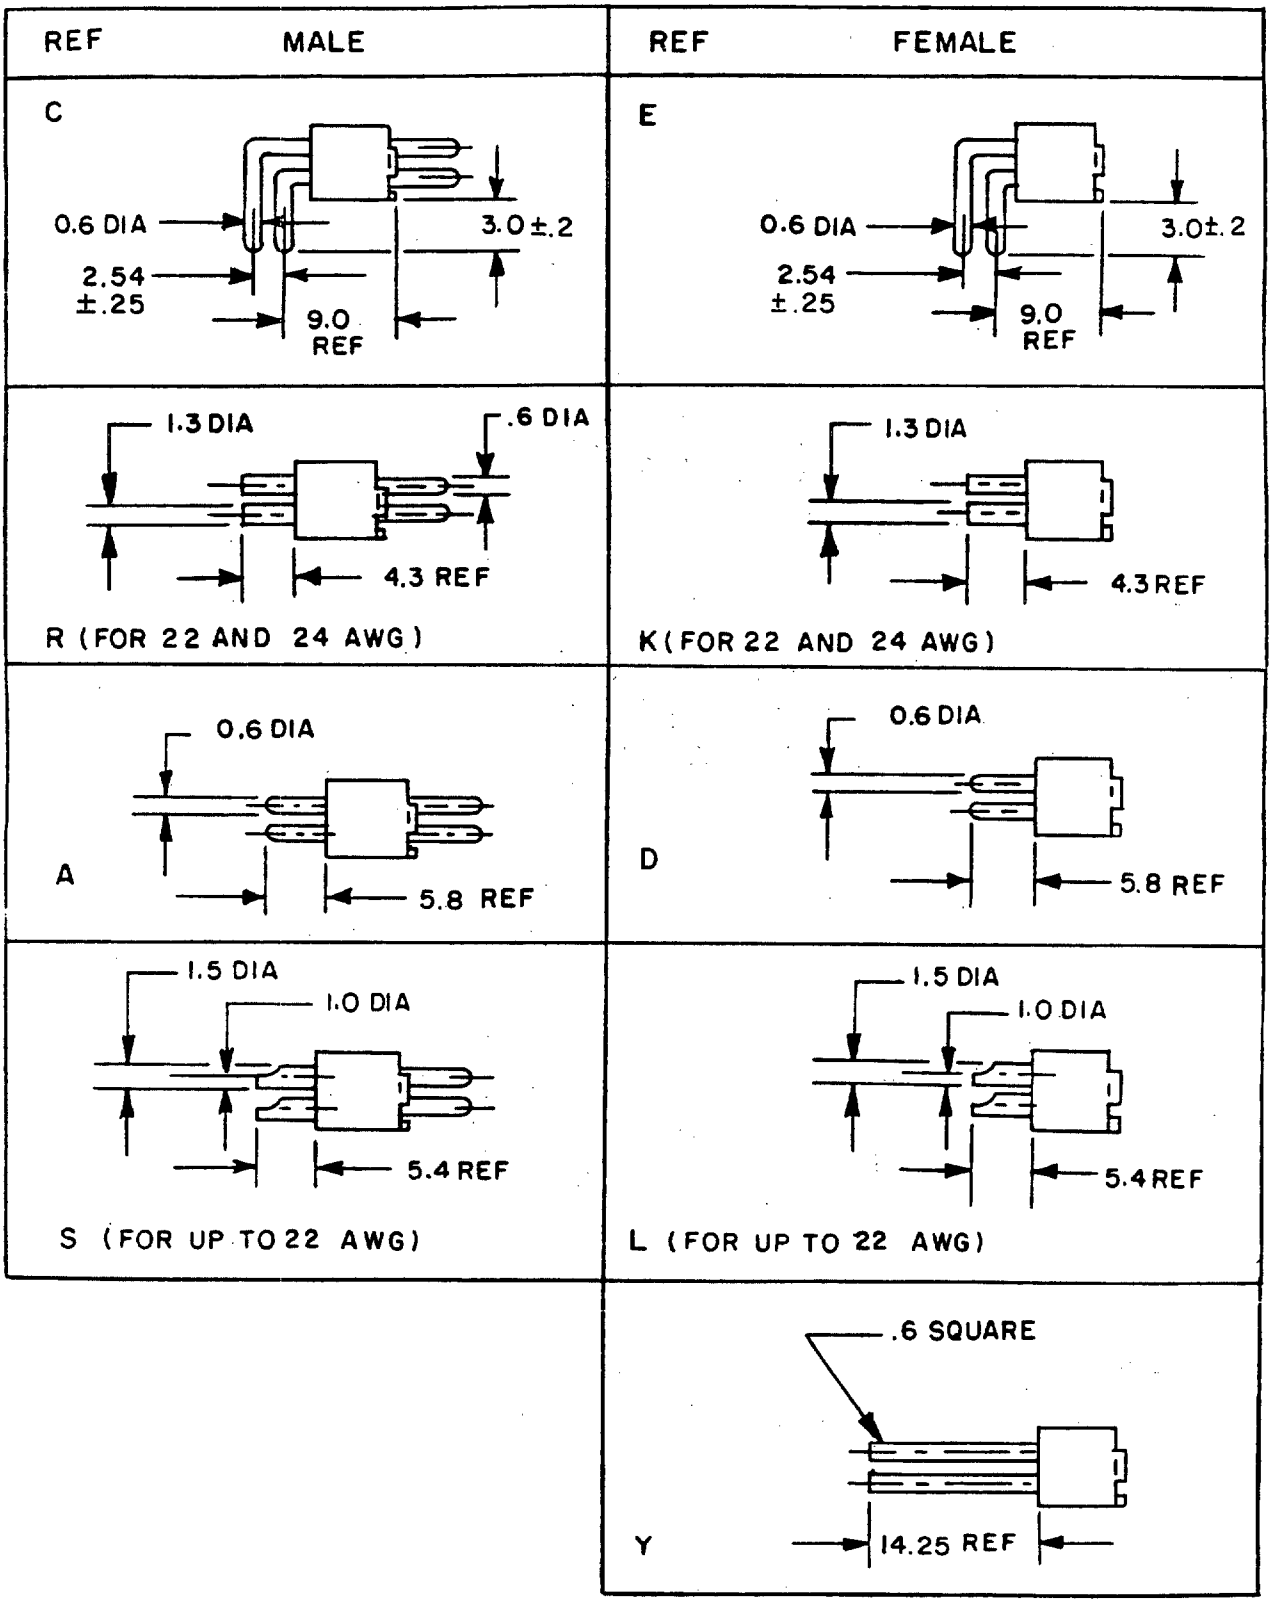


FIGURE 2. Connector termination styles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

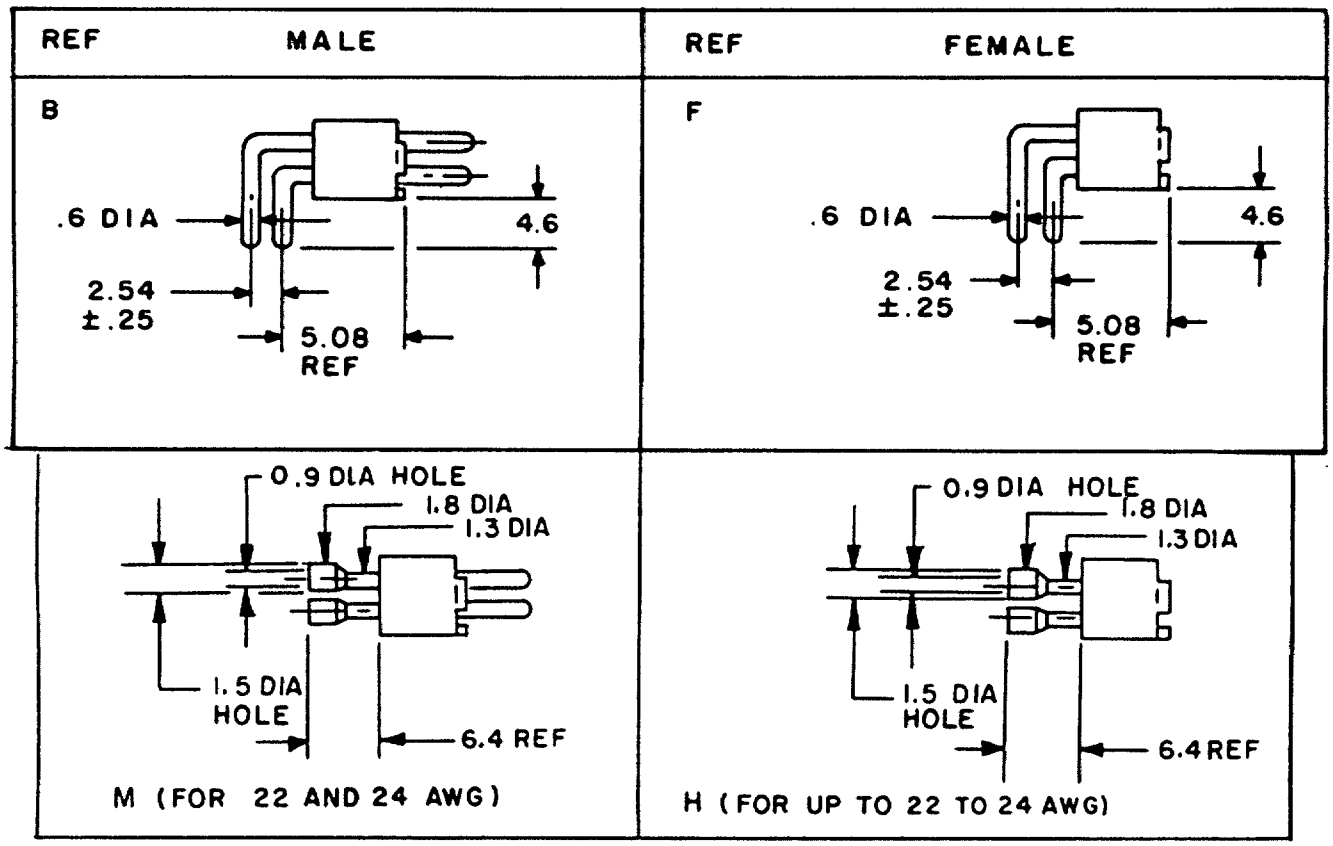

MM	INCHES
0.2	.008
0.25	.010
0.6	.023
0.9	.035
1.0	.039
1.3	.051
1.5	.059
1.8	.071
2.54	.100
3.0	.118
4.3	.169
5.4	.212
5.8	.228
6.4	.252
9.0	.354
14.25	.561

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.

FIGURE 2. Connector termination styles - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

PLUGS MOUNTING STYLES


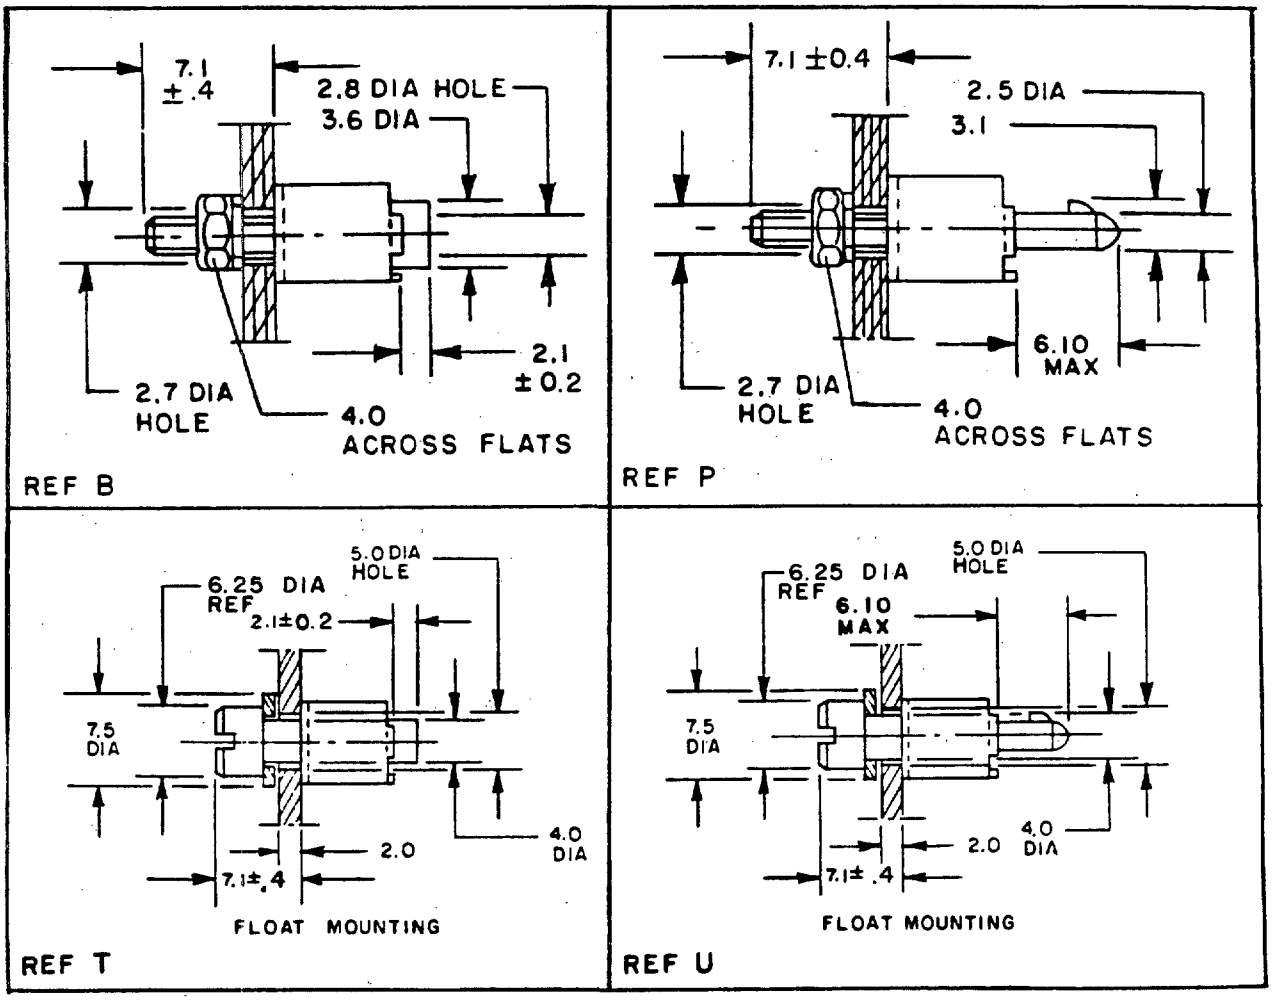


FIGURE 3. Mounting styles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

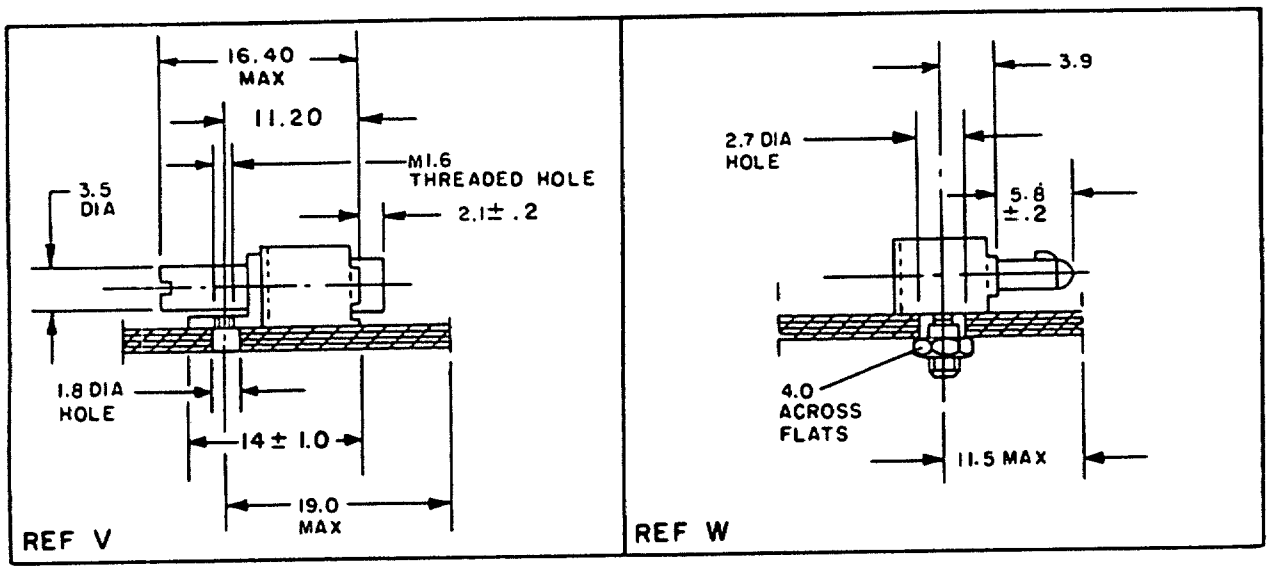

MM	INCHES	MM	INCHES
0.2	.016	3.9	.153
0.4	.008	4.0	.157
1.0	.039	5.0	.197
1.6	.063	5.8	.228
1.8	.071	6.10	.238
2.0	.078	6.25	.246
2.1	.082	7.1	.279
2.5	.098	7.5	.295
2.7	.106	11.20	.441
2.8	.110	11.5	.453
3.1	.122	14.0	.551
3.5	.137	16.40	.640
3.6	.141	19.0	.748

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.

FIGURE 3. Mounting styles - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

PLUGS

LOCKING HARDWARE

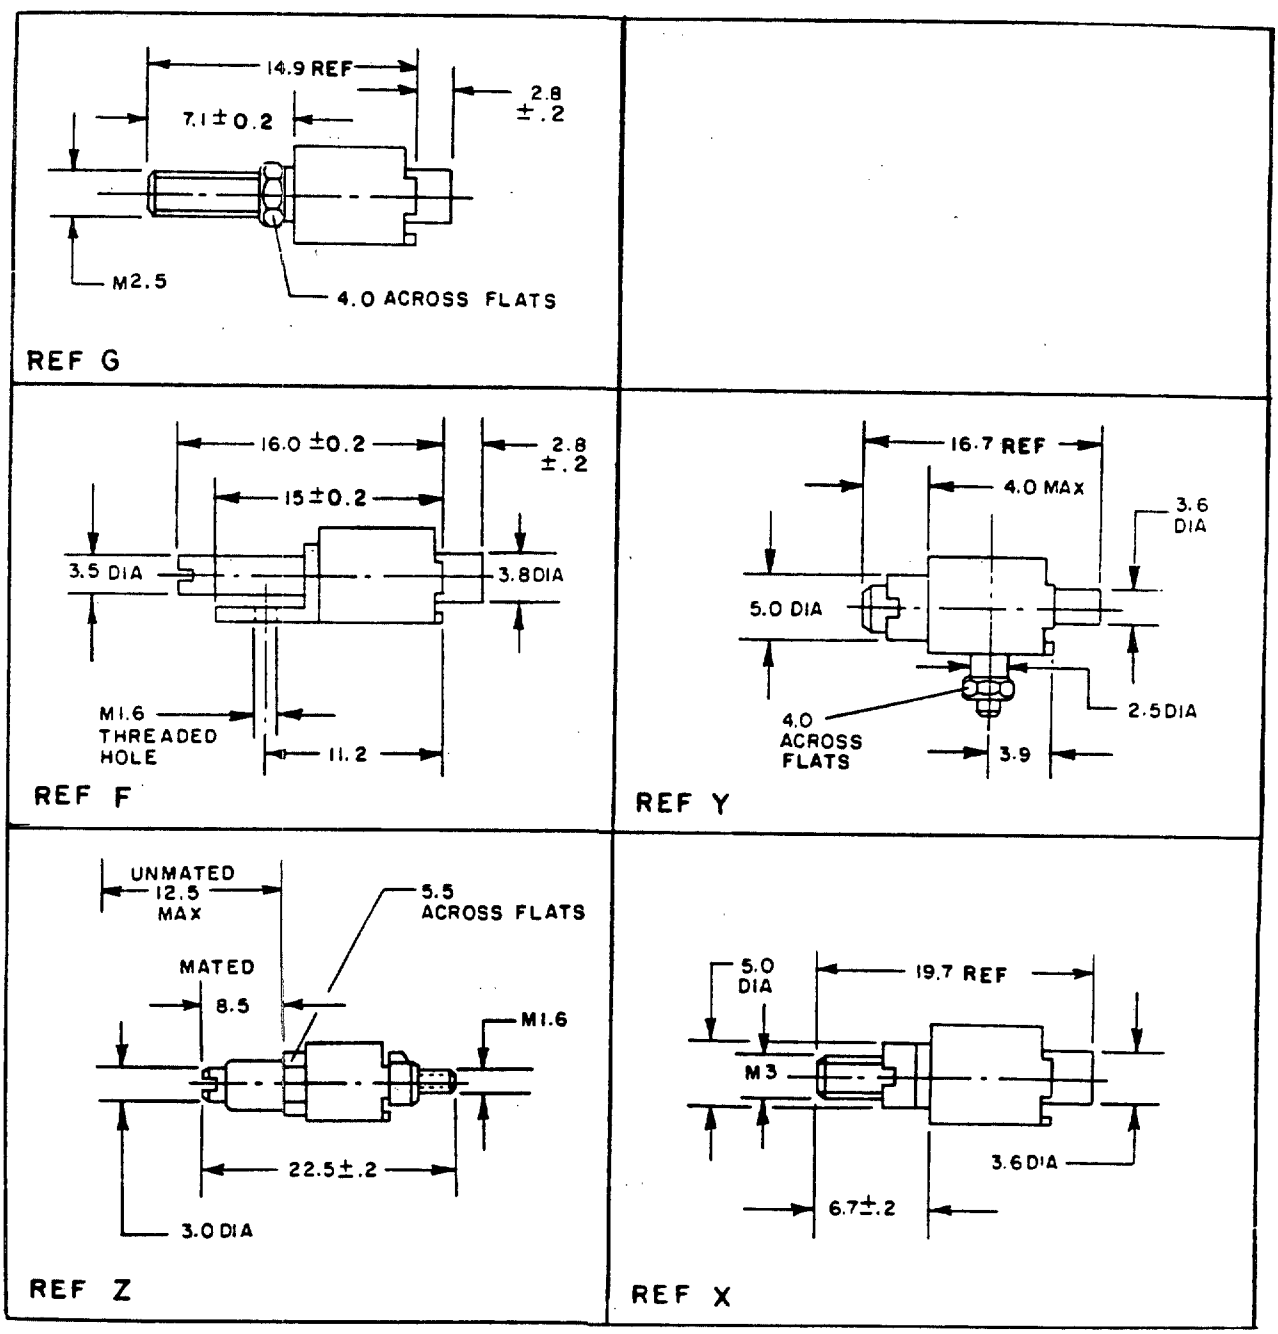


FIGURE 4. Locking hardware.

Source: https://assist.dla.mil - Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

PLUGS

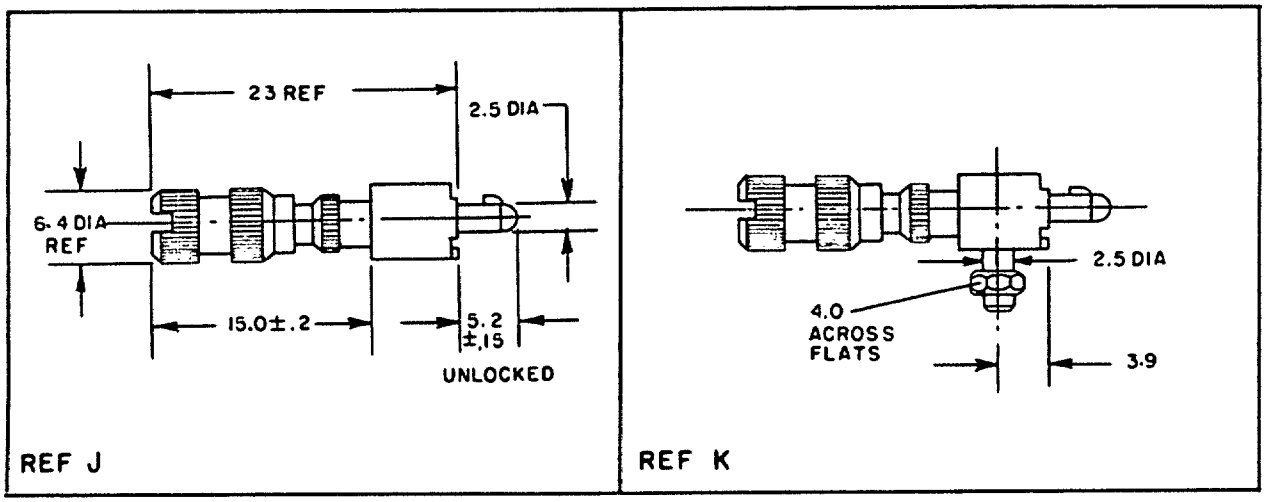


TABLE II. MATING REFERENCES

TYPE	WILL ONLY MATE WITH	LOCKING METHOD
B	P,U,W	NONE
F	J,K	PUSH, 1/4 TURN
G	J,K	PUSH, 1/4 TURN
J	F,G	PUSH, 1/4 TURN
K	F,G	PUSH, 1/4 TURN
P	B,T,V	NONE
T	P,U,W	NONE
U	B,T,V	NONE
V	P,U,W	NONE
W	B,T,V	NONE
X	Z	SCREW
Y	Z	SCREW
Z	X,Y	SCREW

MM	INCHES	MM	INCHES
0.15	.006	5.2	.204
0.2	.008	5.5	.216
1.6	.063	6.4	.252
2.5	.098	6.7	.263
2.8	.110	7.1	.279
3.0	.118	8.5	.334
3.1	.122	11.2	.441
3.5	.137	12.5	.492
3.6	.141	14.9	.586
3.8	.149	15.0	.590
3.9	.153	16.0	.630
4.0	.157	16.7	.657
5.0	.197	19.7	.775
		22.5	.886
		23.0	.905

NOTES:
1. Dimensions are in millimeters.
2. This is a metric design. Inches are to the closest .001.
3. Unless otherwise specified, tolerance is ±.1 (.004 inch).
4. These connectors mate with DOD-C-55302/160.
5. Inch equivalents are given for general information only.
6. See table for mating.
7. Contact identification may be located adjacent to cavity on surface indicated.

FIGURE 4. Locking hardware - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figures 1 through 4.

Material:

Insulators: Diallyl phthalate per MIL-M-14.

(B) Guides and hardware: Brass per QQ-B-626, nickel plated per QQ-N-290, or A151 303 stainless steel or equivalent per QQ-S-764, passivated per QQ-P-35.

Contact identification: See figure 1.

(B) Contact engagement and separation forces:

Minimum force .5 ounce with a .0220 ±.0001 ø pin.
Maximum force 1.6 ounces with a .0230 ±.0001 ø pin.

Note: Pin surface roughness to be .25 - 2.5 microns.

Mating and unmating: The maximum force shall not exceed 2 ounces (56 grams) multiplied by the number of positions.

Contact retention minimum: 8 pounds (3.6 kg) minimum.

Current rating: 5 amperes per line.

Durability: 2,000 cycles minimum.

Dielectric withstanding voltage:

Sea level: 1400 Vac (rms) test, or equivalent dc voltage (2,000 volts).

(B) High altitude: 300 Vac (rms) test.

Keying: Rotation of guides - 6 positions each, 216 possible combinations.

Connector part number:

Example:	D55302/	163	D	160	L
Specification number					
Specification sheet number					
Type of contact termination					
Number of contacts					
Guide hardware number					

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

Custodian:
Army - CR

Review activities:
Army - AR, MI
DLA - ES

User activities:
Army - ME, AT, AV

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-A256-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.