INCH-POUND

MIL-E-62484C(AT)
AMENDMENT 3
30 November 1992
SUPERSEDING
Amendment 2
17 April 1991

MILITARY SPECIFICATION

EARTHMOVER, ARMORED COMBAT, M9
PROCESSING FOR SHIPMENT AND STORAGE OF

This amendment forms a part of MIL-E-62484C(AT), dated 25 January 1990, and is approved for use by the U.S. Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies fo the Department of Defense.

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
31	Reprinted without change
32	32

PAGE 11

Table III, line 13: Delete "5120-00-708-3639 Drift Pin", and substitute "2530-01-075-8292 Drift Pin, Track".

Table III, line 27: Delete "5120-00-198-5409 Key Socket Head Screw IC-Z B" in its entirety.

Table III, line 31: Delete "4930-00-353-2478 Lubricating Gun", and substitute "4930-01-298-3979, Grease Gun, Pneumatic".

PAGE 12

Table III - cont., line 15: Delete "4220-00-555-9006 Vest, 24 Inch", and substitute "4220-00-276-8926 Vest, Life Preserver".

*3.4.1.3.6, line 1: Delete "Windshield. The windshield", and substitute "Windshield and motor. The windshield and motor".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:43Z
Check the source to verify that this is the current version before use.

PAGE 13

*3.4.1.3.7.1, add at the end: "Breather shall be ready for operation and shall not be covered."

*3.4.1.3.7.2, add at the end: "Breather shall be ready for operation and shall not be covered."

*3.4.1.3.7.3, add at the end: "Breather shall be ready for operation and shall not be covered."

*3.4.1.3.7.4, add at the end: "Breather shall be ready for operation and shall not be covered."

*3.4.1.3.7.7, add at the end: "Breather shall be ready for operation and shall not be covered."

PAGE 14

3.4.1.3.8.1, subparagraph d: Delete "Apron Cylinder Rod.", and substitute "Apron Cylinder Rods."

After subparagraph i: Add "j. Road Wheel Hubs.
k. Prop Shaft.
l. Hatch Cam Roller."

3.4.1.3.8.2, subparagraph e: Delete "Dozer Latch.", and substitute "Dozer Latches."

Subparagraph g: Delete "Apron Lockpin", and substitute "Apron Lockpins."

Subparagraph h: Delete "Dozer Lockpin.", and substitute "Dozer Lockpins."

Subparagraph o: Delete "Hatch Hinge.", and substitute "Tiedown Shackles."

Subparagraph r: delete "Operator's Seat." and substitute "Operator's Seat Slides."

PAGE 17

*3.4.1.8.7, add: "3.4.1.8.7 Hull drain valve. Hull drain valve shall be open for shipment."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:43Z
Check the source to verify that this is the current version before use.

*6.2, add to the end:

"j. The access covers shall not be removed for level B shipment (see 3.4.1.1.1)."

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. this was done as a convenience only and the Government assumes no liablility whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespecitive of the marginal notations and relationships to the last previous amendment.

Custodian:
Army - AT

Preparing Activity:
Army - AT

(Project No. PACK-A380)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:43Z
Check the source to verify that this is the current version before use.

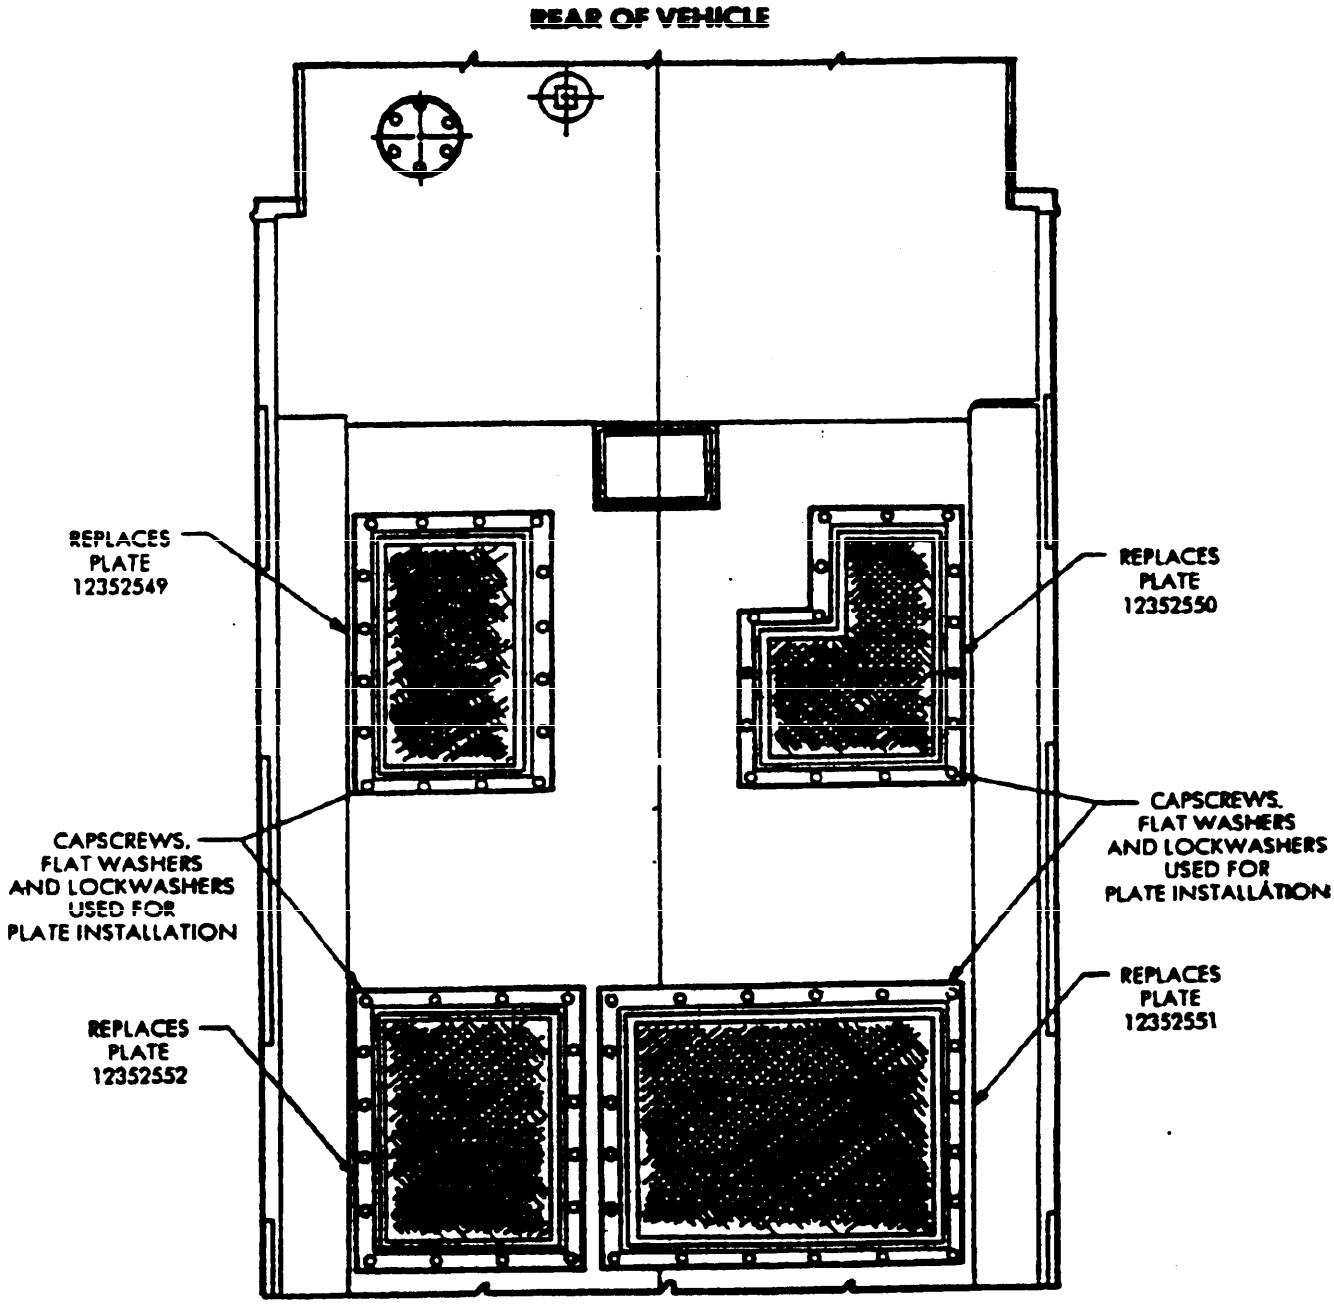
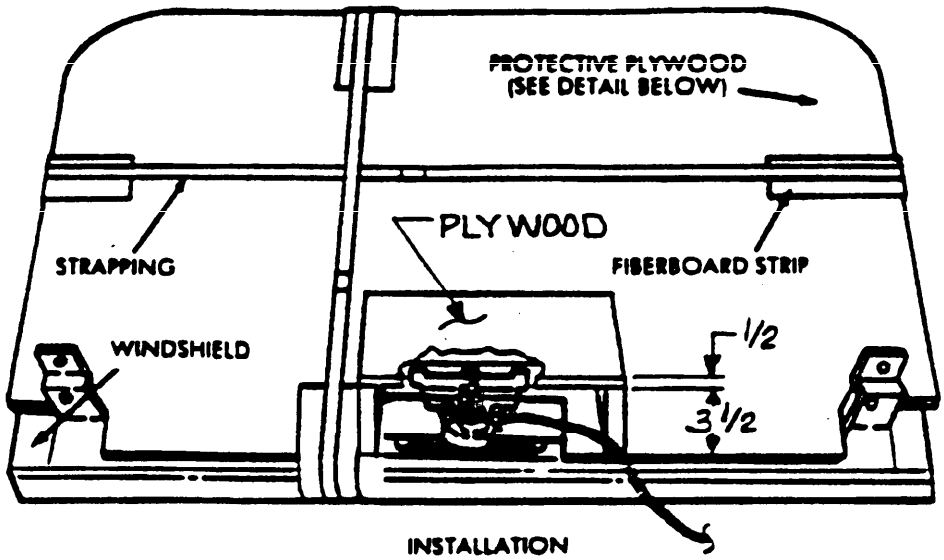


FIGURE 5. View of Vehicle Underside Ventilation Screens.

Reprinted without change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:43Z
Check the source to verify that this is the current version before use.



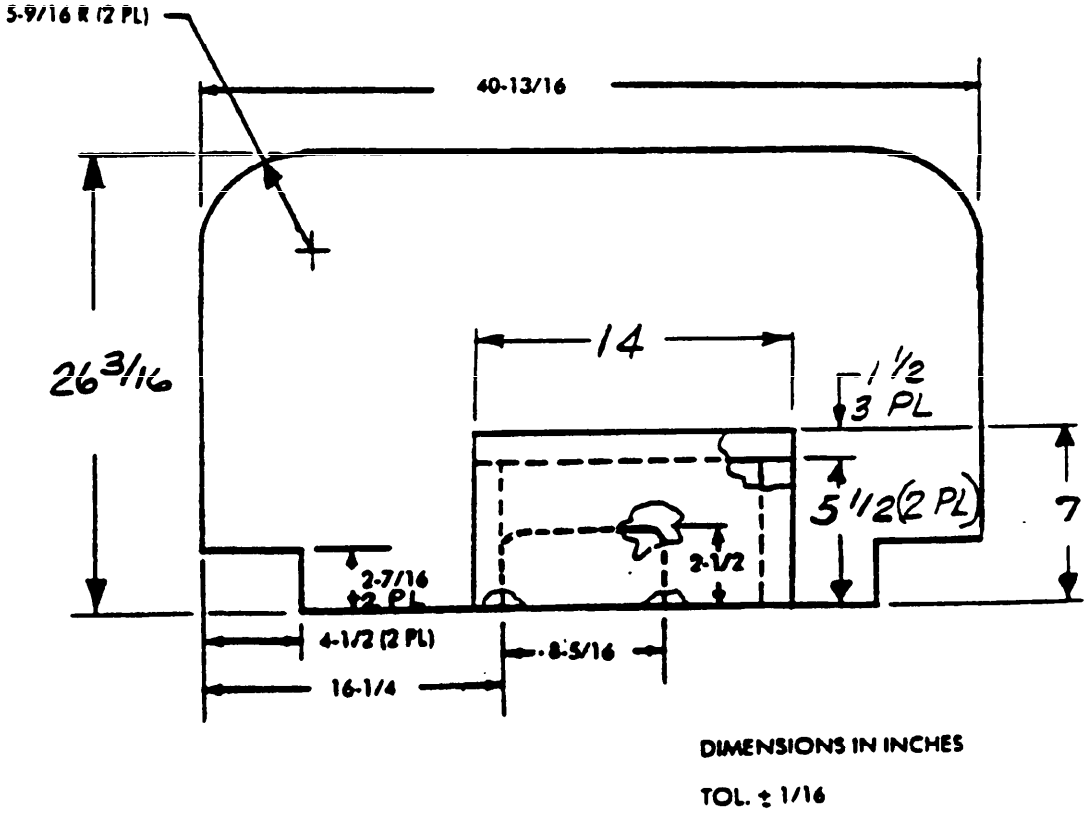


FIGURE 6. Protective plywood detail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:43Z
Check the source to verify that this is the current version before use.