INCH-POUND

MIL-G-50684A (AR)
09 July 1990
SUPERSEDING
MIL-G-50684 (AR)
15 April 1971

MILITARY SPECIFICATION

GATE, I-F BOARD ASSEMBLY - LOWER: 10548654

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an i-f gate board assembly - lower (10548654) part of the l-f gate assembly (10548649) , used in Radar Receiver R1475, part of Radar Set AN/VPS-2 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Material, Manufacture and Inspection, General Specification for

Beneficial comments (recommendations, addition, deletions) and any pertinent data which may be of use in Improving this *document,* should be addressed to: Commander U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Pacatinny Arsenal, New Jersey *07806-5000* by using the self-addressed Stadardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 1285

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Downloaded from http://www.everyspec.com
Check the source to verify that this is the current version before use.

MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-STD-2000 - Standard Requirements for Soldering Electrical and Electronic Assemblies

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines

Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk. Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (see 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

10548227 - Pulse Trasformer
10548654 - I-f Gate Board Assembly - Lower
10548650 - Schematic, I-f Gate

PACKAGING DATA SHEET

P10548654 - Packaging of I-f Gate Board Assembly-- Lower

(Copies of drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 **Components and assemblies.** The components and assemblies shall comply with all requirements specified on Drawing 10548654, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the i-f gate board assembly - lower shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances
b. Inorganic protective surface finishings
c. Part identification and marking
d. workmanship

3.3 Environmental service conditions.

3.3.1 **Vibration.** The i-f gate board assembly - lower shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as fallows:

Frequency Range	Amplitude
10 to 15 hertz	0.06 inches double amplitude
15 to 25 hertz	0.04 inches double amplitude
25 to 55 hertz	0.02 inches double amplitude

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% per decade.
The 10-55-10 hertz sweep time is 3 minutes 45 seconds ± 10%.

3.3.2 Shock. The i-f gate board assembly - lower shall not suffer damaged shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10% 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

The i-f gate board assembly - lower shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

3.3.3.2 Non-operating. The i-f gate board assembly - lower shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The i-f gate board assembly - lower shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40 deg. F and +155 deg. F.

3.3.4.2 Non-operating (storage). The i-f gate board assembly - lower shall not suffer permanent damage when subjected to the constant temperature extremes of -60 deg. F for a period of 24 hours and +160 deg. F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating) The i-f gate board assembly - lower shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram 10548650.

3.5 Performance. The i-f gate board assembly - lower shall produce the results as given in 3.5.1, 3.5.2, and 3.5.3 when loaded and supplied with the following:

a. Load terminals E9 and Ell with 220 ohms 1/2 watt (W) resistor.

b. Load terminals E8 and E10 with 220 ohms 1/2 W resistor.

c. Load terminals E16 and E17 with a 10k ohm resistor, variable.

d. Load terminals E6 and E7 with a 470 ohm 1/2 w resistor.

e. -15.00 ± 0.75 volts direct current (Vdc) between E15 (-) and E24 (+).

f. +15.00 ± 0.75 Vdc between E14 (+) and E24 (-).

g. +10 volts (V) pulse, 20 Kilohertz (KHz), 2.0 micro-seconds (us) pulse width, to E22.

h. -3.5 ± 0.5 V pulse, 20 KHz, 2.2 ± 0.1 us pulse width, to E18.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

1. Terminal E20 connected to E19.

2. Transformer T1 Connected as shown on schematic 10548650.

3.5.1 Voltage A voltage of 5.10 ± 0.52 Vdc shall be present between terminals E21 (-) and E23 (+).

3.5.2 Output A pulse output shall be present at terminal E20 of + 2.5 V minimum amplitude with a width of 0.2 us minimum.

3.5.3 Pulses A pair of complementary pulses shall be present at E6 and E7 the parameters as shown in Figure 1. The base line of the E7 pulse shall be capable of being adjusted to a positive level of exactly the same value of E6 negative baseline level by means of the variable resistor connected between terminals E16 and E17.

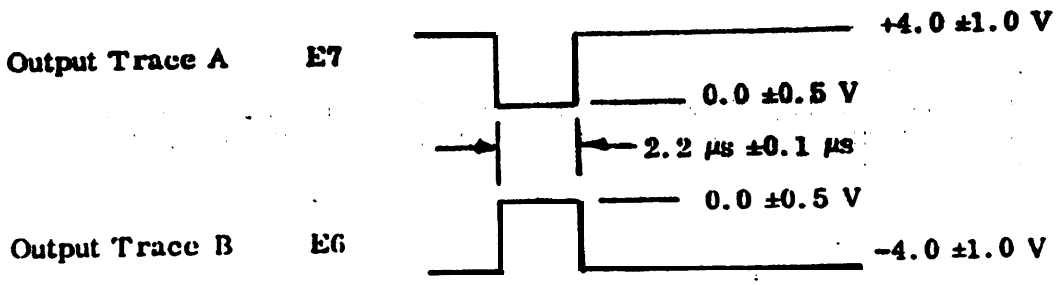


FIGURE 1. Output Pulses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

3.6 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 In addition to detail requirement (task) F of paragraph 1.2 of MIL-STD-2000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all Inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the Inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5 and all applicable drawings. The inspections set forth in this specification shall become a part of the contractor's overall Inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 General Provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50 deg to +90 deg F.
b.	Relative humidity	90% RH Max.
c.	Pressure	28 to 32 inches of Hg.

4.3 First article inspection.

4.3.1 First article submission. The contractor shall submit a first article sample as designated by the contracting officer consisting of three i-f gate-board assemblies - lower for inspection in accordance with 4.3.2.

4.3.2 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component or test specimen to comply with any of the stated requirements.

4.4 quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies. All components, assemblies and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP) . In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (Individual characteristic) basis In accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. *The tests in* Table I shall be performed on a 100% basis.

TABLE I. Functional tests
(100% Inspection)

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		None	N/A
Major:			
101.	Electrical	3.4	4.7.2
102.	Performance	3.5	*4.7.3*
Minor:		None	N/A

4.5 Special sampling. One i-f gate board assembly - lower out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table I and shall then meet the tests in Table IX. Unless otherwise specified in the contract the items shall be returned to the lot upon successful completion of testing.

TABLE II. Special sampling

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		None	N/A
Major:			
103.	Vibration	3.3.1	4.7.1.1
104 .	Shock	3.3.2	4.7.1.2
105.	Altitude	3.3.3	4.7.1.3
106.	Temperature	3.3*4	4.7*1.4
l07•	Humidity	3.3.5	4.7.1.5
Minor:		None	N/A

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:33Z
Check the source to verify that this is the current version before use.

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all prod ction since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the 'Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in 'Examination" and 'Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment Is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment . In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table III shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:33Z
Check the source to verify that this is the current version before use.

TABLE 111. Test equipment list

ITEM NUMBER		DESCRIPTION
1.	Power supply no. 1	Output voltage: 0-20 Vdc, ungrounded. Output current: 0-500 mA. Ripple voltage: less than 10 mV rms.
2.	Power supply no. 2	Same as item 1.
3.	Digital voltmeter	Dc, 3 digit, full scale of 100 V or greeter. Input resistance: greater than 1 megohm.
4.	Pulse generator no. 1	Frequency: 20 KHz internal *or* external. Amplitude: 0 to +10 V, adjustable. Width: 0.1 us to 2.5 us, adjustable. Delay: 0 to 2.0 us from leading edge of trigger pulse. Rise and fail time: less than 20 us.
5.	Pulse generator no. 2	Same as item 4.
6.	oscilloscope, dual	Bandwidth: greater than 500 KHz. channel Deflection factor: 0.5 V/cm to 10 V/cm. Time base range: 1 us/cm to 200 V/cm. Input RC: 1 megohm shunted by approximately 25 pF. Rise time, scope and probe: less than 50 ns.
7.	Test harness	As specified in Figure 2. See Table IV for test harness parts list.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810 except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514, Category 8, Procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The i-f gate board assembly - lower shall be attached to the vibration generator directly or with a fixture, and securely held by Its normal means of attachment. After vibration, the i-f gate board assembly - lower shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response with ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the i-f gate board assembly - lower shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:33Z
Check the source to verify that this is the currentversion before use.

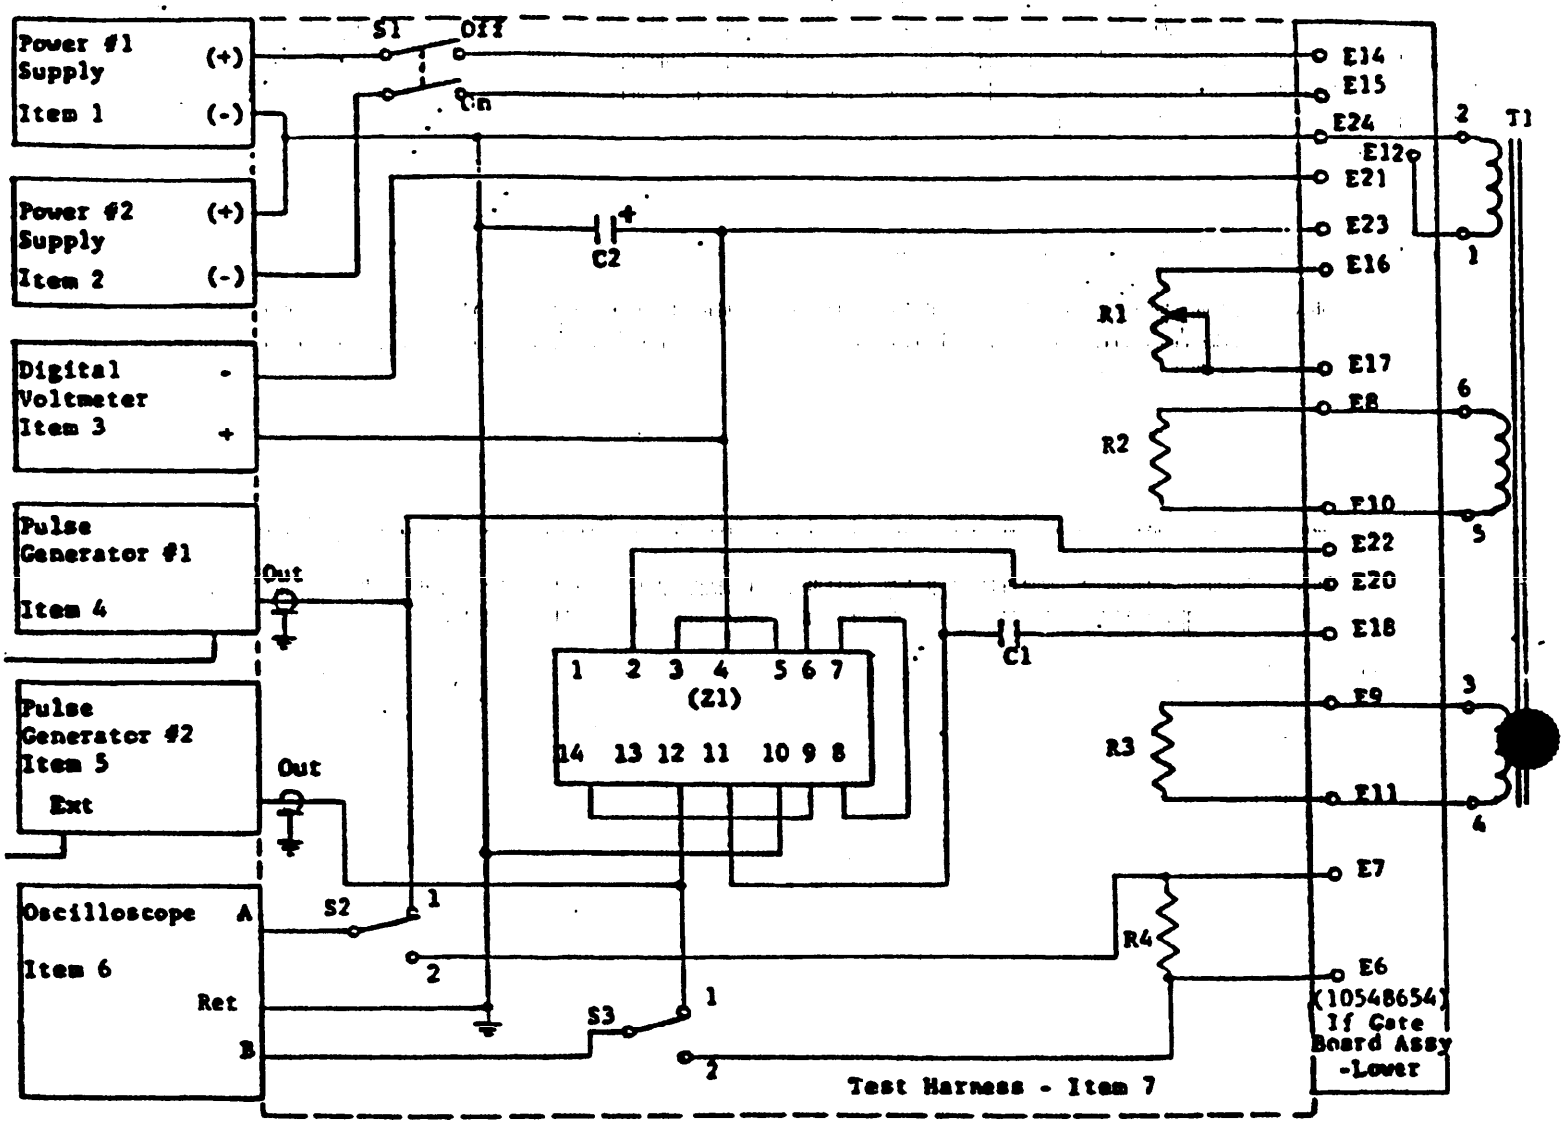


FIGURE 2. I-f gate board assembly - lower, test setup.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:33Z
Check the source to verify that this is the current version before use.

TABLE IV. Test harness parts list

DESIGNATION	PART	DESCRIPTION
cl	Capacitor	0.1 UF, 25 wvdc.
C2	Capacitor	25 uF, 25 wvdc, tantalum.
R1	Resistor, variable	10,000 ohms, 1/2 W .
R2	Resistor	220 ohms, 1/2 w.
R3	Resistor	220 ohms, 1/2 w.
R4	Resistor	470 ohms, 1/2 w.
S1	Switch	DPST, 0.5 A capacity
S2	Switch	SPDT, 0.5 A capacity
S3	Switch	SPDT, 0.5 A capacity.
T1	Transformer, Pulse	Drawing 10548227.
Z1	Integrated circuit	Raytheon RG140 or Sylvania SG140.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 ± to 2,000 hertz. After the application of all the shock impulses, the i-f gate board assembly - lower shall be tested as specified in 4.7..2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating) This test shall be performed as specified in Procedures II and 111, Method 500 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating) This test shall be performed as specified in Procedures I and II, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:33Z
Check the source to verify that this is the current version before use.

4.7.1 .4.2 Low (operating and non-operating) This test shall be performed as specified in Procedures I and II; Method 502 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

407.1.5 Humidity (non-operating) This test shall be performed in accordance with Procedure III, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment (SME) and visual examination for compliance with 3.4.

4.7.3 Performance. The selected i-f gate board assembly - lower shall be tested as follows:

a. Place test harness switch S1 to OFF and S2 and S3 to position 1.

b. Connect test equipment as shown in Figure 2. Connect the test harness to the terminals of the i-f gate board assembly - lower.

c* Adjust power supply (Table III, item 1) for +15.0 ± 0.1 Vdc and power supply (Table III, item 2) for -15.o ± 0.1 Vdc .

d. Adjust pulse generator no. 1 (Table XII, item 4) as follows:

Frequency: 20 KHz, Internal

Amplitude: +10V

Width : 2.0 us

e. Adjust pulse generator no. 2 (Table III, item 5) as follows:

Frequency: external

Amplitude: +3 v

Width : 0.5 us

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:33Z
Check the source to verify that this is the currentversion before use.

D

Delay: 2.2 us from leading edge of pulse generator no. 1 pulse (see Figure 3).

f* Set test harness switches S2 and S3 to position 2.

g" Set test harness switch S1 to ON. Observe digital voltmeter (Table III, item 3) for a reading of +5.10 ± 0.52 Vdc.

h. Observe oscilloscope, item 6, for the waveforms as shown in Figure 1. Adjust R1 on the test harness for the value of baseline of trace A to be equal to the value of trace B baseline, but of opposite polarity.

i. Set test harness switch S1 to OFF. Disconnect i-f gate board assembly - lower from the test harness.

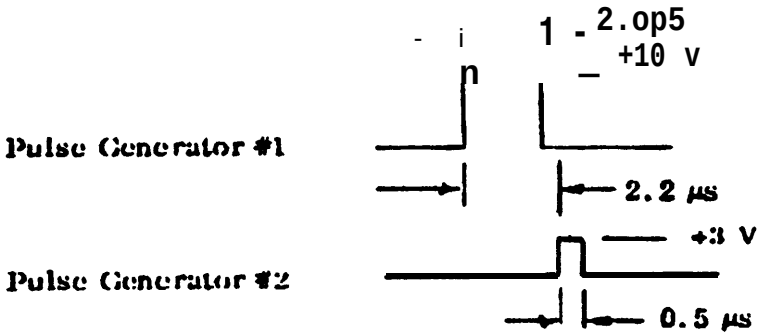


FIGURE 3. Input pulses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

4.8 Soldering. Soldering processes shall be inspected by certified inspec tors to the requirements and acceptance criteria of MIL-STD-2000 as specified in paragraph 3.7.

5. PACKAGING

5.1 General. Preservation, packing, and marking shall be in accordance with Packaging Data Sheet P10548654.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The i-f gate board assembly - lower is used as part of the i-f gate assembly, part of Radar Set AN/VPS-2. When installed in the i-f gate assembly it generates a pair of complementary pulses, initiated by receipt of a mod trigger pulse, which drive a balanced diode bridge in the i-f gate assembly. It also provides a +5 Vdc level which is used as a voltage source for the integrated circuit on the i-f gate board assembly - upper.

6.2 Acquisition requirements. Procurement documents shall specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. Applicable stock number.
First Article Sample requirements.
d. Packaging requirements, if other than specified in Section 5.
e. Serialization requirements, if applicable.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copie of designs as required to: Commander, U.S. Army AMCCOM, ATTN: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, (DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament, Research and Development command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal *or* Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

6.5 Subject term (Key word) listing.

I-f gate board assembly - lower
Radar Set AN/VPS-2
I-f gate board assembly - upper
Radar Receiver R1475/VPS-2

6.6 Changes from Previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A731)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-G-50684A (AR)	9 July 1990

3. DOCUMENT TITLE

GATE, I-F BOARD ASSEMBLY LOWER: 10548654

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER		DATE SUBMITTED

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
US Army ARDEC Standardization & Specification Office	(201) 724-6674	880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S Picatinny Arsenal, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil - Downloaded: 2022-10-22T20:33Z
Check the source to verify that this is the current version before use.