
MIL-S-81824/2A
24 October 1980
Superseding
MIL-S-81824/2
22 June 1979

MILITARY SPECIFICATION SHEET

SPLICE, ELECTRIC, PERMANENT, CRIMP STYLE COPPER,
INSULATED, ONE-PIECE, ENVIRONMENT RESISTANT, CLASS 1

This specification is approved for use by all Departments
and agencies of the Department of Defense.

The complete requirements for procuring the splice,
described herein shall consist of this document
and the latest issue of MIL-S-81824.

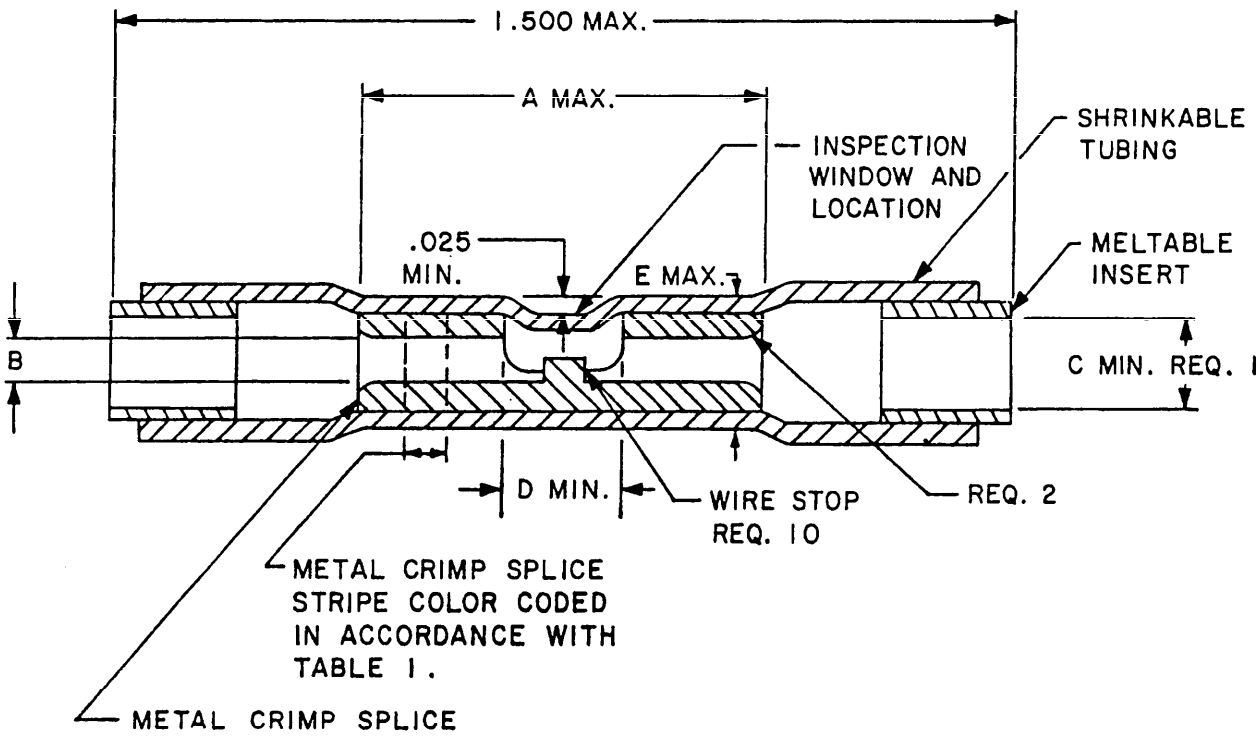

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:14Z
Check the source to verify that this is the current version before use.

TABLE I.

DASH NO.	WIRE RANGE	A MAX.	B	C MIN.	D MIN.	E MAX.	WEIGHT PER 1,000 (POUNDS)	COLOR CODE
-1	26-24-22-20	.515	.055 .043	.085	.120	.160	15.0	Red
-2	20-18-16	.590	.075 .060	.110	.130	.190	24.0	Blue
-3	16-14-12	.590	.110 .090	.170	.135	.230	35.0	Yellow

METRIC TABLE

INCH	mm	INCH	mm	INCH	mm	INCH	mm
.025	0.64	.075	1.91	.120	3.05	.515	13.08
.040	1.02	.085	2.16	.130	3.30	.590	14.99
.055	1.40	.090	2.29	.140	3.56	1.125	28.58
.060	1.52	.110	2.79	.170	4.32		

REQUIREMENTS:

1. .025 max. after unrestricted recovery through meltable material.
2. Wire insertion shall be facilitated by Bell mouth.
3. Material: Copper (See procurement specification, or copper alloy.)
4. Insulation Sleeve: See procurement specification.
5. Sealing material: Modified thermoplastic: See procurement specification.
6. Finish: Metal, tin plated or silver plated: See procurement specification.
7. Dimension B to be determined as the average of two diameters measured at right angles.
8. The inspection window and locator shall provide a positive means of positioning splice in the applicable crimping tool and provide visible inspection of stripped wire ends.
9. Part number: Consists of the letter "M", the basic number of this specification sheet, and a dash number taken from Table I. Example: M81824/2-1 Splice for 26-24 22-20 wire range.
10. The wire stop must prevent wire entering opposing wire barrel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:14Z
Check the source to verify that this is the current version before use.

11. Qualification: For qualification testing, splices shall be tested with wire conforming to MIL-W-22759/11. For crimping tools use Table II. The applicable heat tool is to be used for shrinking the insulating sleeve after crimping to meet the performance requirements. See procurement specification.
12. No etching or solvent treating of the associated wire insulation shall be permitted.
13. Use only M83507/14-01 heat gun on fueled aircraft.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01mm) are given for general information only and are based upon 1 inch = 25.4mm.

TABLE II. CRIMP TOOLS

Splice Part No.	Basic Crimp Tool No.	Die No.	Die Nest Color
M81824/2-1	M22520/5-01	M22520/5-101	White
	M22520/10-01	M22520/10-102	White
M81824/2-2	M22520/5-01	M22520/5-100	*White
	M22520/10-01	M22520/10-101	White
M81824/2-3	M22520/5-01	M22520/5-100	*White
	M22520/10-01	M22520/10-101	White

*For M22520/5-100 Dies use 26-14 Die Closure.

Custodians:

ARMY - ER
NAVY - AS
USAF - 85

Review Activity:

ARMY - AV
USAF - 11, 99
DSA - GS

User Activity:

ARMY - MI
NAVY - EC, MC, SH, OS

Preparing Activity:

NAVY - AS

(Project No. 5940-0896)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-S-81824/2A SPLICE, ELECTRIC, PERMANENT, CRIMP STYLE COPPER, INSULATED, ONE-PIECE, ENVIRONMENT RESISTANT, CLASS 1

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T06:14Z
Check the source to verify that this is the currentversion before use.