MIL-C-13777/6B
1 September 1966
SUPERSEDING
MIL-C-13777/6A
5 November 1963

MILITARY SPECIFICATION SHEET

CABLE, SPECIAL PURPOSE, ELECTRICAL 60, 65, AND 78 CONDUCTORS

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of Specification MIL-C-13777.

REQUIREMENTS:

Dimensions and configuration: See applicable figures and design data for the following types:

601330	601665S	601845S	651125
601495S	601734S	601931S	782166S

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

DESIGN DATA			
Type Designation	601330	601495S	60191S
Figure No.	1	2	1
Total Wires	60	60	60
No. of Conductors & AWG #	60/#18 51/#18	9/#18S	60/#18S
Insulation			
Min average thickness	0.015"	0.015"	0.015"
Spark Test Voltage	3000	3000	3000
Inspection Test Voltage	1500	1500	1500
Cabling			
Layer No. 1	Filler	Filler	Filler
Layer No. 2			
(a) Number of wires	6	6	6
(b) AWG #	#18	#18	#18S
(c) Maximum Lay			
Layer No. 3			
(a) Number of wires	12	9	12
(b) AWG #	#18	#18S	#18S
(c) Maximum Lay			
Layer No. 4			
(a) Number of wires	18	20	18
(b) AWG #	#18	#18	#18S
(c) Maximum Lay			
Layer No. 5			
(a) Number of wires	24	25	24
(b) AWG #	#18	#18	#18S
(c) Maximum Lay	9.00"	12.00"	10.00"
Sheath			
No. of Layers	2	2	2
Total thickness Min	0.141"	0.141"	0.188"
Minimum OD Cable	1.300"	1.470"	1.881"
Maximum OD Cable	1.360"	1.520"	1.981"

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

Type Designation	601665S	601734S	601845S	651125
Figure No.	3	4	5	6
Total Wires	60	60	60	65
No. of Conductors & AWG #	(1)	(4)	(7)	65/#20
Insulation				
Min average thickness	0.015"	0.015"	0.015"	0.015"
Spark Test Voltage	3000	3000	3000	3000
Inspection Test Voltage	1500	1500	1500	1500
Cabling				
Layer No. 1	Filler	Filler	Filler	Filler in Cent.
(a) Number of wires				8
(b) AWG #				#20
(c) Maximum Lay				
Layer No. 2				
(a) Number of wires	(3)	(5)	(8)	13
(b) AWG #				#20
(c) Maximum Lay				
Layer No. 3				
(a) Number of wires	15/#18S	20	(9)	19
(b) AWG #				#20
(c) Maximum Lay				
Layer No. 4				
(a) Number of wires	31/#18	(6)	(10)	25
(b) AWG #				#20
(c) Maximum Lay	11.00"	11.50"	13.00"	
Sheath				
No. of Layers	2	2	2	2
Total thickness Min	0.156"	0.156"	0.109"	0.098"
Minimum OD Cable	1.615"	1.684"	1.820"	1.100"
Maximum OD Cable	1.715"	1.784"	1.870"	1.150"

(1) 35/#18, 5 Prs. Tw & Sh., 15/#18S
(2) Deleted
(3) 5 Prs. Tw. & Sh., 4/#18
(4) 20/#18, 20 Prs. Tw. & Sh.
(5) 6 Prs. Tw. & Sh.
(6) 14 Prs. Tw. & Sh.
(7) 20 Prs. Tw. & Sh., 20 Sing. Sh.
(8) 5 Prs. Tw. & Sh., 3 Singles Sh.
(9) 17 Shielded
(10) 15 Prs. Tw. & Sh.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

DESIGN DATA

Type Designation			782166S		
Figure No.			7		
Total Wires			78		
No. of Conductors & AWG #	64/#20	4/#20S	2/#14	2/#8	6/#4
Insulation					
Min average thickness		0.015"	0.018"	0.025"	0.063"
Spark Test Voltage			3000		
Inspection Test Voltage		1500	1800	2500	3500
Cabling					
Min average thickness					
Layer No. 1			Filler		
Layer No. 2					
(a) Number of wires	2	6	12		
(b) AWG #	#14	#4			4/#20S
(c) Maximum Lay			8.00"		
Layer No. 3					
(a) Number of wires			66		
(b) AWG #		2/#8			64/#20
(c) Maximum Lay			12.00"		
Sheath					
No. of Layers			2		
Total thickness Min			0.183"		
Minimum OD Cable			2.116		
Maximum OD Cable			2.216"		

Custodians:
Army - MU
Navy - SH
Air Force - 17


Reviewer:
Army - MI, EL, MO
Navy - SH - OS
Air Force - 15

Users:
Army - CE
Navy - MC
Air Force - 11

Preparing activity:
Army - MU

(Project 6145-0423)


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

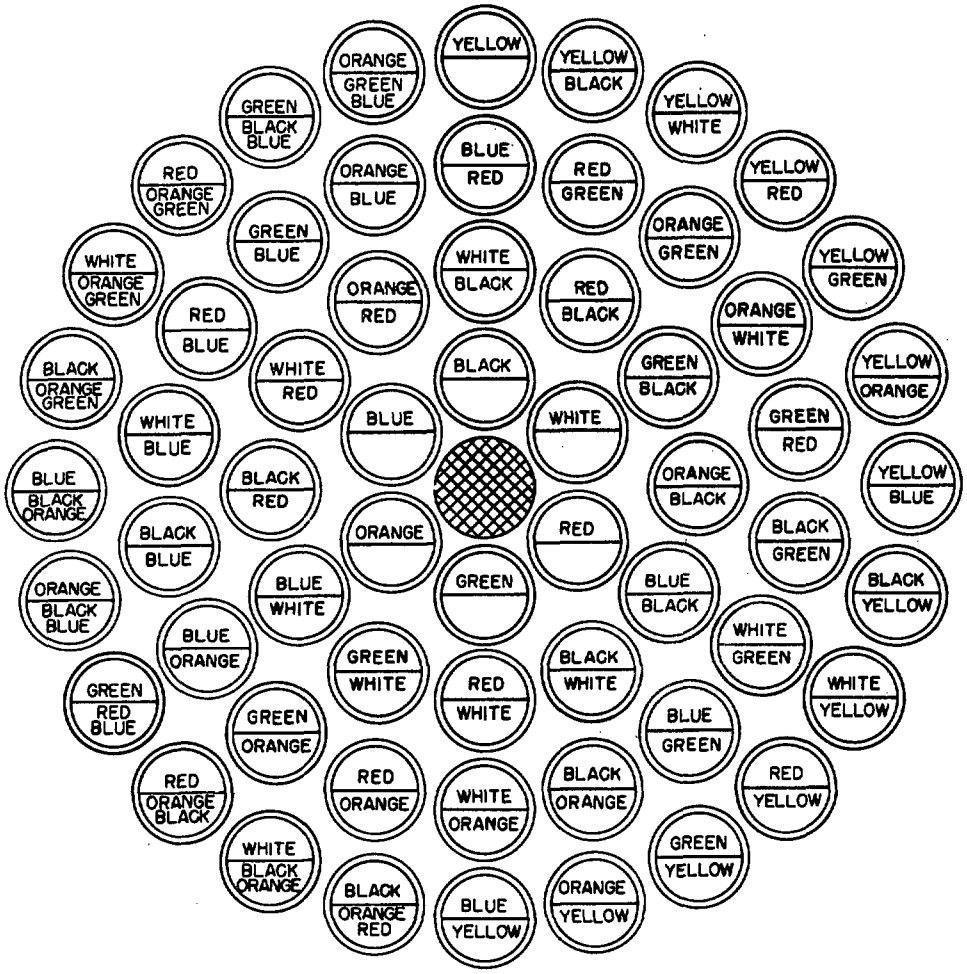

CABLE TYPES: 601330 601931S
NOTE: DOUBLE CIRCLE INDICATES SHIELDED CONDUCTORS

FIGURE 1


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

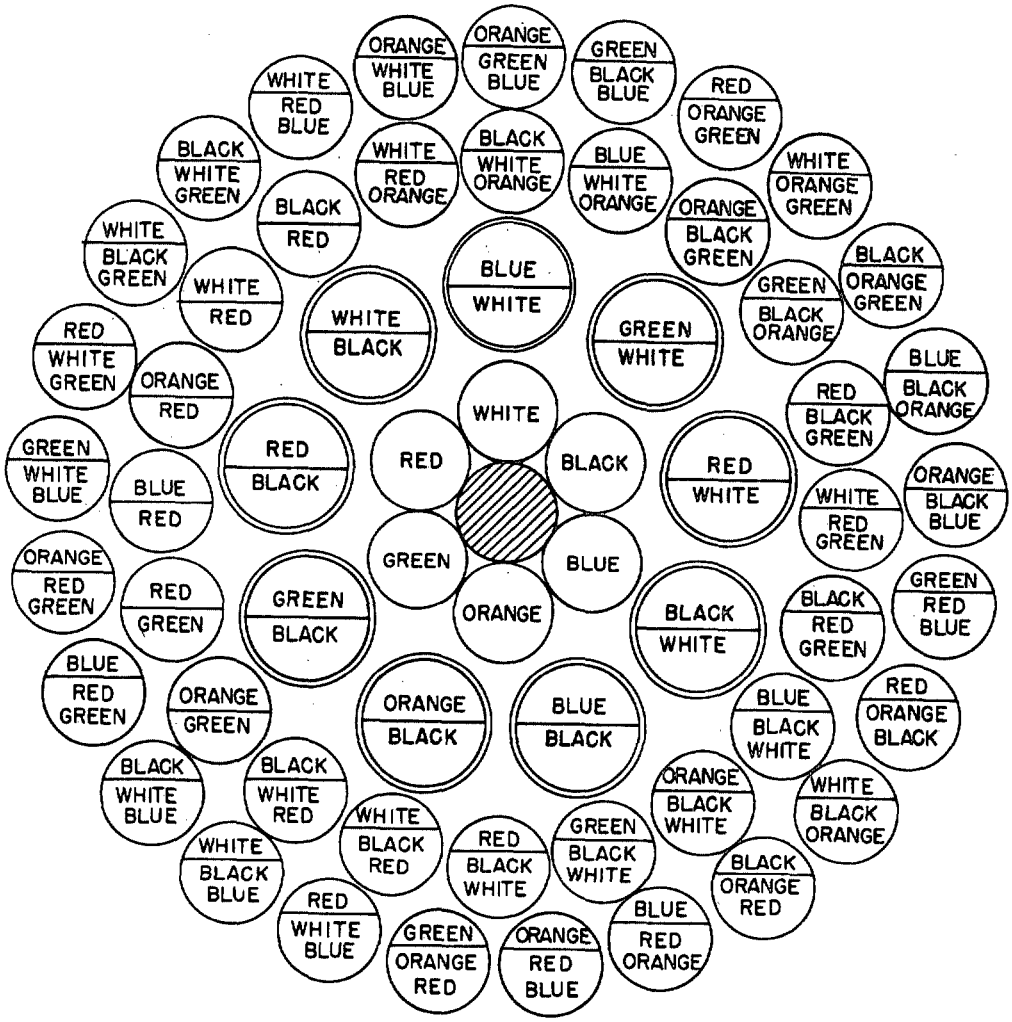

CABLE TYPE: 601495S
NOTE: DOUBLE CIRCLE INDICATES SHIELDED CONDUCTORS

FIGURE 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

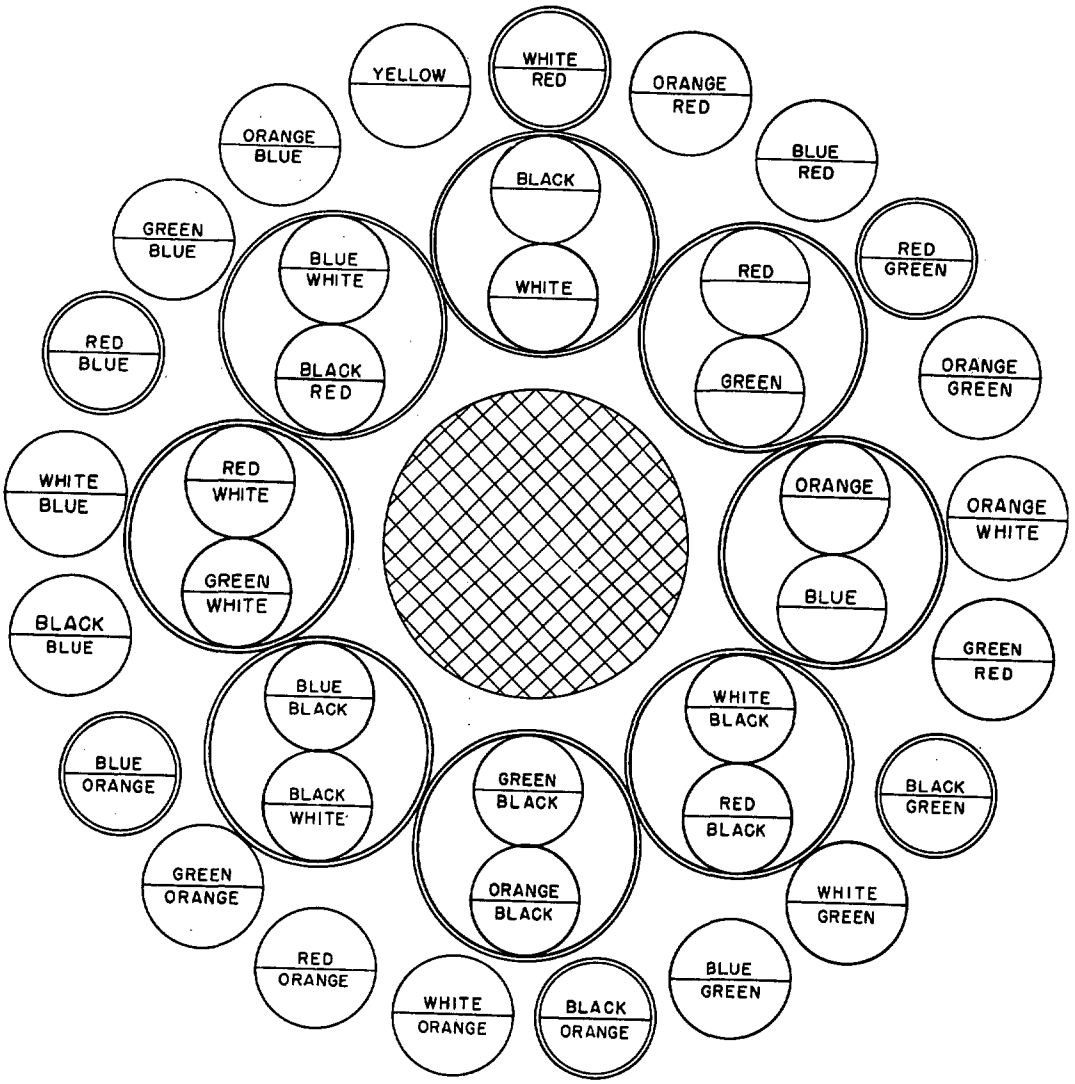

CABLE TYPE: 601665S
NOTE: DOUBLE CIRCLE INDICATES SHIELDED CONDUCTORS

FIGURE 3


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

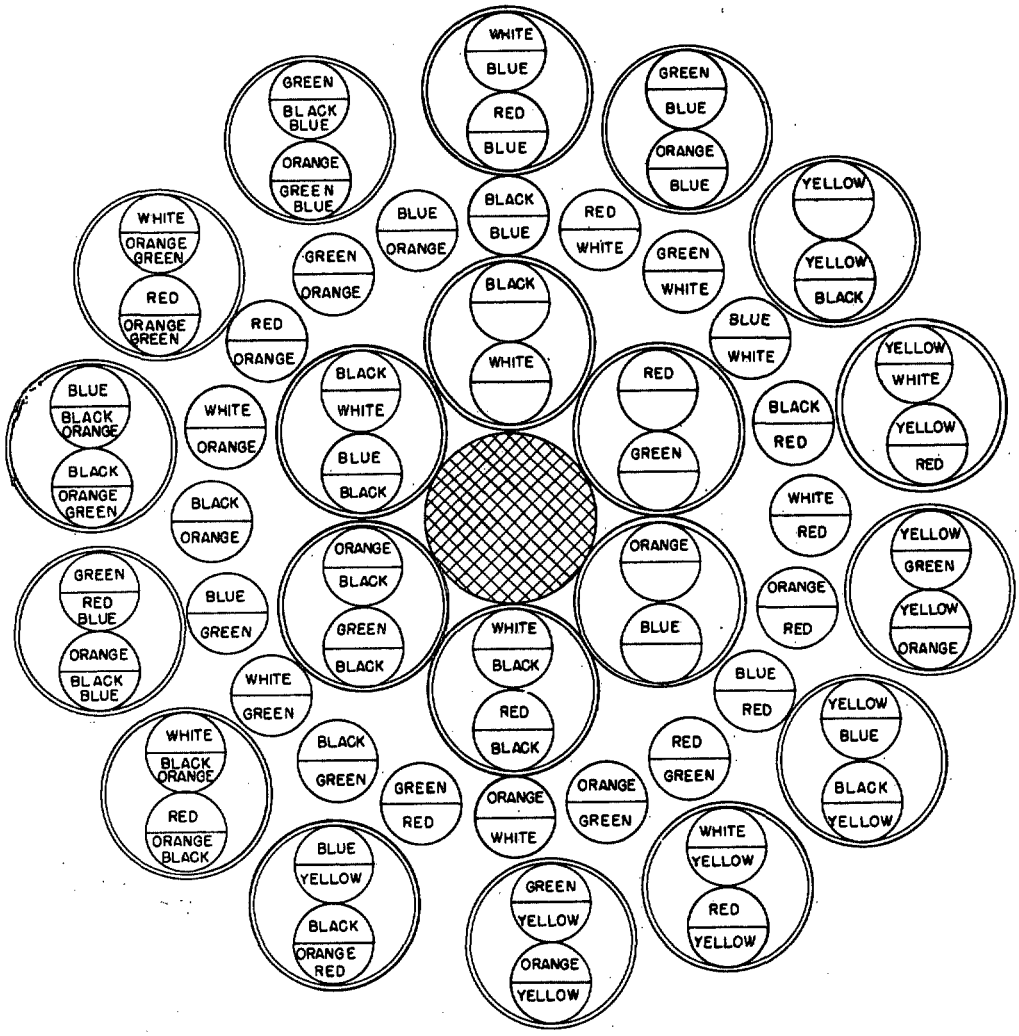

CABLE TYPE: 601734S
NOTE: DOUBLE CIRCLE INDICATES SHIELDED CONDUCTORS

FIGURE 4


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

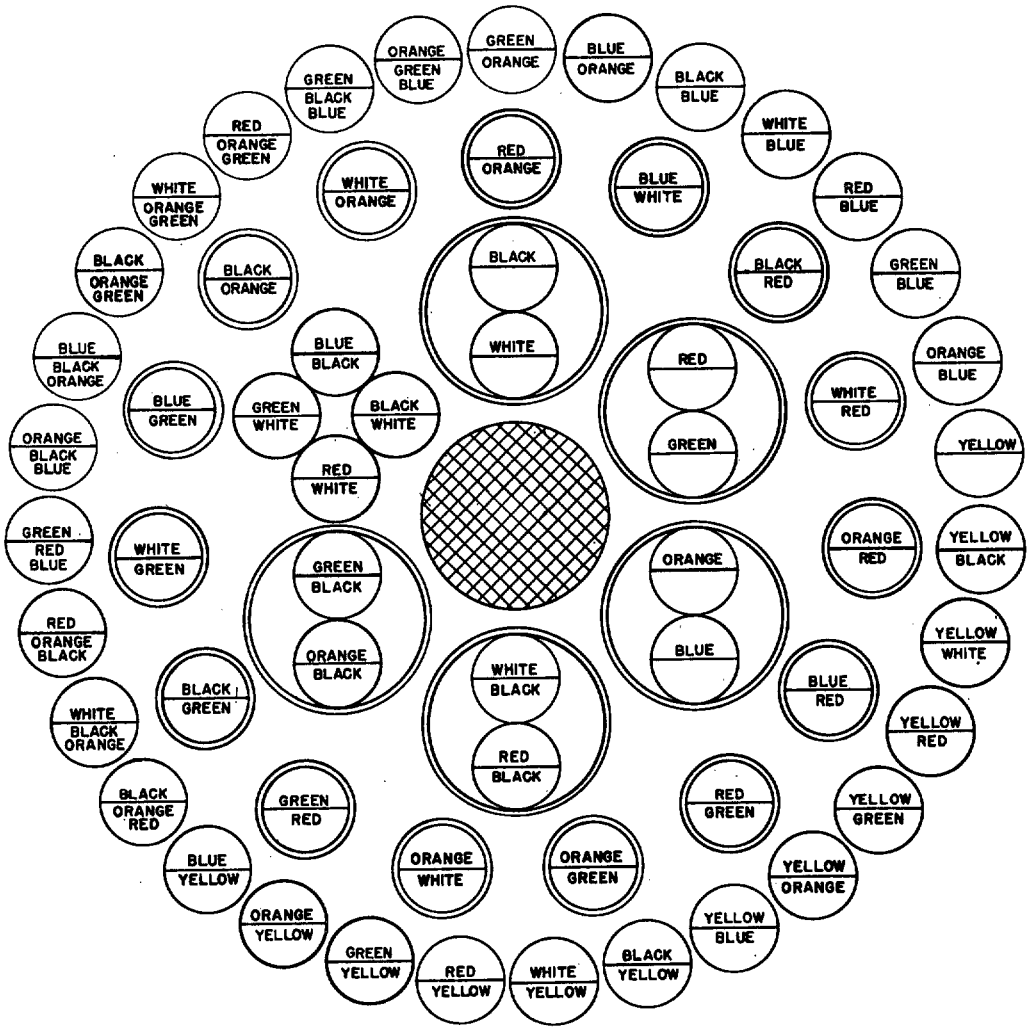

CABLE TYPE: 601845S
NOTE: DOUBLE CIRCLE INDICATES SHIELDED CONDUCTORS

FIGURE 5


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

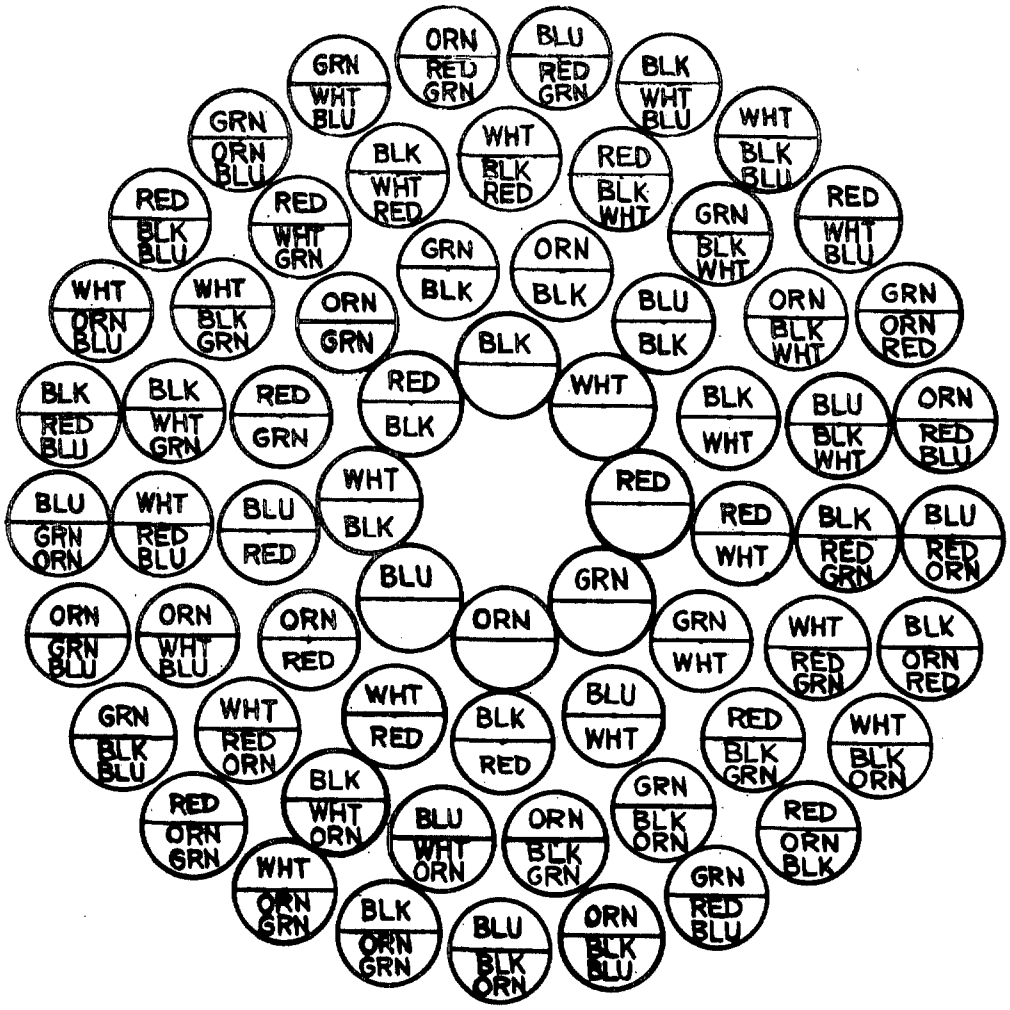

CABLE TYPE: 651125

FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

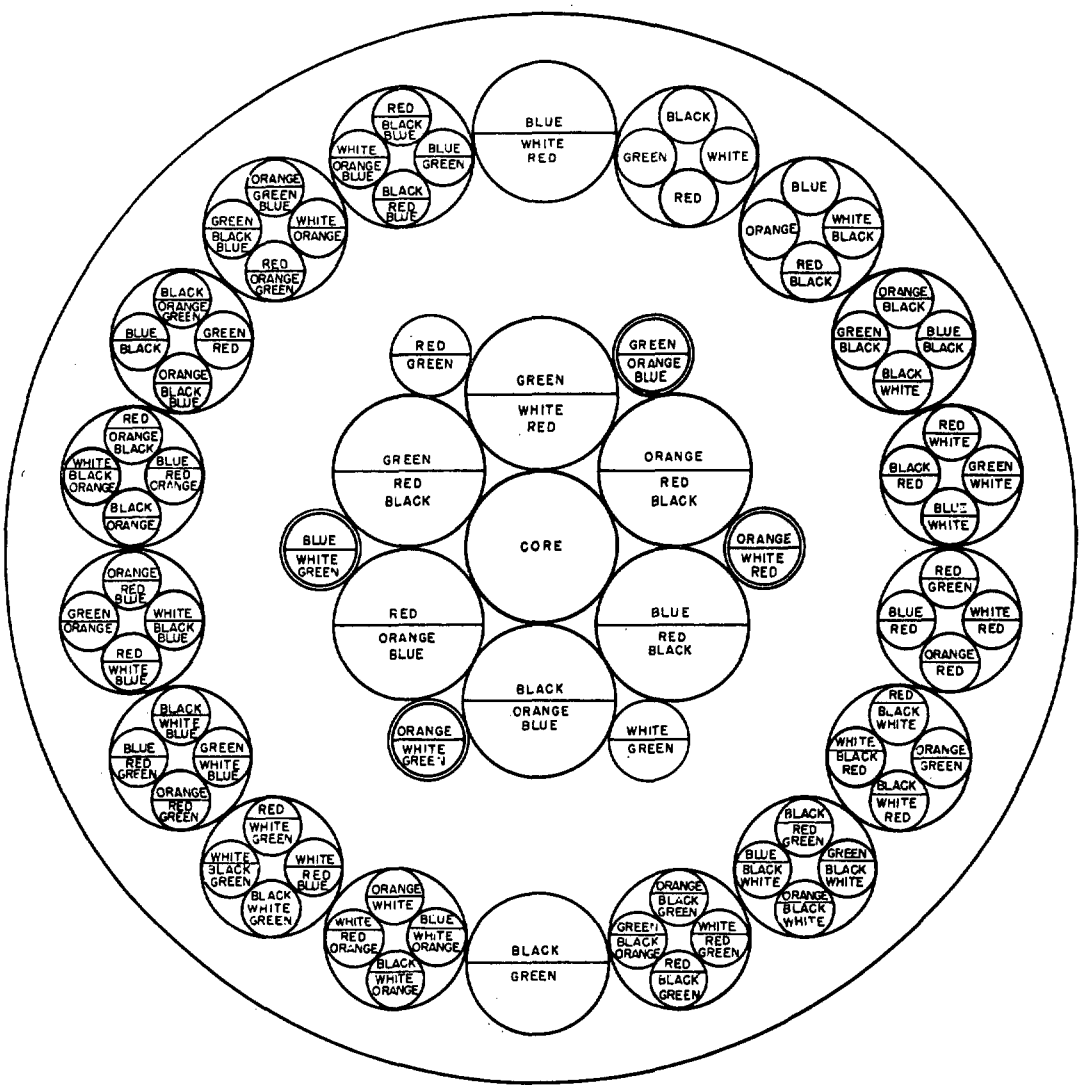

CABLE TYPE: 782166S
NOTE: DOUBLE CIRCLE INDICATES SHIELDED CONDUCTORS

FIGURE 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.