MIL-T-13778A(Ord)
22 January 1958
SUPERSEDING
MIL-P-13778 (Ord)
10 November 1954
AFPS - 67
14 February 1944

MILITARY SPECIFICATION

TELESCOPES, ELBOW, M6A1, M17 SERIES, AND M75 SERIES; PACKAGING OF

1. SCOPE

1.1 This specification covers the packaging and packing of Elbow Telescopes, M6A1, M17 Series, and M75 Series, for each level of protection.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

FF-N-105	-	Nails, Wire; and Staples
NN-P-515	-	Plywood, Container Grade
QQ-S-781	-	Strapping, Flat; Steel
QQ-S-790	-	Strapping, Round; Steel, Bare and Zinc-Coated
UU-T-111	-	Tape; Paper, Gummed (Sealing and Securing)
LLL-F-291	-	Fiberboard; Corrugated, Single Face (Flexible)
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	-	Boxes, Fiber
PPP-B-676	-	Boxes, Set-Up, Paperboard
PPP-C-843	-	Cushioning Material, Cellulosic
PPP-T-60	-	Tape; Pressure-Sensitive Adhesive, Waterproof - For Packaging and Sealing

FSC 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

PPP-T-76	-	Tape, Pressure-Sensitive Adhesive Paper, Water Resistant
PPP-T-495	-	Tubes, Mailing and Filing, Paper

Military

MIL-A-101	-	Adhesive, Water-Resistant, for Sealing Fiberboard Boxes
MIL-P-116	-	Preservation, Methods of
MIL-B-117	-	Bags, Interior Packaging
MIL-B-121	-	Barrier Material, Greaseproofed, Flexible (Waterproofed)
MIL-B-131	-	Barrier Material; Water Vaporproof, Flexible
MIL-D-3464	-	Desiccants, Activated, Bagged, Packaging Use and Static Dehumidification
MIL-A-5092	-	Adhesive, Rubber (Synthetic and Reclaimed Rubber Base)
MIL-R-6855	-	Rubber; Synthetic, Sheet, Molded, and Extruded for Aircraft Applications
MIL-P-14232	-	Packaging of Parts, Spare Parts, Equipment and Tools for Weapons and Fire Control, General Specification for

STANDARDS

Military

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MS 20003	-	Indicator Humidity, Card, Three Spot Impregnated Areas

DRAWINGS

Army-Navy Aeronautical

AN 7513	-	Humidity Indicator, Small

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procureing activity or as directed by the contracting officer).

2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

2.2 Other publications.- The following documents form a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

CONSOLIDATED FREIGHT CLASSIFICATION COMMITTEE

Consolidated Freight Classification Ratings, Rules and Regulations

(Application for copies should be addressed to the Consolidated Freight Classification Committee, 202 Chicago Union Station, Chicago 6, Illinois)

AMERICAN TRUCKING ASSOCIATION

National Motor Freight Classification No. A-2 and No. 13

(Application for copies should be addressed to the American Trucking Association, 1424 Sixteenth Street, N. W., Washington 6, D. C.)

3. REQUIREMENTS

3.1 Materials and methods.- The materials, methods and procedures used in the packaging of items shall be in accordance with this specification. Materials and methods not covered by a specification shall be suited to the intended use and subject to the approval of the contracting officer. Unless otherwise specified, the contractor shall provide the Government inspector certification of adherence to the required material specifications.

3.1.1 Materials.- The following shall apply wherever packaging materials are referred to in this specification by name only:

REFERENCE	FULL IDENTIFICATION
Flexible single face corrugated fiberboard	Type II or III of Specification LLL-F-291
Gummed tape	Class 1 or 2 of Specification UU-T-111
Pressure-sensitive tape	Specification PPP-T-60

3.2 Preservation and packaging

3.2.1 Level A

3.2.1.1 Disassembling.- The eye shield, sunshade, and thumbscrews shall be removed. The sunshade lock screw shall be reinserted into the body

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

to prevent loss.

3.2.1.2 Cleaning

3.2.1.2.1 Optics.- Exposed glass surfaces of the eyelens and objective lens shall be cleaned in accordance with the optical cleaning method as specified in Specification MIL-P-14232.

3.2.1.2.2 Other surfaces.- Cleaning process C-1 of Specification MIL-P-116 shall be used to clean all other surfaces of the telescope.

3.2.1.3 Drying.- Immediately after cleaning, the item shall be dried thoroughly in accordance with any applicable procedure specified in Specification MIL-P-116 that will not damage the item.

3.2.1.4 Preservative application.- The thumbscrews shall be coated with preservative conforming to type P-7 of Specification MIL-P-116.

3.2.1.5 Unit packaging

3.2.1.5.1 Method.- The elbow telescope shall be packaged method IIa, in accordance with Specification MIL-P-116 and as specified herein. (see figure 4).

3.2.1.5.2 Cushioning.- The covered glass surfaces shall be further covered with cellulosic cushioning material at least 1/4 inch thick, conforming to type III, class B of Specification PPP-C-843. The cushioning material shall be secured with pressure sensitive tape. (see figure 2).

3.2.1.5.3 Eye shield.- The eyeshield shall be placed in amailing tube or a paperboard box in such a manner that it will not become deformed. The mailing tube shall conform to type II or III of Specification PPP-T-495. The paper board box shall conform to style III or IV, type B, Class 2 of Specification PPP-B-566 or to type I, III or IV, any class, style 3 or 4 of Specification PPP-B-676. The mailing tube or the paperboard box shall be sealed with gummed tape.

3.2.1.5.4 Sunshade.- The sunshade shall be wrapped with flexible single face corrugated fiberboard. The wrap shall be secured with gummed tape.

3.2.1.5.5 Thumbscrews.- The thumbscrews shall be wrapped with greaseproof barrier material conforming to type I or II, grade A, any class of Specification MIL-B-121. The wrap shall be secured with gummed tape. The wrapped

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

thumbscrews shall be placed in a bag conforming to type I or II, grade A, class C of Specification MIL-P-117. The bag shall be closed by heat sealing after the excess entrapped air is removed.

3.2.1.5.6 Lamp socket. - The lamp socket shall be covered with greaseproof barrier material conforming to type I or II, grade A, any class of specification MIL-B-121. The covering shall be secured with pressure sensitive tape.

3.2.1.5.7 Plywood base. - A plywood base with runners shall be constructed. The plywood used shall conform to type IV of Specification NN-P-515 and the lumber shall conform to Group I or II of Specification PPP-B-621. (see figure 3).

3.2.1.5.8 Preparation of base. - Three machine bolts each with a plain washer and a lock washer, shall be placed in the plywood base. A fiberboard pad shall be positioned over the bolts. The fiberboard material shall conform to class 2, V3c of Specification PPP-B-636 (see figure 4). A gasket fabricated from material conforming to Class II, grade 60 of Specification MIL-R-6855 shall be placed over the bolts. A flexible water-vaporproof barrier of material conforming to Class 1 of Specification MIL-B-131 shall be positioned over the three mounting bolts in the plywood base. Another gasket of material conforming to Specification MIL-R-6855 shall be placed over the barrier material. The gaskets shall be coated on both sides, around the bolt holes, with rubber adhesive conforming to type 3 of Specification MIL-A-5092. (see figure 4). A single layer of flexible single face corrugated fiberboard shall be positioned over the bolts. A sheet of greaseproof barrier material conforming to type I or II, grade A, any class of Specification MIL-B-121 shall then be positioned over the bolts. (see figure 4).

3.2.1.5.9 Mounting telescope on the base. - The telescope shall be mounted upon the prepared base and shall be secured by the three bolts threaded into the base of the mount. This shall be completed before the gasket cement dries. The required units of desiccant, conforming to Specification MIL-D-3464 shall be secured to the telescope with pressure sensitive tape. A humidity indicator conforming to Standard MS20003 or Drawing AN7513 shall be secured to the upper surface of the telescope with pressure sensitive tape. The packaged eyeshield, sunshade and bagged thumbscrews shall be secured to the telescope with pressure sensitive tape. (see figure 5).

3.2.1.5.10 Closure of barrier. - The flexible corrugated fiberboard shall be molded around the telescope and the water-vaporproof bag shall be closed by heat sealing after the excess entrapped air is removed. The time lapse between securing of the desiccant and the closure of the barrier shall be held to an absolute minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

3.2.1.5.11 Fiberboard box. - The bagged telescope, mounted on its base, shall be positioned in a fiberboard box conforming to class 2, V2s, V3s, or V3c; style RSC of Specification PPP-B-636. (see figure 6).

3.2.1.5.11.1 Hold down liner. - The base with telescope shall be immobilized within the fiberboard box by means of a double liner and a top pad, each made of fiberboard conforming to Class 2, V3c of Specification PPP-B-636. The hold down liner shall be constructed from two thickness of fiberboard glued together with water resistant adhesive conforming to Specification MIL-A-101. The creases in the hold down liner shall be parallel to the corrugations. The liner shall fit snugly in the fiberboard box; the bottom edge shall bear against the plywood base with the top edge bearing against the top pad.

3.2.1.5.11.2 Closure. -The fiberboard box shall be closed by covering all seams, including the manufacture's joint, with pressure sensitive tape conforming to Specification PPP-T-76.

3.2.2 Level C

3.2.2.1 Disassembling, cleaning and drying. - Disassembling, cleaning and drying shall be as specified in 3.2.1.1, 3.2.1.2 and 3.2.1.3.

3.2.2.2 Preservative application. - Preservative shall be applied as specified in 3.2.1.4.

3.2.2.3 Unit packaging. - The elbow telescope shall be packaged method I in accordance with Specification MIL-P-116. The packaging operations shall be as specified in 3.2.1.5 except that the gaskets water-vaporproof barrier, desiccant and humidity indicator shall be omitted. The fiberboard box shall conform to Class I, style RSC or FOL of Specification PPP-B-636.

3.3 Packing

3.3.1 Level A. - Six packaged telescopes shall be immobilized in a shipping container conforming to either of the following specifications:

PPP-B-601, Overseas type
PPP-B-621, Class 2 - Overseas

The container shall be strapped in accordance with appendix of the applicable box specification.

3.3.2 Level B. - Six packaged telescopes shall be immobilized in a shipping container conforming to either of the following specifications:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

PPP-B-601, Domestic type
PPP-B-621, Class 1 - Domestic

The container shall be strapped in accordance with appendix of the applicable box specification, except that staples shall not be applied to straps on domestic shipments.

3.3.3 Level C. - Packaged telescopes shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Containers shall comply with Consolidated Freight Classification Rules or Motor Freight Regulations, whichever is applicable.

3.4 Marking

3.4.1 Normal marking. - Unit packages and exterior containers shall be marked in accordance with the requirements of Standard MIL-STD-129.

3.4.2 Protection of overseas marking. - All overseas exterior container markings and labels shall be protected with a coating of transparent waterproof material as specified in Standard MIL-STD-129.

3.5 Pilot pack. - Prior to quantity packaging production, a pilot pack, consisting of a complete and packed shipping container, shall be subjected to the rough handling tests in accordance with the requirements of Specification MIL-P-116. (Applicable to Level A).

3.6 Workmanship. - Adequate controls shall be utilized to check for contamination of cleaning solvents and preservatives. Wraps shall be neat, conforming, and firmly secured. Tape shall be uniformly applied to interior boxes and shall completely cover and adhere to all joints and seams. Shipping containers shall be free of protruding staples, screws, nails, etc. Strapping shall be applied perpendicular to the sides of the container just prior to shipment and shall not cover any container marking. Irrevelant marking shall be neatly obliterated. Visual observation shall indicate that the application of specified materials and methods are practical and will not result in packaging and packing deficiencies.

4. QUALITY ASSURANCE PROVISIONS

4.1 Procedure

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

4.1.1 The inspection and test procedures specified in this section are those that shall be conducted by the contractor or his agent under the surveillance of the Government inspector to determine acceptability of telescopes, elbow, M6A1, M17 Series, and M75 Series, packaging of.

4.1.2 Materials. - Prior to production the contractor shall supply the Government inspector with certification of compliance, thereby certifying that all materials used comply with this specification. Where technical analysis of a sample or specimen is desired, the Government inspector shall utilize appropriate forms and forward them to the technical responsible agency or procuring activity.

4.2 Pilot pack. - (Level A only)

4.2.1 A pilot pack representing initial production shall be submitted to the Government inspector for acceptance inspection. The pilot pack shall be subjected to 100% inspection by both the contractor and the Government inspector in accordance with the requirements herein.

4.3 Disposition of pilot pack

4.3.1 Should a pilot pack fail to pass Government inspection, all production will cease until the defective characteristic(s) have been corrected in the process used to produce the pilot pack. When corrections have been made in the process a new pilot pack will be submitted for acceptance inspection. Any and all rejected pilot packs will be corrected and be part of the first production lot submitted for inspection after acceptance of a pilot pack.

4.4 Acceptance inspection and testing

4.4.1 Sampling for non-destructive inspection shall be in accordance with Table IV A in conjunction with inspection level II of Standard MIL-STD-105.

4.4.2 Sampling for destructive testing shall be in accordance with Table V in conjunction with Inspection level 5 of Standard MIL-STD-105, **Appendix A.**

4.5 Lot sizes. - Lot sizes for destructive and/or non-destructive inspection and/or testing shall be determined by the contracting officer and shall be manufactured under similar conditions. Lot size shall also be compatible with available facilities and consistent with production and delivery schedules. Should lot sizes be of such small quantities as to make sampling inspection impracticable and in variance with lot and sample sizes dictated in Standard MIL-STD-105, 100% inspection shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

4.6 Acceptable quality levels. - Inspection for acceptance shall be conducted in accordance with the following classification of defects and acceptable quality levels. The acceptable quality levels established below are to be used in conjunction with Standard MIL-STD-105, Table IV A. Tightened or reduced inspection shall be instituted when the conditions outlined in Standard MIL-STD-105 are prevalent. Tightened inspection shall be performed using Table IV A, reduced inspection shall be performed utilizing Table V of Standard MIL-STD-105.

CLASSIFICATION OF DEFECTS FOR LEVEL "A"

Major AQL - 2.5		Reqt. Para.	Method of Inspection
1.	Disassembly	3.2.1.1	Visual
2.	Cleaning	3.2.1.2	Visual
3.	Drying	3.2.1.3	Visual
4.	Improper preservation	3.2.1.4	Visual
5.	Improper method of unit packaging	3.2.1.5.1	Visual
6.	Inadequate cushioning material	3.2.1.5.2	Visual
7.	Eyeshield improperly packaged	3.2.1.5.3	Visual
8.	Improper assembly and closure of bags	3.2.1.5.5; 3.2.1.5.10	Visual
9.	Non-conformance to preparation, assembly of base	3.2.1.5.8	Visual
10.	Unit improperly secured	3.2.1.5.9	Visual
11.	Insufficient desiccant	3.2.1.5.9	Visual
12.	Humidity indicator improperly secured	3.2.1.5.9	Visual
13.	Improper immobilization	3.2.1.5.11.1	Visual
14.	Improper closure of box	3.2.1.5.11.2	Visual
15.	Improper illegible marking	3.4.1	Visual
16.	Improper waterproofing of markings	3.4.2	Visual
Minor AQL - 6.5			
41.	Cushioning material improperly secured	3.2.1.5.2	Visual
42.	Improper wrapping	3.2.1.5.4; 3.2.1.5.6	Visual
43.	Assembly improperly boxed	3.2.1.5.11	Visual
44.	Improper type of container	3.3.1	Visual
45.	Prescribed number of packages improperly immobilized	3.3.1	Visual
46.	Improper strapping	3.3.1	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS FOR LEVEL "B"

Major AQL 1.0		Reqt. Para.	Method of Inspection
1.	Prescribed number of packages improperly immobilized	3.3.2	Visual
2.	Improper marking	3.4.1	Visual
Minor AQL 2.5			
41.	Improper type container	3.3.2	Visual
42.	Improper strapping	3.3.2	Visual

CLASSIFICATION OF DEFECTS FOR LEVEL "C"

Major AQL 2.5		Reqt. Para.	Method of Inspection
1.	Disassembly	3.2.1.1	Visual
2.	Cleaning	3.2.1.2	Visual
3.	Drying	3.2.1.3	Visual
4.	Improper preservative application	3.2.4	Visual
5.	Improper method of unit packaging	3.2.2.3	Visual
6.	Inadequate cushioning material	3.2.2.3	Visual
7.	Eyeshield improperly packaged	3.2.2.3	Visual
8.	Non-conformance to preparation, assembly of base	3.2.2.3	Visual
9.	Unit improperly secured	3.2.2.3	Visual
10.	Improper immobilization	3.2.2.3	Visual
11.	Improper closure of box	3.2.2.3	Visual
12.	Special marking	3.4.3	Visual
Minor AQL 4.0			
41.	Improper type box	3.2.2.3	Visual
42.	Assembly improperly boxed	3.2.2.3	Visual
43.	Improper protection	3.3.3	Visual
44.	Improper container	3.3.3	Visual

4.7 Disposition of rejected lots. - All rejected lots shall be returned to the Contractor for screening of all defective characteristics. After corrections have been made the lot will be resubmitted for acceptance inspection on the next tighter AQL Level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

4.8 Level C packing. - The procedure for level C type packing shall be submitted to the technical responsible agency or procuring activity for approval.

4.9 Destructive testing. - Destructive testing shall be performed on each unit package of the pilot pack, in accordance with the test procedures outlined in Specification MIL-P-116, to determine acceptability of the applicable items of which the unit packages are comprised of.

4.10 Disposition of destructive testing

4.10.1 The pilot pack shall be rejected when any of the items fails to conform to the requirements herein. Should a package fail the requirements, production shall cease until the manufacturing process causing the defect(s) has been corrected. Re-inspection shall not be permitted on previously rejected material, a new sample must be selected after corrective measures have been taken.

4.11 Rough handling test. - The pilot pack shall be subject to the rough handling test specified herein, applicable to level A only.

4.12 Disposition of rough handling test

4.12.1 Should a sample fail to pass the rough handling test, production shall cease until the manufacturing process causing the defect (s) has been corrected. Re-inspection shall not be permitted on previously rejected material, a new sample must be selected after corrective measures have been taken.

5. PREPARATION FOR DELIVERY

(Not applicable to this specification).

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Level of protection required.
(c) Applicable stock number.

6.2 Supplementary tables and figures. - The following tables and figures apply specifically to packaging of elbow telescope M6A1:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

TABLE I

*DIMENSIONS OF LEVEL A SHIPPING CONTAINER TELESCOPE, ELBOW, M6A1

	Length	Width	Height
Inside	34-1/4	19	17-1/2
Outside	38-1/4	20-1/8	18-5/8
Displacement		8.3 cubic feet	

TABLE II

*WEIGHTS OF LEVEL A CONTAINERS TELESCOPE, ELBOW, M6A1

	Fiberboard Box	Shipping Container
Net	10.0 lb.	99 lb.
Tare	6.5 lb.	45 lb.
Gross	16.5 lb.	144 lb.

*Container dimensions and weights are approximate and may vary slightly due to manufacture's practice.

TABLE III

BILL OF MATERIAL - LEVEL A TELESCOPE, ELBOW, M6A1

No.	Part	Req'd	Dimensions in Inches (Min.) Length	Width	Thickness	Reference
	*Box, Wooden	1	(per 6 items)			PPP-B-621, Class 2, Style 4 gp I or II
	Sheathing (Top and Bottom)	2	36-3/4	20-1/8	9/16	
	Sheathing (Side)	2	38-1/4	17-1/2	9/16	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

TABLE III - Cont'd

No.	Part	Req'd	Dimensions in Inches (Min) Length	Width	Thickness	Reference
	Sheathing (End)	2	19	17-1/2	3/4	
	Cleats (End)	4	18-3/8	2-1/4	3/4	
	Strapping, Flat or Round	2	85	1/2	.020	QQ-S-781 type I, cl. A or B
		2	85	.080 (14 gage)		QQ-S-790 class A or B
	Nails, 5d		As required for end cleating			FF-N-101
	Nails, 7d		As required for assembly			FF-N-101
1	*Box Fiberboard (inside dimensions)	1	17	9	11 (depth)	PPP-B-636 Class 2, V2s, V3s, or V3c, style RSC
2	Base, Plywood	1	17	9	1/4	NN-P-515 type IV
3	Runners	2	17	1-1/4	3/4	PPP-B-621 gp I or II
	Nails, 4d	16	For assembly of runners to base			FF-N-101
4	Fiberboard	1	6	6		PPP-B-636, cl. 2, V3c
5	Gaskets	2	6	6		MIL-R-6855, cl. II, gr. 60
6	Cement		As required			MIL-A-5092 type 3
7	Water-Vapor-proof Barrier	1	36	24		MIL-B-131, cl.1
8	Corrugated, single Face Fiberboard	1	24	18		LLL-F-291, type II or III
9	Bolts, Machine	3	1-1/4	1/4-20-NC-2 with plain and lock washer per bolt		
10	Cellulosic cushioning Material	2	7	7	1/4	PPP-C-843, type III, cl. B
11	Tape, Pressure-Sensitive		72	1		PPP-T-76
12	Mailing Tube or	1	2	3-1/4 Dia.		PPP-T-495, type II or III, PPP-B-566 or PPP-B-676
	Paperboard box	1	3-1/4	3-1/4 x 2 (depth)		

*Container dimensions are approximate and may vary slightly due to manufacturer's practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

TABLE III - Cont'd

Dimensions in Inches (Min)

No.	Part	Req'd	Length	Width	Thickness	Reference
	Tape, Paper		As required			UU-T-111 any cl.
13	Corrugated, single face fiberboard	1	10	10		LLL-F-291 type II or III
14	Greaseproof Barrier Material		12	6		MIL-B-121, type I or II, Grade A, any class
	Bag, Greaseproof	1	4	3		MIL-B-117, type I or II, class c
15	*Fiberboard Hold Down Liner	2	52	9-7/8		PPP-B-636, class 2, V3c
	Adhesive		As required			MIL-A-101
16	Tape, Pressure-Sensitive		120	2		PPP-T-76
17	*Fiberboard, Top Pad	1	17	9		PPP-B-636, class 2, V3c
18	Desiccant		6 Units			MIL-D-3464
19	Humidity Ind.	1				AN 7513
	Preservative		As required			MIL-P-116 type P-7

*Referenced dimensions are approximate and may vary slightly due to manufacturer's practice.

NOTICE: This specification, together with specifications and drawings pertaining to it and bearing a "Notice" of similar restrictions, is intended for use only in connection with procurement by the United States Government; and shall not be reproduced either wholly or in part except when authorized in connection with Government procurement, nor be used for any other purpose except when specifically authorized by the Chief of Ordnance, Department of the Army".

Custodian:

Army - Ordnance Corps

Preparing Activity:

Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

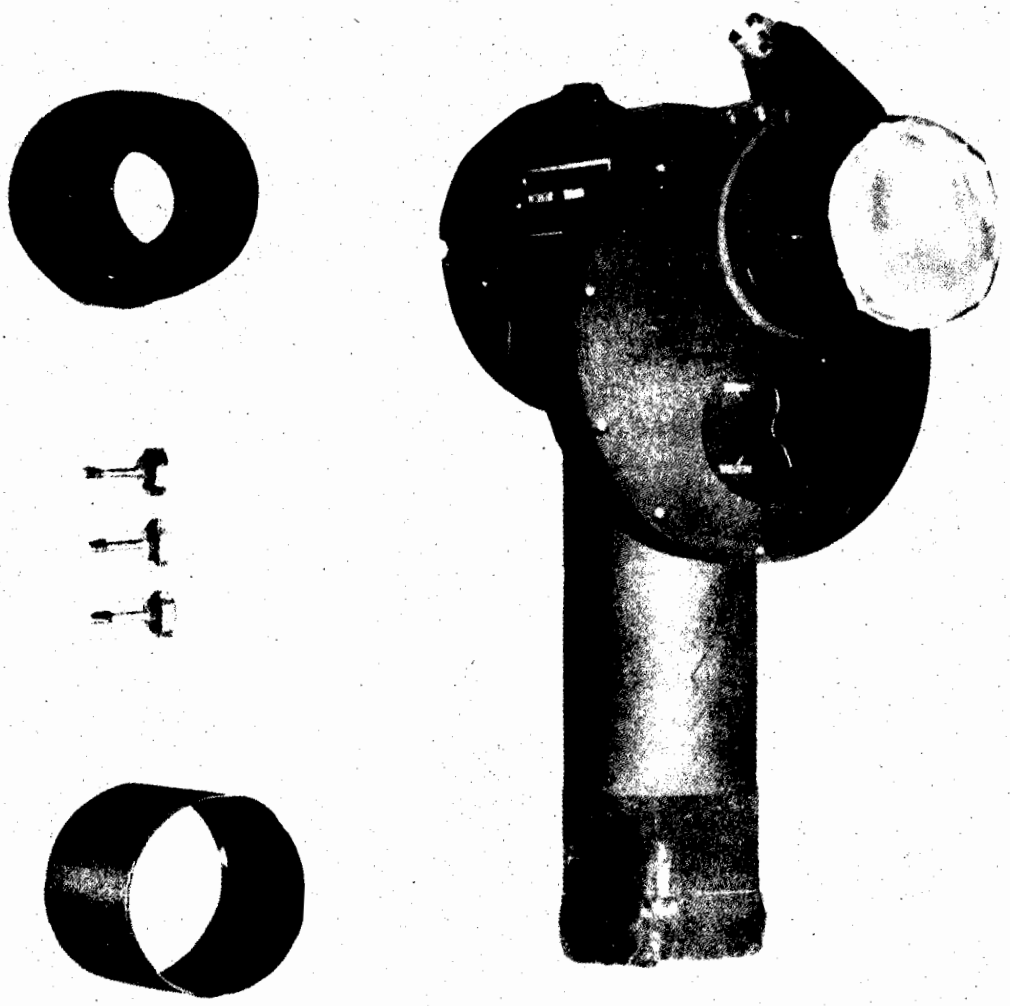


FIGURE 1

TELESCOPE, ELBOW, M6A1, EYESHIELD, THUMBSCREWS, AND SUNSHADE DISASSEMBLED

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

FIGURE 2
TELESCOPE, ELBOW, M6A1, LENSES CUSHIONED AND PARTS PACKAGED
FOR LEVEL A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

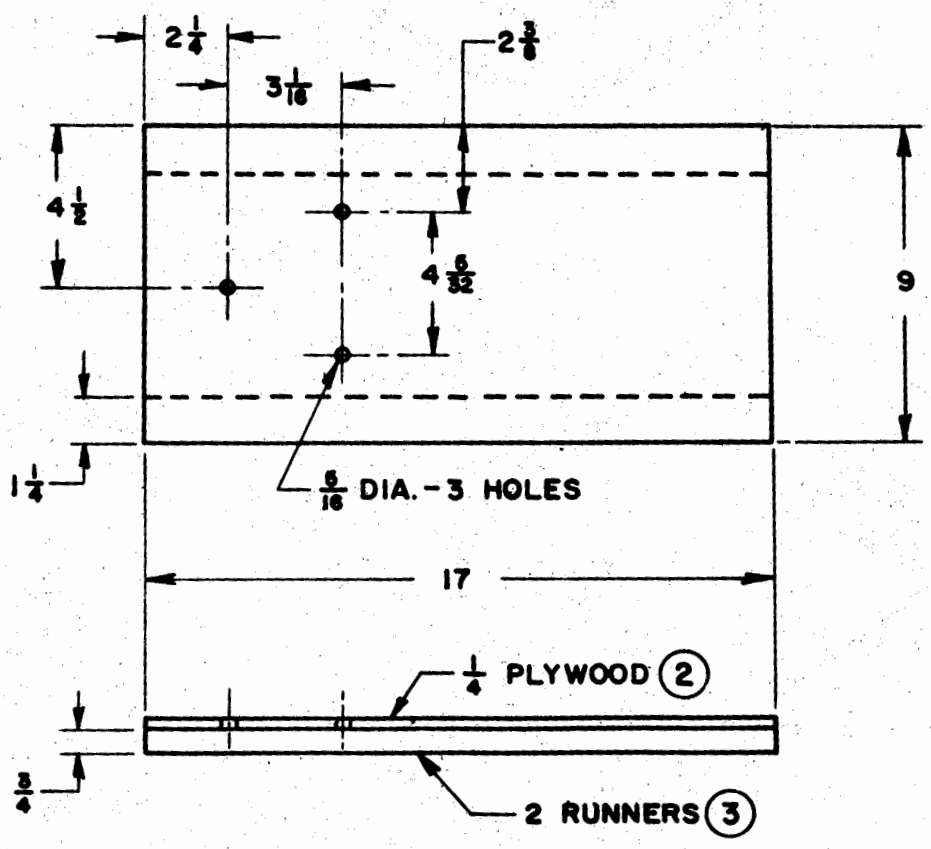


FIGURE 3

TELESCOPE, ELBOW M6A1, BASE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

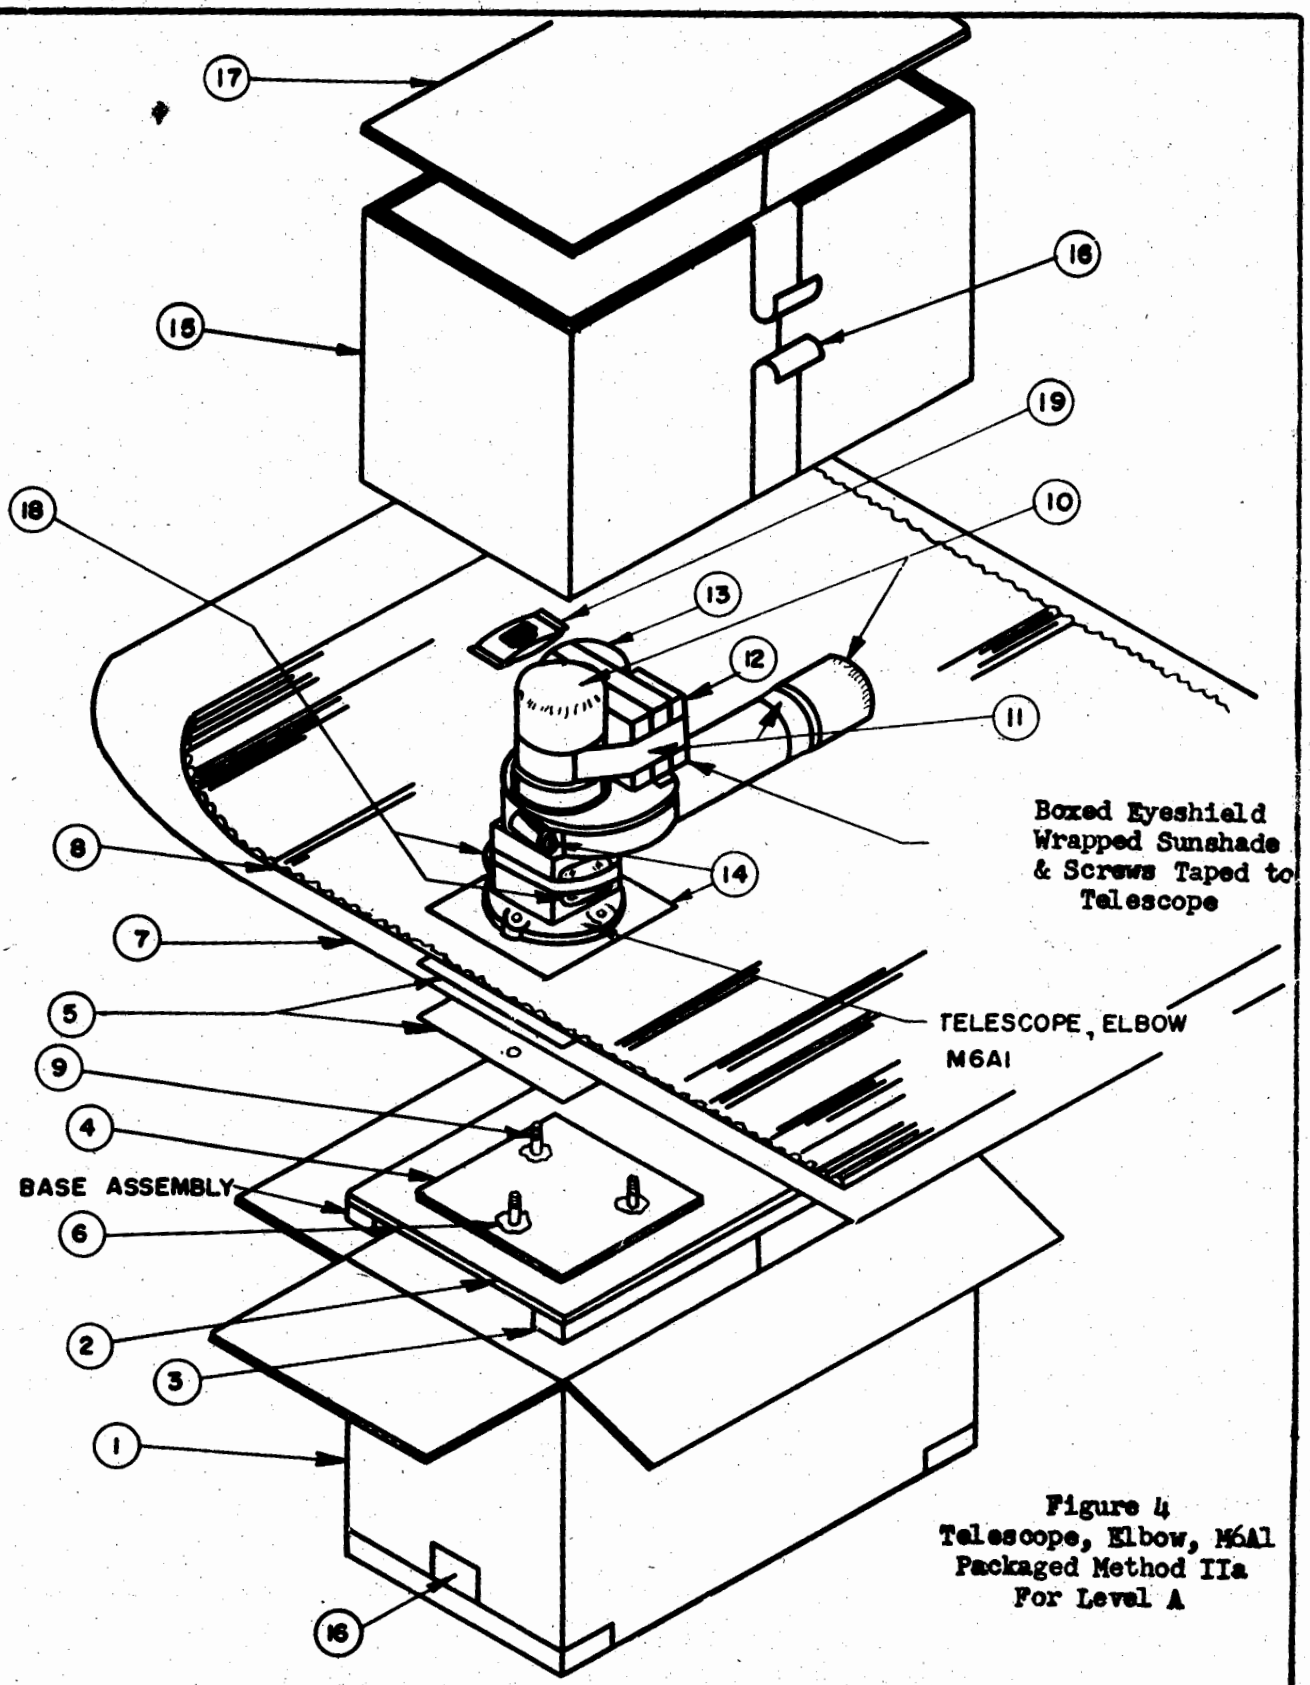


Figure 4
Telescope, Elbow, M6A1
Packaged Method IIa
For Level A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.



FIGURE 3. TELESCOPE, ELBOW, M8A1, READY FOR CLOSURE IN METHOD IIa PACK FOR LEVEL A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.

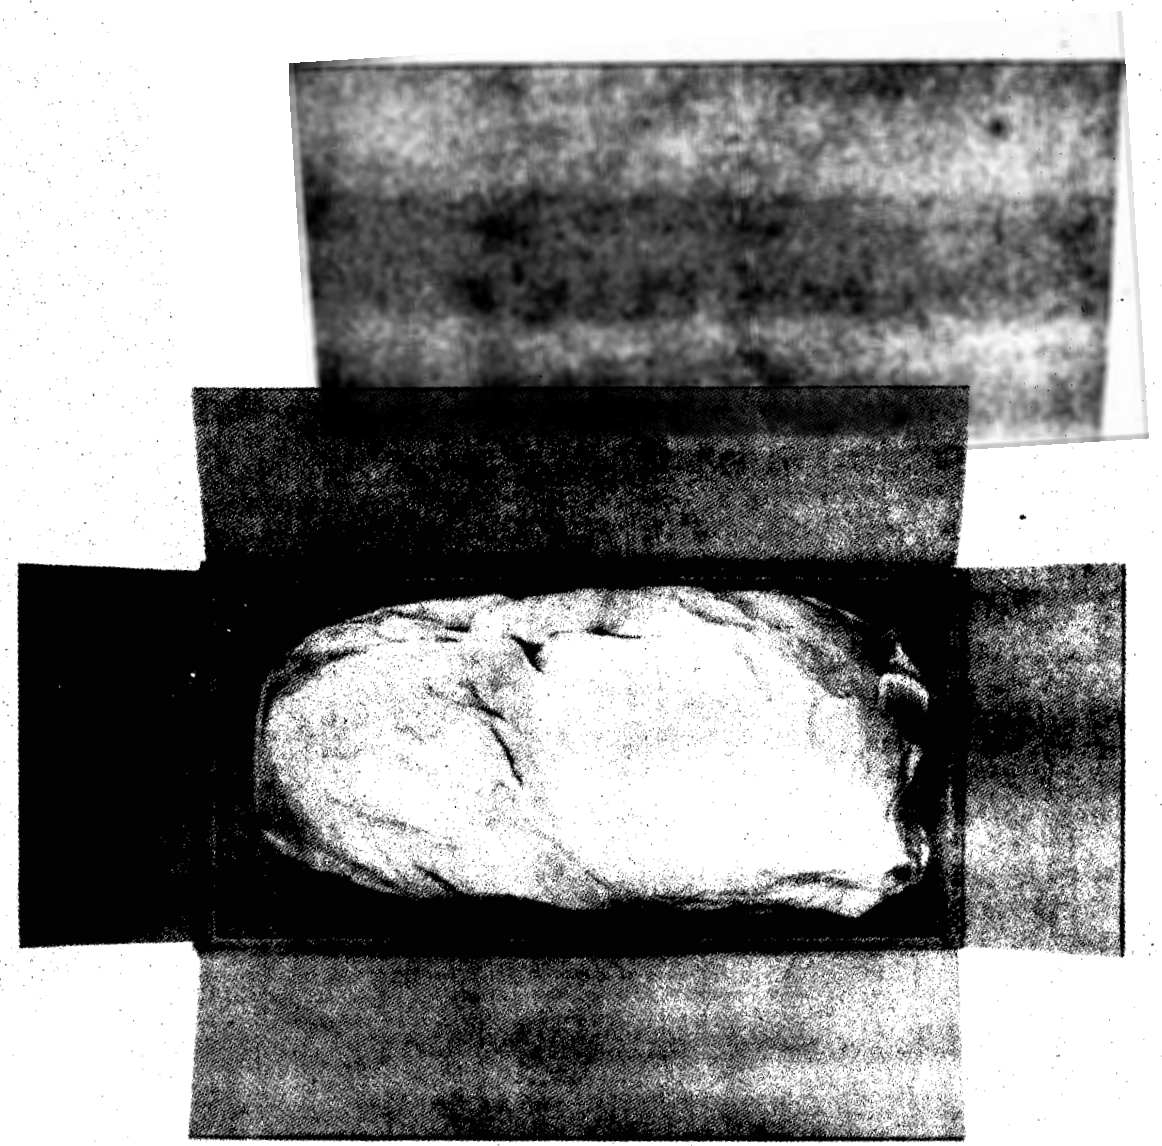


FIGURE 6
TELESCOPE, ELBOW, M6A1, HOLD DOWN LINER IMMOBILIZING BASE IN CONTAINER, LEVEL A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:19Z
Check the source to verify that this is the current version before use.