NOT MEASUREMENT SENSITIVE

MIL-DTL-14639/51
20 December 1996
SUPERSEDING
MIL-I-3949/21E
20 March 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, RANK, CHIEF WARRANT OFFICER W-2 AND W-4, NAVY AND MARINE CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14639 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

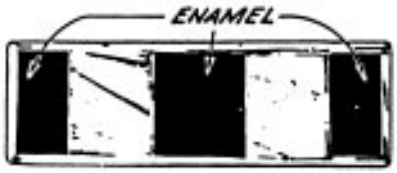

DASH NO.
- -1: Chief Warrant Officer W-4, Navy, Regular Size
- -2: Chief Warrant Officer W-4, Marine Corps, Regular Size
- -3: Chief Warrant Officer W-4, Navy, Miniature Size
- -4: Chief Warrant Officer W-4, Marine Corps, Miniature Size
- -5: Chief Warrant Officer W-2, Navy, Regular Size
- -6: Chief Warrant Officer W-2, Marine Corps, Regular Size
- -7: Chief Warrant Officer W-2, Navy, Miniature Size
- -8: Chief Warrant Officer W-2, Marine Corps, Miniature Size

MATERIAL: Gilding Metal

DIMENSIONS:

HEIGHT (Overall):
- -1, -2, -5, -6: 3/8 inch (0.95 cm) (REF)
- -3, -4, -7, -8: 1/4 inch (0.64 cm) (REF)

WIDTH (Overall):
- -1, -2, -5, -6: 1-1/8 inches (2.86 cm) (REF)
- -3, -4, -7, -8: 3/4 inch (1.91 cm) (REF)

THICKNESS (Overall):
- -1, -2, -5, -6: 0.065 inch $\pm$ 0.005 inch (0.165 cm $\pm$ 0.012 cm)
- -3, -4, -7, -8: 0.065 inch $\pm$ 0.005 inch (0.165 cm $\pm$ 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:11Z
Check the source to verify that this is the current version before use.

FINISH:
-1, -2, -3, -4: Hard Enameled, Nickel Plated, Rhodium Plated, Mirror-like polished.
-5, -6, -7, -8: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and the following distance apart.

-1, -2, -5, -6: 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.
-3, -4, -7, -8: 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) apart.

3. Enamel areas shall be as indicated. The color for Navy insignia shall be blue and conform to TIOH chip number 18 or the standard sample. The color for Marine Corps insignia shall be red and conform to TIOH chip number 1 or the standard sample.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

5. Dash No. -1, -2, -5 and -6 insignia shall be dapped on the horizontal plane to a 5 inch ± 1/64 inch (12.7 cm ± 0.04 cm) radius.

6. Dash No. -1 through -4 insignia may be made from sterling silver for commercial sale and if so, the thickness dimensions are for reference only. A minimum weight of 52 grains for Dash No. -1 and 18 grains for Dash No. -2 shall govern. The finish shall be as specified except the nickel plating requirement shall not apply.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-0874)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:11Z
Check the source to verify that this is the current version before use.