INCH-POUND

MIL-DTL-14639/51A
27 May 2016
SUPERSEDING
MIL-DTL-14639/51
20 December 1996

# DETAIL SPECIFICATION SHEET

## INSIGNIA, RANK, CHIEF WARRANT OFFICER W-2 AND W-4, U.S. NAVY AND U.S. MARINE CORPS

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14639.




DASH NO.
-1: Chief Warrant Officer W-4, Navy, Regular Size
-2: Chief Warrant Officer W-4, Marine Corps, Regular Size
-3: Chief Warrant Officer W-4, Navy, Miniature Size
-4: Chief Warrant Officer W-4, Marine Corps, Miniature Size
-5: Chief Warrant Officer W-2, Navy, Regular Size
-6: Chief Warrant Officer W-2, Marine Corps, Regular Size
-7: Chief Warrant Officer W-2, Navy, Miniature Size
-8: Chief Warrant Officer W-2, Marine Corps, Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1, -2, -3, and -4: Epoxy resin, Nickel Plated, Rhodium Plated, Mirror-like polished.
-5, -6, -7, -8: Epoxy resin, 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry Metal Finish Chip Number 6.

DIMENSIONS:
HEIGHT (Overall):
-1, -2, -5, -6: 3/8 inch (REF)
-3, -4, -7, -8: 1/4 inch (REF)
WIDTH (Overall):
-1, -2, -5, -6: 1-1/8 inches (REF)
-3, -4, -7, -8: 3/4 inch (REF)

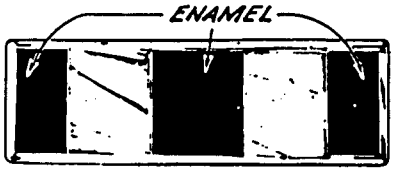

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:11Z
Check the source to verify that this is the current version before use.

THICKNESS (Overall):
-1, -2, -5, -6: 0.065 inch ± 0.005 inch
-3, -4, -7, -8: 0.065 inch ± 0.005 inch

ATTACHING DEVICE:

1. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and the following distance apart, -1, -2, -5, -6: 7/8 inch ± 1/64 inch apart, and -3, -4, -7, -8: 5/8 inch ± 1/64 inch apart.

2. For -1, -2, -5 and -6 insignia shall be dapped on the horizontal plane to a 5 inch ± 1/64 inch radius.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. For -1 through -4 insignia may be made from sterling silver for commercial sale and if so, the thickness dimensions are for reference only. A minimum weight of 52 grains for -1 and 18 grains for -2 shall govern. The finish shall be as specified except the nickel plating requirement shall not apply.

3. For -1, -2, -5 and -6 insignia shall be dapped on the horizontal plane to a 5 inch ± 1/64 inch radius.

4. For -1 through -4 insignia may be made from sterling silver for commercial sale only.

5. The Epoxy resin for Navy insignia shall be blue and shall match TIOH Chip Number 18, and for the Marine Corps insignia shall be red and shall match TIOH Chip Number 1.

EPOXY: Epoxy resin shall be applied to the Insignia as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy No.C-210).

| TIOH HARD ENAMEL COLOR CHIPS | |
|---|---|
| **COLOR** | **CHIP NUMBER** |
| Blue | #18 |
| Red | #1 |

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:11Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-2016-360)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:11Z
Check the source to verify that this is the current version before use.