NOT MEASUREMENT SENSITIVE

MIL-DTL-14639/53E
14 March 2024
SUPERSEDING
MIL-DTL-14639/53D
30 November 2021

DETAIL SPECIFICATION SHEET

INSIGNIA, RANK, CHIEF WARRANT OFFICER CW5, U.S. ARMY, U.S. MARINE CORPS, U.S. NAVY, AND U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-14639.

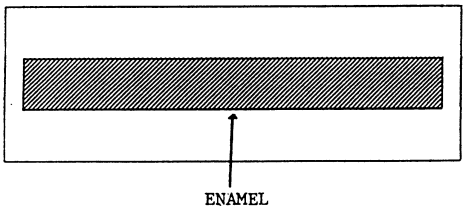

DASH NO.

-1: Regular size Marine Corps
-2: Miniature size Marine Corps
-3: Regular size Navy
-4: Miniature size Navy
-5: Regular size, full color, Army
-6: Regular size, subdued, Army
-7: Regular size, Air Force

MATERIAL: (-1 through -7) Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:

-1 thru -4: Epoxy resin, Nickel Plated, Rhodium Plated, Mirror-like Polished.

-5: Epoxy resin, Nickel Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

-6: Dull flat olive drab baked enamel finish with the area indicated (above) to be dull flat black and shall match TIOH Metal Finish Chip Number 21.

-7: Epoxy resin, Nickel Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip Number 30.

DIMENSIONS:

HEIGHT:

-1, -3, -5, -6 and -7: 3/8 inch (REF)
-2 and -4: 1/4 inch (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:12Z
Check the source to verify that this is the current version before use.

WIDTH:
-1, -3, -5, -6 and -7: 1-1/8 inches (REF)
-2 and -4: 3/4 inch (REF)
THICKNESS (at thickest point):
-1, -3, -5, -6 and -7: 0.065 ± 0.010 inch
-2 and -4: 0.065 ± 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be prong and wing clutch type.

2. Prongs shall be located on the horizontal center line, equidistant from each end and the following distance apart.
-1.-3, -5, -6 and -7: 7/8 inch ± 1/64 inch
-2 and -4: 5/8 inch ± 1/64 inch.

EPOXY:
1. EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210), When Epoxy is used the material requirement shall be either Red Brass or Gilding.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Scarlet -1 and -2 USMC	#1
Ultramarine Blue -3 and -4 USN	#18
Black -5 USA	#26
Blue -7 USAF	#30

2. -6 shall be olive green conforming to Chip Number 34096 of SAE-AMS-595/34096 and Dull Flat Black and shall match TIOH Metal Finish Chip Number 21.

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. -1, -3, -5, -6 and -7 will be dapped on the horizontal plane to a 5 inch ± 1/64 inch radius.

3. Navy and Marine Corps insignia may be made from sterling silver for commercial sale and, if so, the thickness dimensions are for reference only. A minimum weight of 52 grains for -1 and -3 and 18 grains for -2 and -4 shall govern. The finish shall be mirror-like polished.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:12Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Navy - NU
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-2024-085)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:12Z
Check the source to verify that this is the current version before use.