NOT MEASUREMENT SENSITIVE

MIL-DTL-14639/54B
9 June 2020
SUPERSEDING
MIL-DTL-14639/54A
27 May 2016

DETAIL SPECIFICATION SHEET

INSIGNIA, GRADE, COMMAND CHIEF MASTER SERGEANT, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14639.

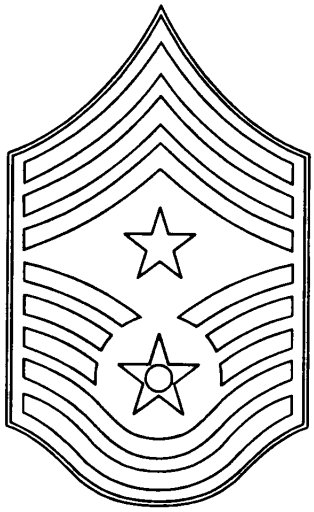

DASH NO.
-1: Regular
-2: Subdued

MATERIAL: Red Brass 85/15 (UNS Alloy C-230)

FINISH:
-1: 24K Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

-2: Dull Flat Olive Drab Enamel in Recessed Areas and Dull Flat Black and shall match TIOH metal Finish Chip Number 21, on Raised Areas

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:12Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall): 1-3/4 inches (REF)
WIDTH (Overall): 1-3/32 inches (REF)
THICKNESS (Edge): 0.065 inch ± 0.010 inch

ATTACHING DEVICE:
1. Attaching device for -1 shall be prong and wing clutch type. Prongs shall be located on a horizontal line 23/32 inch ± 1/64 inch above the base of the insignia and 15/16 inch ± 1/64 inch apart.

2. Attaching device for -2 shall be brass prong and flat ball clutch type. Prongs shall have 3 groves and be located on a horizontal line 23/32 inch ± 1/64 inch above the base of the insignia and 15/16 inch ± 1/64 inch apart.

EPOXY: Epoxy resin shall be applied to the Insignia as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy No.C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Blue	#18

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. For -2, the dull, flat enamel color shall be Olive Drab in the center of the star and in the recessed background area and shall match SAE-AMS-STD-595, Chip No. 34088. The dull, flat enamel color used in the raised area for the star and the stripes shall be Black and match SAE-AMS-STD-595, Chip No. 37038.

3. Insignia may be rhodium plated, mirror-like polish at the option of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-289)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:12Z
Check the source to verify that this is the current version before use.