COMMERCIAL ITEM DESCRIPTION

CONNECTORS, ELECTRICAL, IEEE 488 COMPATIBLE, RECTANGULAR, MINIATURE, POLARIZED SHELL, 24 POSITION, BACK TO BACK INTERFACE BUS, CABLE TERMINATING, INSULATION DISPLACEMENT, SCREW LOCKING

The General Services Administration has authorized the use of this Commercial Item Description (CID).

Abstract This CID covers the general requirements for a polarized shell, 24 pin back to back electrical digital interface bus connector This connector can be used in applications that require conformance to the IEEE 488 interface standard, and require termination of a discrete wire type cable

Application. Connectors covered by this CID are intended for commercial/industrial applications and may be used in military systems where individual environmental and performance requirements can be met.

Part or Identifying Number (PIN). The PIN for the CID shall be as shown in the following example



Salient characteristics.

Design, construction, and dimensions Design construction and dimensions shall be as specified on figure 1 and in accordance with IEEE 488.

Contacts The contacts are formed of a high conductive, high strength copper alloy with gold over nickel plating in the contact area

Connector housings Connector housings are moulded from black polyphenylene plastic material for high impact and dielectric strength.

Metric jackscrews. Metric jackscrews are made of black oxide plated carbon steel.

Termination wire range Terminations are insulation displacement type which accommodate wire ranges of 26-27-28 AWG stranded (7 strand) wire

Contact rating. Contacts are rated at 5.0 amps minimum at 25°C

Termination resistance The contact resistance shall be 20 milliohms maximum initial


Dielectric withstanding voltage There shall be no breakdown of the insulating material when subjected to 1000 V ac for one minute between adjacent contacts of the mated connector assemblies

Mating force Connector mating force shall not exceed 4 64 newtons (1 04 pounds) maximum per contact

Unmating force Connector unmating force shall not exceed 0 46 newton (0 11 pound) minimum per contact

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

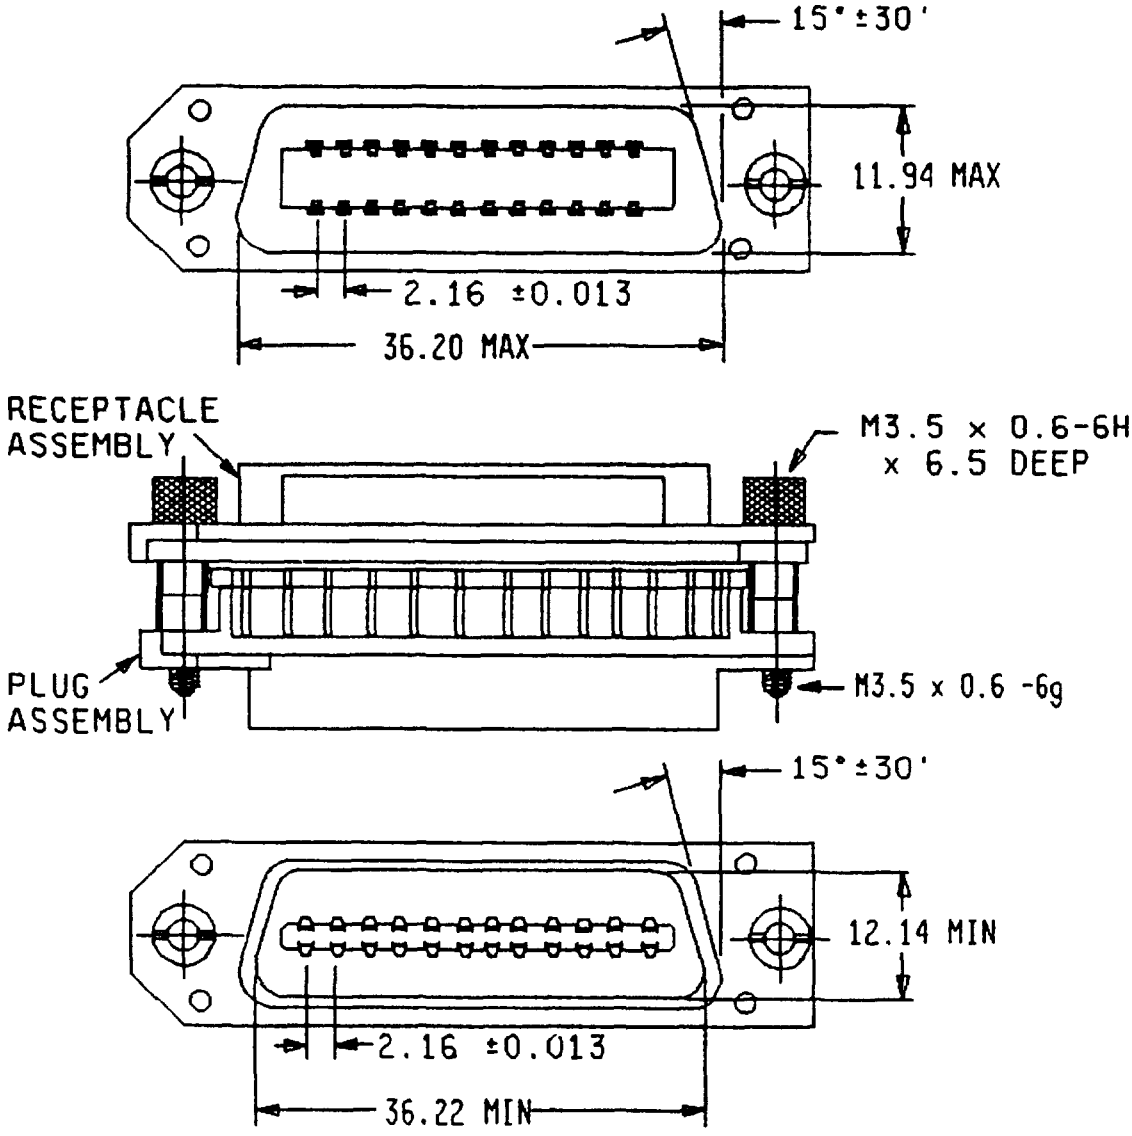

NOTES

1 Dimensions are in millimeters

2 The US government preferred system of measurement is the metric SI system. However, since this item was originally designed using inch-pound units of measurement, in the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence

mm	Inches
0 013	0005
0 36	0142
2 16	085
4.88	192
11 94	470
12 14	478
15 75	620
36 20	1 425
36 22	1 426
46 79	1 842
55 25	2 175

Figure 1 Connector, 24 position, back to back interface bus

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

Durability Durability shall consist of 200 cycles of mating and unmating and upon completion the termination resistance shall not exceed a change greater than 35 milliohms maximum from initial resistance There shall be no indication of physical damage

Operating temperature The operating temperature range shall be from -40°C to 75°C

Vibration The connector, or hardware when assembled to the connector, shall exhibit no evidence of breaking, cracking, or loosening of parts when subjected to vibration of 10-55-10 Hz traversed in 1 minute at 2 millimeters (.06 inch) total excursion for 2 hours in each of 3 mutually perpendicular planes

Physical shock The connector or hardware when assembled to the connector, shall exhibit no evidence of breaking, cracking, or loosening of parts when subjected to 50 G's half-sine wave shock of 11 milliseconds duration, 3 shocks in each direction applied along the 3 mutually perpendicular planes for a total of 18 shocks

Regulatory requirements This section is not applicable to this CID

Quality assurance provisions.

Responsibility for inspection The contractor is responsible for the performance of all inspection, examination and test requirements specified in the contract or purchase order. The contractor may use his or any other facilities suitable for inspection requirements specified in the contract or purchase order, unless otherwise disapproved by the procuring activity. The procurement activity reserves the right to perform any of the inspections set forth in the contract or purchase order where such inspections, examinations and tests are deemed necessary to assure supplies and services conform to prescribed requirements

Contractor certification statement. The contractor shall certify and maintain objective quality evidence that the product offered meets the requirements of this CID and that the product conforms to the producers own drawings, specifications, standards, quality assurance practices, and is the same as the product provided as a bid sample The procurement activity reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract

Certificate of compliance. A certificate of compliance shall accompany all connectors supplied to this CID

Packaging

Preservation, packaging, packing, labeling, and marking Preservation, packaging, labeling and marking shall be as specified in the contract or purchase order

Notes This section contains relevant information which is useful to buyers, users and suppliers in the process of procuring the item, but is not mandatory.

Referenced document

Other Publication

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 488 - IEEE Standard Digital Interface for Programmable Instrumentation

(Applications for copies should be addressed to the Institute of Electrical and Electronics Engineers (IEEE), IEEE Service Center, 445 Hoes Lane, P O Box 1331, Piscataway, NJ 08855-1331)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.

Ordering data. Acquisition documents should specify the following:

a CID document number and revision and CID PIN

b Quality assurance provisions

c. Packaging requirements

Comments Comments on this CID should be directed to Defense Electronics Supply Center, 1507 Wilmington Pike, ATTN DESC-EMT, Dayton, OH 45444-5000, or telephone (513) 296-5391

Sources of supply. A suggested source of supply is listed herein. Additional sources will be added as they become available

TABLE 1 Suggested sources of supply.

CID PIN A-A-55148-	Vendor commercial PIN	Vendor CAGE number
01	554815-1	00779

Vendor CAGE number	Vendor name and address
00779	AMP, Incorporated 470 Friendship Road Harrisburg, PA 17111-1203

CIVIL AGENCY COORDINATING ACTIVITY

GSA - 7FXE

PREPARING ACTIVITY

DLA-ES

(Project 5935-D434)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:43Z
Check the source to verify that this is the current version before use.