INCH-POUND
A-A-50432A
June 5, 2018
SUPERSEDING
A-A-50432
April 20, 1989

COMMERCIAL ITEM DESCRIPTION

HINGE, BUTT
(SHIPBOARD/MARINE)

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description covers commercial and marine quality butt hinges suitable for shipboard use.

2. CLASSIFICATION.

2.1 Type.

a. I – Swaged, fast pin, flush or oval ends, with holes.
b. II – Swaged, loose pin, button-tipped, with holes.
c. III – Swaged, fast pin, flush or oval ends, without holes.
d. IV – Non-swaged, fast pin, flush or oval ends, with holes.
e. V – Swaged (heavy), fast pin, flush or oval ends, with holes.
f. VI – Non-swaged (heavy), fast pin, flush or oval ends, with holes.
g. VII – Non–swaged, fast pin, flush or oval ends, without holes.

2.2 Class.

a. I – Wrought brass hinge with corrosion resistant steel (CRES) pin.
b. II – Wrought aluminum hinge.
   (1) Group A – With hard brass pin.
   (2) Group B – With CRES pin.
c. III – Wrought steel hinge.
   (1) Group A – With hard brass pin.
   (2) Group B – With CRES pin.

2.3 Style.

a. A – Without virgin nylon shoulder bushings (for type II, class I, 3½- by 3-inch hinges only).
b. B – With virgin nylon shoulder bushings (for type II, class I, 3½- by 3-inch hinges only).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Commander, Naval Sea Systems Command, ATTN: SEA 05S, 1333 Isaac Hull Avenue, SE, Stop 5160, Washington Navy Yard DC 20376-5160 or emailed to CommandStandards@navy.mil, with the subject line "Document Comment". Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

FSC 5340

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Design. Unless otherwise specified herein, the requirements shall be in accordance with ANSI/BHMA A156.7.

3.2 Material. Unless otherwise specified herein, hinges shall be constructed of materials in accordance with ANSI/BHMA A156.18 (materials 1 through 9).

3.3 Finishes. The surface of the hinge shall be finished as specified in ANSI/BHMA A156.18.

a. Finish I – After manufacture, brass hinges, tips, and screws shall be satin nickel finished 0.0002-inch thick. Type II, class I, styles A and B, 3½- by 3-inch hinges and screws shall have a dull chrome US26D finish.

b. Finish II – After manufacture, aluminum hinges and tips shall be satin finished and given a commercial anodized treatment that shall provide a coating of aluminum oxide not less than 0.0004-inch thick to obtain the necessary hardness and positive protection against corrosion.

c. Finish III – After manufacture, steel hinges and screws shall be zinc coated with a minimum thickness of 0.0005-inch of zinc and then treated with a phosphate solution.

3.4 Shoulder bushing. Shoulder bushings shall be made of virgin nylon or CRES.

NOTE. 3½- by 3-inch hinges shall be fitted with virgin nylon or CRES shoulder bushings in each knuckle when ordered for metal joiner doors. Type I, II, III, IV, and VII aluminum hinges 3 inches and up shall be fitted with a CRES bushing extending the entire length of each knuckle.

3.5 Pins. Unless otherwise specified herein, pins shall be constructed of materials in accordance with ANSI/BHMA A156.18 (materials 1 through 9).

3.6 Button tips. On steel hinges, button tips shall be made of brass. Button tips shall be of the cylindrical type having a square shoulder approximately ⅛-inch high flush with the barrel of the butt hinge.

3.7 Fasteners. All mounting hardware required for attachment shall be included with the hinges. The hardware shall be of suitable size and shall be compatible with material and finish of the hinge.

3.8 Workmanship. The hinge shall be free from imperfections such as blemishes, burrs, and unsquare edges which may impair durability or serviceability. Also, the pins shall fit neatly and the hinges operate freely.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

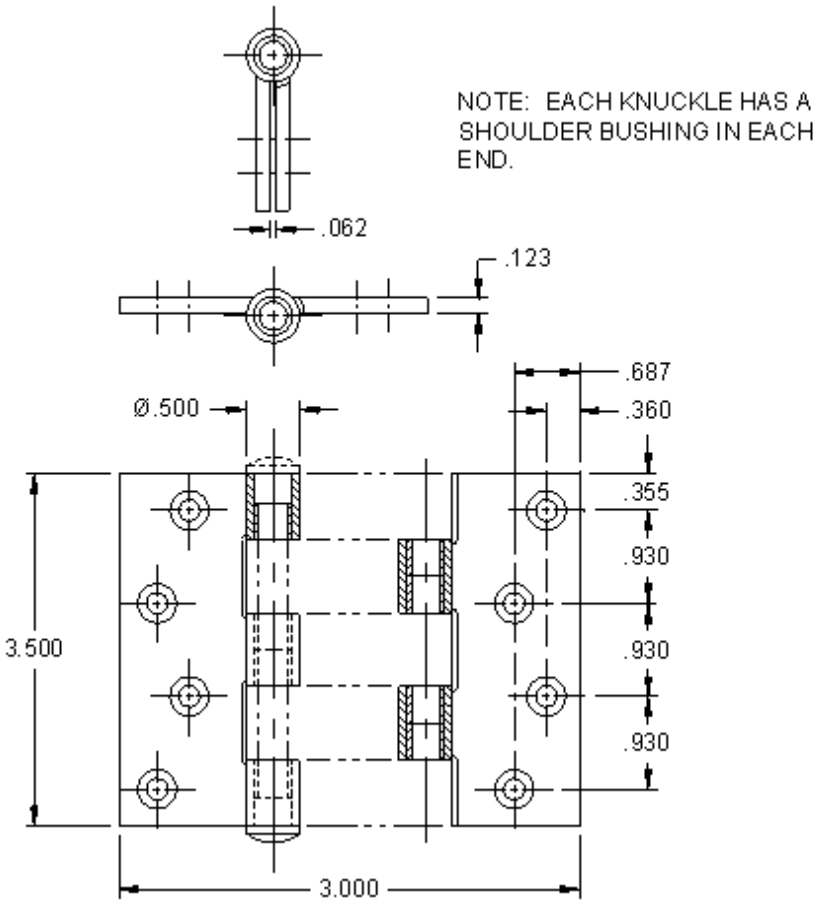


FIGURE 1. Layout of type II, class I, style B, 3½- by 3-inch hinge for metal joiner doors.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Sampling.

5.2.1 Lot. All hinges of the same type, class, style, size, and finish presented for acceptance at one time shall be considered a lot for purposes of inspection.

5.2.2 Sampling for product conformance examination and testing. A random sample of hinges shall be selected from each lot offered to the Government in accordance with ANSI/ASQ Z1.4 at inspection level II and Acceptance Quality Limit (AQL) of 1.0.

5.2.3 Visual and dimensional inspection. A random sample of hinges shall be selected from each lot offered to the Government in accordance with ANSI/ASQ Z1.4 at inspection level II and AQL of 1.0. The sample hinges shall be visually and dimensionally examined to verify compliance with this CID.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

5.2.4 Testing for permanent set and finish. A random sample of hinges shall be selected from each lot offered to the Government in accordance with ANSI/ASQ Z1.4 at inspection level II and AQL of 1.0. The sample hinges shall be tested in accordance with ANSI/BHMA A156.1 and ANSI/BHMA A156.18 as applicable.

5.2.5 Certification of performance and finish test requirements. When specified in the contract or purchase order (see 7.2), a certificate of conformance may be furnished in lieu of actual testing on a lot-by-lot basis provided that:

a. Objective evidence dated not more than 2 years prior to the date of the start of the contract as described in the solicitation, or date of the purchase order as applicable, shall be available.

b. Tests specified in the industry standards referenced herein have been performed by an independent test facility acceptable to the Government.

c. That the product being offered is the same type, material, and finish and has been manufactured using the same material, processes, and manufacturing techniques as the product tested.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Source of documents.

7.1.1 American National Standards Institute. ANSI standards are available online at http://webstore.ansi.org/.

7.1.2 American Society for Quality. ASQ standards are available online at www.asq.org.

7.1.3 FAR. The Federal Acquisition Regulation (FAR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402 or online at https://www.acquisition.gov/far.

7.2 Ordering data. The contract or order should specify the following:

a. CID document number and revision.

b. Type, class, and style of hinge.

c. Size of hinge.

d. The issues of ANSI/BHMA A156.1, ANSI/BHMA A156.18, and ANSI/BHMA A156.7 in effect on the date of the solicitation shall be used to determine compliance with these requirements.

e. When a certificate of conformance is required (see 5.2.5).

f. Packaging requirements.

7.3 National stock numbers (NSNs). The following is a list of NSNs assigned that correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

a. 5340-00-223-4159

b. 5340-00-223-4161

c. 5340-00-229-4343

d. 5340-00-229-4345

e. 5340-00-229-4347

f. 5340-00-229-4354

g. 5340-00-231-2588

h. 5340-00-231-2666

i. 5340-00-231-2667

j. 5340-01-014-4535

k. 5340-01-341-3371

l. 5340-01-357-7523

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

7.4 Key words.

Bushing

Finish

Pin

CONCLUDING MATERIAL

MILITARY INTERESTS:

Custodians:
Army – AR
Navy – SH
Air Force – 82

Review Activities:
Navy – AS, MC, OS
Air Force – 85
DLA – IS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FAS

Preparing Activity:
Navy – SH
(Project 5340-2018-006)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.