MILITARY SPECIFICATION SHEET

SWITCHES, SENSITIVE, 2 CIRCUIT (5 AMPERES) OR SPST (8 AMPERES), UNSEALED, LOW LEVEL SWITCHING, FORM C OR FORM Z

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-8805.


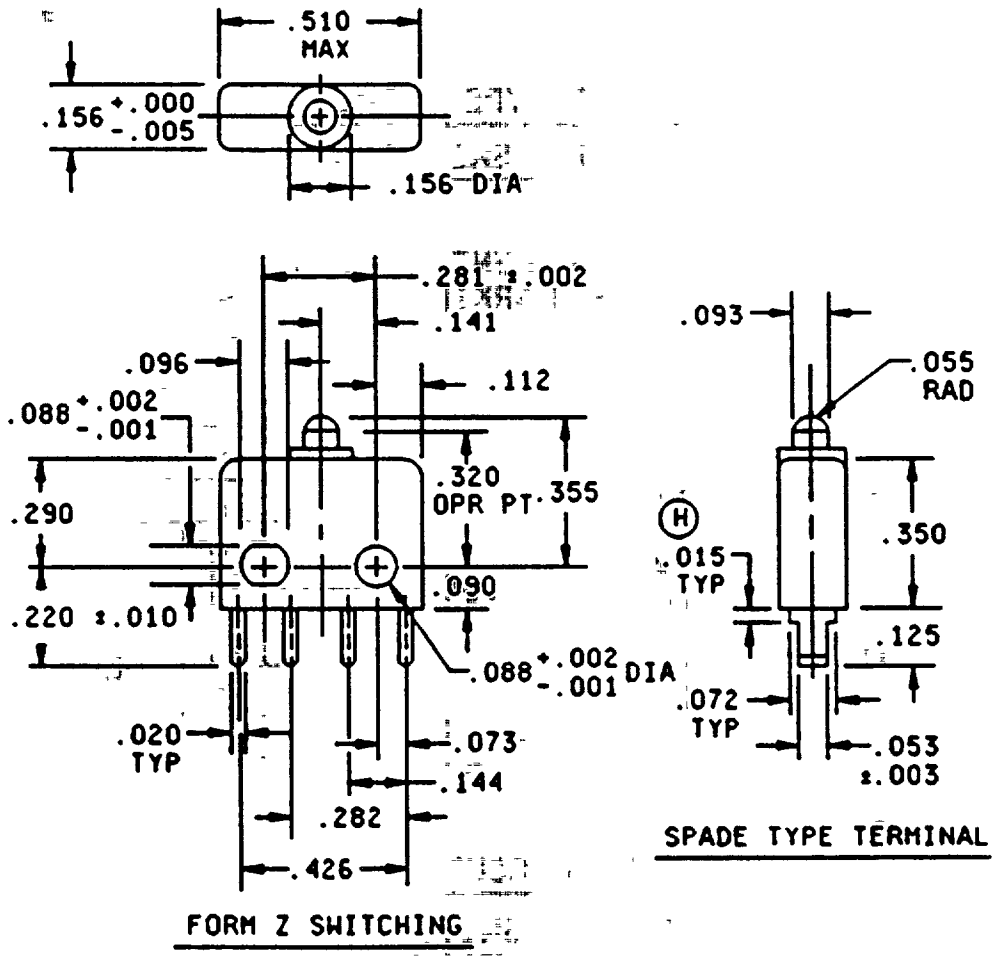


FIGURE 1. Dimensions and configurations.

Ⓗ denotes changes


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:21Z
Check the source to verify that this is the current version before use.

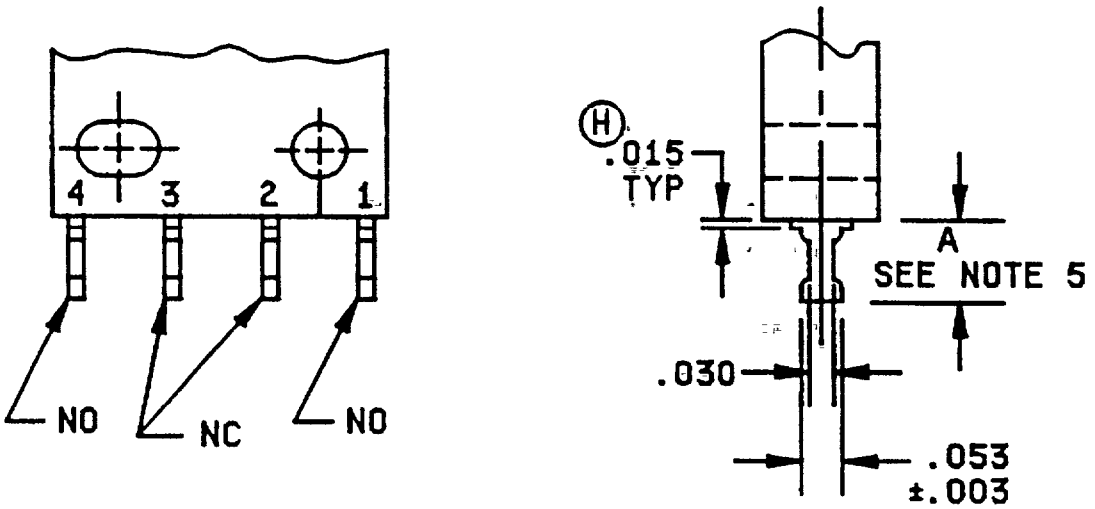

TURRET TYPE TERMINAL

FORM Z SWITCHING

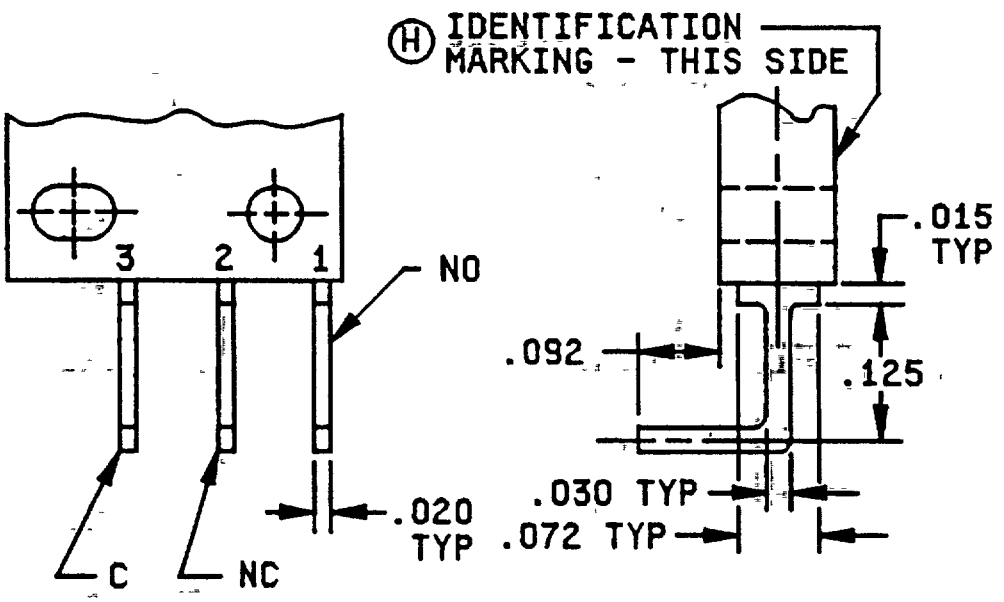


PRINTED CIRCUIT TERMINAL


FORM C SWITCHING

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:21Z
Check the source to verify that this is the current version before use.

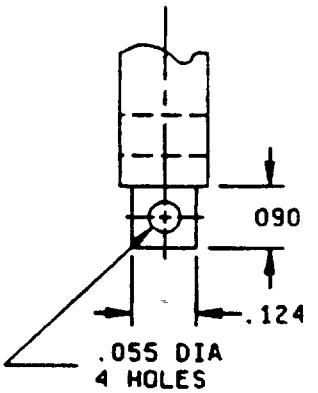


SOLDER LUG TERMINAL

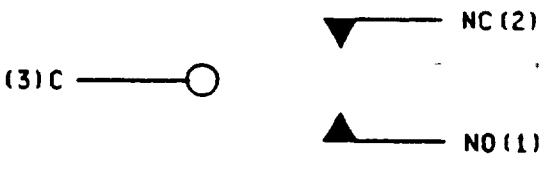

CIRCUIT SCHEMATIC

FORM C

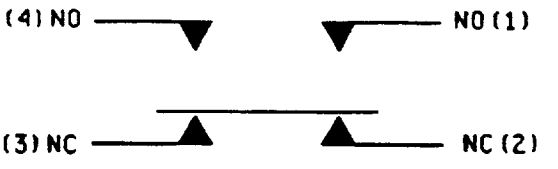

CIRCUIT SCHEMATIC

FORM Z

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.053	1.35	.096	2.44	.220	5.59
.002	0.05	.055	1.40	.112	2.84	.281	7.14
.003	0.08	.072	1.83	.124	3.14	.282	7.16
.005	0.13	.073	1.85	.125	3.18	.290	7.37
.010	0.25	.088	2.24	.141	3.58	.320	8.13
.015	0.38	.090	2.29	.144	3.66	.350	8.89
.020	0.51	.092	2.34	.156	3.96	.355	9.02
.030	0.76	.093	2.36	.187	4.75	.426	10.82
						.510	12.95

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.015 (0.38 mm).
4. Terminal pattern is the same on form C switches as on form Z, except terminal four is not provided.
5. Dimension "A" is .125 (3.18 mm) or .187 (4.75 mm), as defined by the Part or Identifying Number (PIN).
(H) 6 Terminal marking may be on bottom of switch.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1

Enclosure design: 1 (Unsealed).

Temperature characteristic: 2 (-65°C to +125°C).

Shock type: M (100 g).

Vibration grade. 2 (10 Hz to 2,000 Hz).

Weight: .003 pound maximum

Operating characteristics (±20 percent variation from specified values acceptable after test):

Actuating force: 8 ounces maximum.

Overtravel: .004 inch minimum.

Movement differential: .018 ±.008 inch.

Operating point: .320 ±.015 inch (see figure 1).

Strength of actuator. 10 pounds.

Terminal strength: 5 pounds, all directions.

Material:

Base, excluding button and cover: Flame resistant diallyl phthalate in accordance with MIL-M-14, type SDGF.

Terminals: Gold plating may be used. When the gold plate exceeds .000050 inch thickness, no diffusion barrier is required.

Intermediate current: Applicable.

Low level circuit: 50,000 cycles. Applicable to gold contact switches.

Mechanical endurance: 1,000,000 cycles (cycle rate 300 cpm permissible).

Electrical endurance: 50,000 cycles.

Electrical ratings: See tables I and II.

Dielectric withstanding voltage: See table III.

After electrical endurance: Between all terminals and mounting plate only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:21Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings - silver contacts.

Load	Sea level, 28 V dc		Altitude 1/, 28 V dc	
	NO or NC 2/ Form Z	2 circuit 3/ Form Z	NO or NC 2/ Form Z	2 circuit 3/ Form Z
	amperes	amperes	amperes	amperes
Resistive	8	5	8	5
Inductive	5	3	3	2
Motor	5	---	---	---
Lamp	1	---	---	---
	NO or NC 2/ Form C	2 circuit 3/ Form C	NO or NC 2/ Form C	2 circuit 3/ Form C
	amperes	amperes	amperes	amperes
Resistive	8	5	8	5
Inductive	3.5	2.5	2	1.5
Motor	5	---	---	---
Lamp	1	---	---	---

1/ 80,000 feet for PIN's M8805/101-001 through -005, and -023.
70,000 feet for PIN's M8805/101-007 through -021, -025, and -027.
2/ Either NO or NC side loaded.
3/ Both NO and NC side loaded.

TABLE II. Electrical ratings - gold plated contacts.

Load	28 V dc Sea level	28 V dc Altitude 1/
	Form Z	Form Z
	amperes	amperes
Resistive	5	5
Inductive	3	3
	Form C	Form C
	amperes	amperes
Resistive	5	5
Inductive	2.5	2

(H)

1/ 80,000 feet for PIN's M8805/101-003 through -006, and -024.
70,000 feet for PIN's M8805/101-008 through -022, -026, and -028.

Logic level circuit (5.0 V dc, .010 ampere): Applicable to gold contact switches.

Part or Identifying Number (PIN): M8805/101-(dash number from table III).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:21Z
Check the source to verify that this is the current version before use.

Qualification: See table IV. Table IV applies provided that form Z and form C switches have similar internal construction and similar double break contact arrangements.

Group A inspection:

Operating characteristics and contact resistance: Do not exceed low level electrical ratings during any testing of gold contact switches. When contact resistance is tested at 30 millivolts maximum open circuit test voltage and 10 milliamperes maximum current, the maximum contact resistance is 3 ohms.

Dielectric withstanding voltage: 100 percent inspection is required on PIN's M8805/101-001 through -006, -023 and -024.

TABLE III. Dash numbers.

Contact form	Dash numbers		Terminal	Dielectric withstanding voltage	
	Silver contacts	Gold plated contacts		Sea level	Altitude
Z	001 1/ 002 1/ 005 1/ 023 1/	003 1/ 004 1/ 006 1/ 024 1/	Spade .125 turret Printed circuit Solder lug	1,250 V rms initial	400 V rms at 80,000 ft initial
	007 009 011 013 025	008 010 012 014 026	Spade .125 turret Printed circuit .187 turret Solder lug	1,050 V rms	400 V rms at 70,000 ft
C	015 017 019 021 027	016 018 020 022 028	Spade .125 turret Printed circuit .187 turret Solder lug	1,050 V rms	400 V rms at 70,000 ft

1/ Dash numbers -001 through -006, -023, and -024 are selected to meet initial dielectric withstanding voltage requirements at the test voltages specified One hundred percent inspection for dielectric withstanding voltage is required during group A inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:21Z
Check the source to verify that this is the current version before use.

TABLE IV. Qualification inspection.

Dash number	Inspection	Extent of approval
-007	Qualification inspection table of MIL-S-8805	All dash numbers
-010 (12 sample units)	Groups I, VII, X , and XI of qualification inspection table of MIL-S-8805.	
-011 and -025 (2 sample units)	Visual and mechanical examination Solderability Terminal strength Dielectric withstanding voltage Operating characteristics	
-015 (4 sample units)	Groups I and VI of qualification inspection table of MIL-S-8805	

FOR GOVERNMENT LOGISTICAL SUPPORT: See table V.

TABLE V. Cross-reference for Government logistical support.

PIN	Support with PIN
M8805/101-007	M8805/101-001
M8805/101-008	M8805/101-003
M8805/101-009	M8805/101-002
M8805/101-010	M8805/101-004
M8805/101-011	M8805/101-005
M8805/101-012	M8805/101-006
M8805/101-025	M8805/101-023
M8805/101-026	M8805/101-024

CONCLUDING MATERIAL

Custodians:
Air Force - 85
Navy - EC

Review activities:
Air Force - 99

Preparing activity.
DLA - ES

(Project 5930-1616)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:21Z
Check the source to verify that this is the current version before use.