NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-8805/82C
10 April 1979
SUPERSEDING
MIL-S-8805/82B(EC)
29 July 1970

PERFORMANCE SPECIFICATION SHEET

SWITCHES, SENSITIVE, LEAF, SPDT, HERMETIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.


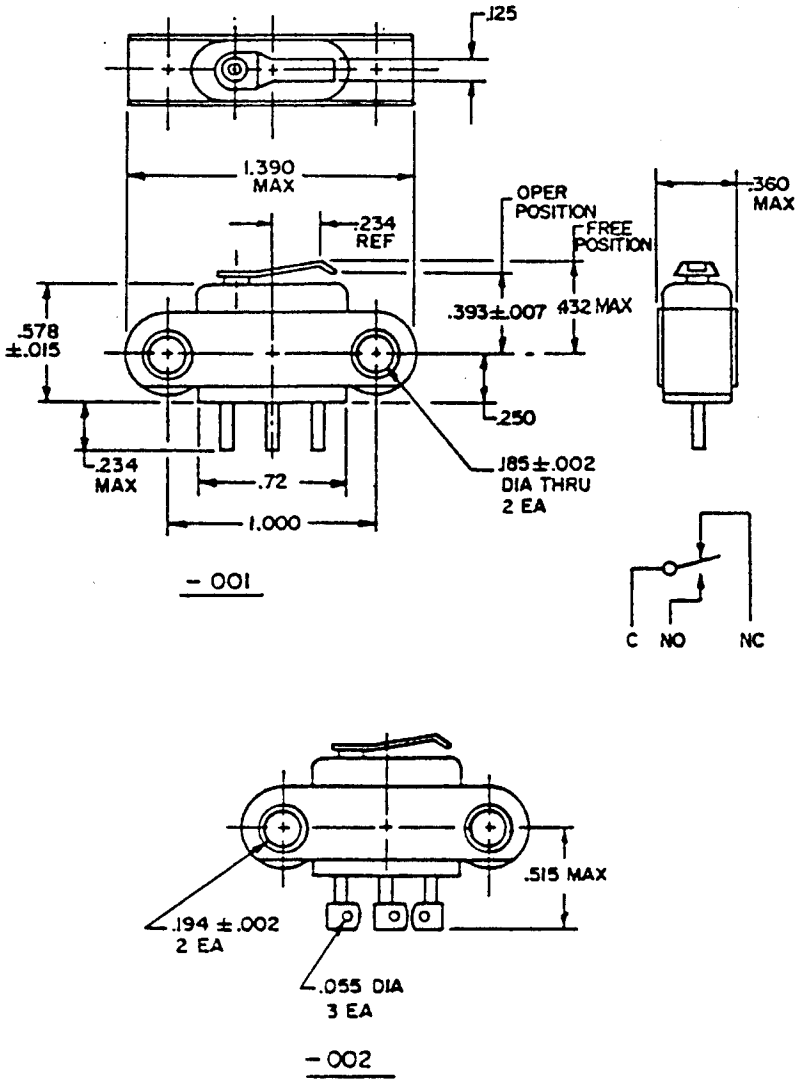


FIGURE 1. Configuration and dimensions.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:17Z
Check the source to verify that this is the current version before use.

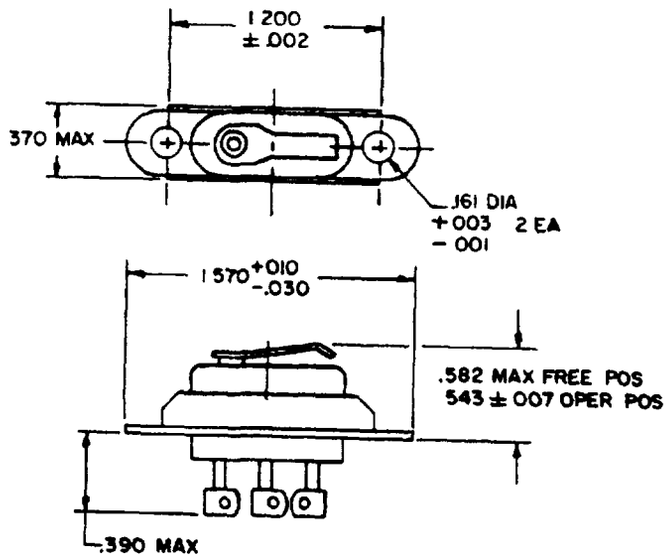

−003

INCHES	MM	INCHES	MM
.001	03	.250	6.35
.002	.05	.360	9.14
.003	08	.370	9 40
005	13	.390	9.91
.007	.18	.393	9.98
010	.25	.432	10.97
.015	38	.515	13.08
.02	5	.543	13.79
.030	.76	.578	14.68
.055	1 40	582	14 78
.125	3 18	.72	18.3
.161	4.09	1.000	25.40
.185	4 70	1.200	30.5
.194	4.93	1.390	35.31
.234	5.94	1.570	39.88

NOTES
1. Dimensions are in inches
2. Unless otherwise specified, tolerance is ±.02 (.5 mm) for two place decimals and ±.005 (13 mm) for three place decimals.
3. Switch configuration optional provided dimensions specified are not exceeded.
4. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Enclosure design. 5 (Hermetic).

Temperature characteristic:
M8805/82-001: 4 (-65°C to +350°C).
M8805/82-002 and -003: -125°F to +350°F.

Shock type: M (100 G, test condition I, method 213 of MIL-STD-202).

Vibration grade. 2 (10 - 2000 Hz), except that the acceleration level shall be 30 G (M8805/82-001) or 40 G (M8805/82-002 and -003).

Weight. See table I.

Operating characteristics: See table I.

Contact resistance: 125 milliohms maximum initial, 1.0 ohm maximum during and after life test.

Dielectric withstanding voltage
Sea level: 1,000 Vrms.

Low level circuit (M8805/82-002 and -003). 15,000 cycles

Electrical and mechanical endurance
15,000 cycles at 10 to 12 cycles per minute.

Short circuit: 90 amperes maximum.
Electrical ratings See table II.

Military part number: See table I.

TABLE I. Part numbers and operating characteristics.

Part number	Actuating force	Release force	Differential travel	Over travel	Maximum weight	Termination
M8805/82-001	26 oz max	6 oz min	.020 inch max	.006 inch min	.025 lb	Braze or weld
M8805/82-002	32 oz max	6 oz min	.020 inch max	.006 inch min	.025 lb	Solder
M8805/82-003	32 oz max	6 oz min	.020 inch max	.006 inch min	.025 lb	Solder

TABLE II. Electrical ratings.

Part number	Load	Sea level and 70,000 ft 115 Vac, 400 Hz and 28 Vdc
		Amperes
M8805/82-001	Resistive	5
	Inductive	3
	Lamp	1.5
M8805/82-002 and M8805/82-003	Resistive	2
	Inductive	.5
	Lamp	.5
	Low level circuit test applicable	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:17Z
Check the source to verify that this is the current version before use.

QUALIFICATION

Group submission See table III. This table is based on prior approval to, or concurrent testing with similar MIL-S-8805/46 items.

TABLE III. Qualification testing - group submission.

Examination or test (See qualification inspection table of MIL-S-8805)	Sample	Extent of approval
Groups I, II, III, VI, VII, and VIII. Group VII tests are required at sea level only.	M8805/82-001	All part numbers
Visual and mechanical examination	M8805/82-003	
Group I Visual and mechanical examination Solderability Operating characteristics Group II Thermal shock Vibration Dielectric withstanding voltage Operating characteristics	M8805/82-002	

QUALITY ASSURANCE

Group A inspection
Seal: Only the watertight test shall be performed.
M8805/82-002 and -003 Do not exceed low level electrical ratings during any testing.

Group C inspection M8805/82-001 shall be submitted to the tests of the group C inspection table of MIL-S-8805. In addition, M8805/82-002 shall be submitted to the tests of table IV.

TABLE IV. Group C inspection requirements for M8805/82-002.

Examination or test	Sample numbers											
	1	2	3	4	5	6	7	8	9	10	11	12
Solderability	X	X										
Thermal shock	X	X										
Mechanical endurance at low temperature-					X							
Contact resistance					X	X						
Overload cycling							X	X	X	X		
Inductive load, dc									X	X		
Resistive load, ac							X	X				
Low level circuit											X	X
Dielectric withstanding voltage							X	X	X	X		
Operating characteristics	X	X	X	X	X	X	X	X	X	X		
Seal	X	X	X	X								

NOTE Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:17Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV, MI
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AM, AT
Navy - MC, OS, SH, AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1090-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:17Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE
MIL-S-8805/82C

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A GIVE PARAGRAPH NUMBER AND WORDING

   B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?
☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:17Z
Check the source to verify that this is the current version before use.

DLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS
INALTY FOR PRIVATE USE $300

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

DLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:17Z
Check the source to verify that this is the current version before use.