NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-8805/92B
23 July 1973
SUPERSEDING
MIL-S-8805/92A
6 July 1970

PERFORMANCE SPECIFICATION SHEET

SWITCH ASSEMBLIES, SENSITIVE, LEVER LOCK; 5 AMPERES, UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

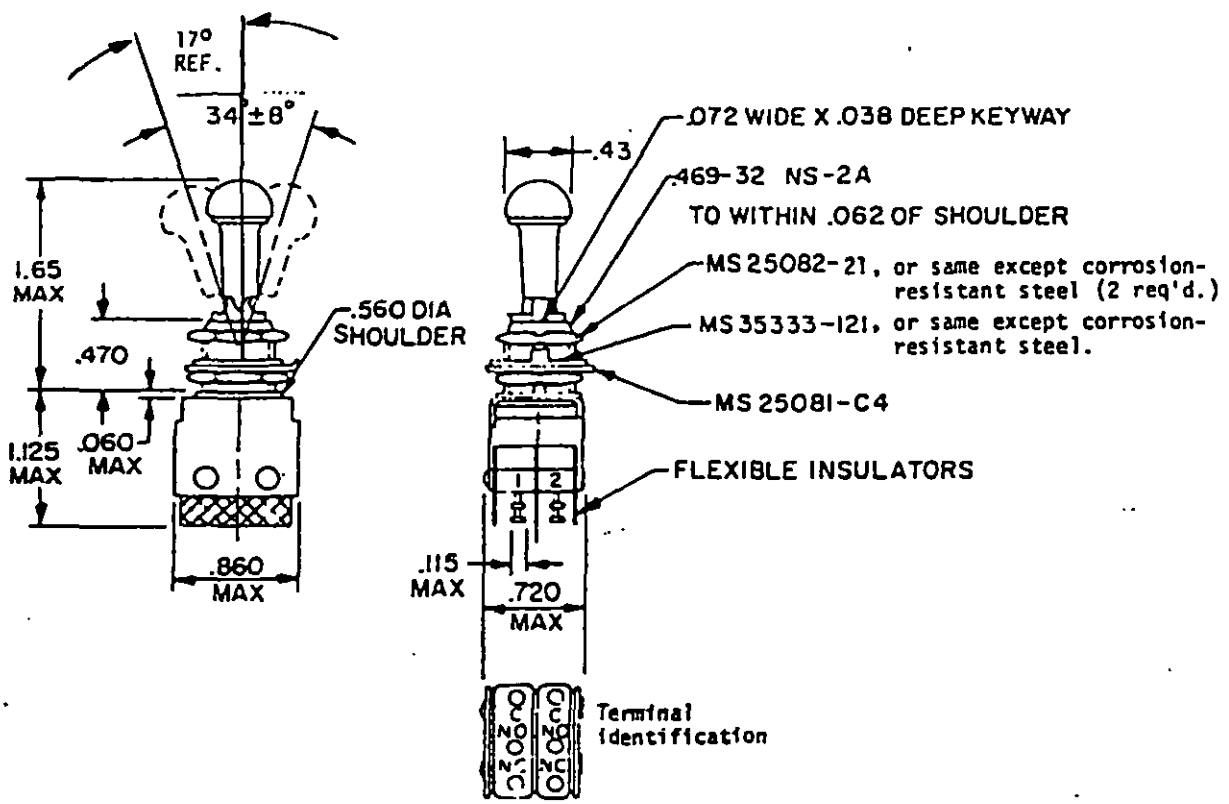


Figure 1.

Ⓑ denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:18Z
Check the source to verify that this is the current version before use.

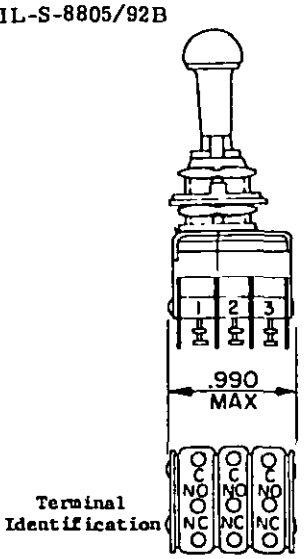


Figure 2

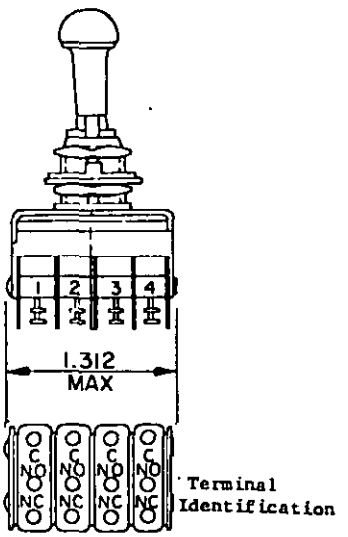


Figure 3

INCHES	MM
.038	.97
.060	1.52
.062	1.57
.072	1.83
.115	2.92
.43	10.92
.469	11.91
.470	11.94
.560	14.22
.720	18.29
.860	21.84
.990	25.15
1.125	28.58
1.312	33.32
1.65	41.91

KEYING SIDE →

"A" LOCKED IN THREE POSITIONS	"B" LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D" LOCKED OUT OF CENTER POSITION	"E" LOCKED IN CENTER POSITION
"F" LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)	"G" LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"J" LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K" LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)
"L" LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)	"M" LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N" LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P" LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)

LOCKING COMBINATION

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.015 (.38 mm) for three place decimals and ±.02 (.51 mm) for two place decimals.
4. Design configuration optional provided maximum dimensions are not exceeded.
5. Base switch number shall be permanently marked as shown.
6. Double turret type terminals shall accept two AN-20 wires.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:18Z
Check the source to verify that this is the current version before use.

MILITARY SPECIFICATION SHEET

SWITCH ASSEMBLIES, SENSITIVE, LEVER LOCK, 5 AMPERES, UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

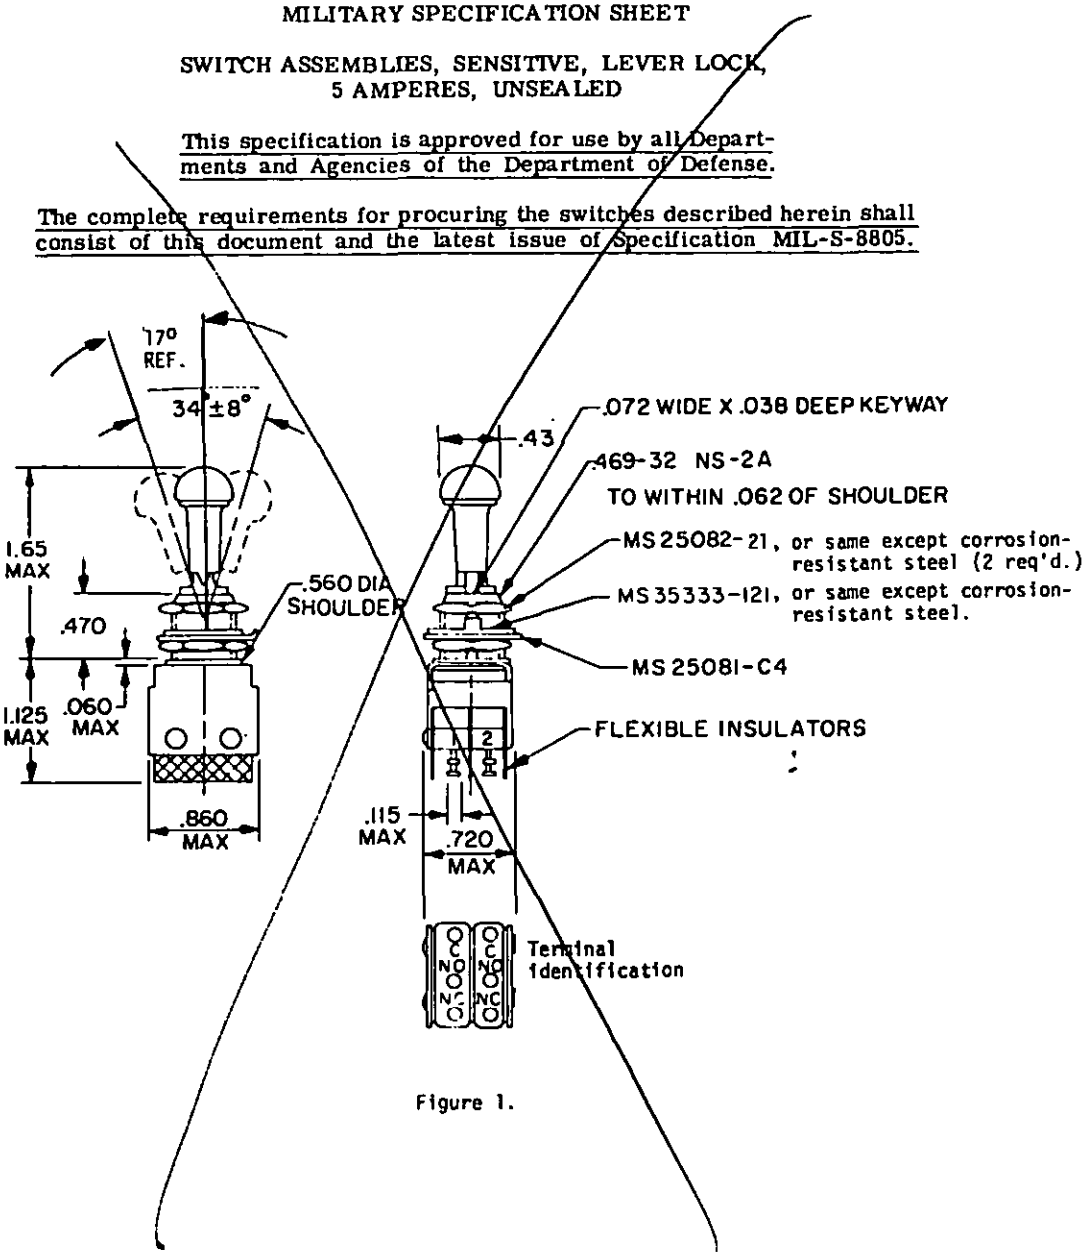


Figure 1.

Ⓑ denotes change

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures.
Enclosure design: 1 (Unsealed).
Temperature class: 1 (-55°C to +85°C).
Ⓑ Shock type: M (100G, test condition I, method 213 of MIL-STD-202).
Vibration grade: 1 (10-500 Hz).
Weight: See table III.
Operating characteristics:
Coincidence of operating and releasing points: All poles shall transfer within 10° of lever travel.
Locking arrangement: Positive locking shall be accomplished and shall prevent motion of the toggle lever until the locking mechanism is manually released.
Locking mechanism release: The force required to release the locking mechanism shall be 3 to 5 pounds.
Material:
Bracket and lever: Corrosion-resistant steel.
Ⓑ Switch assembly: Basic switch shall be MS25085-2 (MIL-S-8805/2) switch listed on QPL-8805.
Contact resistance: Not applicable.
Dielectric withstanding voltage:
Sea level: 1,000 Vrms.
Altitude: 50,000 ft - 400 Vrms.
In qualification inspection table after electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.
Mechanical endurance: 1/ 100,000 cycles.
Electrical endurance: 25,000 cycles.
Electrical ratings: See table I.
Qualification inspection (group submission): See table II.
Military part numbers: See table III.
Circuit configuration: See table IV.

TABLE I. Electrical ratings.

Load	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	amperes	amperes	amperes
Resistive - - -	5	5	5
Inductive - - -	3	5	2.5
Lamp - - - - -	2.4	1.5	2.4

1/ Lever-lock switches shall be tested for 100,000 cycles (at room ambient conditions) with the lever being pulled to its fully extended position and then permitted to return to its fully retracted position by spring action without operation of the switches. The cycling rate for this test shall be 60 cycles per minute maximum. In addition to this test, the lever-lock switches shall receive a normal mechanical endurance test of 100,000 cycles of operation with the lever-lock mechanism held in its fully extended position continuously throughout the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:18Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE II. Qualification inspection (group submission).

Examination or test	Basic switch assembly	Additional sample units for combined submission	Extent of approval
Group I Visual and mechanical examination Operating characteristics	M8805/92-002 (12 sample units)	(2 sample units each) M8805/92-005 M8805/92-016 M8805/92-019 (tested to group I only)	All
Group II Strength of actuating means 1/ Strength of mounting bushing 1/ Thermal shock Vibration Shock Operating characteristics Dielectric withstanding voltage Visual and mechanical examination	(4 sample units from group I)	---	
Group III Salt spray (corrosion) Visual and mechanical examination	(2 sample units from group I)	---	
Group IV Low temperature operation (2 sample units only) Mechanical endurance at room ambient conditions (2 units) Operating characteristics Dielectric withstanding voltage Visual and mechanical examination	(4 sample units from group I)	---	
Group V Electrical endurance Inductive load, dc	(2 sample units from group I)	---	

1/ Two sample units only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:18Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - .
Air Force - 17, 80
DSA - ES

User activities:
Army - MI, AV, WC
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5930-0873-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:18Z
Check the source to verify that this is the current version before use.

TABLE III. Part numbers and characteristics.

Part number	Figure number	Locking combination	Table IV circuit configuration	Switch action			Weight
				Opposite keyway	Center	Keyway	lb max
M8805/92-001	1	D	1	Main	None	Main	.075
M8805/92-002	3	D	4				.100
M8805/92-003		F					.100
M8805/92-004		G					.100
M8805/92-005	1	E	2	Mom	Main	Mom	.075
M8805/92-006		A		Main	Main	Main	.075
M8805/92-007		D					.075
M8805/92-008		E					.075
M8805/92-009		F					.075
M8805/92-010		G					.075
M8805/92-011		J					.075
M8805/92-012		K					.075
M8805/92-013		L					.075
M8805/92-014		M					.075
M8805/92-015		N					.075
M8805/92-016		B		Mom	Main	Main	.075
M8805/92-017		E					.075
M8805/92-018		P					.075
M8805/92-019	2	A	3	Main	Main	Main	.090

TABLE IV. Circuit configuration.

Circuit configuration	Switch pole number	Circuit closed with toggle lever in		
		Opposite keyway side	Center	Keyway side
1	1	C-NC	None	C-NO
	2	C-NC		C-NO
2	1	C-NO	C-NC	C-NC
	2	C-NC	C-NC	C-NO
3	1	C-NO	C-NC	C-NC
	2	C-NC	C-NC	C-NO
	3	C-NO	C-NC	C-NC
4	1	C-NC	None	C-NO
	2	C-NC		C-NO
	3	C-NC		C-NO
	4	C-NC		C-NO

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:18Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:18Z
Check the source to verify that this is the current version before use.