MIL-S-8805/96C
10 NOVEMBER 1989
SUPERSEDING
MIL-S-8805/96B
21 June 1971


MILITARY SPECIFICATION SHEET

SWITCHES, PUSH, MOMENTARY, SPST, 5 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation. MIL-S-8805.

Inches	mm
.015	0.38
.016	0.41
.055	1.39
.130	3.30
.136	3 45
.156	3.96
.250	6.35
.282	7.16
.312	7 92
.343	8.71
1.046	26.5

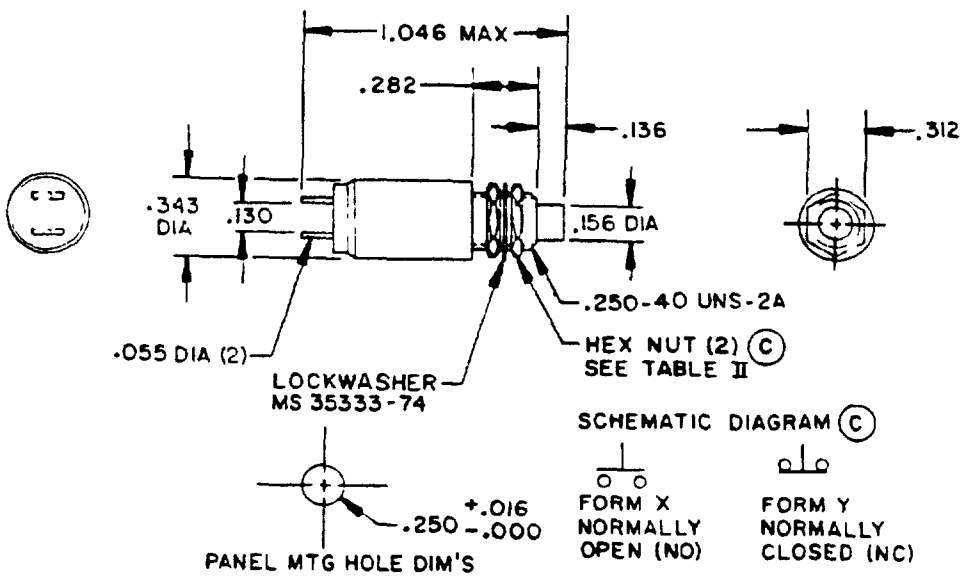

NOTES
1. Dimensions are in inches.
2. Metric equivalent are given for general information only.
3. Unless otherwise specified, tolerance is ±.015 (0.38 mm).

FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration See figure 1.

Enclosure design. See table II.

Temperature characteristics: 1 (-55°C to +85°C).

Shock. MIL-STD-202, method 213, test condition C, 100 g, (half-sine).

Vibration grade: 2 (10-2000 Hz, 15 g peak).

Weight: .010 pound maximum.

Operating characteristics:

Total plunger travel: .095 ±.015.

Operating force

Unsealed 1.50 ± 5 pounds.
Dust tight 1.75 ±.5 pounds.

Material

Case Aluminum alloy 2011-T3.

Molded body. Flame resistant diallylphthalate which meets the requirements of MIL-M-14

Finish Case, MIL-A-8625, type II

Plunger. May be glass filled nylon.

Dielectric withstanding voltage·

Sea level 1000 V rms minimum initial. Following electrical endurance -200 V rms minimum

Mechanical endurance 50,000 cycles.

Electrical endurance 25,000 cycles

Electrical ratings See table I.

TABLE I. Electrical ratings.

Loads	28 V dc	115 V ac, 60 Hz
Resistive	5.0 amperes	5.0 amperes
Inductive	2.0 amperes	2.0 amperes

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:19Z
Check the source to verify that this is the current version before use.

Military part numbers. See table II.

TABLE II. Part numbers and characteristics.

Part number M8805/96	Plunger cap color	Circuit characteristics	Case color	Hex nut	Enclosure design
-001	Red	SPST-NO	Clear	MS25082-14	1 (unsealed)
-002	Black	SPST-NO	Clear	MS25082-14	1 (unsealed)
-003	Red	SPST-NC	Clear	MS25082-14	1 (unsealed)
-004	Black	SPST-NC	Clear	MS25082-14	1 (unsealed)
-005	Red	SPST-NO	Black	1/	1 (unsealed)
-006	Black	SPST-NO	Black	1/	1 (unsealed)
-007	Red	SPST-NC	Black	1/	1 (unsealed)
-008	Black	SPST-NC	Black	1/	1 (unsealed)
-009	Red	SPST-NO	Clear	MS25082-14	2 (dust tight)
-010	Black	SPST-NO	Clear	MS25082-14	2 (dust tight)
-011	Red	SPST-NC	Clear	MS25082-14	2 (dust tight)
-012	Black	SPST-NC	Clear	MS25082-14	2 (dust tight)
-013	Red	SPST-NO	Black	1/	2 (dust tight)
-014	Black	SPST-NO	Black	1/	2 (dust tight)
-015	Red	SPST-NC	Black	1/	2 (dust tight)
-016	Black	SPST-NC	Black	1/	2 (dust tight)

1/ MS25082-14 with black finish.

Qualification inspection.

Group submission. See table III.

TABLE III Group qualification inspection

Switches for testing	Number of sample units	Qualification inspection table of MIL-S-8805	Extent of approval
M8805/96-001	20	Group I All samples Group II 4 samples Group IV 2 samples Group V 2 samples Group VI 4 samples Group VII 8 samples	M8805/96-001 through M8805/96-016
M8805/96-004	8	Group I All samples Group VII 8 samples	
M8805/96-006	2	Group I All samples (visual and mechanical examination only) Group IV 2 samples	
M8805/96-009	12	Group I All samples Group II 4 samples Group III 2 samples Group VI 4 samples Group VIII 2 samples	

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:19Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians.
Army - ER
Navy - EC
Air Force - 85

Review activities.
Army - AR
Navy - AS, SH
Air Force - 99

User activities
Army - AV, MI
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1433)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:19Z
Check the source to verify that this is the current version before use.