
INCH-POUND
MIL-PRF-8805/96F
28 June 2022
SUPERSEDING
MIL-PRF-8805/96E
4 October 2004

PERFORMANCE SPECIFICATION SHEET

SWITCHES, PUSH, MOMENTARY, SPST, 5 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-PRF-8805.

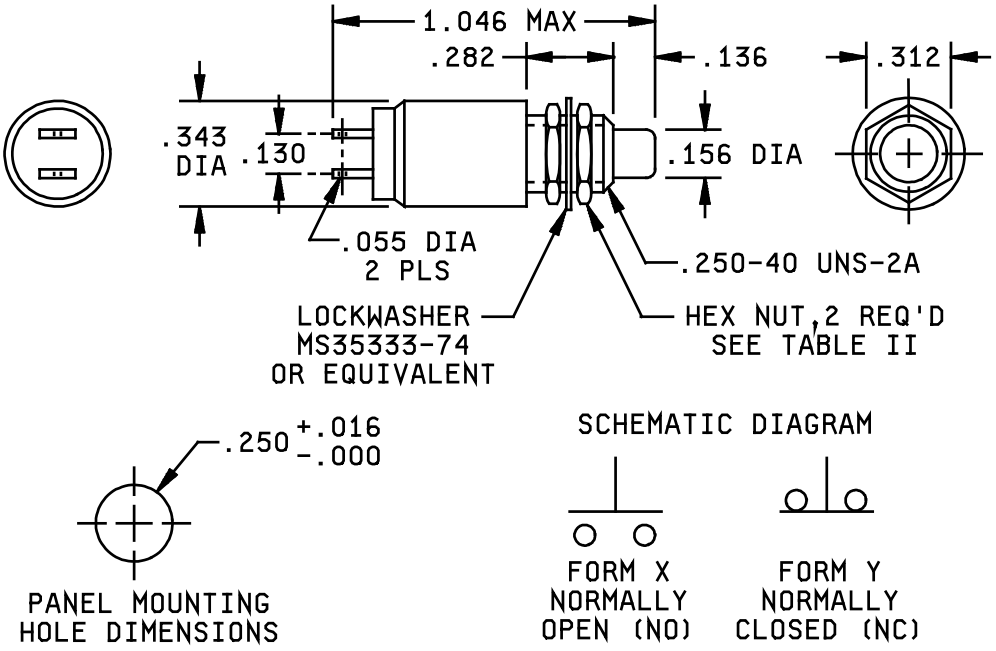

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 inch.
3. MS35333-74 per NASM35333

FIGURE 1. Dimensions and configurations.

AMSC N/A
FSC 5930
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Enclosure design: See table II.

Temperature characteristic: 1 (-55°C to +85°C).

Shock: MIL-STD-202-213, test condition C, 100 g, (half-sine).

Vibration grade: 2 (10 Hz to 2000 Hz, 15 g peak).

Weight: .010 pound maximum.

Operating characteristics:

Total plunger travel: .095 inch ±.015.

Operating force:

Unsealed: 1.50 ±.5 pounds.

Dust tight: 1.75 ±.5 pounds.

Dielectric withstanding voltage:

Sea level: 1,000 V rms minimum initial. Following electrical endurance -200 V rms minimum.

Mechanical endurance: 50,000 cycles.

Low temperature cycling rate: 10 to 15 cycles per minute.

Electrical endurance: 25,000 cycles.

Electrical ratings: See table I.

Qualification:

Group submission – See table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:19Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings.

Loads	28 V dc	115 V ac, 60 Hz
Resistive	5.0 amperes	5.0 amperes
Inductive	2.0 amperes	2.0 amperes

Military part numbers: See table II.

TABLE II. Part numbers and characteristics.

Part number M8805/96	Plunger cap color	Circuit characteristics	Case color	Hex nut	Enclosure design
-001	Red	SPST-NO	Clear	2/	1 (unsealed)
-002	Black	SPST-NO	Clear	2/	1 (unsealed)
-003	Red	SPST-NC	Clear	2/	1 (unsealed)
-004	Black	SPST-NC	Clear	2/	1 (unsealed)
-005	Red	SPST-NO	Black	1/	1 (unsealed)
-006	Black	SPST-NO	Black	1/	1 (unsealed)
-007	Red	SPST-NC	Black	1/	1 (unsealed)
-008	Black	SPST-NC	Black	1/	1 (unsealed)
-009	Red	SPST-NO	Clear	2/	2 (dust tight)
-010	Black	SPST-NO	Clear	2/	2 (dust tight)
-011	Red	SPST-NC	Clear	2/	2 (dust tight)
-012	Black	SPST-NC	Clear	2/	2 (dust tight)
-013	Red	SPST-NO	Black	1/	2 (dust tight)
-014	Black	SPST-NO	Black	1/	2 (dust tight)
-015	Red	SPST-NC	Black	1/	2 (dust tight)
-016	Black	SPST-NC	Black	1/	2 (dust tight)

1/ MS25082-C14 per MS25082 or equivalent with black finish. Alternative base metals and protective finishes, as approved by the qualifying activity, may be utilized for hardware material.

2/ MS25082-C14 per MS25082 or equivalent. Alternative base metals and protective finishes, as approved by the qualifying activity, may be utilized for hardware material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:19Z
Check the source to verify that this is the current version before use.

TABLE III. Group qualification inspection.

Switches for testing	Number of sample units	Qualification inspection table of MIL-PRF-8805	Extent of approval
M8805/96-001	20	Group I All samples Group II 4 samples Group IV 2 samples Group V 2 samples Group VI 4 samples Group VII 8 samples	M8805/96-001 through M8805/96-016
M8805/96-004	8	Group I All samples Group VII 8 samples	
M8805/96-006	2	Group I All samples (visual and mechanical examination only) Group IV 2 samples	
M8805/96-009	12	Group I All samples Group II 4 samples Group III 2 samples Group VI 4 samples Group VIII 2 samples	

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced Documents:
- MIL-PRF-8805
- MIL-STD-202-213
- MS25082
- NASM35333

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Army - AR, AV, MI
Navy - AS, MC, OS, SH
Air Force - 19

Preparing activity:
DLA - CC

(Project 5930-2022-058)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:19Z
Check the source to verify that this is the current version before use.