INCH-POUND

MIL-PRF-8805/98D
31 October 2001

SUPERSEDING
MIL-PRF-8805/98C
31 March 1992

PERFORMANCE SPECIFICATION SHEET

SWITCHES, SENSITIVE, SWITCH ASSEMBLY, TOGGLE, 7 AMPERES, PANEL SEAL, TOGGLE SEAL

This specification forms a part of MIL-PRF-8805, dated 23 January 1998, and is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-8805.

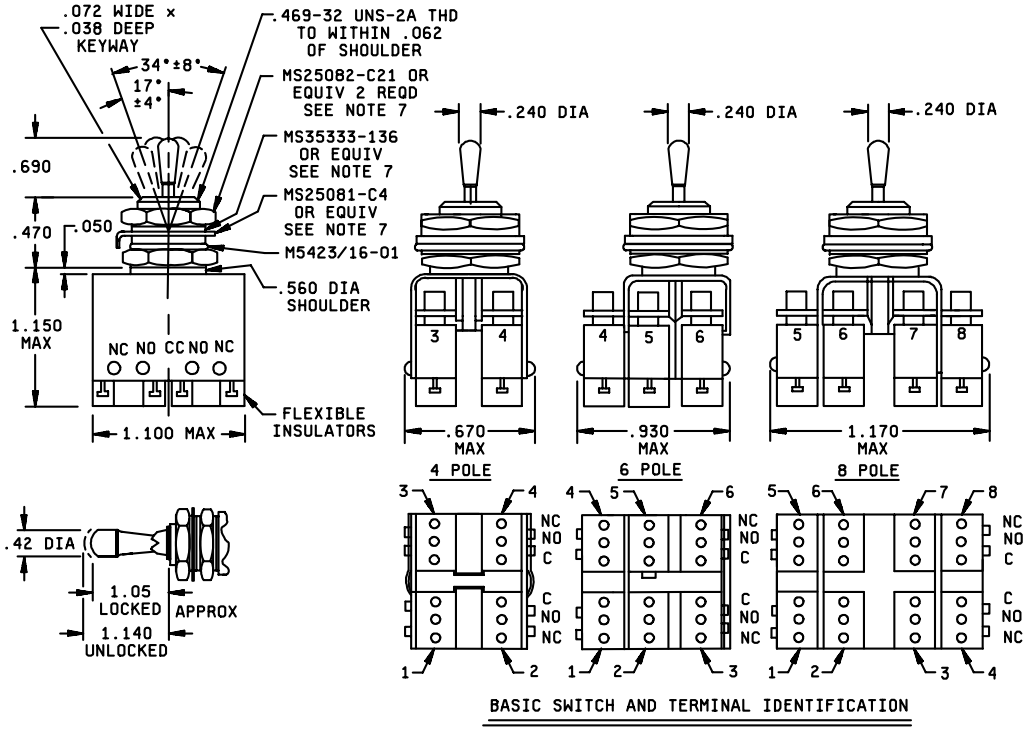


FIGURE 1. Configurations and dimensions.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:20Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.038	0.97	.470	11.94	1.05	26.7
.050	1.27	.560	14.22	1.100	27.94
.062	1.57	.670	17.02	1.140	28.96
.072	1.83	.690	17.53	1.150	29.21
.240	6.10	.760	19.30	1.170	29.72
.42	10.7	.930	23.62	1.300	33.02

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.015 (0.38 mm) for decimals and ±5° for angles.
4. Design configuration optional provided maximum dimensions are not exceeded.
5. Basic switch identification shall be permanently marked on the basic switch as shown.
6. Basic switch terminals shall be single turret (as shown) and shall accept AN-20 wire or equivalent.
7. Alternative base metals and protective finishes, as approved by the qualifying activity, may be utilized for hexagon nut, lock washer and key washer material. Dimensions shall be in accordance with the referenced hardware specifications.

FIGURE 1. Configurations and dimensions - continued.

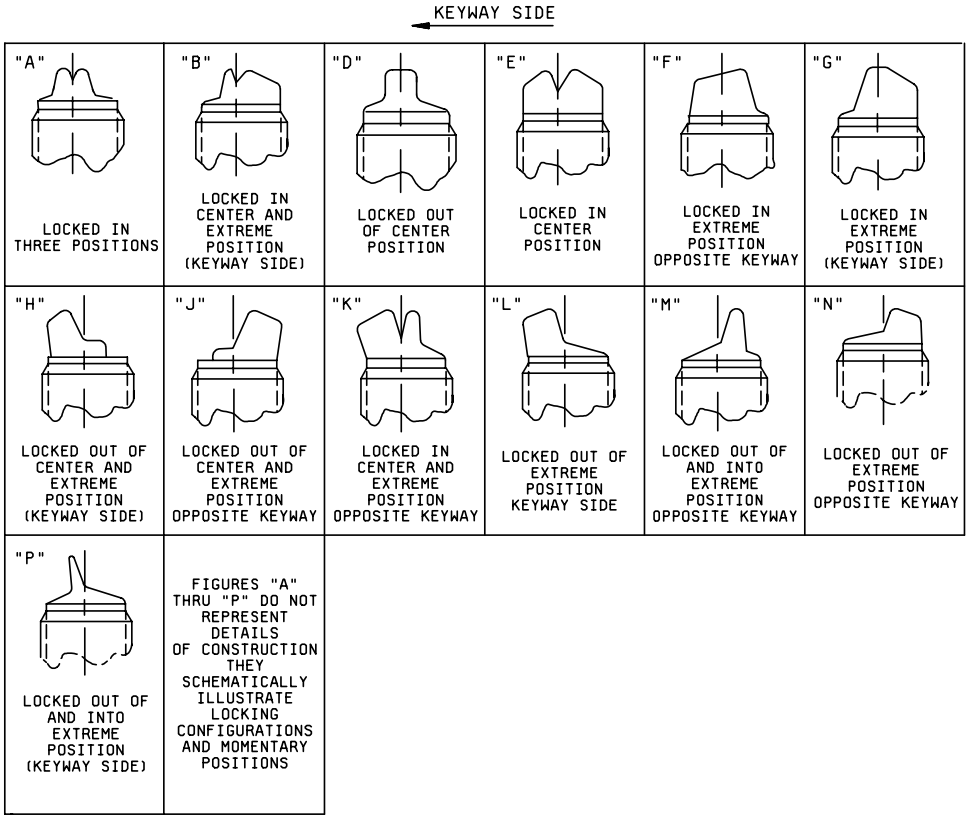


FIGURE 2. Locking arrangement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and 2.

Enclosure design: 1 (Unsealed). Switches shall have molded silicone rubber toggle to bushing seal and panel seal.

Temperature characteristic: 1 (-55°C to +85°C).

Shock type: 50 g, sawtooth, test condition G, method 213 of MIL-STD-202.

Vibration grade: Random vibration, tested in accordance with method 214 of MIL-STD-202 as follows:

20 - 300 Hz, 3 db/octave increase
300 - 1000 Hz, 0.02 G^2 Hz
1000 - 2000 Hz, 6 db/octave decrease

Weight (pounds maximum):

4 pole switches: .095 without lever lock, .110 with lever lock.
6 pole switches: .100 without lever lock, .115 with lever lock.
8 pole switches: .110 without lever lock, .125 with lever lock.

Toggle lever: The toggle lever shall be metal with a lusterless finish and shall have a fixed pivot.

Locking arrangement: The locking combination for the lever lock toggle lever shall provide positive locking and shall not permit a change in toggle lever position until the locking mechanism is manually released.

Panel seal: There shall be no leakage of water through the seals following the toggle seal test of MIL-DTL-83731.

Dielectric withstanding voltage:

Sea level: 1,000 V rms.
Altitude: 400 V rms at 50,000 feet.

Terminal strength: 5 pounds.

Strength of actuating means: 25 pounds.

Strength of mounting bushing: 25 pound-inches shall be applied to the mounting nut.

Mechanical endurance: 50,000 cycles. Lever lock switches shall also be tested for 50,000 cycles by pulling the lever to its fully extended position and returning to its fully locked position without causing contact transfer at a rate of 60 cycles per minute maximum.

Electrical endurance: 25,000 cycles.

Electrical ratings: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:20Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings.

Load	Sea level		50,000 feet
	28 V dc	115 V ac, 60 Hz	28 V dc
	amperes	amperes	amperes
Resistive	7.0	7.0	4.0
Inductive	4.0	7.0	2.5

Quality assurance:

The following tables for quality assurance inspections shall apply only when the basic sensitive switch is approved under specification sheet MIL-PRF-8805/4.

Qualification inspection: in accordance with table II.

Group A inspection: In accordance with table III, provided in process dielectric withstanding voltage is performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:20Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification group submission inspection.

Examination or test	Test sample	Other switch samples	Extent of approval
Group 1. Visual and mechanical examination Dielectric withstanding voltage Insulation resistance Operating characteristics	Group 1. M8805/98-15 (2 units) M8805/98-63 (4 units) M8805/98-81 (6 units)	M8805/98-33 (6 units) 1. Visual and mechanical examination 2. Operating characteristics 3. Lever-lock mechanical endurance (4 units) 4. Salt spray (corrosion) (2 units)	All Part or Identifying Numbers (PIN)
Group 2. Strength of actuating means 1/ Strength of mounting bushing 1/ Thermal shock Vibration (random) Shock (50 G) Moisture resistance Dielectric withstanding voltage Operating characteristics Panel seal	Group 2. M8805/98-63 (4 units)	M8805/98-64 (4 units) 1. Strength of actuating means 1/ 2. Vibration 3. Shock (50 G) 4. Moisture resistance 5. Operating characteristics 6. Panel seal	
Group 3. Salt spray (corrosion)	Group 3. M8805/98-81 (2 units)		
Group 4. Low temperature operation 1/ Mechanical endurance at low temperature 2/ Mechanical endurance at high temperature 1/ Dielectric withstanding voltage Operating characteristics Panel seal	Group 4. M8805/98-81 (4 units)		
Group 5. Electrical endurance Inductive load dc	Group 5. M8805/98-15 (2 units)		

1/ Two sample units only. For low temperature operation, lever shall be held in momentary position.
2/ Same sample units as for low temperature operation.

TABLE III. Group A inspection.

Examination or test
Visual and mechanical examination Operating characteristics

PIN: M8805/98 - (dash number from table IV).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:20Z
Check the source to verify that this is the current version before use.

Table IV. Dash number and characteristics.

Dash number	Number of poles	Lever action and circuitry (table V)	Locking arrangement (figure 2)
-001	4 Pole	1	None
-002			A
-003			B
-004			D
-005			E
-006			F
-007			G
-008			H
-009			J
-010			K
-011			L
-012			M
-013			N
-014			P
-015		3	None
-016			D
-017			F
-018			G
-019		5	None
-020			E
-021			F
-022			K
-023			L
-024			M
-025			N
-026		7	None
-027			E
-028			L
-029			N
-030		8	None
-031			F
-032	6 Pole	1	None
-033			A
-034			B
-035			D
-036			E
-037			F
-038			G
-039			H
-040			J
-041			K
-042			L
-043			M
-044			N
-045			P
-046		3	None
-047			D
-048			F
-049			G
-050		5	None
-051			E
-052			F
-053			K
-054			L
-055			M
-056			N
-057		7	None
-058			E
-059			L
-060			N

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:20Z
Check the source to verify that this is the current version before use.

Table IV. Dash number and characteristics - Continued.

Dash number	Number of poles	Lever action and circuitry (table V)	Locking arrangement (figure 2)
-061	6 Pole	8	None
-062			F
-063	8 Pole	1	None
-064			A
-065			B
-066			D
-067			E
-068			F
-069			G
-070			H
-071			J
-072			K
-073			L
-074			M
-075			N
-076			P
-077		3	None
-078			D
-079			F
-080			G
-081		5	None
-082			E
-083			F
-084			K
-085			L
-086			M
-087			N
-088		7	None
-089			E
-090			L
-091			N
-092		8	None
-093			F
-094 1/	4 Pole	9	P

1/ Inactive for new design.

TABLE V. Lever action and circuitry.

Type number	Basic switch numbers			With toggle lever in position					
				Keying side		Center		Opposite keying side	
	For 4 pole	For 6 Pole	For 8 pole	Toggle action	Circuit closed	Toggle action	Circuit closed	Toggle action	Circuit closed
1	1-2	1-2-3	1-2-3-4	Maintain	C-NC	Maintain	C-NC	Maintain	C-NO
	3-4	4-5-6	5-6-7-8		C-NO		C-NC		C-NC
3	1-2	1-2-3	1-2-3-4	Maintain	C-NC	(None)		Maintain	C-NO
	3-4	4-5-6	5-6-7-8		C-NO				C-NC
5	1-2	1-2-3	1-2-3-4	Momentary	C-NC	Maintain	C-NC	Maintain	C-NO
	3-4	4-5-6	5-6-7-8		C-NO		C-NC		C-NC
7	1-2	1-2-3	1-2-3-4	Momentary	C-NC	Maintain	C-NC	Momentary	C-NO
	3-4	4-5-6	5-6-7-8		C-NO		C-NC		C-NC
8	1-2	1-2-3	1-2-3-4	Momentary	C-NC	(None)		Maintain	C-NO
	3-4	4-5-6	5-6-7-8		C-NO				C-NC
9 1/	1-2	N/A	N/A	Momentary	C-NC	Momentary	C-NO	Maintain	C-NC
	3-4				C-NO		C-NC		C-NC

1/ Inactive for new design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:20Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-1126-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:20Z
Check the source to verify that this is the current version before use.