FUZE, MINE, AT, PRACTICE: M604
LOADING, ASSEMBLING AND PACKING

This specification is approved for use by the U.S. Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers quality assurance provisions and preparation for delivery for Fuze, Mine, AT, Practice: M604. (See 6.1)

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-48078	-	Ammunition, Standard Quality Assurance Provisions, General Specification For.
MIL-P-60345	-	Primer, Stab, M45, Loading, Assembling and Packing.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-286	-	Propellants, Solid: Sampling, Examination and Testing.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS (See 6.5)

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

7548394	-	Container, Ammunition, Metal, For Fuze, Mine, AT, Prac, M604.
7548395	-	Box, Packing, Ammunition, For Fuze, Mine, AT, Prac, M604.
9349315	-	Fuze, Mine, AT, Practice, M604 (Loading Assembly).

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B 117	-	Salt Spray (Fog) Testing

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials and parts. Materials and parts shall be in accordance with the applicable drawings, specifications and standards.

3.2 Fuze assemblies. The mine fuze assemblies shall comply with all requirements specified on Drawing (Dwg.) 9349315, all associated drawings, and with all requirements specified in applicable specifications and standards.

3.3 Moisture content of smoke composition. The moisture content of the smoke composition at the time and place of loading shall not exceed 0.10 percent when tested as specified in 4.5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

3.4 Functioning. The fuzes shall function with a characteristic loud report and produce a characteristic smoke volume when a load of three-hundred (300) pounds, maximum, is applied when tested as specified in 4.5.2.

3.5 Waterproofness. The fuzes shall show no evidence of leakage and shall function satisfactorily following submersion in water for not less than twenty-four (24) hours when tested as specified in 4.5.3.

3.6 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.7 Workmanship. All parts and assemblies shall be fabricated and assembled in a thorough, workmanlike manner. They shall be free of burrs, chips, sharp edges, chipped edges, gouges, cracks, surface defects, dirt, grease, corrosion products, and other foreign matter. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agents. All required markings shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the following items in sample quantities as indicated below and TABLE 1.

Part Description	Drawings	Quantity
Fuze, Mine, AT, Practice, M604 (Loading Assembly	9349315	50

4.3.2 Inspections to be performed. See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-12777A(AR)

PARAGRAPH	TITLE: Fuze, Mine, AT, Practice, M604 (Loading Assembly)		SHEET 1 OF 1		DRAWING NUMBER: 9349315
					NEXT HIGHER ASSEMBLY: --
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Examination for Defects	50		3.2	4.4.2.4
	Functioning test	Note A		3.4	4.5.2
	Waterproofness	Note B		3.5	4.5.3

NOTES: A. Following the examination for defects, twenty-five (25) samples shall be subjected to the functioning test.

B. Following the examination for defects, twenty-five (25) samples shall be subject to the waterproofness test.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil - Downloaded: 202640-17T23:20Z
Check the source to verify that this is the current version before use.

4.4. Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, each lot shall contain:

a. Mine fuze metal parts assemblies of one lot interfix number from one manufacturer.

b. Body cups of one lot interfix number from one manufacturer.

c. Smoke composition from one lot interfix number from one manufacturer.

d. Primers of one lot interfix number from one manufacturer. (See 4.4.5)

4.4.2 Examination. See MIL-A-48078.

a. Sampling plans. Unless otherwise specified in the classification of Defects and Tests Tables, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-12777A(AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.1	Fuze, Mine, AT, Practice, M604 (Loading Assembly) (Prior to Assembling Primer)	1	1	9349315
				NEXT HIGHER ASSEMBLY --

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Distance between bottom of primer cavity and tip of firing pin, min		0.40%	3.2	Gage
102	Firing pin point damaged (broken, mushroomed, bent, etc.)		0.40%	3.2	Visual
103	Foreign matter in primer cavity or in firing pin cavity		0.40%	3.2	Visual
Minor					
201	Poor workmanship		1.0%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:20Z
Check the source to verify that this is the current version before use.

Quality conformance inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-12777A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Fuze, Mine, AT, Practice, M604 (Loading Assembly) (Prior to Assembling Body Cup)				9349315
					NEXT HIGHER ASSEMBLY --
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Primer above flush		100%	3.2	Manual
102	Blue end of primer not visible (Primer inverted)(after sealing)		100%	3.2	Visual
103	Primer crimp less than 360°, unsatisfactory or missing		100%	3.2	Visual
104	Primer disc damaged (punctured, deep cut, wrinkled)		100%	3.2	Visual
105	Primer missing		100%	3.2	Visual
Minor					
201	Rubber adhesive on fuze body inadequate or missing		0.65%	3.2	Visual
202	Poor workmanship		1.0%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:20Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-12777A(AR)

PARAGRAPH 4.4.2.3	TITLE Loaded Body Cup (prior to assembly to Fuze Parts Assembly)		SHEET 1 OF 1		DRAWING NUMBER 9349315
					NEXT HIGHER ASSEMBLY --
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Smoke charge composition			3.2	Certification (See 6.7)
102	Moisture content	4.5.1	-	3.3	4.5.1
103	Smoke charge missing		0.40%	3.2	Visual
Minor					
201	Charge cracked or chipped		0.65%	3.2	Visual
202	Poor workmanship		1.0%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil - Downloaded: 202640-17T23:20Z
Check the source to verify that this is the current version before use.

Quality conformance inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-12777A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.4	Fuze, Mine, AT, Practice, M604 (Loading Assembly)	1 OF 2	9349315
			NEXT HIGHER ASSEMBLY --

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Safety fork incorrectly assembled or missing		100%	3.2	Visual
Major					
101	Functioning		1.0%	3.4	4.5.2
102	Waterproofness		1.0%	3.5	4.5.3
103	Diameter of body cup, max		0.40%	3.2	Gage
104	Total length, max		0.40%	3.2	Gage
105	Part damaged (dented, bent, cracked, etc.)		0.40%	3.2	Visual
106	Part missing (excluding safety fork)		0.40%	3.2	Visual
107	Body cup bulging excessively		0.40%	3.2	Visual
108	Part incorrectly assembled		0.40%	3.2	Visual
109	Body disc punctured		0.40%	3.2	Visual
110	Blue paint missing from exterior of body cup		0.40%	3.2	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:20Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-12777A(AR)

PARAGRAPH 4.4.2.4 (cont'd)	TITLE Fuze, Mine, AT, Practice, M604 (Loading Assembly)		SHEET 2 OF 2		DRAWING NUMBER 9349315
					NEXT HIGHER ASSEMBLY --
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201	Protective coating (where required) damaged or missing (ignoring slight scratches)		0.65%	3.2	Visual
202	Marking incorrect, unidentifiable or missing		0.65%	3.2	Visual
203	Poor workmanship		1.0%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil - Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

Quality conformance inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-12777A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Metal Container (Sealed)				7548394
					NEXT HIGHER ASSEMBLY 7548395
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Air test (Note A)	25	-	3.2	4.5.4
102	Salt spray (Note A)	25	-	3.2	4.5.5
103	Waterproofness destroyed by hole or other puncture		0.40%	3.2	Visual
104	Container dented or deformed		0.40%	3.2	Visual
105	Color incorrect		0.40%	3.2	Visual
106	Key missing		0.40%	3.2	Visual
Minor					
201	Contents move when container is shaken		0.65%	3.2	Manual
202	Protective finish damaged or missing (base metal exposed, ignoring slight scratches)		0.65%	3.2	Visual
203	Marking incorrect, misleading, unidentifiable or missing		0.65%	3.2	Visual
204	Poor workmanship		1.0%	3.7	Visual

NOTES: A. This test shall be performed on the first article samples only. The salt spray test may be performed on the samples subjected to the air test.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:20Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-12777A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 7548395
4.4.2.6	Wooden Packing Box (Sealed)				NEXT HIGHER ASSEMBLY --
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Hardware missing, broken or loose		0.40%	3.2	Visual-Manual
102	Strapping missing, broken or loose		0.40%	3.2	Visual-Manual
103	Protruding nail		0.40%	3.2	Visual
104	Board broken or split		0.40%	3.2	Visual
105	Contents exposed		0.40%	3.2	Visual
Minor					
201	Hardware improperly engaged		0.65%	3.2	Visual-Manual
202	Handle missing, insecure or damaged (deterioration, cut, etc.)		0.65%	3.2	Visual-Manual
203	Contents loose (when box is tilted)		0.65%	3.2	Manual
204	Car seal missing, unsealed or improperly positioned		0.65%	3.2	Visual
205	Strapping improperly assembled		0.65%	3.2	Visual
206	Marking misleading, unidentifiable, or missing (including incorrect color code)		0.65%	3.2	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil - Downloaded: 202640-17T23:20Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in the First article and Quality conformance inspection tables.

4.4.4 Inspection equipment. The inspection equipment required to perform the inspections and tests prescribed in this specification is identified in the "Paragraph Reference/Inspection Method" column in the tables starting with paragraph 4.4.2.1, and the test method paragraph (see 4.5). The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and 6.3 herein.

4.4.5 Check test for deterioration of primers. (See MIL-P-60345). If the total time between original acceptance of any primer lot and the assembly of that lot into the mine fuze exceeds two (2) years, or if the primers have been subjected to adverse conditions, however brief, at any time since previous tests, the primer lot shall be subjected to and must satisfactorily pass, the check test for deterioration specified in MIL-P-60345 immediately before the primer lot is assembled into the mine fuzes. This test shall be performed by the contractor on primers selected by the Government Inspector at the facility assembling the primers into the mine fuzes. (See 6.4)

4.5 Methods of inspection.

4.5.1 Moisture content of smoke composition. The contractor shall provide adequate controls to insure compliance with the applicable moisture content requirements. The moisture content of each lot of smoke charge shall be determined at the loading station at the time of loading the body cups. This determination shall be made at least once for each eight (8) hours of production. Sampling of the smoke charge shall be in accordance with MIL-STD-286, Method 101.2.2. In addition, if the moisture content fails to comply with the requirement specified in 3.3 and loading has not begun, the smoke charge lot shall be rejected until corrective action has been taken as verified by repeating the moisture content determination. If loading has begun, body cups loaded with non-conforming smoke charge shall be rejected. Determination of the moisture content of the smoke charge shall be in accordance with MIL-STD-286, Method 101.2.2, except that the oven temperature shall be $70^{\circ} \pm 2^{\circ}C$.

4.5.2 Functioning. The mine fuzes shall be assembled into the fixture shown in Figure 1 or in a Mine, AT, Practice, M20. The safety fork shall then be removed. A load of three hundred (300) pounds, maximum, shall be applied to the mine fuze or to the mine at a rate not to exceed three (3) feet per minute. Any mine fuze which fails to comply with the requirements specified in 3.4 shall be classed defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

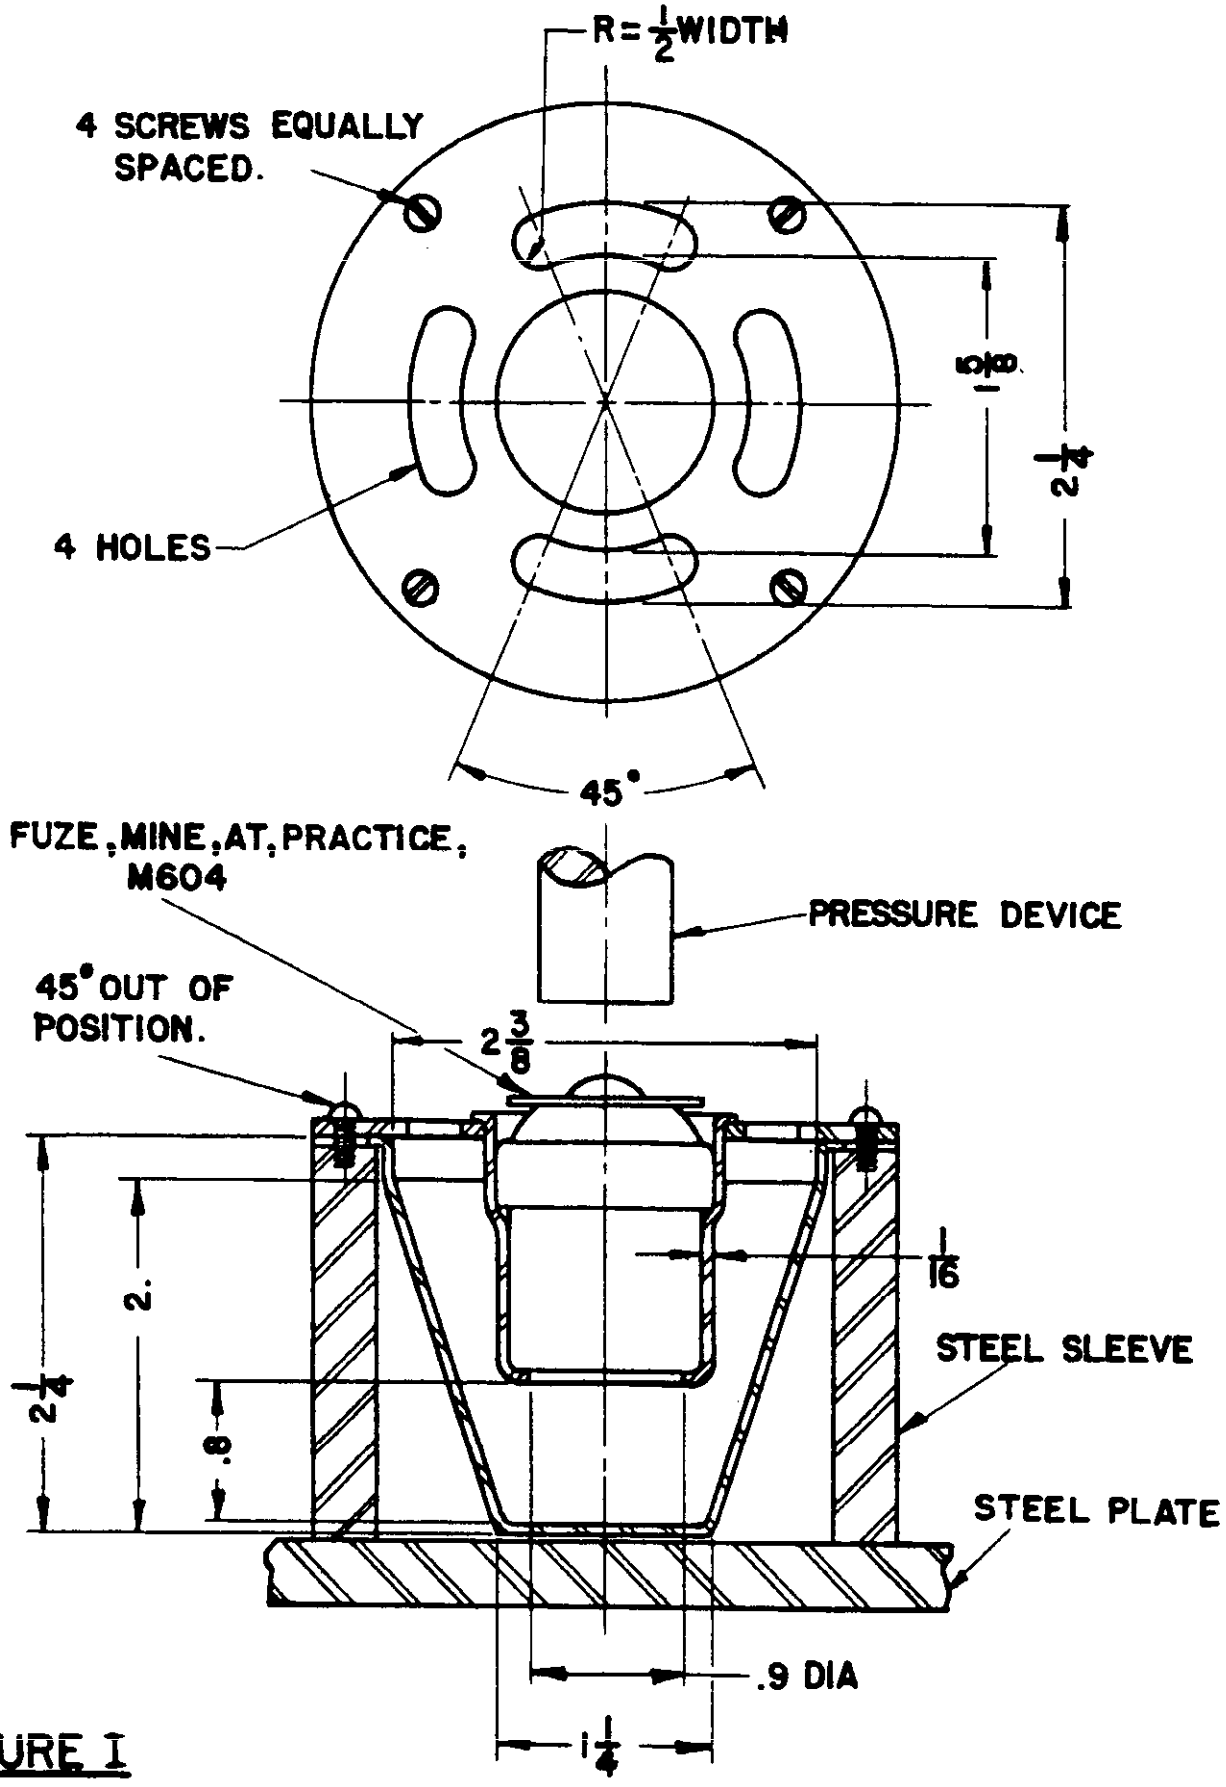


FIGURE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

4.5.3 Waterproofness. The sample mine fuzes shall be completely submerged in water so that the top of the fuze assembly is seven plus or minus one (7 ± 1) inches below the surface of the water for a period of not less than twenty-four (24.0) hours. The water temperature shall be ambient (70° ± 10°F.) and shall contain an approved wetting agent such as Naccatol. Within one-half hour after removal from the water, one-half the sample mine fuzes selected for this test shall be dismantled and visually examined for evidence of leakage. The remaining half shall be subjected to the functioning test specified in 4.5.2. Any mine fuze which fails to comply with the requirements specified in 3.5 shall be classed defective.

4.5.4 Air test of sealed metal container. The test shall be performed as specifed on the applicable drawing using equipment in accordance with 4.4.4. Any sealed container which fails to comply with the specified requirement shall be classed defective.

4.5.5 Salt spray test of sealed metal container. This test shall be performed as specified on the applicable drawing using an atomized sodium chloride solution of 5%. Test procedures shall be in accordance with ASTM B 117. Any sealed container which fails to comply with the specified requirement shall be classed defective.

5. PACKAGING

5.1 Preservation - packaging.

5.1.1 Level A. The mine fuzes shall be preserved and packaged in accordance with Dwg. 7548394.

5.2 Packing.

5.2.1 Level B. The mine fuzes, preserved and packaged as specified in 5.1.1, shall be packed in accordance with Dwg. 7548395.

5.3 Marking. Marking shall be in accordance with Dwgs. 7548394 and 7548395.

5.4 Shipping. When mine fuzes from more than one lot are shipped at one time, each lot shall be kept separate, and the division between lots clearly indicated to prevent mixing of the lots in transit.

6. NOTES

6.1 Intended use. The mine fuze covered by this specification is intended for use with Mine, AT, Practice: M20.

6.2 Ordering data. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

6.3 Submission of inspection equipment designs for approval. (See MIL-A-48078). Equipment designs shall be submitted as required to: Commander, U.S. Army Armament Research and Development Command, ATTN: DRDAR-QAT-I, Dover, New Jersey 07801. Request letter of submittal should state contractor, contract number, specification number, item nomenclature, and classification of defects and tests paragraph number.

6.4 Cost of check test. The contracting officer will arrange for the contractor to be reimbursed for the expense incurred in the performance of the check test for deterioration of the primers. The tests shall be conducted at Government expense without cost to the contractor who loaded the primers or to the contractor assembling the primers into the mine fuzes; and shall not constitute a basis for rejection against either contractor except where deterioration has occurred as a direct result of carelessness in handling, storage, etc., permitted while the primer lot was under the jurisdiction of either contractor.

6.5 Drawings. Drawings listed is Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, and identified as, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities are now under the cognizance of ARRADCOM.

6.6 Data cards. (See MIL-A-48078). Distribution of data cards shall include the following: Commander, U. S. Army Armament Research and Development Command, ATTN: DRDAR-QAT-M, Dover, New Jersey 07801. (See 6.7)

6.7 Data items. Data required by this specification are cited in the paragraphs listed below. The Form DD 1423 should include distribution of data cards as specified in 6.6.

Paragraph	Data Requirement	Applicable DID
4.4.2.3	Quality Inspection Test Demonstration and Evaluation Report	DI-R-1724 (Tailored)
6.6	Ammunition Data Card	DI-L-1410

6.8 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1345-A210)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armament R&D Command
ATTN: DRDAR-QAT-M
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-F-12777A(AR): Fuze, Mine, AT, Practice: M604, Loading, Assembling and Packing

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:20Z
Check the source to verify that this is the current version before use.