MIL-P-12763 (ORD)
29 May 1953
SUPERSEDING
AFPS-99
20 April 1944

MILITARY SPECIFICATION

PACKAGING OF MOUNT, TELESCOPE, M31, W/E

1. SCOPE

1.1 This specification covers the preservation, packaging, packing, and marking for domestic shipment and storage, and overseas shipment for Mount, Telescope, M31, W/E.

Nomenclature	Ord. Dwg. No.	Stock No.
Mount, Telescope, M31, W/E		F002-6733866
(Consisting of:		
1 Mount, Telescope, M31	90-175	F002-7597794
1 Light, Instrument, M36	D7690564	F205-7690564
2 Lamp	DLAX9 (193145-Part No.)	H104-0193145

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS

2.1 The following specifications and standards of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

- FF-N-101 - Nails, Spikes, Staples and Tacks.
- NN-B-601 - Boxes, Wood-Cleated-Plywood, for Domestic Shipment.
- NN-B-621 - Boxes, Wood, Nailed and Lock-Corner.
- QQ-S-781 - Strapping, Flat, Steel
- UU-T-111 - Tape; Paper, Gummed (Sealing and Securing).
- LLL-F-291 - Fiberboard; Corrugated, Single Face, Flexible.

Military

- JAN-P-101 - Packaging and Packing for Overseas Shipment - Adhesive, Water-Resistant, For Sealing Fiberboard Boxes.
- JAN-P-105 - Packaging and Packing for Overseas Shipment - Boxes, Wood, Cleated, Plywood.
- JAN-P-106 - Packaging and Packing for Overseas Shipment - Boxes, Wood, Nailed.
- JAN-P-108 - Packaging and Packing for Overseas Shipment - Boxes, Fiberboard (V-Board W-Board), Exterior and Interior.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

MIL-P-116	-	Preservation, Methods of.
JAN-P-117	-	Packaging and Packing for Overseas Shipment - Bags, Interior Packaging.
JAN-B-121	-	Barrier-Materials, Greaseproof
JAN-P-127	-	Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure-Sensitive, Water-Resistant.
JAN-P-139	-	Packaging and Packing for Overseas Shipment - Plywood, Container Grade
MIL-C-11796	-	Compound, Corrosion Preventive, Petrolatum Type, Hot Application.

Ordnance Department Tentative

AXS-673	-	Compound, Rust Preventive, Thin Film.

STANDARD
Military

MIL-STD-129	-	Marking of Shipments.

(Copies of specifications and standard required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Cleaning . - All exposed unpainted metal surfaces shall be cleaned in accordance with process C-4 followed by C-8 of Specification MIL-P-116. The cleaned surfaces shall be dried in accordance with method D-4 of Specification MIL-P-116. Surfaces of the instrument light and lamps such as rheostats, switches, wire insulation, electrical contact points, and other materials that will be damaged by the cleaning process shall be cleaned in accordance with process C-1 of Specification MIL-P-116.(See figure 1.)

3.2 Preservation. -

3.2.1 The cleaned and dried surfaces of the mount including the mounting hardware shall be coated with corrosion preventive compound conforming to class 2 of Specification MIL-C-11796.

3.3 Packaging. -

3.3.1 The preserved surfaces shall be covered and the mounting hardware wrapped with greaseproof barrier material conforming to type I or II, grade C, class 2 of Specification JAN-B-121. (See figure 2.)

3.3.2 The spare lamps shall be individually wrapped with neutral tissue paper. The wrapped lamps shall be placed in a waterproof bag conforming to any type, grade A, class b or c of Specification JAN-P-117. The bag shall be closed by heat sealing after the excess entrapped air has been removed.

3.3.3 The lamp assembly shall be placed in its holder on the instrument light case. The instrument light shall be wrapped with flexible single face corrugated fiberboard conforming to type II or III of Specification LLL-F-291. The wrap shall be secured with gummed tape conforming to any class of Specification UU-T-111. The wrapped light shall be placed in a moisture vaporproof bag conforming to type I, grade A, class d of Specification JAN-P-117. The bag shall be closed by heat sealing after excess entrapped air has been removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

3.3.4 The preserved and wrapped mounting hardware shall be placed in a waterproof bag conforming to type I or II, grade A, class B or C of Specification JAN-P-117. The bag shall be closed by heat sealing after the excess entrapped air has been removed.

3.3,5 The plywood base with runners, the support block, and the hold down block shall be constructed. The plywood used shall conform to Specification JAN-P-139 and the lumber used shall conform to Specification NN-B-621, group I or II. (See figures 3, 4, and 5.)

3.3.6 The mount shall be positioned on the base in such a manner that mounting holes line up with those in the plywood base and the mount extends through the yoke of the supporting block. Four 3/8 inch carriage bolts shall be placed in position, extending up through the base. Hold down block shall be placed in position with felt pad down against the mount. Nuts shall be applied using a flat washer and a lock washer under each nut. The exposed threads above the nuts shall be coated with unthinned paint, or compound conforming to Specification AXS-673.(See figure 6.)

3.3.6.1 The bagged instrument light, the bagged mounting hardware, and the bagged spare lamps shall be respectively secured to the mount with pressure-sensitive tape, 3 inches wide conforming to type II, grade B, of Specification JAN-P-127. (See figure 7.)

3.3.7 The wood base containing the telescope mount w/e, shall be positioned in an 18 inch x 9½ inch x 9 inch fiberboard box conforming to symbol V2S, V3S, or V3C, any style except FTC of Specification JAN-P-108. (See figure 8.)

3.3.7.1 A one piece double walled corrugated fiberboard hold down liner, minimum bursting strength 350 pounds per square inch, shall be placed inside the fiberboard box on top of the wood base. The liner shall completely cover the end and side panels of the box above the wood base. The ends of the liner shall abut at the center of a side panel and shall be taped with gummed tape, 3 inches wide conforming to class 2 or 3 of Specification UU-T-111. The score lines in the liner shall be parallel to the corrugations and the corrugations shall be of any combination of A, B, and C flutes, except BB. (See figure 9.)

3.3.7.2 The fiberboard box shall be closed by applying water-resistant adhesive, conforming to Specification JAN-P-101, over all areas of contact between the flaps, and by covering all seams, including the manufacturer's joint with pressure-sensitive tape conforming to any type, any grade of Specification JAN-P-127.

3.4 Packing.

3.4.1 Domestic shipment and storage.- Six packaged mounts, w/e shall be immobilized in a shipping container conforming to style A or B, type A, B, or C of Specification NN-B-601 or style 2 or 4 of Specification NN-B-621. When plywood shipping containers are used they shall be strapped as specified in Specification JAN-P-105, except that the straps shall not be stapled.

3.4.2 Overseas shipment.- Two packaged mounts, w/e shall be immobilized in a shipping container conforming to Specification JAN-P-105, or style 2 or 4 of Specification JAN-P-106. Nailed wood boxes shall be constructed from group I or II lumber and when the shipment is to be made in an ocean going vessel, the minimum thickness of lumber for the sides, top, and bottom shall be 11/16 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

3.5 Marking

3.5.1 Except as noted in 6.2 and as specified herein, marking shall be in accordance with Standard MIL-STD-129.

3.5.2 The packages within the fiberboard boxes shall be identified by the nomenclature of their contents as follows:

MOUNTING HARDWARE
SPARE LAMPS
LIGHT INSTRUMENT M36

3.5.3 When the mounts, w/e are packed for overseas shipment, the serial numbers of the mounts shall be included in the permanent marking below the nomenclature and shall be indicated as shown in the following example: "SERIAL NOS. 684 and 685". When the mounts, w/e are packed for domestic shipment and storage, packing lists, as specified in Standard MIL-STD-129, showing the serial numbers of the mounts shall be required.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Inspection..- Inspection of the entire packaging process shall be made. For each shipment of telescope mounts w/e, the shipping container and the contents of at least one fiberboard box shall be thoroughly examined to assure compliance with all of the details of this specification.

4.2 Test procedures. - At the discretion of the Government inspector, preservative retention test and rough handling tests specified in Specification MIL-P-116 may be required to assure compliance with the requirements and intent of this specification.

5. PREPARATION FOR DELIVERY

(Not applicable.)

6. NOTES

6.1 Ordering data. - Procurement documents should specify the title, number, and date of this specification and the type of shipment to be made.

6.2 Special marking. - The marking of overseas shipping containers by Army installations should be in accordance with Department of the Army and Air Force Manual SR 746-30-5, Marking of Oversea Supply.

TABLE I
DIMENSIONS OF SHIPPING CONTAINERS

	OVERSEAS			DOMESTIC SHIPMENT AND STORAGE		
	Dimensions in Inches			Dimensions in Inches		
	Length	Width	Height	Length	Width	Height
Inside	20	18½	9½	30	18½	19
Outside	23	20	11	33	20	20½
Displacement:	2.9 cubic feet			7.8 cubic feet		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

TABLE II
WEIGHTS OF CONTAINERS

Fiberboard Box	Overseas Shipping Container	Domestic Shipment and Storage Container
Net - 18 lbs.	Gross - 75 lbs.	Gross - 197 lbs.
Tare - 7 lbs.		
Gross - 25 lbs.		

TABLE III
BILLS OF MATERIAL

Domestic Shipment and Storage Shipping Container

Nomenclature	Qty. Reqd.	Dimensions in Inches Length	Width	Thickness	Reference
Sheathing (Top or Bottom)	2	31-1/2	20	3/4	
Sheathing (Side)	2	33	19	3/4	
Sheathing (End)	2	18-1/2	19	3/4	
Box Cleat	4	21-3/4	2-1/4	3/4	
Strapping	2	85	5/8	0.020	Type I, class A or B of Spec. QQ-S-781 (or equiv. round wire)
1/8 lb. 5d Nails					Spec. FF-N-101
1 lb. 8d Nails					Spec. FF-N-101

OVERSEAS SHIPPING CONTAINER

Nomenclature	Qty. Reqd.	Dimensions in Inches Length	Width	Thickness	Reference
Sheathing (Top or Bottom)	2	21-1/2	20	3/4	
Sheathing (Side)	2	23	9-1/2	3/4	
Sheathing (End)	2	18-1/2	9-1/2	3/4	
Box Cleat	4	11-1/2	2-1/4	3/4	
Strapping	2	66	1/2	0.020	Type I, class A or B of Spec. QQ-S-781 (or equiv. round wire)
1/10 lb. 5d Nails					Spec. FF-N-101
1/2 lb. 8d Nails					Spec. FF-N-101

Fiberboard Box and Contents

Fiberboard box - 18 in. by 9-1/2 in. by 8-3/4 in. - Spec. JAN-P-108, compliance symbol V2S, V3S, or V3C, any style except FTC.
Plywood base - 17-7/8 in. by 9-7/16 in. by 3/4 in. - See figure 3.
Support block - 7 in. by 5 in. by 1-1/8 in. - See figure 4.
Hold down block - 7 in. by 1-3/4 in. by 1-1/8 in. - See figure 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

Greaseproof barrier material	- 1-1/4 sq. ft. - Spec. JAN-B-121, type I or II, grade C, class 2.
Waterproof bag	- 4 in. wide by 4 in. long - Spec. JAN-P-117, type I or II, grade A, class b or c.
Waterproof bag	- 2 in. wide by 2 in. long - Spec. JAN-P-117, any type, grade A, class b or c.
Moisture vaporproof bag	- 5-1/2 in. wide by 12 in. long - Spec. JAN-P-117, type I, grade A, class d.
Pressure-sensitive tape	- 3 in. wide by 11 ft long - Spec. JAN-P-127, any type, any grade.
Fiberboard hold down liner	- 8 in. wide by 55 in. long; scored to fit interior of fiberboard box - minimum bursting strength 350 lbs. per sq. in.
Gummed tape	- 3 in. wide by 2 ft. long - Spec. UU-T-111, any class.
Carriage bolt	- 3/8 in. dia. by 3-1/2 in. long - with flat washer, lock washer, and nut - 2 required
Carriage bolt	- 3/8 in. dia. by 8-1/2 in. long - with flat washer, lock washer, and nut - 2 required
Water-resistant adhesive	- used as required - Spec. JAN-P-101.
Cleaning materials	- used as required - Spec. MIL-P-116, methods C-4 and C-8.
Corrosion preventive compound	- used as required - Spec. MIL-C-11796, class 2.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related hereto.

Custodian:
Army- Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

Neg.#22391-1

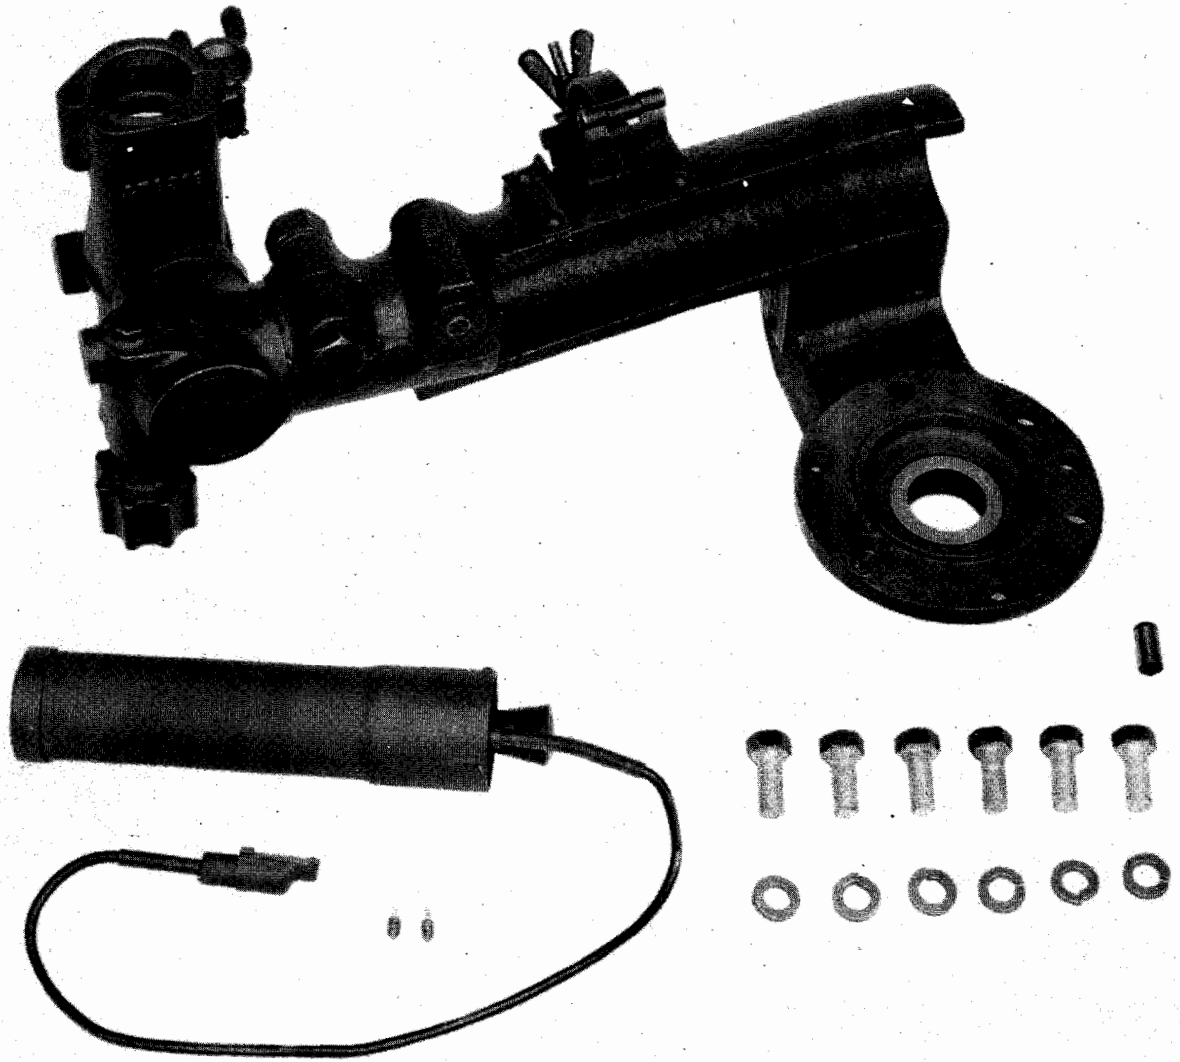


FIGURE 1. MOUNT, TELESCOPE, M31, W/E.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

Neg.#22391-2

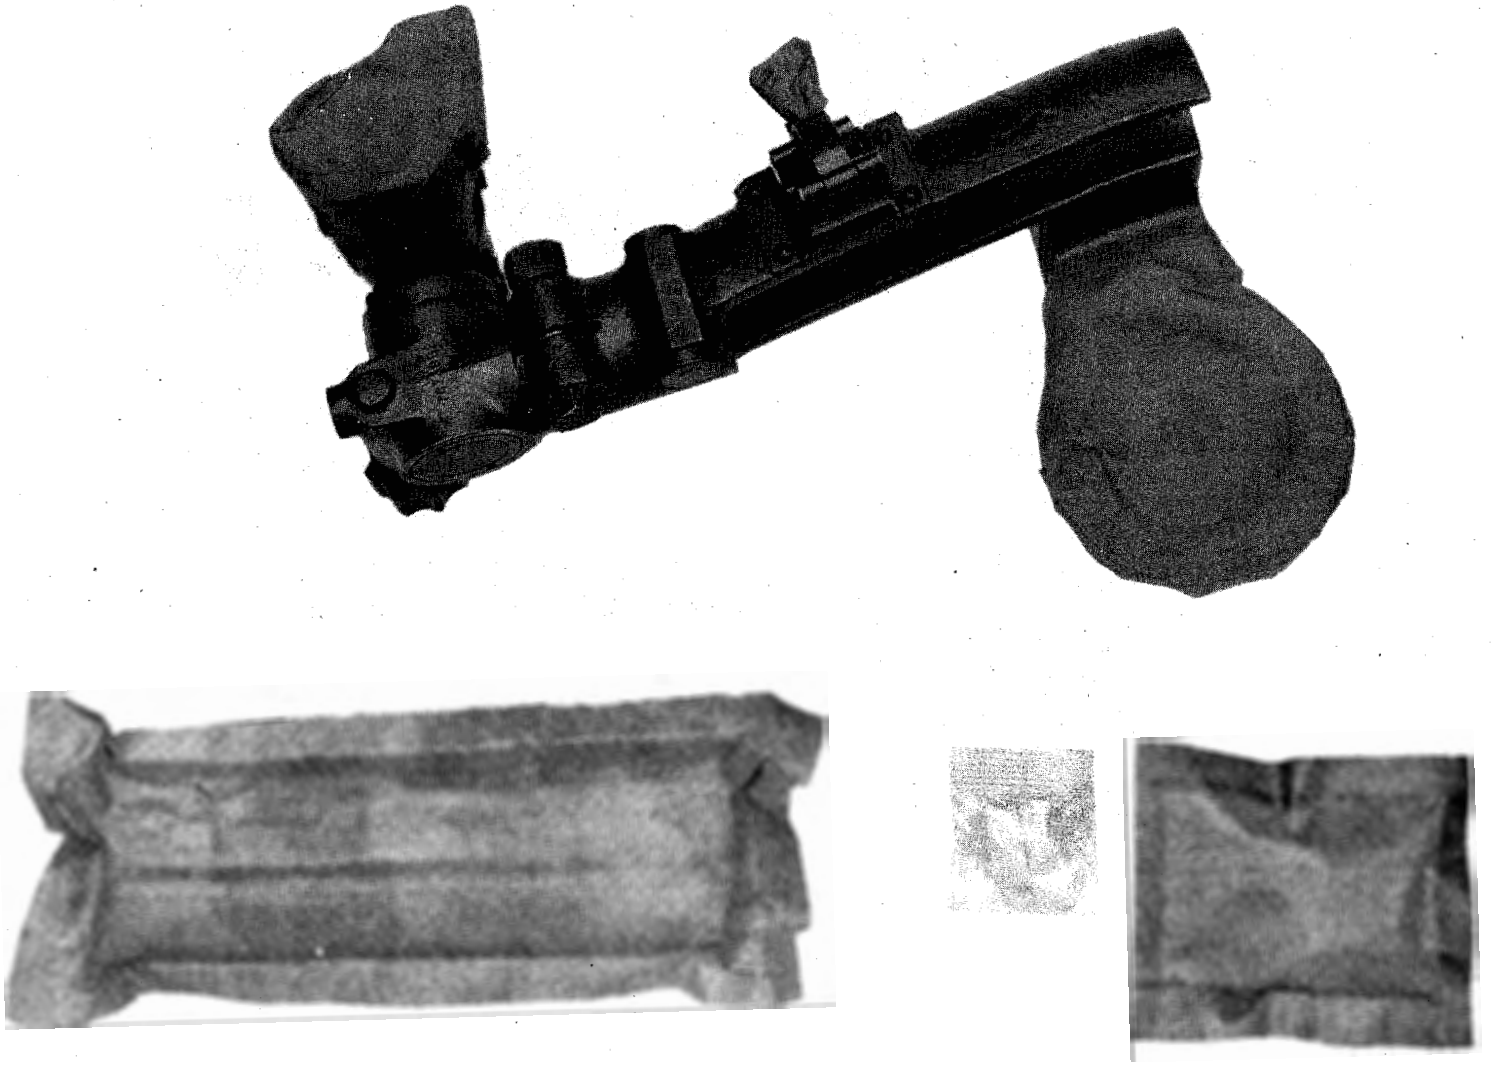


FIGURE 2. MOUNT, TELESCOPE, M31, W/E - item prepared for packaging.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

Neg.#22391-3

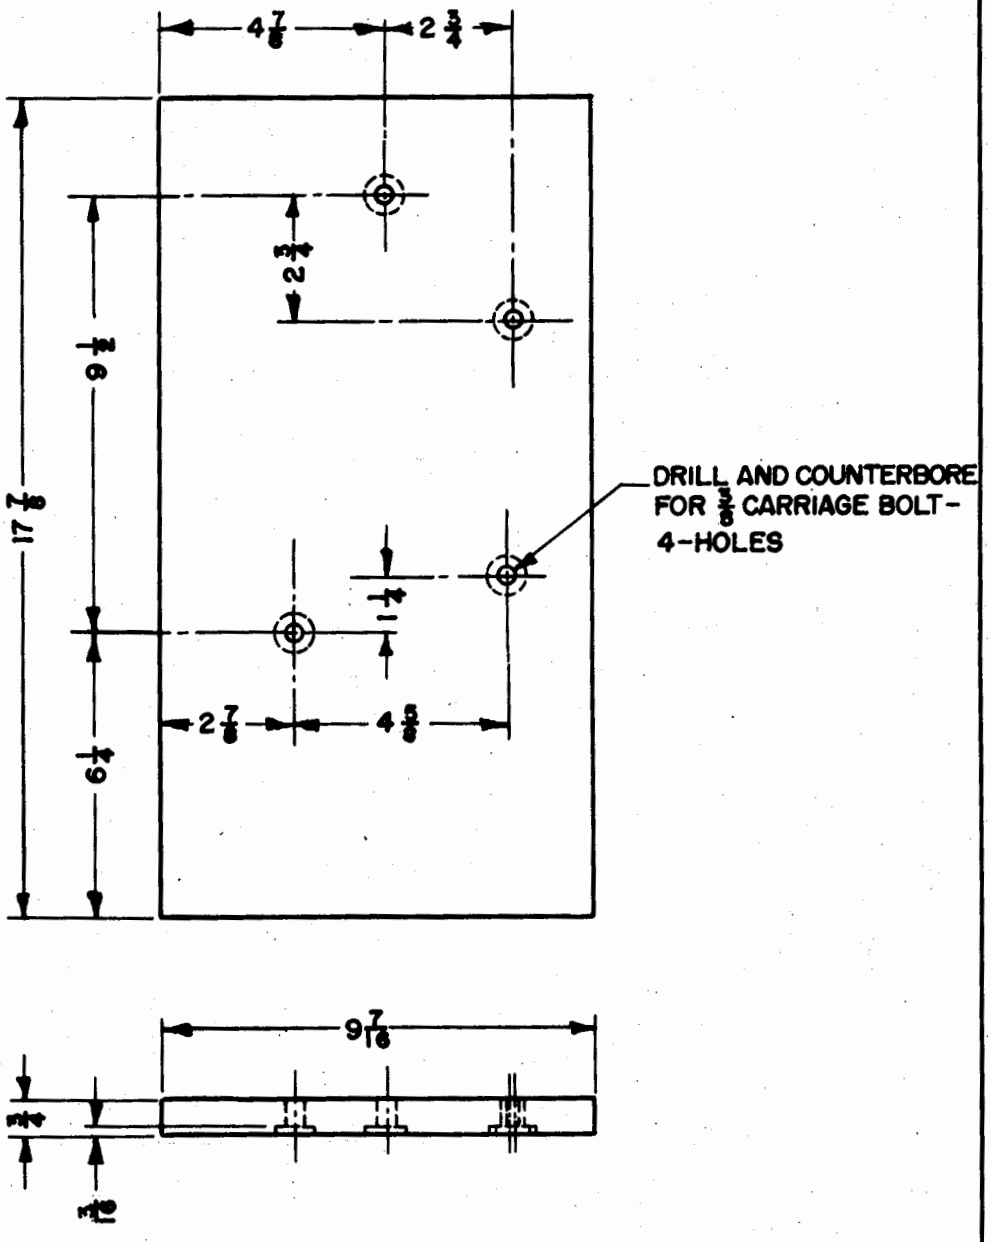


FIGURE 3
PLYWOOD BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

Neg.#22391-4

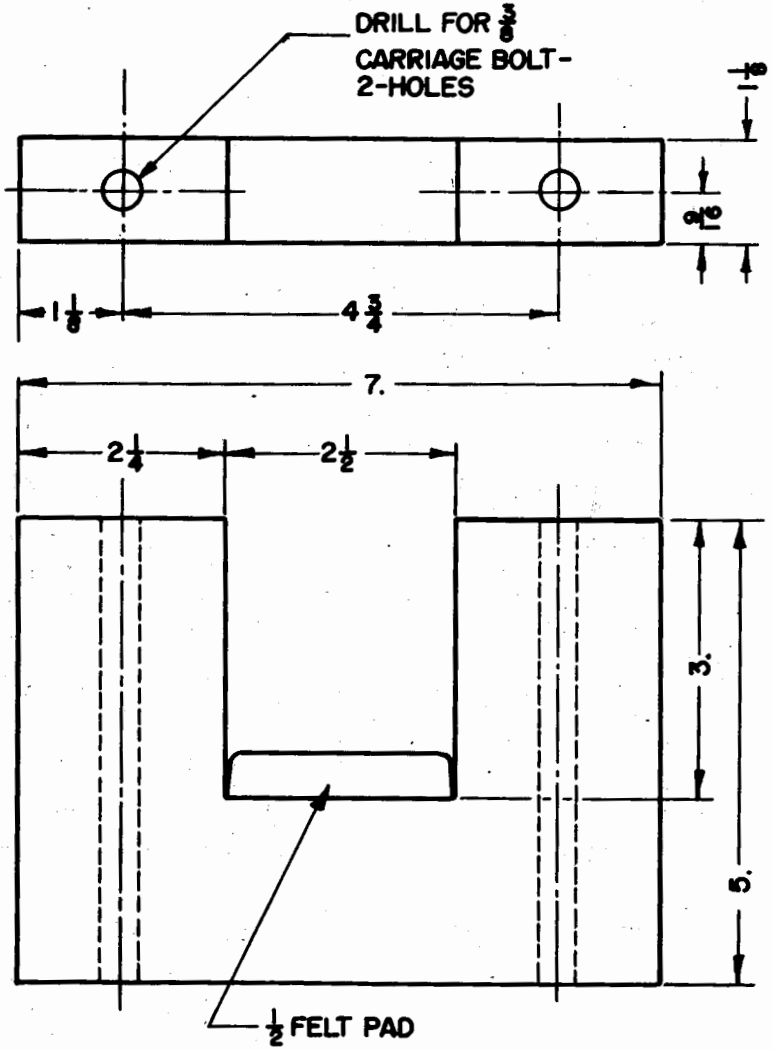


FIGURE 4
SUPPORT BLOCK

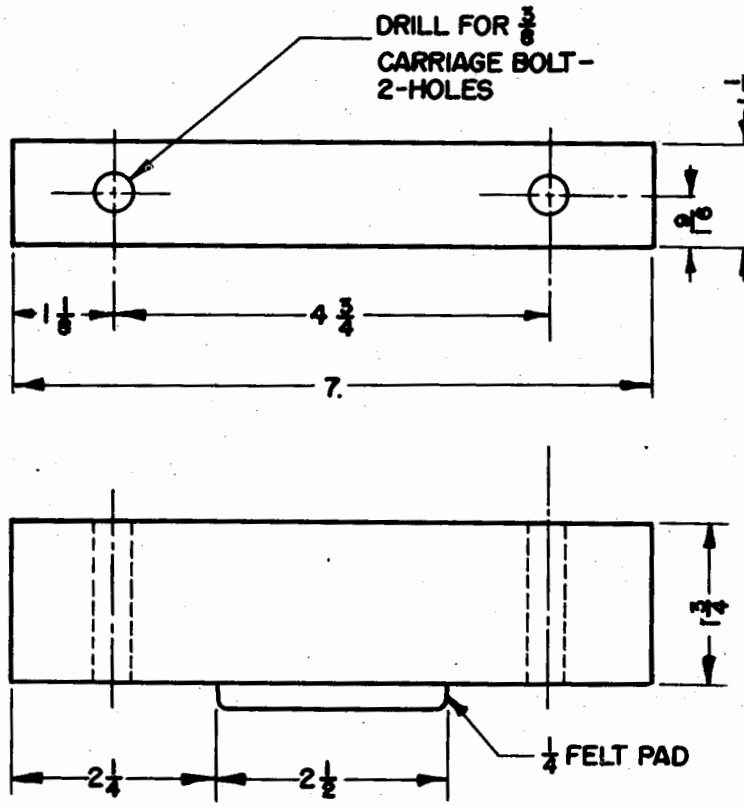


FIGURE 5
HOLD DOWN BLOCK

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

Neg.#22391-5


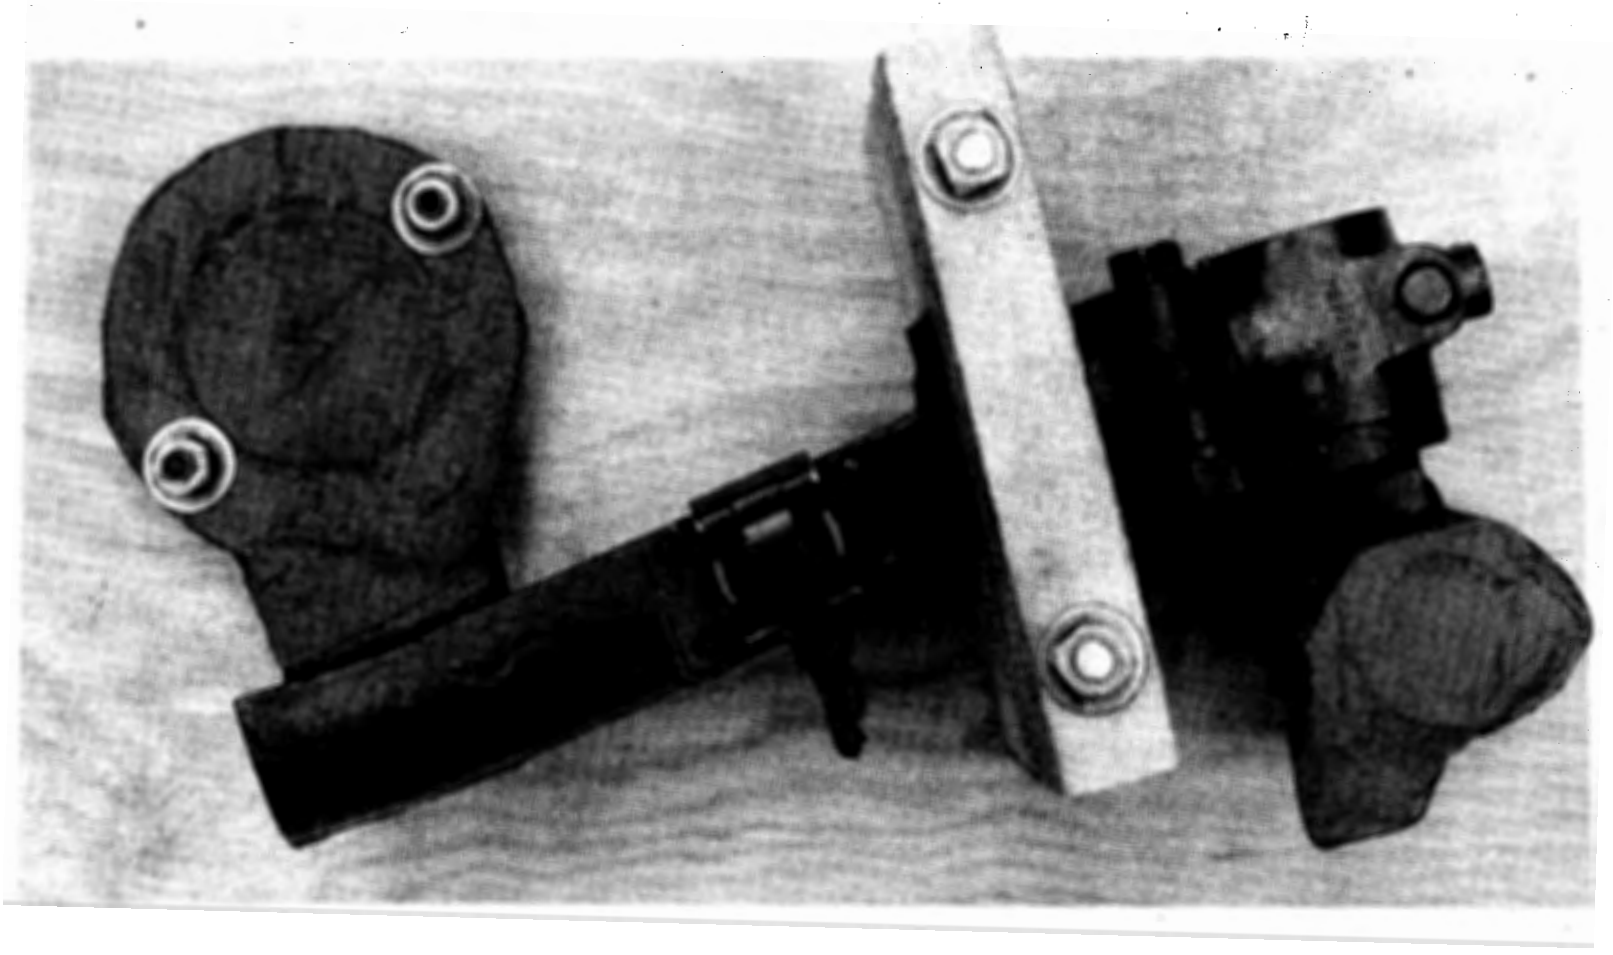


FIGURE 6. MOUNT, TELESCOPE, M31, W/E - mount secured to base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

Neg.#22391-6

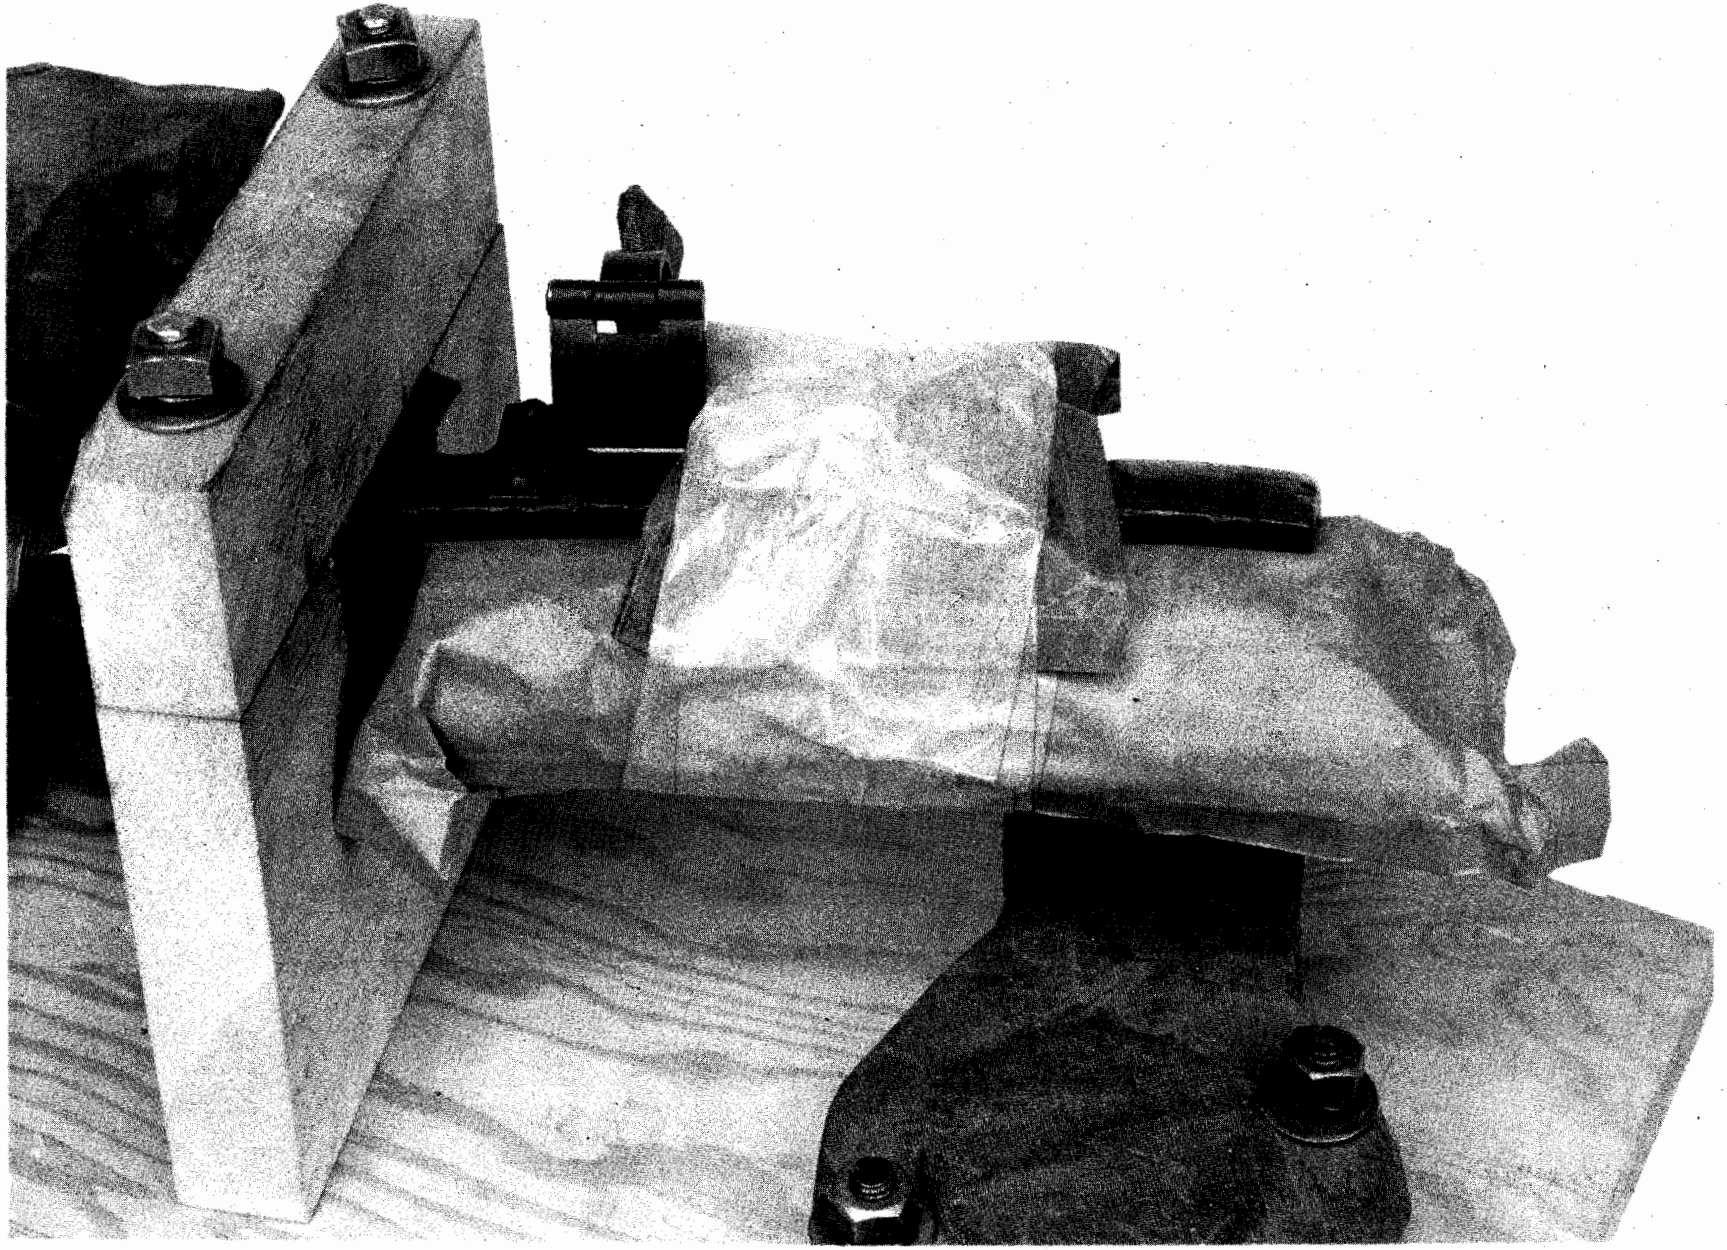

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

FIGURE 7. MOUNT, TELESCOPE, M31, W/E - instrument light, hardware, and spare lamps packages secured to mount.

Neg.#22391-7

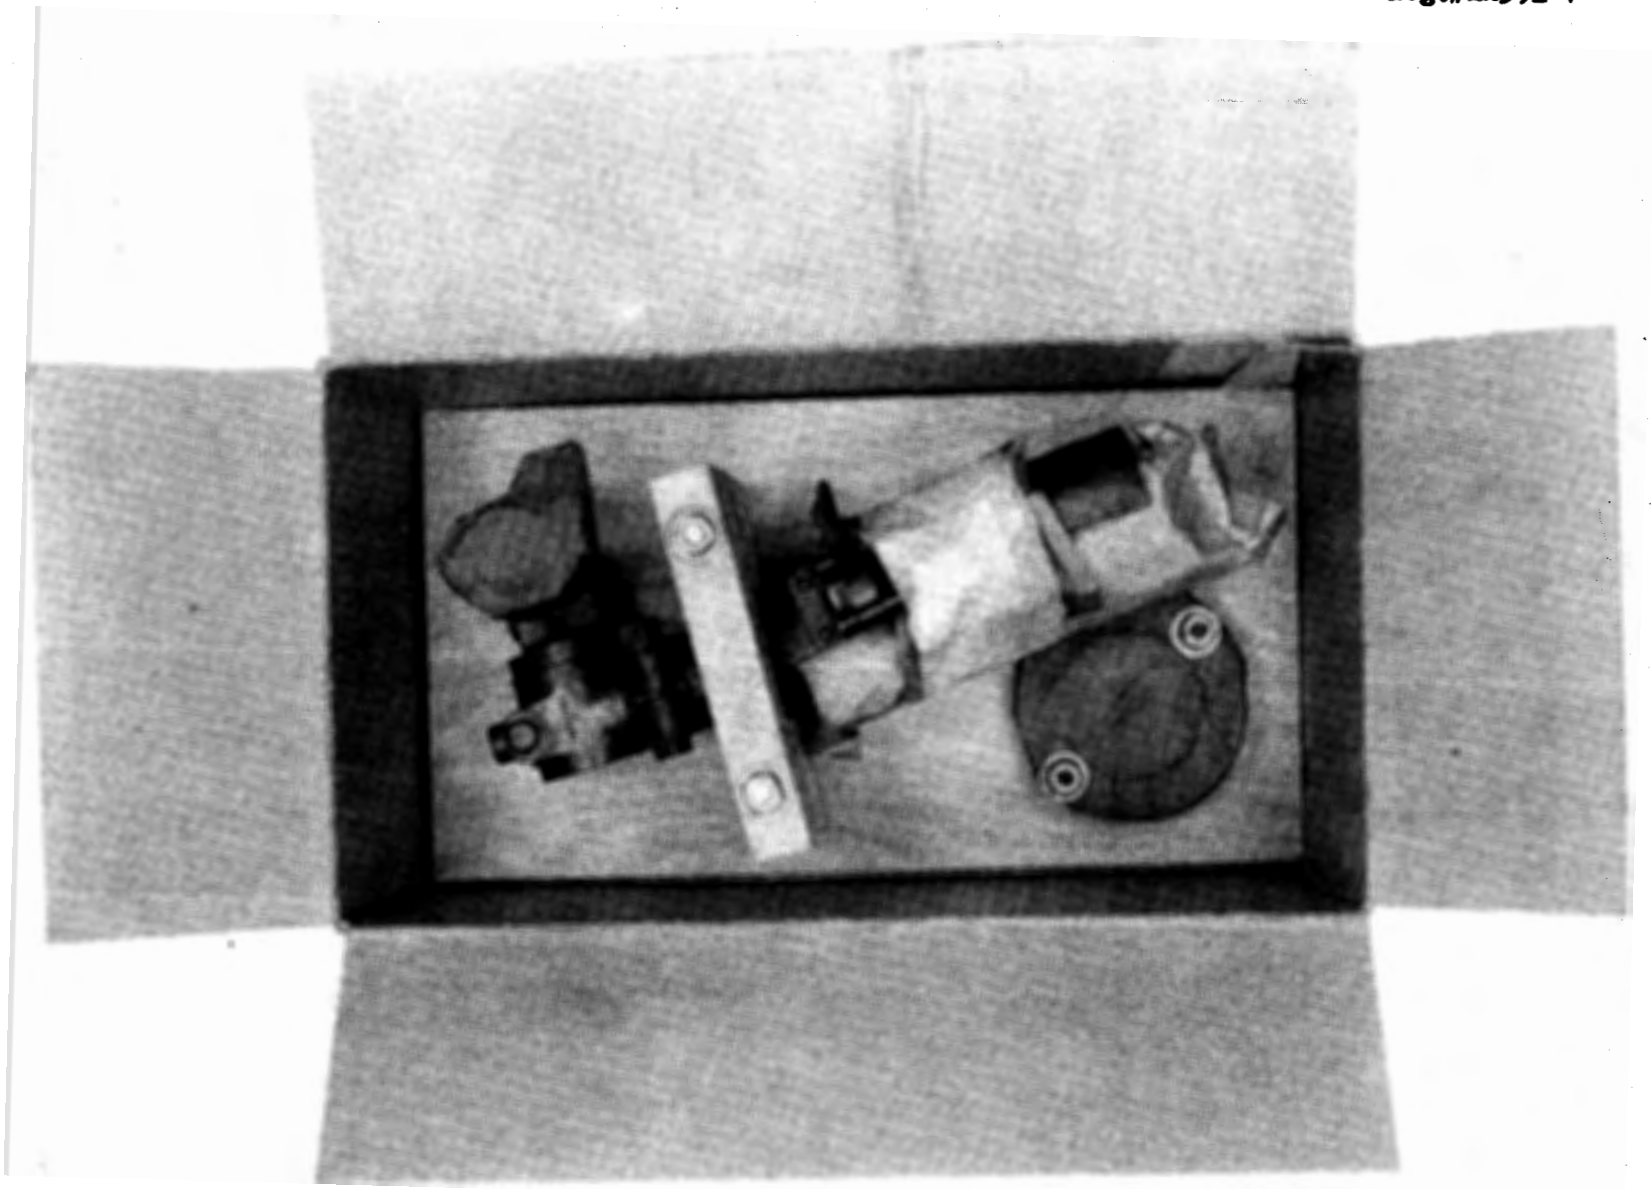


FIGURE 8. MOUNT, TELESCOPE, M31, W/E - mounted item positioned in fiberboard box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.

Neg.#22391-8

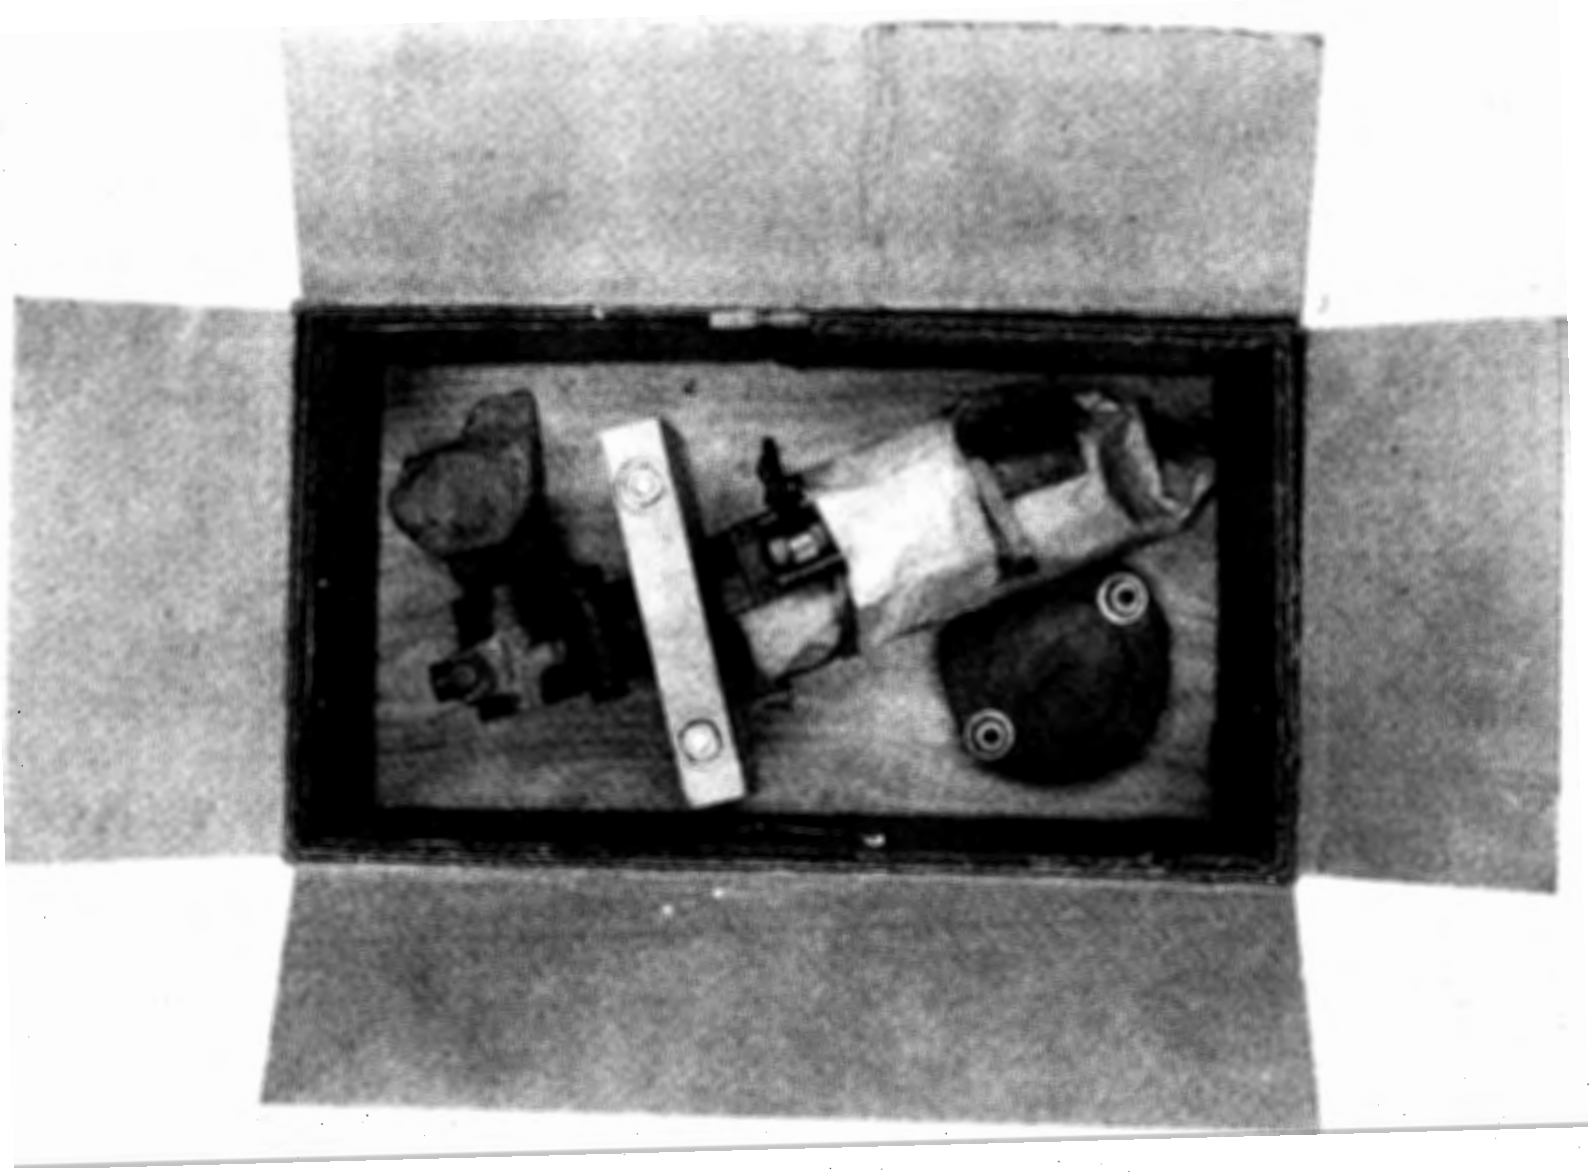


FIGURE 9. MOUNT, TELESCOPE, M31, W/E - hold down liner positioned on wood base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:18Z
Check the source to verify that this is the current version before use.