MIL-T-0012756B(EL)
Amendment 1

30 October 1972

MILITARY SPECIFICATION

TEST SET, BATTERY
(BATTERY TESTER TS-183()/U)

This amendment forms a part of Military Specifications MIL-T-0012756B(EL) dated 31 December 1969.

Page 1

2.1, SPECIFICATIONS, FEDERAL Add:

NN-P-71	Pallet, Materials-handling, Wood (General Construction Requirements)
QQ-S-781	Strapping, Steel, Flat and Seals
PPP-B-585	Box, Wood, Wirebound
PPP-B-601	Box, Wood, Cleated-plywood
PPP-B-621	Box, Wood, Nailed and Lock Corner
PPP-T-76	Tape, Pressure-sensitive Adhesive Paper, Water Resistant, (For Carton Sealing)

Page 2

2.1, SPECIFICATIONS, MILITARY Add:

MIL-B-117	Bag, Sleeve and Tubing-Interior Padding And Cover Set, Asbestos,
MIL-B-43291	Flatwork, Ironer

Page 2

2.1, STANDARDS, MILITARY Add:

MIL-STD-147	Palletized And Containerized Unit Loads 40 Inch x 48 Inch Pallets, Skids, Runners, or Pallet Type Base

Page 10

Table V, Resistor Number R-14 Delete: 40F Nom Value, 42K Max Limit, 38K Min Limit and substitute: 39K Nom Value, 40.95 Max Limit, 37.05 Min Limit.

Page 11

Table V, Resistor Number R-26, Delete: Nom Value 50K, Max Limit 52500, Min Limit 47500 and substitute: Nom Value 51K, Max Limit 52550, Min Limit 48450.

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:17Z
Check the source to verify that this is the current version before use.

Page 12, 13, 14

SECTION 5, Delete in its entirety and substitute the following:

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified in procurement document (see 6.2b)

5.1.1 Level A.

5.1.1.1 Cleaning. Test Set, Battery, TS-183( )/U shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Test Set,Battery, TS-183( )/U shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservation application. None required.

5.1.1.4 Unit packaging. Each Test Set, Battery TS-183( )/U shall be individually packaged in accordance with items 1 through 5 of Table VI and Figure 1.

5.1.2 Level C. Test Set, Battery TS-183( )/U shall be preserved and packaged in a manner that will afford adequate protection against physical and environmental damage during shipment, handling and limited intransit storage.

5.2 Packing. Packing shall be level A,B, or C as specified. Shipping containers for all levels shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging container(s) or its contents.

5.2.1 Level A.

5.2.1.1 Palletized load. A quantity of Test Set, Battery TS-183( )/U packaged as specified in 5.1, shall be placed on a pallet, load type I, conforming to MIL-STD-147 except that the pallet be softwood conforming conforming to NN-P-71, type IV, size 2. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather-resistant, W5a or W3c. The load shall be "banded" to the pallet by strapping.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:17Z
Check the source to verify that this is the current version before use.

5.2.1.2 Less than palletized load. When quantities per destination are less than a pallet load, the item packaged as specified in 5.1, shall be waterproofed, with tape conforming to PPP-T-76, in accordance with the taping requirements of the appendix of the box specification. A quantity of the waterproofed containers shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48x24 inches or more and the weight exceeds 100 pounds, 3x4 inch skids, laid flat, shall be applied in accordance with requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type 1, class B.

5.2.2 Level B.

5.2.2.1 Palletized load. A quantity of Test Set, Battery TS-183( )/U, packaged as specified in 5.1, shall be palletized as specified in 5.2.1.1.

5.2.2.2 Less than palletized load. When quantities per destination are less than a pallet load, a quantity of Test Set, Battery TS-183( )/U, packaged as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-640, class 2, style E, or PPP-B-636, type CF, class weather-resistant, variety DW. The gross weight of boxes conforming to PPP-B-640 shall not exceed 250 pounds. When the gross weight exceeds 200 pounds, or the container length and width is 48x24 inches or more and the weight exceeds 100 pounds, containers will be pallet-mounted on pallets conforming to MN-P-71, type IV. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure-sensitive filament tape banding or nonmetallic strapping conforming to PPP-T-97, type IV and PPP-S-760, type II, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification.

5.2.3 Level C.

5.2.3.1 Palletized load. A quantity of Test Set, Battery TS-183( )/U, packaged as specified in 5.1, shall be palletized as specified in 5.2.1.1 except that the fiberboard caps shall be class domestic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:17Z
Check the source to verify that this is the current version before use.

5.2.3.2 Less than palletized load. When quatities per destination are less than a pallet load, a quantity of Test Set, Battery TS-183( )/U, packaged as specified in 5.1, shall be packed as specified in 5.2.2.2 except that the fiberboard boxes shall conform to PPP-B-640 and PPP-B-636, class 1 and class domestic, respectively, and reinforcing shall not be required for boxes conforming to PPP-B-636.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

Page 14

Add the following table:

BILL OF MATERIAL
TABLE VI

Item No	Item Nomenclature	No Reqd	Method MIL-P 116	L	W	D	Spec No.	T	C	V	G	S
1.	Technical Literature	2	IC-1	10-1/4	7-3/4							
	Bag	2		12	9-1/2		MIL-B-117	II	C			
2.	Test Set, Battery TS-183( )/U	1	III	15	9 1/2	7-1/8 (Bare wt. 15 lbs.)						
	Tape			8	2		PPP-T-76					
	Tape Handle In Place.											
3.	Pad, Top and Bottom	2		15	9-1/2	1/2	PPP-F-320	CF	WR	SW	W6c	
4.	Pad, Corner	4		8	3-3/4	2-3/8	PPP-F-320	CF	WR	SW	W6c	
5.	Box, Fiberboard	1		16-3/4	11-3/8	8-1/4	PPP-B-636	CF	WR	SW	W6c	

T - Type C- Class V- Variety G- Grade S- Style

Page 14

Add Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:17Z
Check the source to verify that this is the current version before use.

TEST SET, BATTERY
TS-183( )/U

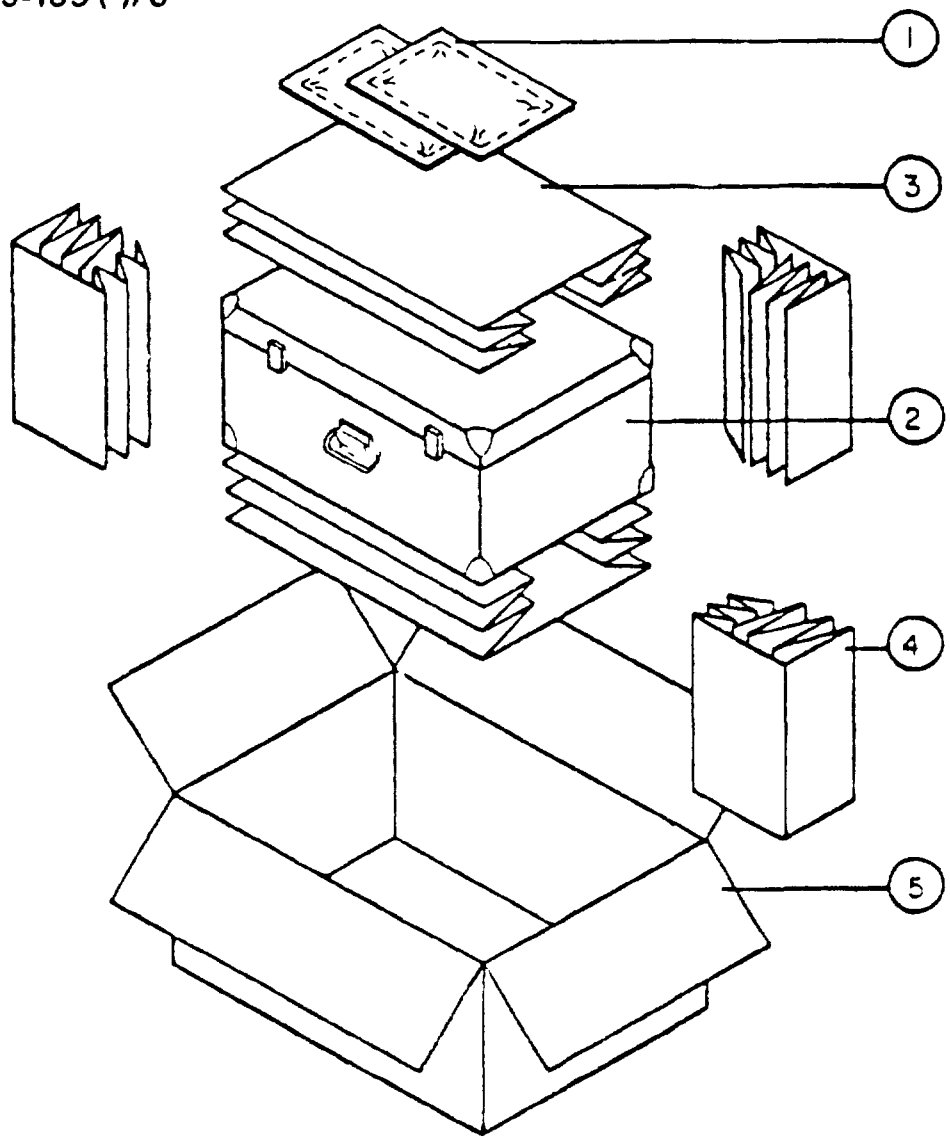


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:17Z
Check the source to verify that this is the current version before use.

6.2 Add:

i. Dimensional Data. Dimensions of packaging materials in the Bill of Material Table are based on the dimensions of the equipment cited in the table. When the dimensions of the equipment vary from those cited, the dimensions of the packaging materials shall be adjusted accordingly.

j. Deviations. Request for deviations in packaging and packing design shall be supported by test data proving the ability of the equipment, packaged and packed in accordance with the proposed design change, to withstand the applicable tests for the selected method including the rough handling tests in accordance with MIL-P-116. Deviation approval shall be contingent on availability of packaging and packing materials selected and economies realized (see Section 5).

CUSTODIAN:
Army - EL

PREPARING ACTIVITY
US Army - EL

Project No. 6625-A547

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:17Z
Check the source to verify that this is the current version before use.