MIL-HDBK-146
1 OCTOBER 1982

SUPERSEDING
MIL-HDBK-137
VOLUME 2
20 FEBRUARY 1970

MILITARY HANDBOOK

FUZE CATALOG LIMITED STANDARD, OBSOLESCENT, OBSOLETE, TERMINATED, AND CANCELLED FUZES

FSC 1390

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE, WASHINGTON, DC 20025

MIL-HDBK-146
Fuze Catalog
1 October 1982

1. This standardization handbook was developed by the Department of Defense in accordance with established procedure.

2. This publication was approved 1 October 1982 for printing and inclusion in the military standardization handbook series.

3. This document provides technical information on limited standard, obsolescent, obsolete, terminated, and canceled fuzes of the Army, Air Force, Marine Corps, and Navy. It will provide useful information to personnel concerned with the design and procurement of military fuzes. The handbook is not intended to be referenced in purchase specifications except for informational purposes, nor shall it supersede any specification requirements.

4. Every effort has been made to reflect accurate fuze information. It is the intent to review this handbook periodically to ensure its completeness and accuracy. Users of this document are encouraged to report any errors discovered and any recommendations for changes or inclusions. A set of blank data sheets and instructions is included in Appendix A to facilitate the submission of new data.

5. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be submitted on the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter. Address information to Commander, U.S. Army Armament Research and Development Command, DRDAR-TST-S, Dover, NJ 07801.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FOREWORD

This handbook is the second of a series of documents revising or superseding MIL-HDBK-137, Fuze Catalog. MIL-HDBK-137 was written in 3 Volumes: Vol. 1, Current Fuzes; Vol. 2, Obsolete and Terminated Fuzes; and Vol. 3, Fuze Explosive Components.

MIL-HDBK-145, dated 1 October 1980, superseded MIL-HDBK-137, Volume 1, and contains information on all production standard and development fuzes.

MIL-HDBK-146, dated 1 October 1982, supersedes MIL-HDBK-137, Volume 2, and includes fuzes contained in Volume 1 which have subsequently been designated, limited standard, obsolete, obsolescent, terminated, or canceled.

MIL-HDBK-137, Volume 3, Fuze Explosive Components, is retained under its present designation.

All of the items contained in MIL-HDBK-145 and some of the items recently designated limited standard, obsolete, obsolescent, terminated, or canceled, which are contained in MIL-HDBK-146, are maintained in a computer file at the Naval Surface Weapons Center, White Oak Laboratory. Use of the computer will result in a more up-to-date fuze data base and ease the publication of future fuze handbooks. Data sheets of fuzes which were in MIL-HDBK-137 were updated and placed in this handbook. Fuzes that came into existence after the publication of MIL-HDBK-137 were described on new format data sheets (MIL-HDBK-145), the data placed in the computer, and placed in this handbook. Therefore, two different styles of data sheets are contained in MIL-HDBK-146.

Some procurement standard fuzes which have not been procured for many years were placed in MIL-HDBK-146 and noted accordingly. These fuzes are generally used on inactive weapon systems, but could be procured again.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INTRODUCTION

1. SCOPE

This handbook is a catalog of military fuzes and fuze setters for non-nuclear weapons. It lists technical data for limited standard, obsolescent, obsolete, terminated or canceled items. Excluded are:

a. fuzes for nuclear ammunition

b. foreign fuzes

c. devices of the National Aeronautics and Space Administration and the Department of Energy

d. commercial explosive components

e. power sources

f. complex missile fuzing systems that consist of many identifiable components dispersed throughout the system

g. most procurement standard and development fuzes (see MIL-HDBK-145)

h. fuze explosive components (See MIL-HDBK-137, Volume 3).

2. REFERENCE DOCUMENTS

The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

MIL-STD-331, Fuze and Fuze Components, Environmental and Performance Test for.

MIL-STD-332, Fuze, Army, Design Safety Criteria for.

MIL-STD-444, Nomenclature and Definitions in the Ammunition Area.

MIL-STD-1316, Fuze Design, Safety Criteria for.

Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

3. DEFINITIONS

Terms used in this handbook are defined in MIL-STD-444.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

4. HOW TO USE THIS HANDBOOK

The fuzes are grouped in chapters by their weapon (projectile, bomb, etc.). Within each chapter, the fuzes are listed in numeric-alpha order without regard for the cognizant service.

When searching for a specific fuze data sheet, look first in the master index. This master index lists all fuzes and the handbook number, chapter, and series where each fuze can be located. The fuze number, type, chapter, and series are located on the bottom outer corner of the data sheet.

Appendix A contains instructions for submission of data covering new fuzes. Fuze data are tabulated on a two-page data sheet. An explanation of the data sheet headings is contained in Appendix A.

All fuzes contained in MIL-HDBK-145 and 146 are listed in the index in numerical order. The index in MIL-HDBK-146 is accurate and more up-to-date than the index in MIL-HDBK-145 due to its later publication date.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

MIL-HDBK-146
NOTICE 1
11 JULY 1988

MILITARY HANDBOOK

FUZE CATALOG LIMITED STANDARD, OBSOLETE, TERMINATED, AND CANCELLED FUZES

MIL-HDBK-146, dated 01 October 1982, has been reviewed and determined to be valid for use in acquisition.

Preparing activity:
Army - AR

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 1390

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

NOTICE
OF
CHANGE

NOT MEASUREMENT
SENSITIVE

MIL-HDBK-146
NOTICE 2
1 February 1993

MILITARY HANDBOOK
FUZE CATALOG
LIMITED STANDARD, OBSOLESCENT, OBSOLETE, TERMINATED, AND CANCELED FUZES

TO ALL HOLDERS OF MIL-HDBK-146:

1. THE FOLLOWING PAGES OF MIL-HDBK-146 HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

New Page	Date	Superseded Page	Date
vii thru xxviii	1-Feb-93	vii thru xxx	1-Oct-82
1-3 thru 1-4	1-Feb-93	1-3 thru 1-4	1-Oct-82
1-9 thru 1-10	1-Feb-93	1-9 thru 1-10	1-Oct-82
1-10A thru 1-10-B	1-Feb-93	New pages	
1-11 thru 1-12	1-Feb-93	1-11 thru 1-12	1-Oct-82
1-15 thru 1-16	1-Feb-93	1-15 thru 1-16	1-Oct-82
1-23 thru 1-24	1-Feb-93	1-23 thru 1-24	1-Oct-82
1-26A thru 1-26B	1-Feb-93	New pages	
1-27 thru 1-28	1-Feb-93	1-27 thru 1-28	1-Oct-82
1-28A thru 1-28J	1-Feb-93	New pages	
1-35 thru 1-38	1-Feb-93	1-35 thru 1-38	1-Oct-82
1-41 thru 1-42	1-Feb-93	1-41 thru 1-42	1-Oct-82
1-42A thru 1-42B	1-Feb-93	New pages	
1-49 thru 1-52	1-Feb-93	1-49 thru 1-52	1-Oct-82
1-55 thru 1-60	1-Feb-93	1-55 thru 1-60	1-Oct-82
1-60A thru 1-60H	1-Feb-93	New pages	
1-61 thru 1-62	1-Feb-93	1-61 thru 1-62	1-Oct-82
1-62A thru 1-62B	1-Feb-93	New pages	
1-74A thru 1-74B	1-Feb-93	New pages	
1-81 thru 1-82	1-Feb-93	1-81 thru 1-82	1-Oct-82
1-85 thru 1-86	1-Feb-93	1-85 thru 1-86	1-Oct-82
1-92A thru 1-92B	1-Feb-93	New pages	
1-93 thru 1-94	1-Feb-93	1-93 thru 1-94	1-Oct-82
1-97 thru 1-102	1-Feb-93	1-97 thru 1-102	1-Oct-82
1-104A thru 1-104B	1-Feb-93	New pages	
1-105 thru 1-108	1-Feb-93	1-5 thru 1-8	1-Oct-82
1-111 thru 1-112	1-Feb-93	1-111 thru 1-112	1-Oct-82
1-119 thru 1-120	1-Feb-93	1-119 thru 1-120	1-Oct-82
1-123 thru 1-128	1-Feb-93	1-123 thru 1-128	1-Oct-82

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AMSC/NA

FSC 13GP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

New Page	Date	Superseded Page	Date
1-128A thru 1-128B	1-Feb-93	New pages	
1-131 thru 1-132	1-Feb-93	1-131 thru 1-132	1-Oct-82
1-136A thru 1-136B	1-Feb-93	New pages	
1-139 thru 1-140	1-Feb-93	1-139 thru 1-140	1-Oct-82
1-140A thru 1-140B	1-Feb-93	New pages	
1-141 thru 1-142	1-Feb-93	1-141 thru 1-142	1-Oct-82
1-147 thru 1-148	1-Feb-93	1-147 thru 1-148	1-Oct-82
1-151 thru 1-156	1-Feb-93	1-151 thru 1-156	1-Oct-82
1-159 thru 1-160	1-Feb-93	1-159 thru 1-160	1-Oct-82
1-171 thru 1-172	1-Feb-93	1-171 thru 1-172	1-Oct-82
1-183 thru 1-186	1-Feb-93	1-183 thru 1-186	1-Oct-82
1-199 thru 1-200	1-Feb-93	1-199 thru 1-200	1-Oct-82
1-207 thru 1-214	1-Feb-93	1-207 thru 1-214	1-Oct-82
1-217 thru 1-218	1-Feb-93	1-217 thru 1-218	1-Oct-82
1-221 thru 1-222	1-Feb-93	1-221 thru 1-222	1-Oct-82
1-367 thru 1-368	1-Feb-93	1-367 thru 1-368	1-Oct-82
1-371 thru 1-372	1-Feb-93	1-371 thru 1-372	1-Oct-82
1-372A thru 1-372B	1-Feb-93	New pages	
1-373 thru 1-374	1-Feb-93	1-373 thru 1-374	1-Oct-82
1-377 thru 1-386	1-Feb-93	1-377 thru 1-386	1-Oct-82
1-386A thru 1-386D	1-Feb-93	New pages	
1-387 thru 1-390	1-Feb-93	1-387 thru 1-390	1-Oct-82
1-393 thru 1-394	1-Feb-93	1-393 thru 1-394	1-Oct-82
1-401 thru 1-402	1-Feb-93	1-401 thru 1-402	1-Oct-82
1-402A thru 1-402B	1-Feb-93	New pages	1-Oct-82
1-407 thru 1-408	1-Feb-93	1-407 thru 1-408	1-Oct-82
1-417 thru 1-418	1-Feb-93	1-417 thru 1-418	1-Oct-82
1-421 thru 1-426	1-Feb-93	1-421 thru 1-426	1-Oct-82
1-429 thru 1-440	1-Feb-93	1-429 thru 1-440	1-Oct-82
1-443 thru 1-444	1-Feb-93	1-443 thru 1-444	1-Oct-82
1-447 thru 1-450	1-Feb-93	1-447 thru 1-450	1-Oct-82
1-461 thru 1-464	1-Feb-93	1-461 thru 1-464	1-Oct-82
1-473 thru 1-476	1-Feb-93	1-473 thru 1-476	1-Oct-82
1-480A thru 1-480B	1-Feb-93	New pages	
1-486A thru 1-486B	1-Feb-93	New pages	
1-493 thru 1-494	1-Feb-93	1-493 thru 1-494	1-Oct-82
1-503 thru 1-504	1-Feb-93	1-503 thru 1-504	1-Oct-82
1-507 thru 1-510	1-Feb-93	1-507 thru 1-510	1-Oct-82
1-513 thru 1-516	1-Feb-93	1-513 thru 1-516	1-Oct-82
1-519 thru 1-520	1-Feb-93	1-519 thru 1-520	1-Oct-82
1-520A thru 1-520D	1-Feb-93	New pages	
1-522A thru 1-522F	1-Feb-93	New pages	
1-524A thru 1-524J	1-Feb-93	New pages	
2-5 thru 2-8	1-Feb-93	2-5 thru 2-8	1-Oct-82
2-12A thru 2-12B	1-Feb-93	New pages	
2-14A thru 2-14B	1-Feb-93	New pages	
2-27 thru 2-28	1-Feb-93	2-27 thru 2-28	1-Oct-82
2-36A thru 2-36B	1-Feb-93	New pages	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

New Page	Date	Superseded Page	Date
2-41 thru 2-42	1-Feb-93	2-41 thru 2-42	1-Oct-82
2-45 thru 2-46	1-Feb-93	2-45 thru 2-46	1-Oct-82
2-78A thru 2-78B	1-Feb-93	New pages	
2-89 thru 2-90	1-Feb-93	2-89 thru 2-90	1-Oct-82
2-98A thru 2-98B	1-Feb-93	New pages	
2-112A thru 2-112B	1-Feb-93	New pages	
2-143 thru 2-144	1-Feb-93	2-143 thru 2-144	1-Oct-82
2-153 thru 2-154	1-Feb-93	2-153 thru 2-154	1-Oct-82
2-157 thru 2-158	1-Feb-93	2-157 thru 2-158	1-Oct-82
2-165 thru 2-168	1-Feb-93	2-165 thru 2-168	1-Oct-82
2-195 thru 2-196	1-Feb-93	2-195 thru 2-196	1-Oct-82
2-275 thru 2-276	1-Feb-93	2-275 thru 2-276	1-Oct-82
2-297 thru 2-298	1-Feb-93	2-297 thru 2-298	1-Oct-82
2-303 thru 2-304	1-Feb-93	2-303 thru 2-304	1-Oct-82
2-309 thru 2-310	1-Feb-93	2-309 thru 2-310	1-Oct-82
2-317 thru 2-318	1-Feb-93	2-317 thru 2-318	1-Oct-82
3-13 thru 3-14	1-Feb-93	3-13 thru 3-14	1-Oct-82
3-17 thru 3-22	1-Feb-93	3-17 thru 3-22	1-Oct-82
4-3 thru 4-8	1-Feb-93	4-3 thru 4-8	1-Oct-82
4-10A thru 4-10B	1-Feb-93	New pages	
4-14A thru 4-14D	1-Feb-93	New pages	
4-15 thru 4-18	1-Feb-93	4-15 thru 4-18	1-Oct-82
4-29 thru 4-30	1-Feb-93	4-29 thru 4-30	1-Oct-82
5-4A thru 5-4B	1-Feb-93	New pages	
5-22A thru 5-22B	1-Feb-93	New pages	
5-33 thru 5-34	1-Feb-93	5-33 thru 5-34	1-Oct-82
5-111 thru 5-112	1-Feb-93	5-111 thru 5-112	1-Oct-82
5-115 thru 5-116	1-Feb-93	5-115 thru 5-116	1-Oct-82
5-153 thru 5-154	1-Feb-93	5-153 thru 5-154	1-Oct-82
5-165 thru 5-166	1-Feb-93	5-165 thru 5-166	1-Oct-82
5-171 thru 5-172	1-Feb-93	5-171 thru 5-172	1-Oct-82
5-175 thru 5-176	1-Feb-93	5-175 thru 5-176	1-Oct-82
5-181 thru 5-182	1-Feb-93	5-181 thru 5-182	1-Oct-82
5-182A thru 5-182B	1-Feb-93	New pages	
5-188A thru 5-188D	1-Feb-93	New pages	
5-190A thru 5-190 B	1-Feb-93	New pages	
5-257 thru 5-260	1-Feb-93	5-257 thru 5-260	1-Oct-82
6-2A thru 6-2B	1-Feb-93	New pages	
6-4A thru 6-4B	1-Feb-93	New pages	
6-16A thru 6-16B	1-Feb-93	New pages	
6-38A thru 6-38F	1-Feb-93	New pages	
6-49 thru 6-50	1-Feb-93	6-49 thru 6-50	1-Oct-82
6-63 thru 6-70	1-Feb-93	6-63 thru 6-70	1-Oct-82
6-72A thru 6-72B	1-Feb-93	New pages	
6-78A thru 6-78B	1-Feb-93	New pages	
7-3 thru 7-4	1-Feb-93	7-3 thru 7-4	1-Oct-82
7-4A thru 7-4L	1-Feb-93	New pages	
7-5 thru 7-6	1-Feb-93	7-5 thru 7-6	1-Oct-82

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

New Page	Date	Superseded Page	Date
7-13 thru 7-14	1-Feb-93	7-13 thru 7-14	1-Oct-82
7-21 thru 7-22	1-Feb-93	7-21 thru 7-22	1-Oct-82
7-24A thru 7-24B	1-Feb-93	New pages	
7-77 thru 7-80	1-Feb-93	7-77 thru 7-80	1-Oct-82
7-85 thru 7-88	1-Feb-93	7-85 thru 7-88	1-Oct-82
7-96A thru 7-96H	1-Feb-93	New pages	
7-99 thru 7-110	1-Feb-93	7-99 thru 7-100	1-Oct-82
8-2A thru 8-2D	1-Feb-93	New pages	
8-4A thru 8-4B	1-Feb-93	New pages	
8-7 thru 8-16	1-Feb-93	8-7 thru 8-16	1-Oct-82
8-21 thru 8-22	1-Feb-93	8-21 thru 8-22	1-Oct-82
9-2A thru 9-2B	1-Feb-93	New pages	
9-5 thru 9-6	1-Feb-93	9-5 thru 9-6	1-Oct-82
9-8A thru 9-8F	1-Feb-93	New pages	
9-13 thru 9-14	1-Feb-93	9-13 thru 9-14	1-Oct-82
9-21 thru 9-24	1-Feb-93	9-21 thru 9-24	1-Oct-82
A-1 thru A-9	1-Feb-93	A-1 thru A-8	1-Oct-82
I-1 thru I-36	1-Feb-93	I-1 thru I-36	1-Oct-82

. RETAIN THIS NOTICE AND INSERT BEFORE TABLE OF CONTENTS.

. Holders of MIL-HDBK-146 will verify that page changes and dditions indicated above have been entered. This notice page will be etained as a check sheet. This issuance, together with appended ages, is a separate publication. Each notice is to be retained by tocking points until the military handbook is completely revised or anceled.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Reviewing activities:
Army - EA, MI, MT, TE

Preparing activity:
Army - AR

(Project 13GP0027)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

NOTICE OF CHANGE

NOT MEASUREMENT SENSITIVE

MIL-HDBK-146
NOTICE 3
1 August 1994

MILITARY HANDBOOK
FUZE CATALOG
LIMITED STANDARD, OBSOLESCENT, OBSOLETE, TERMINATED AND CANCELLED FUZES

TO ALL HOLDERS OF MIL-HDBK-146:

1. THE FOLLOWING PAGES OF MIL-HDBK-146 HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

New Page	Date	Superseded Page	Date
vii thru xxviii	1-Aug-94	vii thru xxviii	1-Feb-93
xxix	1-Aug-94	None	New Page
1-11 thru 1-12	1-Aug-94	1-11 thru 1-12	1-Feb-93
1-13 thru 1-14	1-Aug-94	1-13 thru 1-14	1-Oct-82
1-17 thru 1-18	1-Aug-94	1-17 thru 1-18	1-Oct-82
1-21 thru 1-22	1-Aug-94	1-21 thru 1-22	1-Oct-82
1-26A thru 1-26B	1-Aug-94	1-26A thru 1-26B	1-Feb-93
1-39 thru 1-40	1-Aug-94	1-39 thru 1-40	1-Oct-82
1-47 thru 1-48	1-Aug-94	1-47 thru 1-48	1-Oct-82
1-51 thru 1-52	1-Aug-94	1-51 thru 1-52	1-Feb-93
1-59 thru 1-60	1-Aug-94	1-59 thru 1-60	1-Feb-93
1-60A thru 1-60B	1-Aug-94	1-60A thru 1-60B	1-Feb-93
1-60G thru 1-60H	1-Aug-94	1-60G thru 1-60H	1-Feb-93
1-77 thru 1-78	1-Aug-94	1-77 thru 1-78	1-Oct-82
1-81 thru 1-82	1-Aug-94	1-81 thru 1-82	1-Feb-93
1-99 thru 1-100	1-Aug-94	1-99 thru 1-100	1-Feb-93
1-113 thru 1-114	1-Aug-94	1-113 thru 1-114	1-Oct-82
1-117 thru 1-118	1-Aug-94	1-117 thru 1-118	1-Oct-82
1-123 thru 1-124	1-Aug-94	1-123 thru 1-124	1-Feb-93
1-127 thru 1-128	1-Aug-94	1-127 thru 1-128	1-Feb-93
1-137 thru 1-138	1-Aug-94	1-137 thru 1-138	1-Oct-82
1-177 thru 1-180	1-Aug-94	1-177 thru 1-180	1-Oct-82
1-185 thru 1-186	1-Aug-94	1-185 thru 1-186	1-Feb-93
1-187 thru 1-188	1-Aug-94	1-187 thru 1-188	1-Oct-82
1-193 thru 1-194	1-Aug-94	1-193 thru 1-194	1-Oct-82
1-205 thru 1-206	1-Aug-94	1-205 thru 1-206	1-Oct-82
1-209 thru 1-210	1-Aug-94	1-209 thru 1-210	1-Feb-93
1-215 thru 1-216	1-Aug-94	1-215 thru 1-216	1-Oct-82
1-219 thru 1-220	1-Aug-94	1-219 thru 1-220	1-Oct-82

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AMSC/NA

FSC 13GP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

New Page	Date	Superseded Page	Date
1-221 thru 1-222	1-Aug-94	1-221 thru 1-222	1-Feb-93
1-371 thru 1-372	1-Aug-94	1-371 thru 1-372	1-Feb-93
1-372A thru 1-372B	1-Aug-94	1-372A thru 1-372B	1-Feb-93
1-383 thru 1-384	1-Aug-94	1-383 thru 1-384	1-Feb-93
1-391 thru 1-392	1-Aug-94	1-391 thru 1-392	1-Oct-82
1-395 thru 1-400	1-Aug-94	1-395 thru 1-400	1-Oct-82
1-407 thru 1-408	1-Aug-94	1-407 thru 1-408	1-Feb-93
1-409 thru 1-416	1-Aug-94	1-409 thru 1-416	1-Oct-82
1-417 thru 1-418	1-Aug-94	1-417 thru 1-418	1-Feb-93
1-419 thru 1-420	1-Aug-94	1-419 thru 1-420	1-Oct-82
1-421 thru 1-422	1-Aug-94	1-421 thru 1-422	1-Feb-93
1-486A thru 1-486B	1-Aug-94	1-486A thru 1-486B	1-Feb-93
1-495 thru 1-498	1-Aug-94	1-495 thru 1-498	1-Oct-82
1-520A thru 1-520D	1-Aug-94	1-520A thru 1-520D	1-Feb-93
1-524C thru 1-524F	1-Aug-94	1-524C thru 1-524F	1-Feb-93
2-4A thru 2-4D	1-Aug-94	None	New Page
2-89 thru 2-90	1-Aug-94	2-89 thru 2-90	1-Feb-93
2-275 thru 2-276	1-Aug-94	2-275 thru 2-276	1-Feb-93
2-276A thru 2-276B	1-Aug-94	None	New Page
2-313 thru 2-314	1-Aug-94	2-313 thru 2-314	1-Oct-82
3-13 thru 3-14	1-Aug-94	3-13 thru 3-14	1-Feb-93
3-19 thru 3-20	1-Aug-94	3-19 thru 3-20	1-Feb-93
4-7 thru 4-8	1-Aug-94	4-7 thru 4-8	1-Feb-93
4-10A thru 4-10B	1-Aug-94	4-10A thru 4-10B	1-Feb-93
4-25 thru 4-26	1-Aug-94	4-25 thru 4-26	1-Oct-82
4-29 thru 4-30	1-Aug-94	4-29 thru 4-30	1-Feb-93
5-22A thru 5-22B	1-Aug-94	5-22A thru 5-22B	1-Feb-93
5-33 thru 5-34	1-Aug-94	5-33 thru 5-34	1-Feb-93
5-182A thru 5-182B	1-Aug-94	5-182A thru 5-182B	1-Feb-93
5-185 thru 5-188	1-Aug-94	5-185 thru 5-188	1-Oct-82
5-188A thru 5-188D	1-Aug-94	5-188A thru 5-188D	1-Feb-93
6-67 thru 6-68	1-Aug-94	6-67 thru 6-68	1-Feb-93
7-2A thru 7-2B	1-Aug-94	None	New Page
7-10A thru 7-10B	1-Aug-94	None	New Page
7-11 thru 7-12	1-Aug-94	7-11 thru 7-12	1-Feb-93
7-21 thru 7-22	1-Aug-94	7-21 thru 7-22	1-Feb-93
7-83 thru 7-84	1-Aug-94	7-83 thru 7-84	1-Oct-82
7-89 thru 7-94	1-Aug-94	7-89 thru 7-94	1-Oct-82
7-99 thru 7-100	1-Aug-94	7-99 thru 7-100	1-Feb-93
7-104A thru 7-104B	1-Aug-94	None	New Page
8-2C thru 8-2D	1-Aug-94	8-2C thru 8-2D	1-Feb-93
8-4A thru 8-4B	1-Aug-94	8-4A thru 8-4B	1-Feb-93
8-17 thru 8-18	1-Aug-94	8-17 thru 8-18	1-Oct-82
I-1 thru I-36	1-Aug-94	I-1 thru I-36	1-Feb-93
I-37	1-Aug-94	None	New Page

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

2. RETAIN THIS NOTICE AND INSERT BEFORE TABLE OF CONTENTS.

3. Holders of MIL-HDBK-146 will verify that page changes and additions indicated above have been entered. This notice page will be retained as a check sheet. This issuance, together with appended pages, is a separate publication. Each notice is to be retained by stocking points until the military handbook is completely revised or canceled.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Preparing activity:
Army - AR

(Project 13GP0045)

Reviewing activities:
Army - EA, MI, MT, TE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

Chapter		Page
1	Projectiles	1-1
2	Bombs	2-1
3	Submunitions	3-1
4	Mines	4-1
5	Rockets	5-1
6	Missiles	6-1
7	Small Caliber	7-1
8	Grenades	8-1
9	Miscellaneous	9-1
10	Scant	10-1
Appendix		
A	Data Sheet Description	A-1
I	Master Index of Fuzes	I-1

All items contained in this handbook are listed in order of appearance on the following pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
MK 2 Mod 9	Base Iginition Fuze	1-3	01/15/93
MK 3 Mods 0-2	BD Fuze	1-5	04/01/87
M5	Time & SQ Fuze	1-7	10/01/82
MK 7 Mod 0	PD Fuze	1-9	09/24/90
MK 7 Mod 1	PD Fuze	1-10A	09/24/90
M8	PD Fuze	1-11	12/10/93
MK 8 Mod 0-6	BD Fuze	1-13	07/27/94
M9	PD Fuze	1-15	12/10/91
MK 9 Mod 0-3	BD Fuze	1-17	07/27/94
MK 10 Mod 0	BD Fuze	1-19	10/01/82
MK 13 Mod 0-7	BD Fuze	1-21	07/27/94
MK 17 Mod 0-13	Aux Det Fuze	1-25	10/01/82
EX 18 Mod 0	Arming Safety Device (ASD)	1-26A	05/13/94
MK 18 Mod 0	MT Fuze	1-27	09/25/90
MK 18 Mod 1	MT Fuze	1-28A	09/25/90
MK 18 Mod 2	MT Fuze	1-28C	09/25/90
MK 18 Mod 3	MT Fuze	1-28E	09/25/90
MK 18 Mod 4	MT Fuze	1-28G	09/25/90
MK 18 Mod 5	MT Fuze	1-28I	09/25/90
MK 19 Mod 0-3	BD Fuze	1-29	10/01/82
M20A2	Booster	1-31	10/01/82
MK 20 Mod 0-5	BD Fuze	1-33	10/01/82
M22	Booster	1-39	09/21/93
MK 22 Mod 0-3	MT Fuze	1-41	09/26/90
MK 22 Mod 4-6	MT Fuze	1-42A	09/26/90
EX 23	Proximity Fuze	1-43	10/01/82
MK 23 Mod 0	BD Fuze	1-45	10/01/82
M24B1	Booster	1-47	09/21/93
MK 25 Mod 5	MT Fuze	1-51	08/23/93
EX 26	Proximity Fuze	1-53	10/01/82
MK 29 Mod 0-2	PD Fuze	1-59	08/23/93
MK 29 Mod 3	PD Fuze	1-60A	08/23/93
MK 29 Mod 4	PD Fuze	1-60C	09/27/90
MK 30 Mod 0-2	PD Fuze	1-60E	10/12/90
MK 30 Mod 3	PD Fuze	1-60G	09/21/93
MK 32 Mod 0-40	Proximity Fuze	1-62A	10/03/90
MK 35 Mod 0	BD Fuze	1-63	10/01/82
T36E2	Booster	1-65	10/01/82
MK 36 Mod 0,1	BD Fuze	1-67	10/01/82
M37A1	Time & SQ Fuze	1-69	10/01/82
M39A2	PD Fuze	1-71	10/01/82
MK 39 Mod 0,1	BD Fuze	1-73	10/01/82
MK 40	Proximity Fuze	1-74A	10/04/90
MK 42	MT Fuze	1-75	10/01/82
M43A4	MT Fuze	1-77	09/23/93
M44A2	Dummy Fuze	1-78A	12/16/93
T44	Booster	1-79	10/01/82
MK 44 Mod 1,2	Aux Det Fuze	1-81	08/23/93
M45	PD Fuze	1-83	10/01/82
MK 45 Mods 1-12	Proximity Fuze	1-85	10/04/90
M46	PD Fuze	1-87	10/01/82
MK 46	Aux Det Fuze	1-89	10/01/82

Supersedes page viii of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
M47	PD Fuze	1-91	10/01/82
MK 47 Mod 0	Proximity Fuze	1-92A	10/04/90
M48A3E2	PD Fuze	1-95	10/01/82
MK 50 Mod 8	MT Fuze	1-99	09/23/93
M51A5-3	PD Fuze	1-103	10/01/82
MK 51 Mod 5	MT Fuze	1-104A	02/11/92
M53A1	PD Fuze	1-109	01/01/87
MK 53 Mods 0-6	Proximity Fuze	1-111	10/04/90
M54	Time & SQ Fuze	1-113	09/23/93
XP-54A	ET Fuze	1-115	10/01/82
M55A3	Time & SQ Fuze	1-117	09/23/93
XP-56A	BD Fuze	1-121	10/01/82
M57	PD Fuze	1-123	09/23/93
MK 57 Mod 0-3	MT Fuze	1-125	03/06/92
M58	BD Fuze	1-127	09/23/93
MK 58 Mod 0	Proximity Fuze	1-128A	10/04/90
XP-58A	BD Fuze	1-129	10/01/82
MK 59 Mod 0	Proximity Fuze	1-131	10/04/90
M60	BD Fuze	1-133	10/01/82
EX 60	Target Detecting Device	1-136A	02/11/92
MK 60 Mod 1	Proximity Fuze	1-135	10/01/82
M61A2	MT Fuze	1-137	09/23/93
EX 61	Target Detecting Device	1-140A	02/11/92
MK 62 Mod 0,1	MT Fuze	1-141	03/06/92
MK 63 Mod 0	MT Fuze	1-143	10/01/82
XP-63A	BD Fuze	1-145	10/01/82
XP-64A	BD Fuze	1-149	10/01/82
M66A1, A2	BD Fuze	1-153	11/05/92
MK 66 Mod 0	PD Fuze	1-155	10/10/90
M67A3	MT Fuze	1-157	10/01/82
M68A1	BD Fuze	1-159	02/11/92
XP-68B	BD Fuze	1-161	10/01/82
MK 69	Proximity Fuze	1-163	10/01/82
XP-69A,B	MT Fuze	1-165	10/01/82
M70	PD Fuze	1-167	10/01/82
XP-70A,B	MT Fuze	1-169	10/01/82
XP-71A,B	MT Fuze	1-173	10/01/82
M72	BD Fuze	1-175	10/01/82
MK 74 Mod 0,1	Proximity Fuze	1-177	09/23/93
MK 75 Mod 0-5	Proximity Fuze	1-179	09/24/93
MK 76 Mod 0,3	Proximity Fuze	1-181	10/01/82
M79	Dummy Fuze	1-185	12/16/93
MK 79 Mod 0,1	Proximity Fuze	1-187	09/24/93
MK 80 Mod 0	PD Fuze	1-189	10/01/82
M81A1	PD Fuze	1-191	01/01/87
M82, A1, A1B1	PD Fuze	1-193	09/27/93
MK 82 Mod 0	Aux Det Fuze	1-195	10/01/82
M83	CP Fuze	1-197	10/01/82
M85	PD Fuze	1-201	10/01/82
M86E1	PD Fuze	1-203	10/01/82
M89	PD Fuze	1-205	12/17/93
M90, M90A1	PI Fuze	1-209	12/10/93

Supersedes page ix of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
XM92	Safety-Arming Device	1-215	05/13/94
M124	Booster	1-219	12/10/93
T126	Dummy Fuze	1-221	12/16/93
T155E2	PD Fuze	1-223	10/01/82
T165E7	BD Fuze	1-225	10/01/82
T175E3	CP Fuze	1-227	10/01/82
T183E4	PD Fuze	1-229	10/01/82
T184E11	PD Fuze	1-231	10/01/82
T188	PD Practice Fuze	1-233	10/01/82
T191E6	PD Fuze	1-235	10/01/82
T193	PD Fuze	1-237	10/01/82
T194	PD Fuze	1-239	10/01/82
T198E1	PD Fuze	1-241	10/01/82
T199E5	BD Fuze	1-243	10/01/82
T202	Proximity Fuze	1-245	10/01/82
T204	PD Fuze	1-247	10/01/82
T206E4	PD Fuze	1-249	10/01/82
T209E3	PI BD Fuze	1-251	10/01/82
T210E2	PD Fuze	1-253	10/01/82
T212	PD Fuze	1-255	10/01/82
T216	PD Fuze	1-257	10/01/82
T219	PD SD Fuze	1-259	10/01/82
T221	BD Fuze	1-261	10/01/82
T224	PI BD Fuze	1-263	10/01/82
T228	PD Fuze	1-265	10/01/82
T230	PD Fuze	1-267	10/01/82
T234E2	PD SD Fuze	1-269	10/01/82
T235	PI BD Fuze	1-271	10/01/82
T236	PI BD Fuze	1-273	10/01/82
T240	MT SQ Fuze	1-275	10/01/82
T244	PD Fuze	1-277	10/01/82
T246	PD Fuze	1-279	10/01/82
T250E1	MT SQ Fuze	1-281	10/01/82
T252	MT Fuze	1-283	10/01/82
T257	BD Fuze	1-285	10/01/82
T265	PD Fuze	1-287	10/01/82
T267	PI BD Fuze	1-289	10/01/82
T271	PD SD Fuze	1-291	10/01/82
T272	PD SD Fuze	1-293	10/01/82
T273	PD SD Fuze	1-295	10/01/82
T277	PI BD Fuze	1-297	10/01/82
T279	Proximity Fuze	1-299	10/01/82
T280	PI BD Fuze	1-301	10/01/82
T282	ET SQ Fuze	1-303	10/01/82
T284	MT SQ Fuze	1-305	10/01/82
T285	PD Fuze	1-307	10/01/82
T287	PD Fuze	1-309	10/01/82
T289	MT SQ Fuze	1-311	10/01/82
T291E3	PD Fuze	1-313	10/01/82
T293	Proximity Fuze	1-315	10/01/82
T294	Proximity Fuze	1-317	10/01/82
T296	BD Fuze	1-319	10/01/82

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
T297	PD Fuze	1-321	10/01/82
T298	PD Fuze	1-323	10/01/82
T299	BD Fuze	1-325	10/01/82
T302	MT SQ Fuze	1-327	10/01/82
T303	BD Fuze	1-329	10/01/82
T305	Proximity Fuze	1-331	10/01/82
T311	PD Fuze	1-333	10/01/82
T312	PD Fuze	1-335	10/01/82
T313	PD Fuze	1-337	10/01/82
T314	PD Fuze	1-339	10/01/82
T315	PD Fuze	1-341	10/01/82
T324	PI BD Fuze	1-343	10/01/82
T325	BD Fuze	1-345	10/01/82
T326	BD Fuze	1-347	10/01/82
T327E1	BD Fuze	1-349	10/01/82
T331	PD Fuze	1-351	10/01/82
T335	Proximity Fuze	1-353	10/01/82
MK 336 Mod 0	MT Fuze	1-355	10/01/82
T337	BD Fuze	1-357	10/01/82
EX 337 Mod 0	Proximity Fuze	1-359	10/01/82
T338	PD Fuze	1-361	10/01/82
MK 338 Mod 0	Proximity Fuze	1-363	10/01/82
T339	PD Fuze	1-365	10/01/82
T355	MT Fuze	1-369	10/01/82
MK 357 Mod 0	Fuze & Adapter Assembly	1-371	04/21/94
MK 360 Mod 0	Fuze & Adapter Assembly	1-372A	04/21/94
MK 363 Mod 0	PD Fuze	1-373	04/19/90
T370E1	PI BD Fuze	1-375	10/01/82
MK 392 Mod 0	MT Fuze	1-379	11/05/92
MK 400	Proximity Fuze	1-383	04/21/94
EX 402	Proximity Fuze	1-385	11/05/92
EX 416	ET Fuze	1-386A	11/05/92
MK 424 Mod 0	ET Fuze	1-386C	03/06/92
M502, A1	MT SQ Fuze	1-391	12/17/93
M504, A1, A2	Proximity Fuze	1-395	12/15/93
M506	MT SQ Fuze	1-397	12/15/93
M507	PD Fuze	1-399	12/15/93
M509A2E1	PI BD Fuze	1-402A	11/05/92
M510	MT SQ Fuze	1-403	10/01/82
M511	MT Fuze	1-405	10/01/82
M513, B1	Proximity Fuze	1-407	12/15/93
M514, B1	Proximity Fuze	1-409	12/15/93
M514A3	Proximity Fuze	1-411	12/15/93
M515	Proximity Fuze	1-413	12/15/93
M516,B1,B2,A1	Proximity Fuze	1-415	12/15/93
M517	Proximity Fuze	1-417	05/13/94
M518, A1	MT SQ Fuze	1-419	12/15/93
M519	PD Fuze	1-421	08/23/93
M522	MT SQ Fuze	1-427	10/01/82
M535	PD Fuze	1-441	01/01/87
M543	MT Fuze	1-445	10/01/82
M557E1	PD Fuze	1-451	10/01/82

Supersedes page xi of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
XM558	MT Fuze	1-453	10/01/82
XM559E1	PI BD Fuze	1-455	10/01/82
XM560	MT SQ Fuze	1-457	10/01/82
XM561	Time & SQ Fuze	1-459	10/01/82
XM566	PD Fuze	1-465	10/01/82
XM568	MT Fuze	1-467	10/01/82
XM569	PI BD Fuze	1-469	10/01/82
XM570	MT Fuze	1-471	10/01/82
M572E1	PD Fuze	1-477	10/01/82
XM574	ET Fuze	1-479	10/01/82
M578A1	BD Fuze	1-480A	11/05/92
XM583	Proximity Fuze	1-481	10/01/82
XM584	ET Fuze	1-483	10/01/82
XM585E4	PD Fuze	1-485	10/01/82
M587	ET/PD Fuze	1-486A	05/13/94
XM588	Proximity Fuze	1-487	10/01/82
XM589	Proximity Fuze	1-489	10/01/82
M591	MT Fuze	1-491	10/01/82
M592	MT Fuze	1-495	12/15/93
XM593, E1	PD Fuze	1-497	12/16/93
XM597	PD Fuze	1-499	10/01/82
XM599	MT Fuze	1-501	10/01/82
M711	MT Fuze	1-503	10/28/92
XM712E2	PD Fuze	1-505	10/01/82
XM718	Proximity Fuze	1-511	10/01/82
M719	PD Fuze	1-513	10/28/92
XM723E1	PD Fuze	1-517	10/01/82
M732A1	Proximity Fuze	1-520A	05/13/94
XM741	Multi-Option Fuze	1-520C	05/13/94
XM742	ET Fuze	1-521	10/01/82
M747E2	PD Practice Fuze	1-522A	03/04/92
M748	PD Practice Fuze	1-522C	03/04/92
XM763	PI BD Fuze	1-522E	03/04/92
XM765	PI BD Fuze	1-523	10/01/82
XM768	Time Fuze	1-524A	03/04/92
XM769	Time Fuze	1-524C	12/16/93
XM770	Medium-Altitude Proximity Fuze	1-524E	05/13/94
M777	PI BD Fuze	1-524G	03/04/92
XM778	Electronic Time Fuze	1-524I	11/04/92
M1117	BD Fuze	1-525	10/01/82
M1907M	Fuze Combination	1-527	10/01/82
FAE	Bomb Proximity Fuze	2-321	10/01/82
Opener	ET Opener	2-323	10/01/82
M2	Bomb Impact Fuze	2-3	04/01/87
M20	Bomb Proximity Sensor	2-4A	05/16/94
M20A1	Bomb Proximity Sensor	2-4C	05/16/94
DSU-23/B	Target Detecting Device	2-5	11/05/90
E28	Bomb Fuze	2-9	10/01/82
E29	Bomb Fuze	2-11	10/01/82
DSU-29/B	Target Detecting Device	2-12A	11/05/90
E30	Bomb Fuze	2-13	10/01/82
DSU-30/B	Target Detecting Device	2-14A	03/20/90

Supersedes page xii of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
E34R4	Bomb Impact Fuze	2-15	10/01/82
FMU-35/B	Bomb Long Delay Fuze	2-17	10/01/82
E38	Bomb Impact Fuze	2-19	10/01/82
E40	Bomb Impact Fuze	2-21	10/01/82
E41	Bomb Impact Fuze	2-23	10/01/82
E43	Bomb Impact Fuze	2-25	10/01/82
FMU-57A/B	Bomb Proximity Fuze	2-29	10/01/82
FMU-63/B	Bomb Impact Fuze	2-31	10/01/82
E64	Bomb MT Initiator	2-33	10/01/82
XB-65A	Bomb Impact Fuze	2-35	10/01/82
FMU-67/B	Bomb Proximity Fuze	2-36A	10/10/90
FMU-68/B	Bomb Impact Fuze	2-37	10/01/82
FMU-70/B	Bomb Impact Fuze	2-39	10/01/82
XB-74B	Bomb Long Delay Fuze	2-43	10/01/82
FMU-82/B	Bomb Proximity Fuze	2-47	10/01/82
T93	Bomb Proximity Fuze	2-49	10/01/82
AN-M100A2	Bomb Impact Fuze	2-51	10/01/82
AN-M101A2	Bomb Impact Fuze	2-53	10/01/82
AN-M102A2	Bomb Impact Fuze	2-55	10/01/82
AN-M103A2	Bomb Impact Fuze	2-57	10/01/82
AN-M104	Bomb Impact Fuze	2-59	10/01/82
M105	Bomb Impact Fuze	2-61	10/01/82
M106A2	Bomb Impact Fuze	2-63	10/01/82
M107	Bomb MT Fuze	2-65	10/01/82
M108	Bomb Impact Fuze	2-67	10/01/82
M109	Bomb Impact Fuze	2-69	10/01/82
XM109	Bomb MT Initiator	2-71	10/01/82
AN-M110A1	Bomb Impact Fuze	2-73	10/01/82
M111A2	Bomb MT Fuze	2-75	10/01/82
M112A1	Bomb Impact Fuze	2-77	10/01/82
FMU-112/B	Bomb Impact Fuze	2-78A	08/06/90
M113A1	Bomb Impact Fuze	2-79	10/01/82
M114A1	Bomb Impact Fuze	2-81	10/01/82
M115	Bomb Impact Fuze	2-83	10/01/82
M116	Bomb Impact Fuze	2-85	10/01/82
M117	Bomb Impact Fuze	2-87	10/01/82
FMU-117/B	Bomb Impact Fuze	2-89	05/16/94
AN-M120A1	Bomb Impact Fuze	2-91	10/01/82
M121	Bomb Impact Fuze	2-93	10/01/82
FMU-122/B	Bomb Proximity Fuze	2-95	10/01/82
M123A1	Bomb Long Delay Fuze	2-97	10/01/82
FMU-123/B	Bomb Proximity Fuze	2-98A	01/01/87
M124A1	Bomb Long Delay Fuze	2-99	10/01/82
M125A1	Bomb Long Delay Fuze	2-101	10/01/82
AN-M126A1	Bomb Impact Fuze	2-103	10/01/82
FMU-126/B	Bomb Fuze	2-105	10/01/82
M127	Bomb MT Fuze	2-107	10/01/82
AN-M128	Bomb Impact Fuze	2-109	10/01/82
M129	Bomb Impact Fuze	2-111	10/01/82
FMU-130/B	Bomb Impact Fuze	2-112A	08/06/90
M131A1	Bomb AD Fuze	2-113	10/01/82
M132	Bomb Time Fuze	2-115	10/01/82

Supersedes page xiii of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
M133	Bomb Time Fuze	2-117	10/01/82
M134	Bomb Time Fuze	2-119	10/01/82
M135A1	Bomb MT Fuze	2-121	10/01/82
M136A1	Bomb MT Fuze	2-123	10/01/82
M137	Bomb Impact Fuze	2-125	10/01/82
M138	Bomb MT Fuze	2-127	10/01/82
AN-M139A1	Bomb Impact Fuze	2-129	10/01/82
MK 140	Bomb Hydrostatic Fuze	2-131	10/01/82
AN-M140A1	Bomb Impact Fuze	2-133	10/01/82
M142A1	Bomb Impact Fuze	2-135	10/01/82
M144	Bomb MT Fuze	2-137	10/01/82
AN-M145A1	Bomb MT Fuze	2-139	10/01/82
AN-M146A1	Bomb MT Fuze	2-141	10/01/82
M148	Bomb Impact Fuze	2-145	10/01/82
M149	Bomb Impact Fuze	2-147	10/01/82
M150A1	Bomb Impact Fuze	2-149	10/01/82
M151E2	Bomb Impact Fuze	2-151	10/01/82
M153	Bomb MT Fuze	2-155	10/01/82
M156	Bomb Impact Fuze	2-159	10/01/82
M157	Bomb Impact Fuze	2-161	10/01/82
XM157	Arming Assembly	2-163	10/01/82
M160	Bomb Impact Fuze	2-169	10/01/82
M161	Bomb Impact Fuze	2-171	10/01/82
M162	Bomb Impact Fuze	2-173	10/01/82
M163	Bomb Impact Fuze	2-175	10/01/82
M164	Bomb Impact Fuze	2-177	10/01/82
M165	Bomb Impact Fuze	2-179	10/01/82
M166E3	Bomb Proximity Fuze	2-181	10/01/82
M167	Bomb Impact Fuze	2-183	10/01/82
M168E2	Bomb Proximity Fuze	2-185	10/01/82
M169	Bomb Impact Fuze	2-187	10/01/82
M170	Bomb Impact Fuze	2-189	10/01/82
M171	Bomb Impact Fuze	2-191	10/01/82
M172	Bomb Impact Fuze	2-193	10/01/82
M174	Bomb Impact Fuze	2-197	10/01/82
M175	Bomb Impact Fuze	2-199	10/01/82
M176	Bomb Impact Fuze	2-201	10/01/82
AN-M177	Bomb Impact Fuze	2-203	10/01/82
M178	Bomb Impact Fuze	2-205	10/01/82
M179	Bomb Impact Fuze	2-207	10/01/82
M180	Bomb Impact Fuze	2-209	10/01/82
M181	Bomb Impact Fuze	2-211	10/01/82
M182	Bomb Impact Fuze	2-213	10/01/82
M183	Bomb Impact Fuze	2-215	10/01/82
M184	Bomb Impact Fuze	2-217	10/01/82
M185	Bomb Impact Fuze	2-219	10/01/82
M186	Bomb Impact Fuze	2-221	10/01/82
M187	Bomb Impact Fuze	2-223	10/01/82
M188	Bomb Proximity Fuze	2-225	10/01/82
M189	Bomb Impact Fuze	2-227	10/01/82
M190	Bomb Impact Fuze	2-229	10/01/82
M191	Bomb Impact Fuze	2-231	10/01/82

Supersedes page xiv of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
M192	Bomb Impact Fuze	2-233	10/01/82
M193	Bomb Impact Fuze	2-235	10/01/82
M194	Bomb Impact Fuze	2-237	10/01/82
M195	Bomb Impact Fuze	2-239	10/01/82
M196	Bomb Impact Fuze	2-241	10/01/82
M198	Bomb MT Fuze	2-243	10/01/82
EX 200 Mod 4	Bomb Impact Fuze	2-245	10/01/82
ANMK219	Bomb Impact Fuze	2-247	10/01/82
M220	Bomb Time Fuze	2-249	10/01/82
MK 221	Bomb Impact Fuze	2-251	10/01/82
MK 223	Bomb Impact Fuze	2-253	10/01/82
MK 227	Bomb Impact Fuze	2-255	10/01/82
ANMK228	Bomb Impact Fuze	2-257	10/01/82
MK 230 Mod 4B	Bomb Hydrostatic Fuze	2-259	10/01/82
MK 243 Mod 0	Bomb Impact Fuze	2-261	10/01/82
MK 244 Mod 1	Bomb Impact Fuze	2-263	10/01/82
MK 247 Mod 0	Bomb Impact Fuze	2-265	10/01/82
MK 255 Mod 0	Bomb Impact Fuze	2-267	10/01/82
MK 256	Bomb MT Fuze	2-269	10/01/82
MK 257 Mod 0	Bomb Proximity Fuze	2-271	10/01/82
MK 347 Mod 0	Bomb Impact Fuze	2-273	10/01/82
MK 374 Mod 0	Bomb Impact Fuze	2-275	05/16/94
MK 374 Mod 1	Bomb Impact Fuze	2-276A	05/16/94
XM590E2	Time Fuze	2-277	10/01/82
T702E1	Bomb Proximity Fuze	2-279	10/01/82
T704	Bomb Proximity Fuze	2-281	10/01/82
T736	Bomb MT Fuze	2-283	10/01/82
T763	Bomb ET Fuze	2-285	10/01/82
T766	Bomb Proximity Fuze	2-287	10/01/82
T779	Bomb Proximity Fuze	2-289	10/01/82
T787E4	Bomb Long Delay Fuze	2-291	10/01/82
T796	Bomb Proximity Fuze	2-293	10/01/82
M903	Bomb AD Fuze	2-295	10/01/82
M906	Bomb Impact Fuze	2-299	10/01/82
T906	Bomb ET Fuze	2-301	10/01/82
M908	Bomb MT Fuze	2-305	10/01/82
T908E4	Bomb Impact Fuze	2-307	10/01/82
M910	Bomb Proximity Fuze	2-311	10/01/82
M913	Bomb Proximity Fuze	2-313	05/13/94
M914E1	Bomb Proximity Fuze	2-315	10/01/82
T1301	Bomb Proximity Fuze	2-319	10/01/82
DADT	Bomblet AD SD Fuze	3-33	10/01/82
BLU-7A/B	Bomblet, Fuze for	3-3	10/01/82
BLU-25/B	Bomblet, Fuze for	3-5	10/01/82
FMU-50/B	Bomb Impact Fuze	3-7	10/01/82
FMU-65/B	Bomb Impact Fuze	3-9	10/01/82
FMU-73/B	Bomb Impact Fuze	3-11	10/01/82
FMU-74/B	Submunition Impact Fuze	3-13	05/16/94
M130A1	Bomb MT Fuze	3-15	10/01/82
M218	Submunition Time Fuze	3-19	06/07/94
XM221	General Purpose Grenade Fuze	3-23	10/01/82
XM222	General Purpose Grenade Fuze	3-25	10/01/82

Supersedes page xv of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
XM737	Impact Fuze	3-27	10/01/82
XM922	Bomblet Impact Fuze	3-29	10/01/82
XM928	Bomblet Impact Fuze	3-31	10/01/82
Bomine	PI and Proximity Fuze	4-59	10/01/82
M6A1	Mine Combination Fuze	4-3	12/10/91
M7A1	Mine Combination Fuze	4-5	12/10/91
M10, A2, A3	AP Practice Mine Fuze	4-7	09/08/93
M12	AT Mine Practice Fuze	4-9	10/01/82
F/M26 AP Mine	Land Mine, Fuze for	4-10A	09/08/93
FMU-30A/B	Mine Seismic Fuze	4-11	10/01/82
XM44	Anti-Instrusion Device	4-13	10/01/82
XM84	AT/AV Mine, fuze for	4-14A	10/27/92
XM132	AT Mine System, fuze for	4-14C	01/01/87
M609	AT Mine Influence Fuze	4-19	10/01/82
XM611	AP Mine Combination Fuze	4-21	10/01/82
M612	AT Mine Fuze	4-23	10/01/82
M616	AT Mine Fuze	4-25	09/08/93
XM617	AP Mine Influence Fuze	4-27	10/01/82
M619	AT Mine Influence Fuze	4-29	09/08/93
XM621	Anti Disturb Device	4-31	10/01/82
T1200E1	AP Mine Fuze	4-33	10/01/82
T1205	GP Mine Fuze	4-35	10/01/82
T1214	AT Mine Fuze	4-37	10/01/82
T1215	AT Mine Practice Fuze	4-39	10/01/82
T1216	AT Mine Fuze	4-41	10/01/82
T1221E1	Mine Combination Practice Fuze	4-43	10/01/82
T1223	AT Mine Influence Fuze	4-45	10/01/82
T1224E1	AT Mine Influence Fuze	4-47	10/01/82
T1226	AT Mine Fuze	4-49	10/01/82
T1228	AT Mine Fuze	4-51	10/01/82
T1229	AT Mine Fuze	4-53	10/01/82
T1231	AT Mine Fuze	4-55	10/01/82
T1233	AT Mine Influence Fuze	4-57	10/01/82
MARS	Timer	5-255	10/01/82
SHAWL (F)	PI BD Fuze	5-257-	01/15/93
SHAWL (R)	BD Fuze	5-259-	01/15/93
T1E4	Rocket PD Fuze	5-3	04/01/87
T3	Rocket PD Fuze	5-4A	01/15/93
AIR-3	Rocket PD Fuze	5-5	04/01/87
M4A2	Rocket PD Fuze	5-7	10/01/82
PIR-8	Rocket BD Fuze	5-9	10/01/82
AIR-9-1	Rocket PD Fuze	5-11	10/01/82
PIR-9	Rocket BD Fuze	5-13	10/01/82
AIR-12-1	Rocket PD Fuze	5-15	10/01/82
PIR-14	Rocket BD Fuze	5-17	10/01/82
PIR-22	Rocket BD Fuze	5-19	10/01/82
PIR-23	Rocket BD Fuze	5-21	10/01/82
MK 30 Mod 4	Rocket PD Fuze	5-22A	09/21/93
XR-36	Rocket BD Fuze	5-23	10/01/82
M43	Safety-Arming Device	5-25	01/01/87
XR-51	Rocket BD Fuze	5-27	10/01/82
XR-78	Rocket BD Fuze	5-29	10/01/82

Supersedes page xvi of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
XM79	Safety-Arming Device	5-31	10/01/82
FMU-98/B	Rocket Proximity Fuze	5-33	05/13/94
MK 100 Mod 0-2	Rocket PD Fuze	5-35	10/01/82
EX 104 Mod 0	Rocket Time Fuze	5-37	10/01/82
EX 107	Rocket Time & SQ Fuze	5-39	10/01/82
EX 110A	Rocket MT Fuze	5-41	10/01/82
EX 111	Rocket PD Fuze	5-43	10/01/82
MK 131	Rocket PD Fuze	5-45	10/01/82
MK 132 Mod 0	Rocket PD Fuze	5-47	10/01/82
MK 133	Rocket PD Fuze	5-49	10/01/82
MK 134 Mod 0	Rocket Time Fuze	5-51	10/01/82
MK 135	Rocket PD Fuze	5-53	10/01/82
MK 136	Rocket PD Fuze	5-55	10/01/82
MK 137 Mod 0-2	Rocket PD Fuze	5-57	10/01/82
MK 139	Rocket PD Fuze	5-59	10/01/82
MK 141 Mod 0	Rocket PD Fuze	5-61	10/01/82
MK 144	Rocket PD Fuze	5-63	10/01/82
MK 145 Mod 0,1	Rocket PD Fuze	5-65	10/01/82
MK 146 Mod 1	Rocket BD Fuze	5-67	10/01/82
MK 147 Mod 0,1	Rocket PD Fuze	5-69	10/01/82
MK 148	Rocket PD Fuze	5-71	10/01/82
MK 149 Mod 0,1	Rocket PD Fuze	5-73	10/01/82
MK 152	Rocket PD Fuze	5-75	10/01/82
MK 154 Mod 0,2,3	Rocket PD Fuze	5-77	10/01/82
MK 155 Mod 0	Rocket PD Fuze	5-79	10/01/82
MK 156	Rocket PD Fuze	5-81	10/01/82
MK 157 Mod 0-2	Rocket BD Fuze	5-83	10/01/82
MK 158	Rocket BD Fuze	5-85	10/01/82
MK 159 Mod 0,1	Rocket BD Fuze	5-87	10/01/82
MK 160	Rocket BD Fuze	5-89	10/01/82
MK 161 Mod 0	Rocket BD Fuze	5-91	10/01/82
MK 162 Mod 0	Rocket BD Fuze	5-93	10/01/82
MK 163 Mod 0,1	Rocket BD Fuze	5-95	10/01/82
MK 164	Rocket BD Fuze	5-97	10/01/82
MK 165 Mod 0	Rocket BD Fuze	5-99	10/01/82
MK 166 Mod 0-2	Rocket BD SD Fuze	5-101	10/01/82
MK 170	Rocket Proximity Fuze	5-103	10/01/82
MK 172 Mod 0-2	Rocket Proximity Fuze	5-105	10/01/82
MK 173 Mod 0-4	Rocket Proximity Fuze	5-107	10/01/82
MK 174 Mod 0-3	Rocket Proximity Fuze	5-109	10/01/82
MK 177 Mod 0,1	Rocket PD Fuze	5-113	10/01/82
MK 179 Mod 0	Rocket BD Fuze	5-117	10/01/82
MK 180 Mod 0	Rocket BD Fuze	5-119	10/01/82
MK 184	Rocket PD Fuze	5-121	10/01/82
MK 185	Rocket PD Fuze	5-123	10/01/82
MK 189 Mod 0,1	Rocket PD Fuze	5-125	10/01/82
MK 190 Mod 0	Rocket PI BD Fuze	5-127	10/01/82
MK 192 Mod 0-2	Rocket MT Fuze	5-129	10/01/82
MK 198	Rocket MT Fuze	5-131	10/01/82
T214	Rocket MT SQ Fuze	5-133	10/01/82
T274	Rocket MT SQ Fuze	5-135	10/01/82
T332	Rocket MT Fuze	5-137	10/01/82

Supersedes page xvii of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
EX 335 Mod 0	Rocket Proximity Fuze	5-139	10/01/82
MK 378 Mod 0,1	Rocket Proximity Fuze	5-141	10/01/82
MK 387 Mods 0-2	Proximity Fuze	5-143	03/06/92
M400	Rocket BD Fuze	5-145	10/01/82
M401	Rocket BD Fuze	5-147	10/01/82
M402A2	Rocket Proximity Fuze	5-149	10/01/82
M403A2	Rocket Proximity Fuze	5-151	10/01/82
M406	Rocket PI BD Fuze	5-155	10/01/82
M408E1	Rocket PI BD Fuze	5-157	10/01/82
M409	Rocket PI BD Fuze	5-159	10/01/82
M411	Rocket MT Fuze	5-161	10/01/82
XM413	Rocket Proximity Fuze	5-163	10/01/82
M415	Rocket PD Fuze	5-167	10/01/82
XM416	Rocket MT Fuze	5-169	10/01/82
M417	Rocket PD Fuze	5-171	04/19/91
M421	Rocket MT Fuze	5-173	10/01/82
XM425	Rocket Proximity Fuze	5-177	10/01/82
XM426E4	Rocket MT Fuze	5-179	10/01/82
EX 427 Mod 0	Electronic Time Fuze	5-181	03/10/92
M431	Rocket PD Fuze	5-182A	09/08/93
XM432	Rocket ET Fuze	5-183	10/01/82
XM443	Rocket ET Fuze	5-185	05/13/94
XM444	Rocket Multi-option Fuze	5-187	05/13/94
XM448	Rocket ET Fuze	5-188A	05/13/94
XM450	Rocket Prox/Time Fuze	5-188C	05/13/94
XM540	MT Fuze	5-189	10/01/82
XM750	Rocket ET Fuze	5-190A	03/13/92
XM1133	Rocket Time Fuze	5-191	10/01/82
T2000E3	Rocket PI BD Fuze	5-193	10/01/82
T2019	Rocket PD Fuze	5-195	10/01/82
T2021E6	Rocket PD SD Fuze	5-197	10/01/82
T2022E8	Rocket BD Fuze	5-199	10/01/82
T2024	Rocket PD SD Fuze	5-201	10/01/82
T2025E2	Rocket PD Fuze	5-203	10/01/82
T2027	Rocket PD Fuze	5-205	10/01/82
T2028	Rocket PI BD Fuze	5-207	10/01/82
T2029	Rocket PI BD Fuze	5-209	10/01/82
T2034	Rocket PI BD SD Fuze	5-211	10/01/82
T2036	Rocket PD SD Fuze	5-213	10/01/82
T2037	Rocket Time Fuze	5-215	10/01/82
T2039	Rocket Proximity Fuze	5-217	10/01/82
T2040	Rocket PD Fuze	5-219	10/01/82
T2041	Rocket PD SD Fuze	5-221	10/01/82
T2043	Rocket PD SD Fuze	5-223	10/01/82
T2044E5	Rocket PD Fuze	5-225	10/01/82
T2046	Rocket Proximity Fuze	5-227	10/01/82
T2047	Rocket PD SD Fuze	5-229	10/01/82
T2048	Rocket PD Fuze	5-231	10/01/82
T2049	Rocket PD Fuze	5-233	10/01/82
T2051	Rocket PD Fuze	5-235	10/01/82
T2052	Rocket BD SD Fuze	5-237	10/01/82
T2053	Rocket PI BD Fuze	5-239	10/01/82

Supersedes page xviii of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
T2054	Rocket BD SD Fuze	5-241	10/01/82
T2055	Rocket BD SD Fuze	5-243	10/01/82
T2056	Rocket BD Fuze	5-245	10/01/82
T2057	Rocket BD Fuze	5-247	10/01/82
T2063	Rocket PI BD Fuze	5-249	10/01/82
T2066	Rocket Fuze	5-251	10/01/82
T2069	Rocket Time Fuze	5-253	10/01/82
MINIRAD	Proximity Fuze	6-87	10/01/82
MK 1 Mod 0	Safety-Arming Device	6-2A	12/19/92
MK 2 Mod 0	Safety-Arming Device	6-3	04/01/87
MK 3 Mod 3	Safety-Arming Device	6-4A	12/19/92
MK 4 Mod 1	Safety-Arming Device	6-5	10/01/82
MK 5 Mod 2	Safety-Arming Device	6-7	10/01/82
MK 6 Mod 1	Safety-Arming Device	6-9	10/01/82
MK 7 Mod 1	Safety-Arming Device	6-11	10/01/82
MK 10 Mod 0	Safety-Arming Device	6-13	10/01/82
MK 12 Mod 0	Safety-Arming Device	6-15	10/01/82
MK 13 Mod 0	Safety-Arming Device	6-16A	02/21/90
MK 14 Mod 0	Safety-Arming Device	6-17	10/01/82
XM26	Movement	6-19	10/01/82
M30A1	Safety-Arming Device	6-21	10/01/82
XM32	Safety-Arming Device	6-23	10/01/82
XM32E6	Safety-Arming Device	6-25	10/01/82
M51	GM PIBD Element	6-27	10/01/82
FMU-71/B	GM Proximity Fuze	6-29	10/01/82
T90E3	Safety-Arming Device	6-31	10/01/82
XM90	Safety-Arming Device	6-33	10/01/82
T93E8	Safety-Arming Device	6-35	10/01/82
T104	Safety-Arming device	6-37	10/01/82
FMU-131/B	GM Impact Fuze	6-38A	12/19/92
FMU-133/B	GM Impact Fuze	6-38C	12/19/92
FMU-137/B	Safety-Arming Device	6-38E	12/19/92
MK 304 Mod 2	GM Impact Fuze	6-39	10/01/82
MK 310 Mod 0	GM Impact Fuze	6-41	10/01/82
MK 312 Mod 0,1	GM Impact Fuze	6-43	10/01/82
MK 312 Mod 2	GM Impact Fuze	6-45	10/01/82
MK 312 Mod 3	GM Impact Fuze	6-47	10/01/82
MK 330 Mod 0	GM Impact Fuze	6-51	10/01/82
MK 330 Mod 1	GM Impact Fuze	6-53	10/01/82
MK 383 Mod 0	GM Impact Fuze	6-55	10/01/82
M800	GM BD Fuze	6-57	10/01/82
XM802	GM BD SD Fuze	6-59	10/01/82
XM804E1	GM Impact Fuze	6-61	10/01/82
M813	Safety-Arming Device	6-67	06/07/94
XM815	GM Impact Fuze	6-71	10/01/82
M819	GM ET Practice Fuze	6-72A	12/19/92
T1402E5	GM PD Fuze	6-73	10/01/82
T1403E2	GM Impact SD Fuze	6-75	10/01/82
T1404	GM MT Fuze	6-77	10/01/82
T1407	GM Impact Fuze	6-78A	12/19/92
T1409	GM Impact Fuze	6-79	10/01/82
T1410	GM PI BD Fuze	6-81	10/01/82

Supersedes page xix of MIL-HDBK-146.

Sourcé: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INF
T1411	GM Impact Fuze	6-83	10/01/82
T1412	GM Impact Fuze	6-85	10/01/82
AM-2	Multipurpose Fuze	7-2A	08/03/93
MK 12 Mod 0	PD Fuze	7-3	09/24/90
MK 12 Mod 1	PD Fuze	7-4A	09/24/90
MK 12 Mod 2	PD Fuze	7-4C	09/24/90
MK 12 Mod 3	PD Fuze	7-4E	09/24/90
MK 26 Mod 0	PD Fuze	7-4G	09/27/90
MK 26 Mod 1	PD Fuze	7-4I	10/12/90
MK 26 Mod 2	PD Fuze	7-4K	10/12/90
MK 27 Mod 0	PD Fuze	7-5	10/17/90
MK 34 Mod 0,1	PD Fuze	7-7	10/01/82
M38A1	BD Fuze	7-9	10/01/82
M50	PD Dummy Fuze	7-10A	12/16/93
M56	PD Fuze	7-11	09/23/93
M69	Dummy Fuze	7-13	02/11/92
M71	PD Fuze	7-15	10/01/82
M74	PD Fuze	7-17	10/01/82
M75	PD Fuze	7-19	10/01/82
MK 78 Mod 0-2	PD Fuze	7-21	08/23/93
MK 81 Mod 0	PD Fuze	7-23	10/01/82
FMU-128/B	PD Fuze	7-24A	10/01/82
T195E11	PD Fuze	7-25	10/01/82
T200E16	PD Fuze	7-27	10/01/82
T231E3	PD Fuze	7-29	10/01/82
T238	Time Fuze	7-31	10/01/82
XM246 PROJ	SD FOR	7-33	10/01/82
T253	PD Fuze	7-35	10/01/82
T262	PD Fuze	7-37	10/01/82
T263E14	PD Fuze	7-39	10/01/82
T264E9	PD Fuze	7-41	10/01/82
T270	PD SD Fuze	7-43	10/01/82
T292	PD Fuze	7-45	10/01/82
T300	BD SD Fuze	7-47	10/01/82
T301	BD Fuze	7-49	10/01/82
T306	BD SD Fuze	7-51	10/01/82
T307	BD Fuze	7-53	10/01/82
T308	BD Fuze	7-55	10/01/82
T320	PD Fuze	7-57	10/01/82
T321	PD Fuze	7-59	10/01/82
T322	PD Fuze	7-61	10/01/82
T323	PD Fuze	7-63	10/01/82
T328	PD Fuze	7-65	10/01/82
T329	PD SD Fuze	7-67	10/01/82
T346E7	PD Fuze	7-69	10/01/82
T363	BD Fuze	7-71	10/01/82
T364	BD Fuze	7-73	10/01/82
EX 380 Mod 0	PD Fuze	7-75	10/01/82
EX 421	PD Fuze	7-77	02/27/92
M505A3E2	PD Fuze	7-79	10/01/82
XM537	PD Fuze	7-81	10/01/82
XM538E1	PD Fuze	7-83	05/13/94

Supersedes page xx of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
M552	PD Fuze	7-85	03/04/92
XM579	PI BD Fuze	7-87	10/10/90
M581E1	PD Fuze	7-89	07/15/93
M594	PD SD Fuze	7-91	09/08/93
M596	Proximity Fuze	7-93	05/13/94
M714E5	PD SD Fuze	7-96C	03/05/92
M714E6	PI BD Fuze	7-96E	03/05/92
M714E8	PD SD Fuze	7-96G	03/05/92
XM714	PD SD Fuze	7-95	10/01/82
XM714E2	PD SD Fuze	7-96A	03/05/92
XM722	PD SD Fuze	7-97	10/01/82
XM755	PD SD Fuze	7-99	09/08/93
XM756	PD SD Fuze	7-101	10/31/92
XM757	PD SD Fuze	7-103	10/31/92
M758E1	PD SD Fuze	7-104A	07/22/93
M760	PD SD Fuze	7-105	10/31/92
M761	PD SD Fuze	7-107	10/31/92
M766	Proximity Fuze	7-109	10/31/92
M1	Hand Grenade Fuze	8-2A	04/01/87
M6A3	Hand Grenade Fuze	8-2C	12/10/93
M6A4D	Hand Grenade Fuze	8-3	10/01/82
M10A3	Hand Grenade Fuze	8-4A	12/10/93
XM75	Hand Grenade Igniter	8-5	10/01/82
M217	Hand Grenade Fuze	8-17	12/10/93
XM225	Hand Grenade Fuze	8-19	10/01/82
MK 394 Mod 0	Hand Grenade Fuze	8-21	01/15/93
T1015	Hand Grenade Fuze	8-23	10/01/82
T1020	Hand Grenade Fuze	8-25	10/01/82
T1021	Rifle Grenade Fuze	8-27	10/01/82
T1022E2	Rifle Grenade Fuze	8-29	10/01/82
T1023	Rifle Grenade Fuze	8-31	10/01/82
T1025	Hand Grenade Fuze	8-33	10/01/82
F/MK15 Mod 1 SUS	Arming and Firing Mechanism	9-2A	02/21/90
M23	Fuze Setter	9-3	10/01/82
M28	Fuze Setter	9-7	10/01/82
MK 30 Mod 0	Arming and Firing Device	9-8A	02/27/90
MK 31 Mod 0	Arming and Firing Mechanism	9-8C	02/27/90
FZU-35/B	Bomb Fuze Initiator	9-8E	01/01/87
XM64	Firing Device	9-9	10/01/82
XM70	Demolition Firing Device	9-11	10/01/82
MK 175 Mod 0	Signal Hydrostatic Fuze	9-13	03/06/90
MK 182 Mod 0	Signal Hydrostatic Fuze	9-15	10/01/82
MK 183 Mod 0	Signal Hydrostatic Fuze	9-17	10/01/82
XM715	MT Fuze	9-19	10/01/82
T1304	Line Charge Time Fuze	9-25	10/01/82
M1,A1	AT Mine Fuze	10-3	04/01/87
T1	AT Mine Fuze	10-3	04/01/87
T1	Bomb Fuze	10-3	04/01/87
MK 1	Combination Fuze	10-3	04/01/87
MK 1	PD Fuze	10-3	04/01/87
MK 1 Mods 0,1	BD Fuze	10-3	04/01/87
MK 1 Mods 0-1	BD Fuze	10-	07/27/94

Supersedes page xxi of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
MK 1 Mods 0-4	Base Ignition Fuze	10-3	04/01/87
M2	MT Fuze	10-3	04/01/87
M2	PD Fuze	10-3	04/01/87
M2A1	APERS Mine Fuze	10-3	04/01/87
T2	AT Mine Fuze	10-3	04/01/87
T2	Bomb Fuze	10-3	04/01/87
T2	Rocket PD Fuze	10-3	04/01/87
MK 2 Mod 0	BD Fuze	10-3	04/01/87
MK 2 Mod 1	BD Fuze	10-3	04/01/87
MK 2 Mod 2	BD Fuze	10-3	04/01/87
MK 2 Mod 3	BD Fuze	10-3	04/01/87
MK 2 Mods 0-8	Base Iginition Fuze	10-	01/15/93
M3	PD Fuze	10-3	04/01/87
M3A1	APERS Mine Fuze	10-3	04/01/87
T3	PD Fuze	10-3	04/01/87
MK 3	PD Fuze	10-3	04/01/87
MK 3 Mod 0	BD Fuze	10-3	04/01/87
MK 3 Mod 0	Base Iginition Fuze	10-3	04/01/87
MK 3 Mod 1	BD Fuze	10-3	04/01/87
MK 3 Mod 2	BD Fuze	10-3	04/01/87
MK 3A2	Time Fuze	10-3	04/01/87
FMU-3/B	Rocket PD SD Fuze	10-3	04/01/87
M4	AT Mine Fuze	10-3	10/01/82
T4	PD Fuze	10-3	10/01/82
T4	Rocket Practice Fuze	10-3	10/01/82
MK 4 Mod 0	BD Fuze	10-	07/27/94
MK 4 Mods 0-3	Base Ignition Fuze	10-	07/26/94
M5	AT Mine Fuze	10-3	10/01/82
M5	Hand Grenade Fuze	10-3	10/01/82
M5	Rocket BD Fuze	10-4	10/01/82
T5	BD Fuze	10-4	10/01/82
T5	Hand Grenade Fuze	10-4	10/01/82
MK 5 Mod 0	BD Fuze	10-3	07/27/94
MK 5 Mods 0-2	Base Ignition Fuze	10-	07/26/94
M6	Rocket Dummy Fuze	10-4	10/01/82
T6	PD Fuze	10-4	10/01/82
MK 6 Mod 0	Nose Ignition Fuze	10-	07/26/94
MK 6 Mods 0, 2	BD Fuze	10-	07/27/94
M7	Hand Grenade Fuze	10-4	10/01/82
T7	BD Fuze	10-4	10/01/82
MK 7 Mod 0	Nose Ignition Fuze	10-	07/26/94
XP-7A	BD SD Fuze	10-4	10/01/82
M8	Rifle Grenade Fuze	10-4	10/01/82
T8	Rocket PD Fuze	10-4	10/01/82
MK 8 Mods 0-6	Base Ignition Fuze	10-	07/26/94
M9	AP Mine Fuze	10-4	10/01/82
M9	Rifle Grenade Fuze	10-4	10/01/82
T9	Bomb Fuze	10-4	10/01/82
MK 9 Mods 0-3	Nose Ignition Fuze	10-	07/26/94
T10	PD Fuze	10-4	10/01/82
MK 10 Mods 0-9	Base Ignition Fuze	10-	07/26/94
T11	MT SQ Fuze	10-5	10/01/82

Supersedes page xxii of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
MK 11 Mods 0-5	Nose Ignition Fuze	10-	07/26/94
MK 11 Mods 0-8	BD Fuze	10-	07/27/94
T13	Time Fuze	10-5	10/01/82
MK 14 Mod 0	Base Ignition Fuze	10-	07/26/94
MK 14 Mods 0-3	Aux Det Fuze	10-	07/27/94
T15	MT Fuze	10-5	10/01/82
MK 15 Mod 0	BD Fuze	10-	07/27/94
MK 15 Mods 0-1	Nose Ignition Fuze	10-	07/26/94
T16	Rocket PD Fuze	10-5	10/01/82
MK 16 Mods 0-5	Nose Ignition Fuze	10-	07/26/94
T17	Rocket BD Fuze	10-5	10/01/82
XP-17A	BD Fuze	10-5	10/01/82
T18	Rocket PD Fuze	10-5	10/01/82
L19A3	BD Fuze	10-5	10/01/82
M19	Fuze Setter	10-5	10/01/82
T19	Rocket PD Fuze	10-5	10/01/82
XP-19A	BD Fuze	10-5	10/01/82
T20	PD Fuze	10-5	10/01/82
T20	Rocket PD Fuze	10-5	10/01/82
XP-20A	BD SD Fuze	10-5	10/01/82
T21	Mine Fuze	10-6	10/01/82
M22	Fuze Setter	10-6	10/01/82
T22	PD Fuze	10-6	10/01/82
M23	Booster	10-6	10/01/82
M24	Fuze Setter	10-6	10/01/82
XP-24A	PD Fuze	10-6	10/01/82
T25	Bomb Fuze	10-6	10/01/82
T25	PD Fuze	10-6	10/01/82
T25	Rocket BD Fuze	10-6	10/01/82
XP-25A	Aux Det Fuze	10-6	10/01/82
T26	Bomb Fuze	10-6	10/01/82
T27	Bombl Barometric Fuze	10-6	10/01/82
FMU-27/B	Rocket Proximity Fuze	10-6	10/01/82
T28	Rocket PD Fuze	10-6	10/01/82
FMU-28/B)	Rocket Proximity Fuze	10-6	10/01/82
FMU-29/B	Bomb Long Delay Fuze	10-6	10/01/82
T30	Rocket Proximity Fuze	10-6	10/01/82
T31	Bomb Impact Fuze	10-7	10/01/82
FMU-31/B	GM Proximity Fuze	10-7	10/01/82
T34	Bomb Fuze	10-7	10/01/82
M35	PD Fuze	10-7	10/01/82
T35	Rocket PD Fuze	10-7	10/01/82
XP-35A	PD Fuze	10-7	10/01/82
M36	PD Fuze	10-7	10/01/82
T36	Rocket PD Fuze	10-7	10/01/82
T37	Bomb Fuze	10-7	10/01/82
T39	Percussion Fuze	10-7	10/01/82
M40	PD Fuze	10-7	10/01/82
T40	PD Fuze	10-7	10/01/82
T41	PD Fuze	10-7	10/01/82
MK 41	Proximity Fuze	10-8	10/01/82
M42A1	Dummy Fuze	10-8	10/01/82

Supersedes page xxiii of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
T42	Bomb Fuze	10-8	10/01/82
T42	Rocket PD Fuze	10-8	10/01/82
T43	Bomb Proximity Fuze	10-8	10/01/82
MK 43 Mod 1	Aux Det Fuze	10-8	10/01/82
FMU-43/B	Proximity Fuze	10-8	10/01/82
T45	Percussion Fuze	10-8	10/01/82
XP-45A	BD Fuze	10-8	10/01/82
T46	Percussion Fuze	10-8	10/01/82
T47	Rocket BD Fuze	10-8	10/01/82
T49	Dummy Fuze	10-8	10/01/82
T50	Bomb Proximity Fuze	10-8	10/01/82
T50	PD Fuze	10-8	10/01/82
FMU-51/B	Bomb Impact Fuze	10-8	10/01/82
T52	Dummy Fuze	10-8	10/01/82
T53	PD Fuze	10-8	10/01/82
T55	BD Fuze	10-8	10/01/82
MK 56 Mod 0	Proximity Fuze	10-9	10/01/82
T57	BD Fuze	10-9	10/01/82
T58	Bomb Fuze	10-9	10/01/82
FMU-58/B	Bomb Inertial Fuze	10-9	10/01/82
T59	BD SD Fuze	10-9	10/01/82
T59	Bomb Fuze	10-9	10/01/82
M60B1	BD Fuze	10-9	10/01/82
T60	Bomb Fuze	10-9	10/01/82
FMU-60/B	Bomb Impact Fuze	10-9	10/01/82
T61	PD SD Fuze	10-9	10/01/82
T62	Bomb Fuze	10-9	10/01/82
T62	PD SD Fuze	10-9	10/01/82
M63	Dummy Fuze	10-9	10/01/82
T63	Bomb Fuze	10-9	10/01/82
T64	PD Fuze	10-9	10/01/82
FMU-64/B	Bomb Impact Fuze	10-9	10/01/82
T65	Bomb Fuze	10-9	10/01/82
T65	PD Fuze	10-10	10/01/82
FMU-66/B	Bomb Proximity Fuze	10-10	10/01/82
MK 67	Proximity Fuze	10-10	10/01/82
MK 68	Proximity Fuze	10-10	10/01/82
T69	Bomb Impact Fuze	10-10	10/01/82
FMU-69/B	Rocket Proximity Fuze	10-10	10/01/82
T70	BD Fuze	10-10	10/01/82
T72	Bomb MT Fuze	10-10	10/01/82
T75	Proximity Fuze	10-10	10/01/82
FMU-75/B	GM Impact Fuze	10-10	10/01/82
M76	PD Fuze	10-10	10/01/82
T76	Bomb Fuze	10-10	10/01/82
FMU-76/B	Bomb Proximity Fuze	10-10	10/01/82
T77	Bomb MT Fuze	10-10	10/01/82
FMU-77/B	GM Proximity Fuze	10-10	10/01/82
T78	Bomb Impact Fuze	10-11	10/01/82
FMU-78/B	GM PI BD Fuze	10-11	10/01/82
T79	MT SQ Fuze	10-11	10/01/82
FMU-79/B	Bomb Proximity Fuze		

Supersedes page xxiv of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
T80	Bomb Fuze	10-11	10/01/82
FMU-80/B	Bomb Time Fuze	10-11	10/01/82
T82	Bomb Proximity Fuze	10-11	10/01/82
T83	Bomb Fuze	10-11	10/01/82
T83	PD Fuze	10-11	10/01/82
T84	Bomb Fuze	10-11	10/01/82
MK 84	MT Fuze	10-11	10/01/82
FMU-84/B	GM Training Fuze	10-11	10/01/82
MK 85 Mod 0	MT Fuze	10-11	10/01/82
FMU-85/B	GM Proximity Fuze	10-11	10/01/82
MK 86	MT Fuze	10-11	10/01/82
FMU-86/B	Bomb MT Fuze	10-11	10/01/82
M87	PD Fuze	10-11	10/01/82
T88	Bomb MT Fuze	10-11	10/01/82
T89	PD Fuze	10-12	10/01/82
FMU-91/B	GM Proximity Fuze	10-12	10/01/82
M92	Proximity Fuze	10-12	10/01/82
FMU-92/B	PD Fuze	10-12	10/01/82
M93	Proximity Fuze	10-12	10/01/82
M94	Proximity Fuze	10-12	10/01/82
M95	Proximity Fuze	10-12	10/01/82
M96	Proximity Fuze	10-12	10/01/82
M97A1	Proximity Fuze	10-12	10/01/82
M98	Proximity Fuze	10-12	10/01/82
M99	Proximity Fuze	10-12	10/01/82
FMU-99/B	Dispenser MT Fuze	10-12	10/01/82
FMU-100/B	Bomb Impact Fuze	10-12	10/01/82
M101	Rocket PI Fuze	10-12	10/01/82
T101	Time & SQ Fuze	10-12	10/01/82
FMU-101/B	Bomb Impact Fuze	10-13	10/01/82
T102	PD Fuze	10-13	10/01/82
FMU-102/B	Bomb impact Fuze	10-13	10/01/82
T103	PD Fuze	10-13	10/01/82
FMU-103/B	Bomblet Impact Fuze	10-13	10/01/82
T104	PD Fuze	10-13	10/01/82
FMU-104/B	Bomblet Impact Fuze	10-13	10/01/82
FMU-106/B	GM Proximity Fuze	10-13	10/01/82
FMU-108/B	GM Proximity Fuze	10-13	10/01/82
T109	PD Fuze	10-13	10/01/82
T112	Time & PD Fuze	10-13	10/01/82
T114	PD Fuze	10-13	10/01/82
FMU-114/B	Bomb Impact Fuze	10-13	10/01/82
FMU-115/B	Time Fuze	10-14	10/01/82
T116	MT Fuze	10-14	10/01/82
FMU-116/B	Rocket Dummy Fuze	10-14	10/01/82
M118	Bomb Impact Fuze	10-14	10/01/82
T118	Time & SQ Fuze	10-14	10/01/82
M119	Bomb Impact Fuze	10-14	10/01/82
M120	Bomb Impact Fuze	10-14	10/01/82
T120	PD Fuze	10-14	10/01/82
FMU-120/B	Bomb Impact Fuze	10-14	10/01/82
T121	Dummy BD Fuze	10-14	10/01/82

Supersedes page xxv of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
M122	Bomb Impact Fuze	10-14	10/01/82
M122	Booster	10-14	10/01/82
T125	PD Fuze	10-14	10/01/82
MK 127	Ejector Fuze	10-14	10/01/82
T128	PD Fuze	10-14	10/01/82
T130	Proximity Fuze	10-14	10/01/82
T131	PI Fuze	10-15	10/01/82
T132	Proximity Fuze	10-15	10/01/82
FMU-132/B	GM Impact Fuze	10-15	01/01/87
T135	PD Fuze	10-15	10/01/82
T136	BD Fuze	10-15	10/01/82
T137	BD Fuze	10-15	10/01/82
T138	PD Fuze	10-15	10/01/82
T139	PD Fuze	10-15	10/01/82
T140	BD Fuze	10-15	10/01/82
M143	Bomblet Time Fuze	10-15	10/01/82
T143	BD Fuze	10-15	10/01/82
T146	PD Fuze	10-15	10/01/82
T148	PD Fuze	10-15	10/01/82
T150E2	PI Fuze	10-15	10/01/82
T151	PI Fuze	10-15	10/01/82
T153	MT SQ Fuze	10-15	10/01/82
M154	Bomb Impact Fuze	10-15	10/01/82
T154	CP Fuze	10-16	10/01/82
T156	Rocket BD Fuze	10-16	10/01/82
T158	Rocket BD Fuze	10-16	10/01/82
T161	Rocket BD Fuze	10-16	10/01/82
T162	Rocket PI BD Fuze	10-16	10/01/82
T163	CP Fuze	10-16	10/01/82
T164	PD Fuze	10-16	10/01/82
T166	Time Fuze	10-16	10/01/82
T167	PD Fuze	10-16	10/01/82
T168	PI BD Fuze	10-16	10/01/82
T171	Proximity Fuze	10-16	10/01/82
T173	PI Fuze	10-16	10/01/82
T174	BD Fuze	10-16	10/01/82
T187	PD Fuze	10-16	10/01/82
T189	PI Fuze	10-16	10/01/82
M197	Bomb Impact Fuze	10-17	10/01/82
M200A1	Hand Grenade Fuze	10-17	10/01/82
M202	Rifle Grenade Fuze	10-17	10/01/82
M203	Rifle Grenade Fuze	10-17	10/01/82
T205	PD Fuze	10-17	10/01/82
T207	PD Fuze	10-17	10/01/82
M212	Grenade Fuze	10-17	10/01/82
T213	PD Fuze	10-17	10/01/82
XM214	Hand Grenade Fuze	10-17	10/01/82
T217	PD Fuze	10-17	10/01/82
T223	PD Fuze	10-17	10/01/82
M229	Grenade Fuze	10-17	10/01/82
T229	PD SD Fuze	10-17	10/01/82
MK 229	Bomb Hydrostatic Fuze	10-17	10/01/82

Supersedes page xxvi of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
MK 231	Bomb Hydrostatic Fuze	10-18	10/01/82
MK 233	Bomb Hydrostatic Fuze	10-18	10/01/82
MK 235	Bomb Impact Fuze	10-18	10/01/82
MK 236	Bomb Impact Fuze	10-18	10/01/82
MK 237	Bomb Long Delay Fuze	10-18	10/01/82
MK 238	Bomb Long Delay Fuze	10-18	10/01/82
MK 239	Bomb Impact Fuze	10-18	10/01/82
MK 240	Bomb Hydrostatic Fuze	10-18	10/01/82
T241	PD Fuze	10-18	10/01/82
T243	PD SD Fuze	10-18	10/01/82
MK 245	Bomb Impact Fuze	10-18	10/01/82
T248	PD Fuze	10-18	10/01/82
T251	PD Fuze	10-18	10/01/82
T254	PD Fuze	10-18	10/01/82
T268	PD SD Fuze	10-18	10/01/82
T290	Time Fuze	10-19	10/01/82
T295	ET SQ Fuze	10-19	10/01/82
MK 301	GM Proximity Fuze	10-19	10/01/82
MK 303 Mod 2	GM Proximity Fuze	10-19	10/01/82
MK 305 Mod 2	GM Impact Fuze	10-19	10/01/82
MK 308 Mod 3	GM Proximity Fuze	10-19	10/01/82
MK 309 Mod 2	GM Proximity Fuze	10-19	10/01/82
MK 311	GM Dummy Fuze	10-19	10/01/82
MK 313 Mod 1	GM Dummy Fuze	10-19	10/01/82
MK 315	GM Proximity Fuze	10-19	10/01/82
MK 316	GM Proximity Fuze	10-19	10/01/82
T317	MT Fuze	10-19	10/01/82
MK 317	GM Impact Fuze	10-19	10/01/82
T318	MT SQ Fuze	10-19	10/01/82
MK 319 Mod 2	GM Proximity Fuze	10-19	10/01/82
MK 322 Mod 2	GM Proximity Fuze	10-20	10/01/82
MK 323 Mod 2	GM Proximity Fuze	10-20	10/01/82
MK 325 Mod 3	GM Proximity Fuze	10-20	10/01/82
MK 327 Mod 0	Bomb Proximity Fuze	10-20	10/01/82
T330	MT SQ Fuze	10-20	10/01/82
T341	Time Fuze	10-20	10/01/82
T344	MT Fuze	10-20	10/01/82
T345	MT Fuze	10-20	10/01/82
EX 353	MT PD Fuze	10-20	10/01/82
EX 354	MT PD Fuze	10-20	10/01/82
EX 355	PD Fuze	10-20	10/01/82
T356	PD Fuze	10-20	10/01/82
EX 356	MT PD Fuze	10-20	10/01/82
EX 364	Rocket Time Fuze	10-20	10/01/82
EX 368	Target Detecting Device	10-20	10/01/82
EX 373	Aux Det Fuze	10-21	10/01/82
EX 385	PD Fuze	10-21	10/01/82
EX 386	PD Fuze	10-21	10/01/82
EX 397	Proximity Fuze	10-21	10/01/82
MK 401	GM Proximity Fuze	10-21	10/01/82
EX 408	Proximity Fuze	10-21	10/01/82
EX 409	GM Proximity Fuze	10-21	10/01/82

Supersedes page xxvii of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
EX 410	Proximity Fuze	10-21	10/01/82
M418	Rocket MT Fuze	10-21	10/01/82
M419	Rocket MT Fuze	10-21	10/01/82
XM422	Rocket MT Training Fuze	10-21	10/01/82
XM430	Rocket Proximity Fuze	10-21	10/01/82
XM437	Rocket Practice Fuze	10-21	10/01/82
XM441	Rocket PD Fuze	10-21	10/01/82
M512	MT Fuze	10-21	10/01/82
M523	MT SQ Fuze	10-22	10/01/82
XM529	MT SQ Fuze	10-22	10/01/82
M542	MT Fuze	10-22	10/01/82
XM544E1	PD Fuze	10-22	10/01/82
XM545	Dummy Fuze	10-22	10/01/82
XM546	Proximity Fuze	10-22	10/01/82
XM547	MT Fuze	10-22	10/01/82
XM554	MT SQ Fuze	10-22	10/01/82
XM556	MT SQ Fuze	10-22	10/01/82
XM575	MT SQ Fuze	10-22	10/01/82
M576	PD Fuze	10-22	10/01/82
XM595	MT Fuze	10-22	10/01/82
M600	AT Mine Fuze	10-22	10/01/82
M601	AT Mine Fuze	10-23	10/01/82
M602	AT Mine Fuze	10-23	10/01/82
XM610	AT Mine Fuze	10-23	10/01/82
XM613	AT Mine Fuze	10-23	10/01/82
XM614	AT Mine Fuze	10-23	10/01/82
XM615	AT Mine Fuze	10-23	10/01/82
XM618	AT Mine Influence Fuze	10-23	10/01/82
XM623	AT Mine Fuze	10-23	10/01/82
XM714E3	PD SD Fuze	10-23	10/01/82
XM714E4	PD SD Fuze	10-23	10/01/82
XM721	MT Fuze	10-23	10/01/82
XM725	PD Fuze	10-23	10/01/82
XM729	PD Fuze	10-23	10/01/82
XM760	PD SD Fuze	10-23	10/01/82
XM801	GM BD SD Fuze	10-23	10/01/82
XM803	GM Impact Fuze	10-23	10/01/82
XM806	GM Proximity Fuze	10-24	10/01/82
M807	GM Proximity Fuze	10-24	10/01/82
XM808	GM Proximity Fuze	10-24	10/01/82
XM809	GM MT Fuze	10-24	10/01/82
XM810	GM Proximity Fuze	10-24	10/01/82
M900	Bomb Impact Fuze	10-24	10/01/82
XM911	Bomblet Impact Fuze	10-24	10/01/82
XM919	Bomb MT Fuze	10-24	10/01/82
XM920E2	Bomb MT Fuze	10-24	10/01/82
XM921	Bomb MT Fuze	10-24	10/01/82
XM923	Bomb Impact Fuze	10-24	10/01/82
XM924	Bomb Impact Fuze	10-24	10/01/82
M925	Bomb Impact Fuze	10-24	10/01/82
XM926	Bomblet AD Fuze	10-25	10/01/82
XM927	Bomblet AD Fuze	10-25	10/01/82

Supersedes page xxviii of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CONTENTS

MODEL	TYPE	CHAPTER-PAGE	DATE OF INFO.
XM929	Bomb Impact Fuze	10-25	10/01/82
T1010	Rifle Grenade Fuze	10-25	10/01/82
T1013	Hand Grenade Fuze	10-25	10/01/82
T1016	Hand Grenade Fuze	10-25	10/01/82
T1018	Hand Grenade Fuze	10-25	10/01/82
T1019	Hand Grenade Fuze	10-25	10/01/82
T1201	AP Mine Fuze	10-25	10/01/82
T1204	AP Mine Fuze	10-25	10/01/82
T1209	AT Mine Influence Fuze	10-25	10/01/82
T1222	AT Mine Influence Fuze	10-25	10/01/82
T1225	AT Mine Influence Fuze	10-25	10/01/82
T1227	AT Mine Influence Fuze	10-25	10/01/82
T1230	AP Mine Fuze	10-26	10/01/82
T1232	AT Mine Fuze	10-26	10/01/82
T1408	GM Fuze	10-26	10/01/82
T2003	Rocket PI BD Fuze	10-26	10/01/82
T2006	Rocket PD Fuze	10-26	10/01/82
T2009	Rocket PI BD Fuze	10-26	10/01/82
T2013	Rocket PD Fuze	10-26	10/01/82
T2017	Rocket Proximity Fuze	10-26	10/01/82
T2026	Rocket PD Fuze	10-26	10/01/82
T2032	Rocket ET Fuze	10-26	10/01/82
T2035	Rocket Proximity Fuze	10-26	10/01/82
T2045	Rocket Time Fuze	10-26	10/01/82
T2059	Rocket PD Fuze	10-26	10/01/82
T2067	Rocket Time Fuze	10-26	10/01/82

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CHAPTER 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

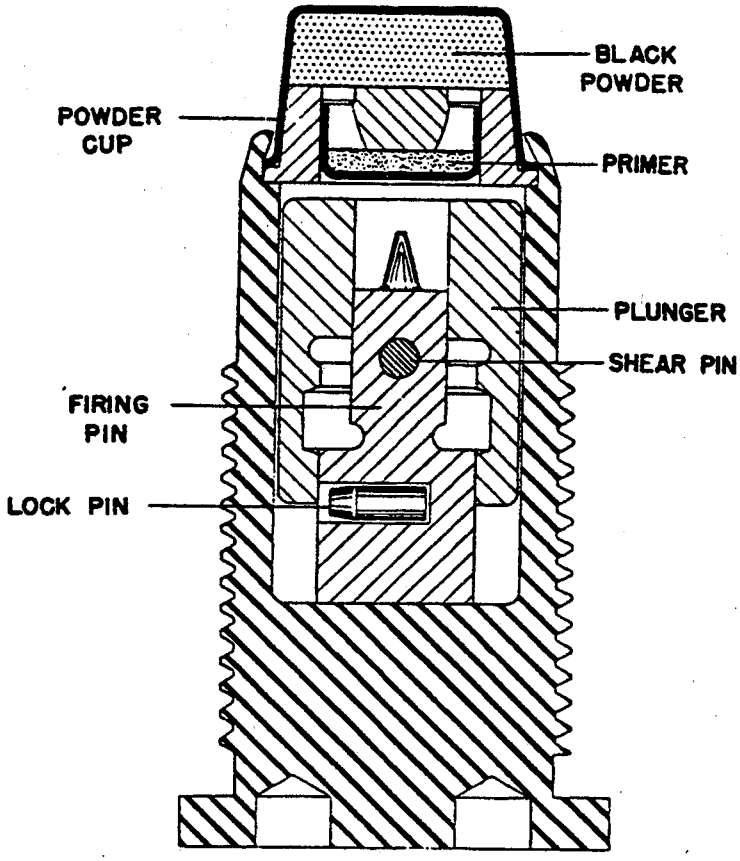

- OVERALL SIZE -	- INTRUSION -	WT:
LG: 1.75 in (44.5 mm)	DP:	THD: 0.722-18LH *
XSECT: 0.875 in (22.2 mm)	DIA: 0.63 in (16.0 mm)	THD DP: 0.80 in (20.3 mm)

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G41
CONTACT:
PHONE:
STATUS: Obsolete
USER: Navy
ASSY DWG: 57 331
PARTS LIST:
SPEC:
PUB:

NATIONAL STOCK NO:
NA
DODIC: NA
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY:

GENERAL
WEAPON: 3-in/23, 1 pdr/40,
3 pdr/50,
6 pdr/40/42/45/50
AMMUNITION:
Common

LOCATION: Base
BALLISTIC LEVELS:
ROTATION:
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: Doesn't meet MIL-STD-331
SETTERS: None

Supersedes page 1-3 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback

SECOND SAFETY:
Spin

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
None

EXPLOSIVE COMPONENTS

S&A DEVICE: In-line explosive train

PRIMER: Yes

DETONATOR: None

LEAD: None

BOOSTER: Black powder

OTHER:

FUNCTIONING DATA

MODES: BD
TYPE: Mechanical, pyrotechnic
CHARACTERISTICS:
Instantaneous

TARGET: Ground
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

The Mk 2 Mod 9 Base Ignition Fuze consists of a brass fuze body housing a firing pin and a plunger assembly. The firing pin and plunger are locked together by a copper shear pin, in the unarmed position. A primer and black powder magazine are crimped to the upper end of the fuze body. When the projectile is fired from the gun, the force of setback drives the plunger back towards the head of the fuze, shearing the copper pin locking the plunger to the firing pin. When the plunger has moved back sufficiently, centrifugal force moves the lock pin in the firing pin into the groove cut in the interior of the plunger body. The two units are again locked together, but the plunger is now in the lower position. There is no anticreep spring. After setback, nothing prevents forward motion of the plunger and firing pin towards the primer. On impact inertia forces both the plunger and the firing pin forward, driving the firing pin into the primer and initiating the black powder ignition charge. This fires the black powder/TNT main charge in the projectile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 3 MOD 0,2, FUZE, BD

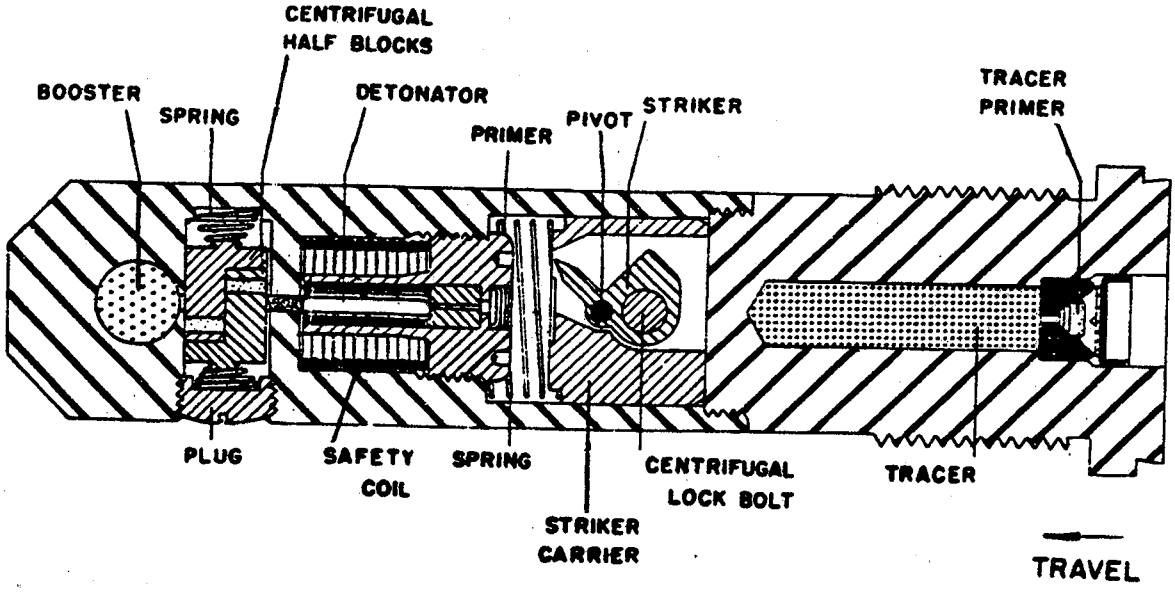

IDENTIFICATION

Agency	NSWC, Code G44 A. Munach AV 290-1970
Status	Obsolete
Ass'y Dwg. No.	GA 58460 (MOD 2)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	
Location	Base
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 3 MOD 0,2, FUZE, BD

ARMING DATA

Method

Delay

Rotation (rps)

Non-arm Arm

Setback (g)

Non-arm Arm

Arming Wire No

External Indicat. No

PHYSICAL DATA

Weight

Total Length (in.)

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action BD

Type Mechanical

Delay

Time Type

Time Setting (sec)

Target Ground

Sensitivity

Material

Thickness (in.)

Max Obliq. (°)

Velocity (fps)

Carrier

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M5, FUZE, TIME

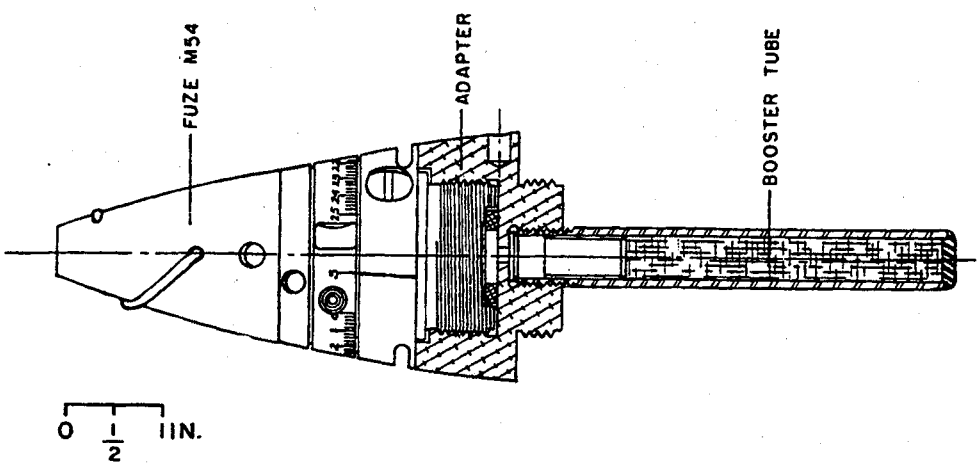

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T S. Honickman AV 880-3174
Status	Obsolete
Ass'y Dwg. No.	73-3-181
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	4.2 in.
Location	Nose
Use	HE
MIL-STD's	331, Tests 101, 102
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M5, FUZE, TIME

ARMING DATA

Method	Spin, setback
Delay	
Rotation (rps)	
Non-arm	25
Arm	33
Setback (g)	
Non-arm	
Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	8.03
Body Diam. (in.)	
Intrusion	5.06 in.
Thread Size	1.7-14NS-1A

FUNCTIONING DATA

Action	PD, SQ, time
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	25
Target	Antipersonnel
Sensitivity	
Material	Wood screen
Thickness (in.)	1
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M39
Detonator	M24
Booster	

REMARKS

Fuze is essentially a M54 time fuze with adapter for use in 4.2 in. mortar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

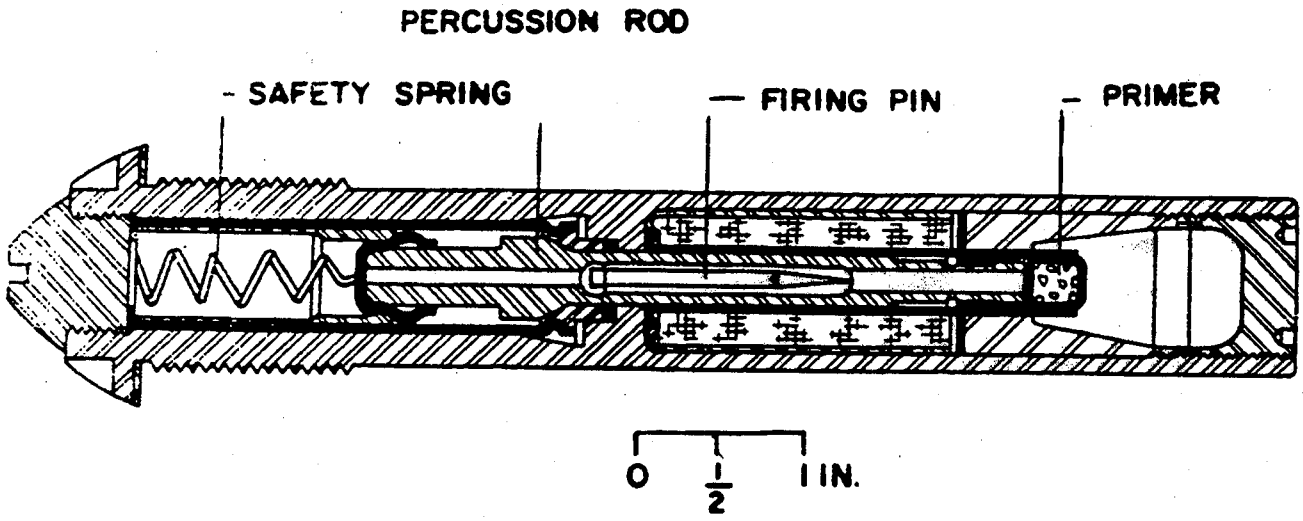

- OVERALL SIZE -	- INTRUSION -	
LG: 7.81 in (198.4 mm)	DP: Unknown	WT: Unknown
XSECT: 1.62 in (41.1 mm)	DIA: 1.12 in (28.4 mm)	THD: 1.257-10RH
		THD DP: 1.27 in (32.3 mm)

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G402
CONTACT: Bagnall, J
PHONE: DSN 290-2791
STATUS: Obsolete
USER: Navy
ASSY DWG: 51 757
PARTS LIST: LD 41 204
SPEC: Unknown
PUB: None

NATIONAL STOCK NO:
None
DODIC: None
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY:

GENERAL
WEAPON: 7-in/45 Field Marine Shore Batteries

AMMUNITION:
HE

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: Unknown
SETBACK: Unknown
VELOCITY: Unknown

CREEP: Unknown
FLIGHT TIME: Unknown
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 1-9 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Fuze arms and functions simultaneously. Detonator held out of alignment until impact.

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Yes, composition unknown

LEAD: None

BOOSTER: Yes, composition unknown

OTHER: None

FUNCTIONING DATA

MODES: PD
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Personnel, material
SENSITIVITY:
Unknown

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
PD

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
Prior to firing, the percussion rod is held in place by a safety spring and the rolled edges of its upper cap. The detonator is positioned in a safety chamber away from the booster. On impact, inertia of the percussion rod drives the rolled edges of its upper cap past the shoulder of the cap retaining sleeve. The percussion rod is slotted longitudinally, permitting it to slide forward around ears on the firing pin. The ears engage the firing pin retaining sleeve holding the firing pin stationary with respect to the fuze body. The percussion rod continues into the upper portion of the fuze body, against the force of the safety spring. The detonator moves forward with the rod out of the safety chamber and in line with the booster initiating against the fixed firing pin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

PERCUSSION ROD

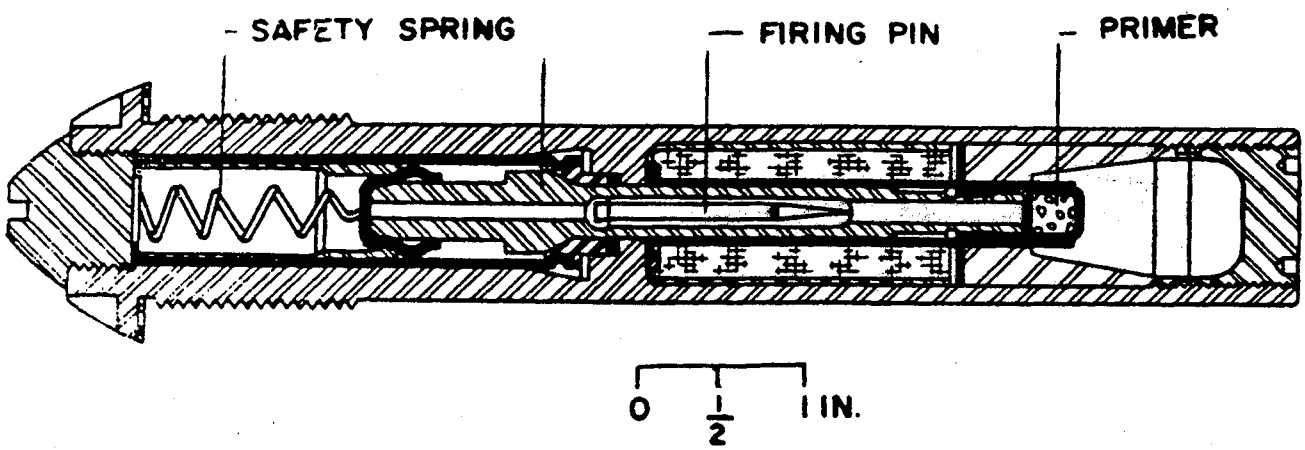

- OVERALL SIZE -	- INTRUSION -	
LG: 7.81 in (198.4 mm)	DP: Unknown	WT: Unknown
XSECT: 1.62 in (41.1 mm)	DIA: 1.12 in (28.4 mm)	THD: 1.257-10RH
		THD DP: 1.27 in (32.3 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 55 189
- PARTS LIST: LD 41 942
- SPEC: Unknown
- PUB: None

NATIONAL STOCK NO:
None
DODIC: None
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY:

GENERAL
- WEAPON: 7-in/45 Field Marine Shore Batteries

AMMUNITION:
HE

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: Unknown
- SETBACK: Unknown
- VELOCITY: Unknown

CREEP: Unknown
FLIGHT TIME: Unknown
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Fuze arms and functions simultaneously. Detonator held out of alignment until impact.

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Yes, composition unknown

LEAD: None

BOOSTER: Yes, composition unknown

OTHER: None

FUNCTIONING DATA

MODES: PD
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Personnel, material
SENSITIVITY:
Unknown

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
PD

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
Prior to firing, the percussion rod is held in place by a safety spring and the rolled edges of its upper cap. The detonator is positioned in a safety chamber away from the booster. On impact, inertia of the percussion rod drives the rolled edges of its upper cap past the shoulder of the cap retaining sleeve. The percussion rod is slotted longitudinally, permitting it to slide forward around ears on the firing pin. The ears engage the firing pin retaining sleeve holding the firing pin stationary with respect to the fuze body. The percussion rod continues into the upper portion of the fuze body, against the force of the safety spring. The detonator moves forward with the rod out of the safety chamber and in line with the booster initiating against the fixed firing pin.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

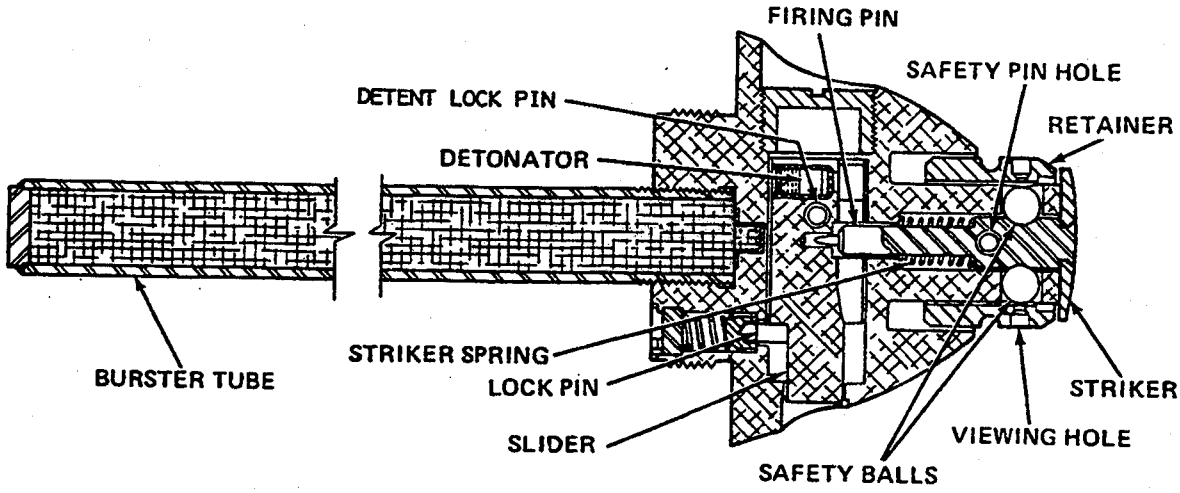

- OVERALL SIZE -	- INTRUSION -	
LG: 16.25 in (414 mm)	DP: 14.1 in (358.1 mm)	WT: 1.90 lb (861 g)
XSECT: 2.76 in (70.2 mm)	DIA: 0.62 in (15.8 mm)	THD: 1.7-14UNS-2A
		THD DP:

IDENTIFICATION
AGENCY: ARDEC, SMCAR-AEF-C
CONTACT:
PHONE: DSN 880-
STATUS: Obsolete
USER: Army
ASSY DWG: 73-2-311
PARTS LIST:
SPEC:
PUB: TM 43-0001-28

NATIONAL STOCK NO:
1390-00-985-4415
DODIC: N338
PRIOR MODEL NO:
SIMILAR TO: M9

REPLACES: M2
REPLACED BY:

GENERAL
WEAPON: M2 & M30 4.2-in Mortar

AMMUNITION:
M2 Series Gas Cartridges

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: 49 to 119 rps
SETBACK: 2000 to 8000 g
VELOCITY: 345 to 840 ft/s
(105 to 256 m/s)

CREEP: NA
FLIGHT TIME: NA
SAFETY STD: Doesn't meet MIL-STD-1316B
SETTERS: None

Supersedes page 1-11 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Pull wire

SECOND SAFETY:
Setback: 600 g arm
500 g no arm

OTHER SAFETY:
Spin, slight

SAFE/ARM INDICATION:
Yes

ARMING TIME OR DISTANCE:
None, bore safe only

EXPLOSIVE COMPONENTS

S&A DEVICE: Shear pin

PRIMER: None

DETONATOR: M22 Stab

LEAD: None

BOOSTER: 65 g Tetryl

OTHER: None

FUNCTIONING DATA

MODES: SQ
TYPE: Mechanical
CHARACTERISTICS:
SQ

TARGET: Gnd - Pers, Screening
SENSITIVITY:
NA

FUNCTION TEMP:
-40 to +52 deg C
MODE ON DELIVERY:
SQ

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0408
US HCSDS:
UN CL/DIV SCG: 1.1 D
US DOT SHIP CL: A
NET EXPL WT: 65.27 g
NET PROP WT: None
STORAGE TEMP: -62 deg C 3 days max
+71 deg C 4 hr/day max

REMARKS/DESCRIPTION:
In the safe position, the slider is restrained by a setback pin and the firing pin. The firing pin is restrained by a pull wire, shear wire, and two centrifugal ball detents. The safety pull wire is removed from the retainer and body. On firing acceleration, a pin moves back out of slider partially releasing the slider and the retainer moves back, cutting the shear pin and releasing the two ball detents which were locking the striker to the retainer. Centrifugal force moves these balls outward and with the firing pin spring move the striker and firing pin assembly forward completely releasing the slider. Centrifugal force moves the slider to the armed position and locks it with a spin detent. On impact, the firing pin functions the M22 Detonator. The M9 Fuze is the same as the M8, except that it has a booster for HE loaded shells instead of a burster for chemical shells.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

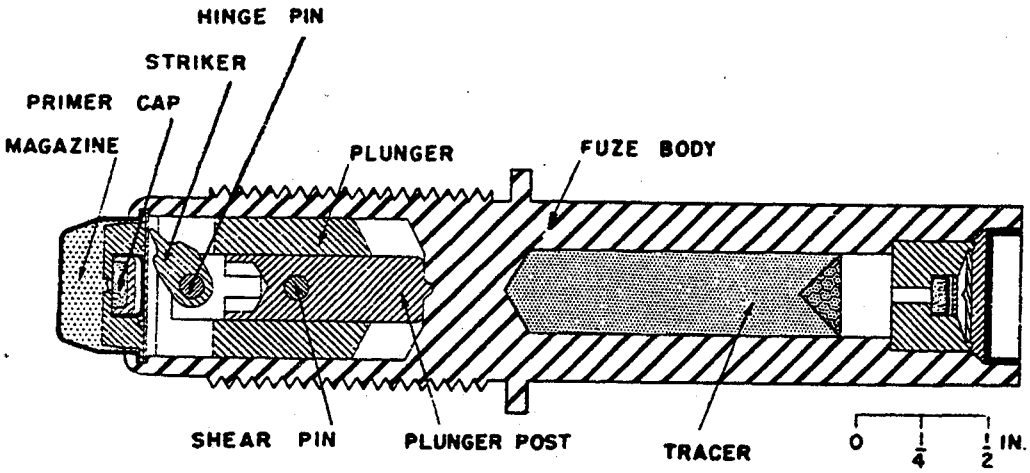

- OVERALL SIZE -	- INTRUSION -	WT: 0.286 lb (130 g)
LG: 3.61 in (92 mm)	DP:	THD: 1.375-20LH
XSECT: 0.875 in (22 mm)	DIA:	THD DP: 1.0 in (25.4 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: See remarks
- PARTS LIST: LD 41 668 (Mod 1)
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 1, 3, & 6 pounder; 3-in/32; 3-in/50

- AMMUNITION:
  - GP, AP

LOCATION: Base
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 1-13 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: Not identified

DETONATOR:

LEAD:

BOOSTER: Magazine charge

OTHER: Tracer

FUNCTIONING DATA
MODES: BD
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Ground
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
The body of the fuze is made of brass or bronze and contains the plunger and the plunger post which is fitted to the plunger by a shear pin. The striker is attached by a hinge pin to the plunger. The primer-magazine unit is held to the body by upsetting the end inward. Setback cuts the shear pin allowing the plunger to ride back on the plunger post. This motion carries the striker, which straightens out as it enters the recess in the end of the plunger post and then points at the primer cap. The firing pin is not aligned with the primer until after setback and cannot be aligned until the plunger has moved relative to the plunger post. On impact, the plunger and plunger post go forward together and fire the primer, which ignites the magazine.
Mod 0, Dwg 58 506. Mod 1, LD 41 668, similar to Mod 0 except for tracer. Mod 4 has longer body than Mod 5 and integral external tracer assembly. Mod 6, Dwg 56 193.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

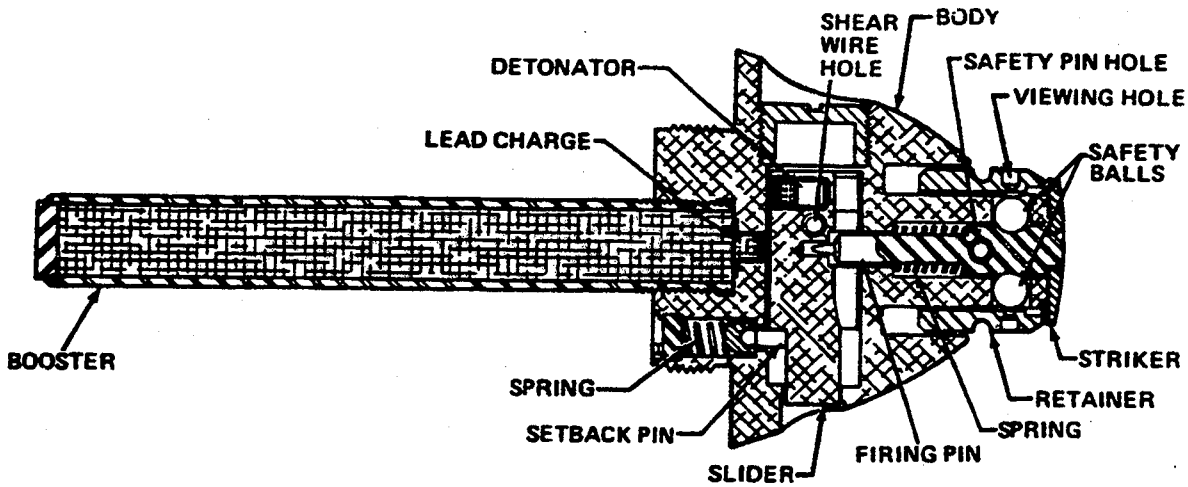

- OVERALL SIZE -	- INTRUSION -	WT: 0.98 lb (444 g)
LG: 6.87 lb (174 mm)	DP: 4.7 in (119 mm)	THD: 1.7-14UNS-2A
XSECT: 2.76 in (70.2 mm)	DIA: 0.62 in (15.8 mm)	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-C
- CONTACT:
- PHONE: DSN 880-
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-2-312
- PARTS LIST:
- SPEC:
- PUB: TM 43-0001-28

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO: M8

- REPLACES: M3
- REPLACED BY:

GENERAL
- WEAPON: M2 & M30 4.2-in Mortar

- AMMUNITION:
  - HE

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 49 to 119 rps
- SETBACK: 2000 to 8000 g
- VELOCITY: 345 to 840 ft/s (105 to 256 m/s)

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: Doesn't meet MIL-STD-1316B
SETTERS: None

Supersedes page 1-15 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Pull wire

SECOND SAFETY:
Setback: 600 g arm
500 g no arm

OTHER SAFETY:
Spin, slight

SAFE/ARM INDICATION:
Yes

ARMING TIME OR DISTANCE:
None, bore safe only

EXPLOSIVE COMPONENTS

S&A DEVICE: Shear pin

PRIMER: None

DETONATOR: M22 Stab

LEAD: None

BOOSTER: 65 g Tetryl
(0.63 in dia x 4.667 in long)

OTHER: None

FUNCTIONING DATA

MODES: SQ
TYPE: Mechanical
CHARACTERISTICS:
SQ

TARGET: Ground personnel
SENSITIVITY:
NA

FUNCTION TEMP:
-40 to +52 deg C
MODE ON DELIVERY:
SQ

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0408
US HCSDS:
UN CL/DIV SCG: 1.1 D
US DOT SHIP CL: A
NET EXPL WT: 65.27 g
NET PROP WT: None
STORAGE TEMP: -62 deg C 3 days max
+71 deg C 4 hr/day max

REMARKS/DESCRIPTION:
In the safe position, the slider is restrained by a setback pin and the firing pin. The firing pin is restrained by a pull wire, shear wire, and two centrifugal ball detents. The safety pull wire is removed from the retainer and body. On firing acceleration, a pin moves back out of slider partially releasing the slider and the retainer moves back, cutting the shear pin and releasing the two ball detents which were locking the striker to the retainer. Centrifugal force moves these balls outward and with the firing pin spring move the striker and firing pin assembly forward completely releasing the slider. Centrifugal force moves the slider to the armed position and locks it with a spin detent. On impact, the firing pin functions the M22 Detonator. The M8 Fuze is the same as the M9, except that it has a burster for chemical shells instead of a booster for HE shells.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

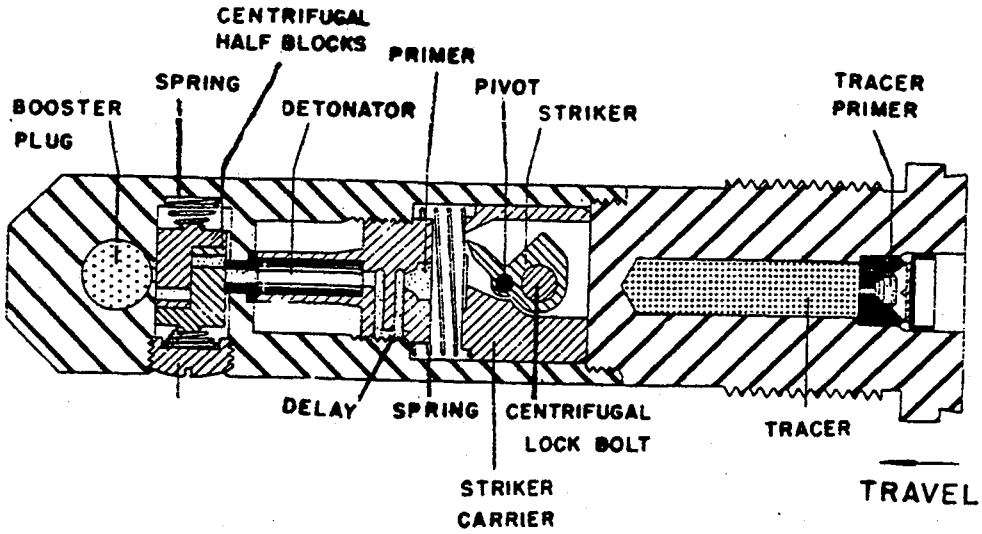

- OVERALL SIZE -	- INTRUSION -	WT:
LG: 6.62 in (168 mm)	DP:	THD: 1.50-12LH
XSECT: 1.8 in (46 mm)	DIA:	THD DP: 1.25 in (32 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 59 370 (Mod 0)
- PARTS LIST: LD 41 820
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 6-in to 16-in guns

- AMMUNITION:
  - HE, AP and common projectiles

LOCATION: Base
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 1-17 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: Not identified

LEAD: Not identified

BOOSTER: Not identified

OTHER: Tracer primer;
Tracer charge

FUNCTIONING DATA

MODES: BD
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Ground
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, the tracer primer functions and ignites the tracer. Centrifugal force, causes the centrifugal lock bolts and the centrifugal half-blocks to move outward against their springs. This aligns the booster lead-ins in the half blocks and unlocks the pivoted striker. Since the striker is heavily weighted on its lower end, centrifugal force rotates the striker about its pivot and brings the striker point into alignment with the primer. The shape of the striker prevents centrifugal force from aligning it with the primer while the projectile is still in the bore of the gun. On impact, the striker carrier moves forward against its spring, bringing the striker against the primer, which fires the delay element and the detonator. The flash from the detonator initiates the stemmed lead-ins in the half-blocks, the booster charge, and finally the projectile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 10, FUZE, BD

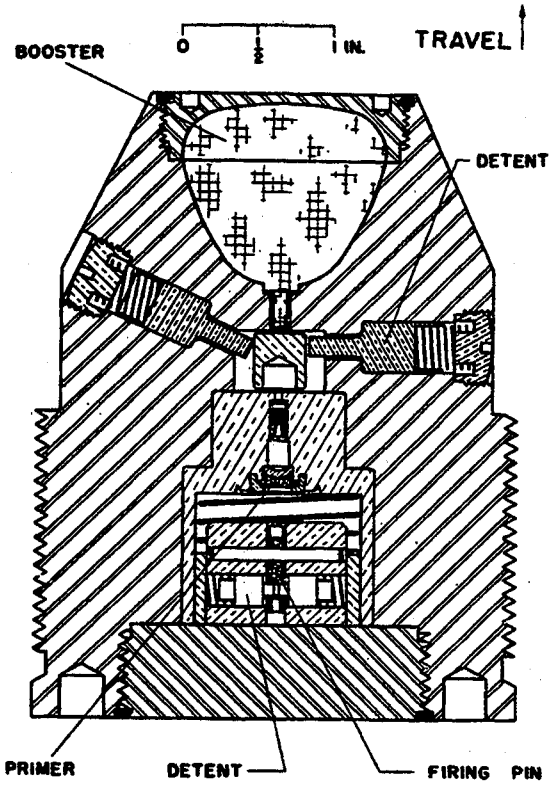

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Obsolete
Ass'y Dwg. No.	B-2-74
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	155 mm, 6 in.
Location	Base
Use	AP
MIL-STD's	331, Tests 101, 102
Max Values	
Rotat. (rps)	220
Setback (g)	11,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 10, FUZE, BD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	19
Arm	24
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	9.22 lb
Total Length (in.)	4.28
Body Diam. (in.)	
Intrusion	3.55 in.
Thread Size	3.6-6NS-2A (LH)

FUNCTIONING DATA

Action	BD, delay
Type	Mechanical
Delay	0.04 - 0.06 sec
Time Type	
Time Setting (sec)	
Target	Ships
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M21
Booster	Tetryl

REMARKS

Identical to Fuze M60.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

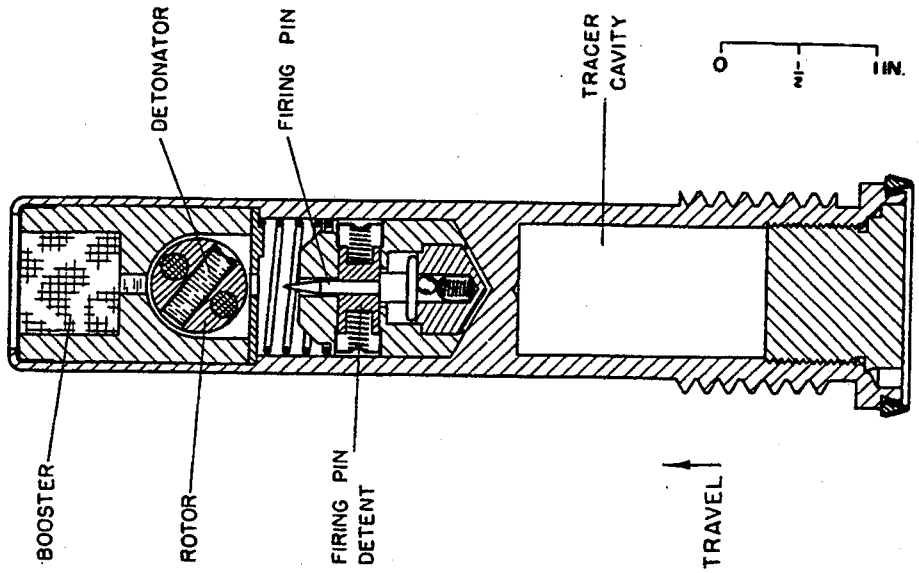

- OVERALL SIZE -	- INTRUSION -	
LG: 5.80 in (147 mm)	DP:	WT: 0.897 lb (407 g)
XSECT: 1.26 in (32 mm)	DIA:	THD: 1.25-7NS-3LH
		THD DP:

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G402
CONTACT: Bagnall, J
PHONE: DSN 290-2791
STATUS: Obsolete
USER: Navy
ASSY DWG: See remarks
PARTS LIST: See remarks
SPEC: See remarks
PUB:

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY: Mk 28

GENERAL
WEAPON: 5-in/25, 5-in/38

AMMUNITION:
AA, common projectiles

LOCATION: Base
BALLISTIC LEVELS:
ROTATION: 210 rps
SETBACK: 14.500 g
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 1-21 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 45 rps, none arm;
67 rps, all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: Information not available

LEAD:

BOOSTER: Information not available

OTHER:

FUNCTIONING DATA

MODES: BD, SQ
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Ground
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

On firing, centrifugal force moves the firing pin detents out against their springs, releasing the firng pin. When the detents are out, the compressed spring moves the firing pin forward and the locking ball moves into the place formerly occupied by the firing pin, thus locking it in a forward position. Centrifugal force also moves the rotor detents back against their springs releasing the rotor. Centrifugal force, acting on the lead counterweights in the rotor, causes the rotor to turn until the detonator is in line with the firing pin and booster. In this position, the rotor is dynamically balanced, centrifugal force holding the two lead filled holes at a maximum radius from the axis of the rotation of the fuze. On impact, the firing pin housing, being free to move, rides forward against the weak anti-creep spring causing the firing pin to hit the detonator which sets off the booster in the base of the fuze.

Mods 0-2, dwg 79 686. Mods 3-5, LD 41 239, dwg 79 943, OS 572. Mod 6, dwg 225 389, LD 41 340, OS 2106, arms at 3,000 to 4,000 rpm. Mod 7, dwg 225 576, LD 41386, OS 894.

Supersedes page 1-22 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 15 Mod 0 Rear Fitting Safety Device may be found in MIL-HDBK-145B.

Supersedes pages 1-23 and 1-24 of MIL-HDBK 146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 17 MOD 0-13, FUZE, AUX. DET.

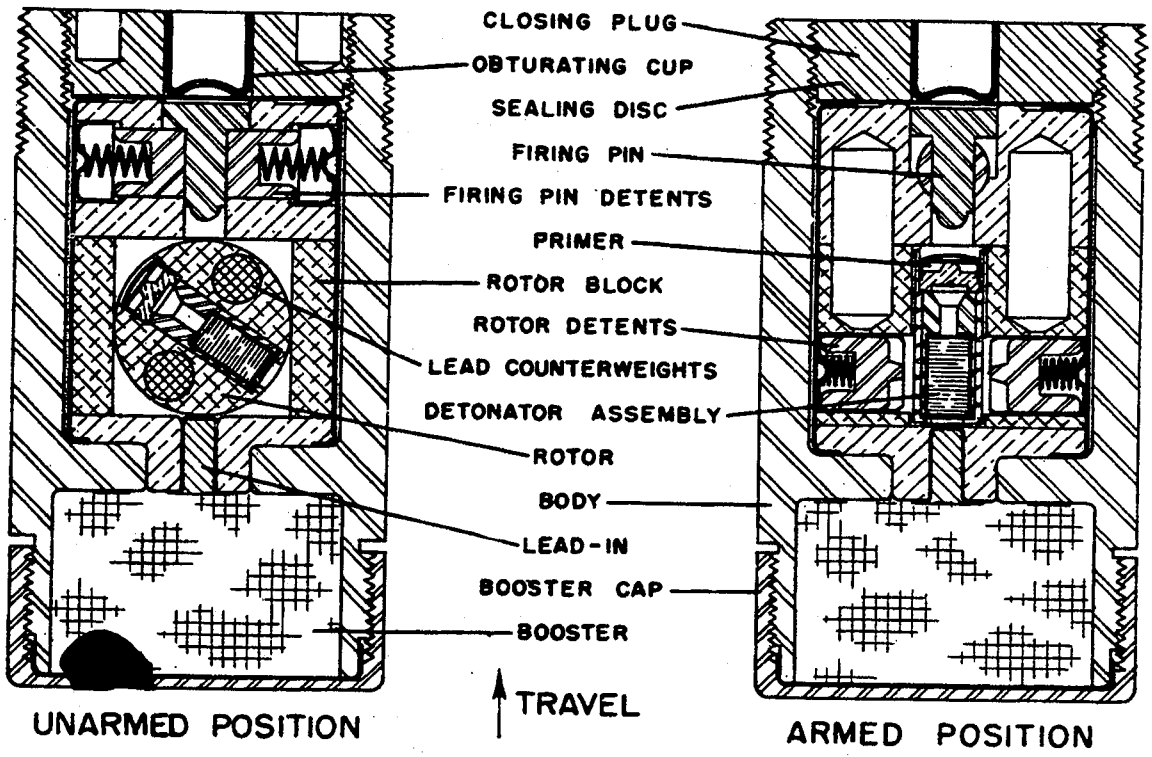

IDENTIFICATION

Agency	NSWC, Code G44 A. Munach AV 290-1970
Status	Obsolete
Ass'y Dwg. No.	GA 190845 (MOD 13)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	3, 5, 6 in.
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	340
Setback (g)	21,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 17 MOD 0-13, FUZE, AUX. DET.

ARMING DATA

Method	Spin
Delay	Bore safe
Rotation (rps)	
Non-arm 50 Arm 75	
Setback (g)	
Non-arm Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.78 lb
Total Length (in.)	2.50
Body Diam. (in.)	
Intrusion	
Thread Size	1.375-20NS

FUNCTIONING DATA

Action	SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl
Lead	Tetryl

REMARKS

MK 17 replaced by MK 46
MK 46 replaced by MK 54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

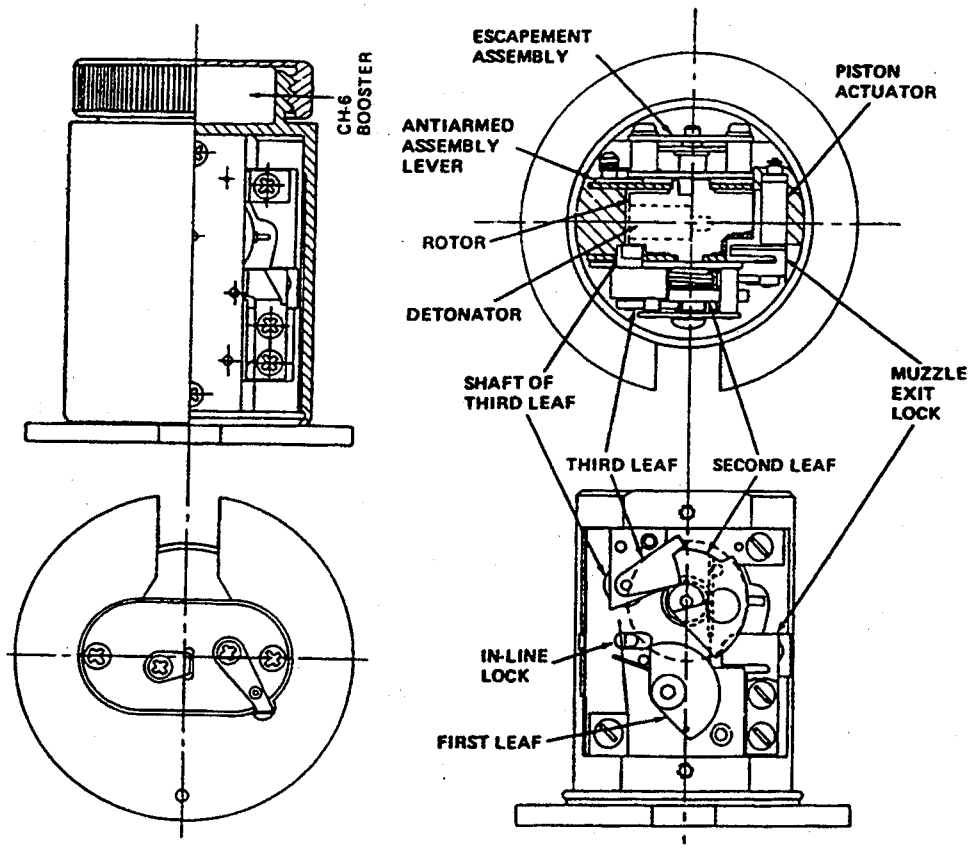

- OVERALL SIZE -	- INTRUSION -	
LG: 2.447 in (62 mm)	DP: 2.324 in (56 mm)	WT: 0.35 lb (159 g)
XSECT: 1.5 in (38 mm)	DIA: 1.5 in (38 mm)	THD: None
		THD DP: NA

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-T
- CONTACT: Beard, J
- PHONE: DSN 290-2420
- STATUS: Terminated
- USER: Navy
- ASSY DWG: 5 021 123
- PARTS LIST: DL 5 021 123
- SPEC: XWS 18712
- PUB: None

NATIONAL STOCK NO:
None
DODIC: None
PRIOR MODEL NO: None
SIMILAR TO: Nothing

REPLACES: Nothing
REPLACED BY: Nothing

GENERAL
WEAPON: 5-in/54 Mk 18 & 19 Guns

AMMUNITION:
5-in guided projectile,
EX 105 and EX 106

LOCATION: Base of warhead
BALLISTIC LEVELS:
- ROTATION: 20 rps
- SETBACK: 7,500 g
- VELOCITY: 2,030 ft/s (619 m/s)

CREEP: NA
FLIGHT TIME: NA
SAFETY STD: STANAG 4187
SETTERS: None

Supersedes page 1-26A of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 375 g, no arm
850 g, all arm

SECOND SAFETY:
Muzzle exit (sensed elsewhere in projectile). Input to ASD is 2,500 erg/min electric pulse

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
0.6 to 1.2 s

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: None

DETONATOR: Mk 96-0 electric

LEAD: 160 mg CH-6

BOOSTER: 8.5 g CH-6

OTHER: Piston actuator used to remove second rotor lock

FUNCTIONING DATA

MODES: Proximity
TYPE: Mechanical
CHARACTERISTICS:
Functions on target detection signal from EX 60 or EX 61 TDD.

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS: 1583 or 1585
UN CL/DIV SCG:
US DOT SHIP CL: A
NET EXPL WT: 8.70 g
NET PROP WT: None
STORAGE TEMP: -54°C to +72°C

REMARKS/DESCRIPTION:
The EX 18 is used to base-detonate the EX 109 Warhead of the EX 105 & EX 106 Guided Projectiles. The ASD keeps the explosive train of the projectile out of line prior to launch and aligns the explosive train after the projectile has travelled a safe distance from the gun. The ASD consists of a housing, a rotor containing a electric detonator, and anti-armed assembly lever, a runaway escapement, a setback system which locks the rotor, a second lock on the rotor, and a piston actuator. The rotor is in the out of line (safe) position prior to launch. During launch, setback causes the setback system to cock a spring which provides the energy to drive the rotor into line. The setback force also removes one lock from the rotor. As the projectile exits the muzzle, a signal is induced elsewhere in the projectile to fire the piston actuator which removes the second lock on the rotor. The rotor then moves to the in-line position. The motion of the rotor is dampened by a runaway escapement providing the necessary arming delay. When the rotor reaches the in-line position, the detonator is connected to the firing circuits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

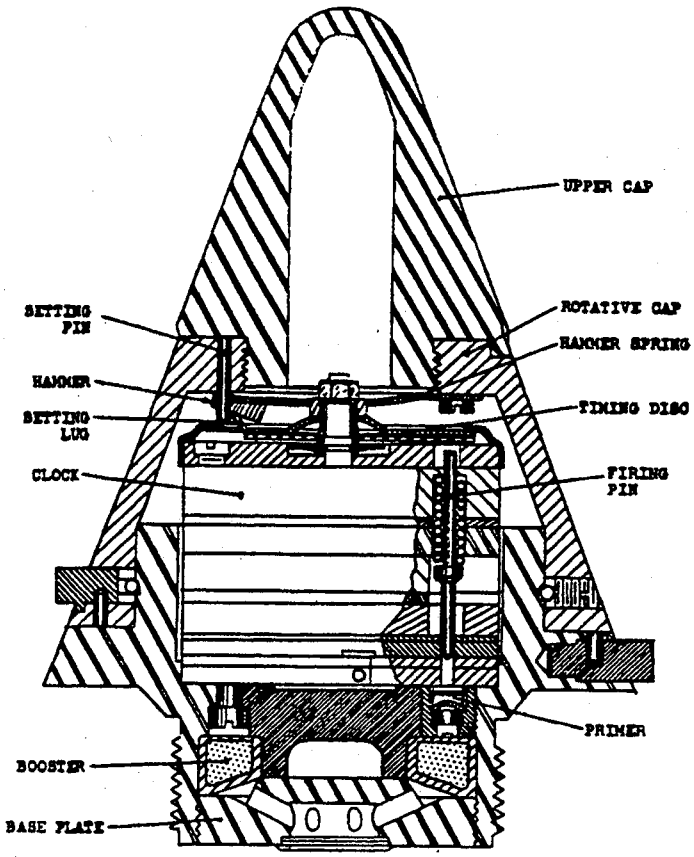

- OVERALL SIZE -	- INTRUSION -	WT: 2.5 lb (1134 g)
LG: 4.313 in (109.6 mm)	DP: 0.803 in (20.4 mm)	THD: 1.7-14NS-1RH
XSECT: 3.05 in (77.5 mm)	DIA: 1.7 in (43.2 mm)	THD DP: 0.81 in (20.6 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army, Navy
- ASSY DWG: 190 845
- PARTS LIST: LD 59 189
- SPEC: OS 2114
- PUB: OP 1212

- NATIONAL STOCK NO: None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 22, Mk 25, Mk 51

- REPLACES:
- REPLACED BY: Mk 50

GENERAL
- WEAPON: 4-in/50, 5-in/25, 5-in/38, 5-in/51, 6-in/47, 6-in/53 guns
- AMMUNITION: HC, AAC, Illumination

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 210 rps
- SETBACK: 14,500 g
- VELOCITY: Unknown

- CREEP: Unknown
- FLIGHT TIME: Unknown

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: Hand

Supersedes page 1-27 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: releases separate locks on timing disc and firing arm shaft.

SECOND SAFETY:
Spin: lever unlocks escapement; 33 rps, no arm; 100 rps, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Unknown

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: FA70 primer mix

DETONATOR: None

LEAD: Black powder relay

BOOSTER: 40 grains (2.6 g) black powder

OTHER: None

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
2.4 to 45 s
Junghans escapement

TARGET: Aircraft
SENSITIVITY:
Unknown

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
Time

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: 2.6 g
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
Rotation of the lower cap to the preset time turns the internal timing disc which is held in place on the main pinion with a friction clutch. Two setback features and one centrifugally operated mechanism maintain fuze safety until firing. On firing, setback and subsequent creep forces release the setting pin from the timing disk through the operation of the hammer weights and setting lug. A separate setback pin moves aft, unlocking the firing arm shaft. A centrifugal safety lever releases the escapement permitting the timer to start. After all safeties are removed, the pinion shaft turns by two sector gears which are powered by centrifugal weights and kick-off springs. The movement is governed by the escapement. At the preset time, a notch in the timing disk engages a lug on the firing arm shaft. The shaft rotates, clearing the firing pin safety plate and releasing the firing pin. The firing pin initiates the percussion primer which subsequently initiates the rest of the explosive train. A safety disk covers the notch in the timing disk when the fuze is set "safe" or below the minimum prescribed setting. Mk 54 AD Fuze used in HC rounds. Mod 0 made at NTS, Newport.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

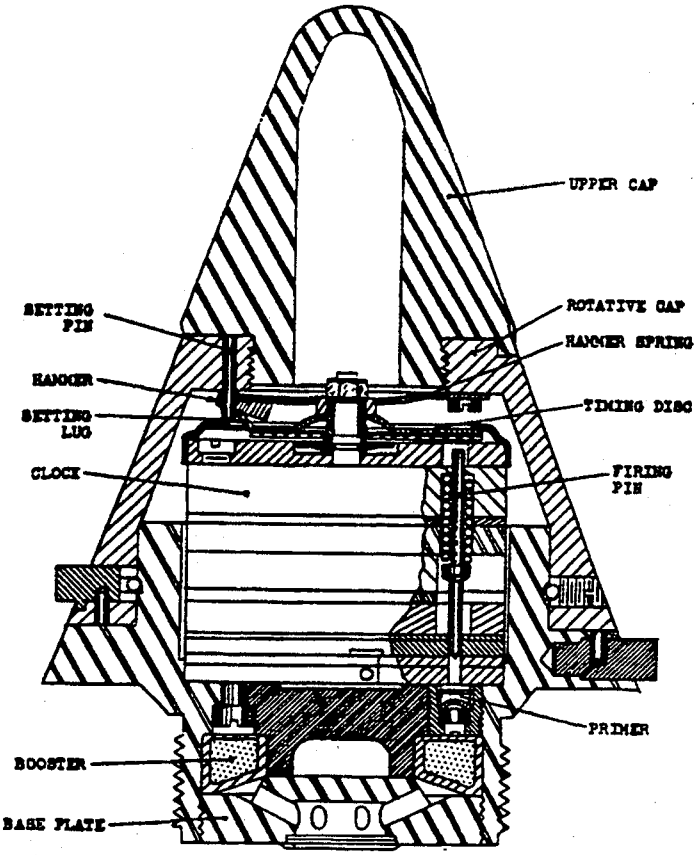

- OVERALL SIZE -	- INTRUSION -	
LG: 4.313 in (109.6 mm)	DP: 0.803 in (20.4 mm)	WT: 2.33 lb (1057 g)
XSECT: 3.05 in (77.5 mm)	DIA: 1.7 in (43.2 mm)	THD: 1.7-14NS-1RH
		THD DP: 0.81 in (20.6 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army, Navy
- ASSY DWG: 219 869
- PARTS LIST: Unknown
- SPEC: OS 2114
- PUB: OP 1212

- NATIONAL STOCK NO: None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 22, Mk 25, Mk 51

- REPLACES:
- REPLACED BY: Mk 50

GENERAL
- WEAPON: 4-in/50, 5-in/25, 5-in/38, 5-in/51, 6-in/47, 6-in/53 guns
- AMMUNITION: HC, AAC, Illumination

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 210 rps
- SETBACK: 14,500 g
- VELOCITY: Unknown

- CREEP: Unknown
- FLIGHT TIME: Unknown

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: Hand

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: releases separate locks on timing disc and firing arm shaft.

SECOND SAFETY:
Spin: lever unlocks escapement; 33 rps, no arm; 100 rps, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Unknown

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: FA70 primer mix

DETONATOR: None

LEAD: Black powder relay

BOOSTER: 40 grains (2.6 g) black powder

OTHER: None

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
2.4 to 45 s
Junghans escapement

TARGET: Aircraft
SENSITIVITY:
Unknown

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
Time

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: 2.6 g
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
Rotation of the lower cap to the preset time turns the internal timing disc which is held in place on the main pinion with a friction clutch. Two setback features and one centrifugally operated mechanism maintain fuze safety until firing. On firing, setback and subsequent creep forces release the setting pin from the timing disk through the operation of the hammer weights and setting lug. A separate setback pin moves aft, unlocking the firing arm shaft. A centrifugal safety lever releases the escapement permitting the timer to start. After all safeties are removed, the pinion shaft turns by two sector gears which are powered by centrifugal weights and kick-off springs. The movement is governed by the escapement. At the preset time, a notch in the timing disk engages a lug on the firing arm shaft. The shaft rotates, clearing the firing pin safety plate and releasing the firing pin. The firing pin initiates the percussion primer which subsequently initiates the rest of the explosive train. A safety disk covers the notch in the timing disk when the fuze is set "safe" or below the minimum prescribed setting. Mk 54 AD Fuze used in HC rounds. Mod 1 made at Frankford Arsenal.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

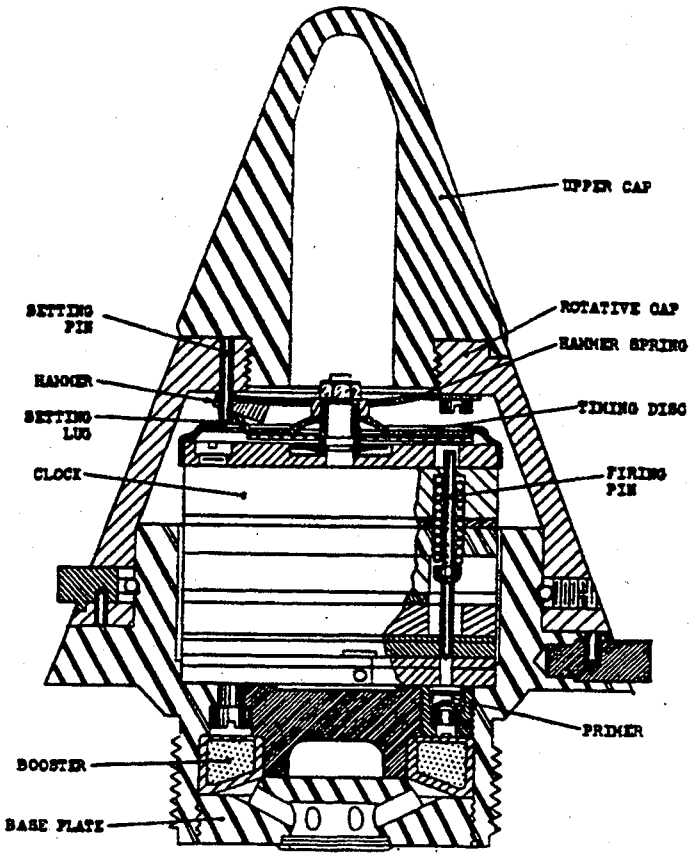

- OVERALL SIZE -	- INTRUSION -	
LG: 4.313 in (109.6 mm)	DP: 0.803 in (20.4 mm)	WT: 2.33 lb (1057 g)
XSECT: 3.05 in (77.5 mm)	DIA: 1.7 in (43.2 mm)	THD: 1.7-14NS-1RH
		THD DP: 0.81 in (20.6 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army, Navy
- ASSY DWG: 439 468
- PARTS LIST: LD 109 332
- SPEC: OS 2114
- PUB: OP 1212

- NATIONAL STOCK NO:
  - None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 22, Mk 25, Mk 51

- REPLACES:
- REPLACED BY: Mk 50

GENERAL
- WEAPON: 4-in/50, 5-in/25, 5-in/38, 5-in/51, 6-in/47, 6-in/53 guns
- AMMUNITION:
  - HC, AAC, Illumination

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 210 rps
- SETBACK: 14,500 g
- VELOCITY: Unknown

- CREEP: Unknown
- FLIGHT TIME: Unknown

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: Hand

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: releases separate locks on timing disc and firing arm shaft.

SECOND SAFETY:
Spin: lever unlocks escapement; 33 rps, no arm; 100 rps, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Unknown

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: FA70 primer mix

DETONATOR: None

LEAD: Black powder relay

BOOSTER: 40 grains (2.6 g) black powder

OTHER: None

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
0.8 to 45 s
Junghans escapement

TARGET: Aircraft
SENSITIVITY:
Unknown

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
Time

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: 2.6 g
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
Rotation of the lower cap to the preset time turns the internal timing disc which is held in place on the main pinion with a friction clutch. Two setback features and one centrifugally operated mechanism maintain fuze safety until firing. On firing, setback and subsequent creep forces release the setting pin from the timing disk through the operation of the hammer weights and setting lug. A separate setback pin moves aft, unlocking the firing arm shaft. A centrifugal safety lever releases the escapement permitting the timer to start. After all safeties are removed, the pinion shaft turns by two sector gears which are powered by centrifugal weights and kick-off springs. The movement is governed by the escapement. At the preset time, a notch in the timing disk engages a lug on the firing arm shaft. The shaft rotates, clearing the firing pin safety plate and releasing the firing pin. The firing pin initiates the percussion primer which subsequently initiates the rest of the explosive train. A safety disk covers the notch in the timing disk when the fuze is set "safe" or below the minimum prescribed setting. Mk 54 AD Fuze used in HC rounds. Mod 2 made at Bendix Aviation, Eclipse Div.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

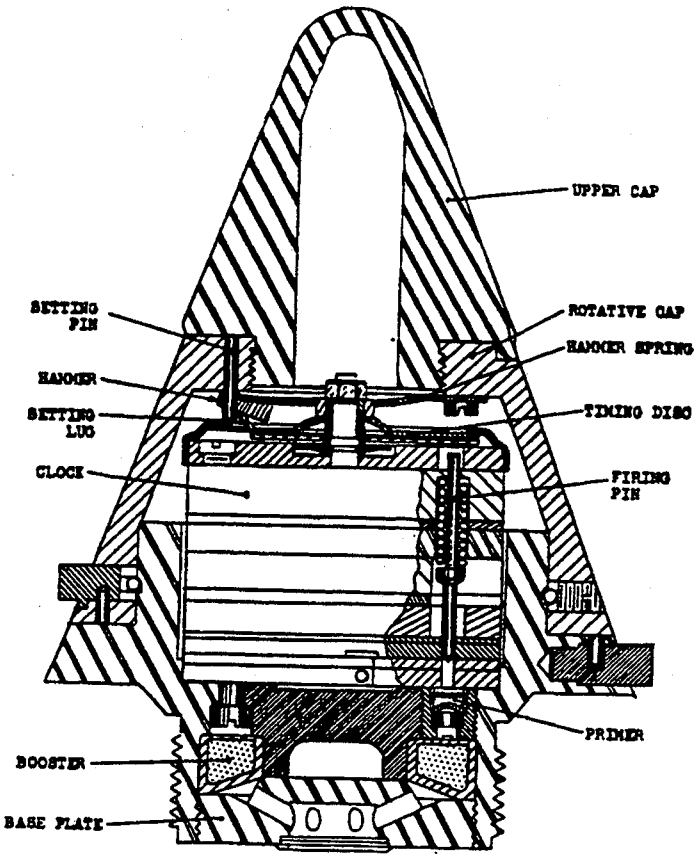

- OVERALL SIZE -	- INTRUSION -	
LG: 4.313 in (109.6 mm)	DP: 0.803 in (20.4 mm)	WT: 2.33 lb (1057 g)
XSECT: 3.05 in (77.5 mm)	DIA: 1.7 in (43.2 mm)	THD: 1.7-14NS-1RH
		THD DP: 0.81 in (20.6 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army, Navy
- ASSY DWG: Unknown
- PARTS LIST: Unknown
- SPEC: OS 2114
- PUB: OP 1212

NATIONAL STOCK NO:
None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 22, Mk 25, Mk 51

- REPLACES:
- REPLACED BY: Mk 50

GENERAL
- WEAPON: 4-in/50, 5-in/25, 5-in/38, 5-in/51, 6-in/47, 6-in/53 guns
- AMMUNITION:
  HC, AAC, Illumination

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 210 rps
- SETBACK: 14,500 g
- VELOCITY: Unknown

- CREEP: Unknown
- FLIGHT TIME: Unknown

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: Hand

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: releases separate locks on timing disc and firing arm shaft.

SECOND SAFETY:
Spin: lever unlocks escapement; 33 rps, no arm; 100 rps, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Unknown

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: FA70 primer mix

DETONATOR: None

LEAD: Black powder relay

BOOSTER: 40 grains (2.6 g) black powder

OTHER: None

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
0.8 to 45 s
Junghans escapement

TARGET: Aircraft
SENSITIVITY:
Unknown

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
Time

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: 2.6 g
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
Rotation of the lower cap to the preset time turns the internal timing disc which is held in place on the main pinion with a friction clutch. Two setback features and one centrifugally operated mechanism maintain fuze safety until firing. On firing, setback and subsequent creep forces release the setting pin from the timing disk through the operation of the hammer weights and setting lug. A separate setback pin moves aft, unlocking the firing arm shaft. A centrifugal safety lever releases the escapement permitting the timer to start. After all safeties are removed, the pinion shaft turns by two sector gears which are powered by centrifugal weights and kick-off springs. The movement is governed by the escapement. At the preset time, a notch in the timing disk engages a lug on the firing arm shaft. The shaft rotates, clearing the firing pin safety plate and releasing the firing pin. The firing pin initiates the percussion primer which subsequently initiates the rest of the explosive train. A safety disk covers the notch in the timing disk when the fuze is set "safe" or below the minimum prescribed setting. Mk 54 AD Fuze used in HC rounds. Mod 3 made at Frankford Arsenal.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

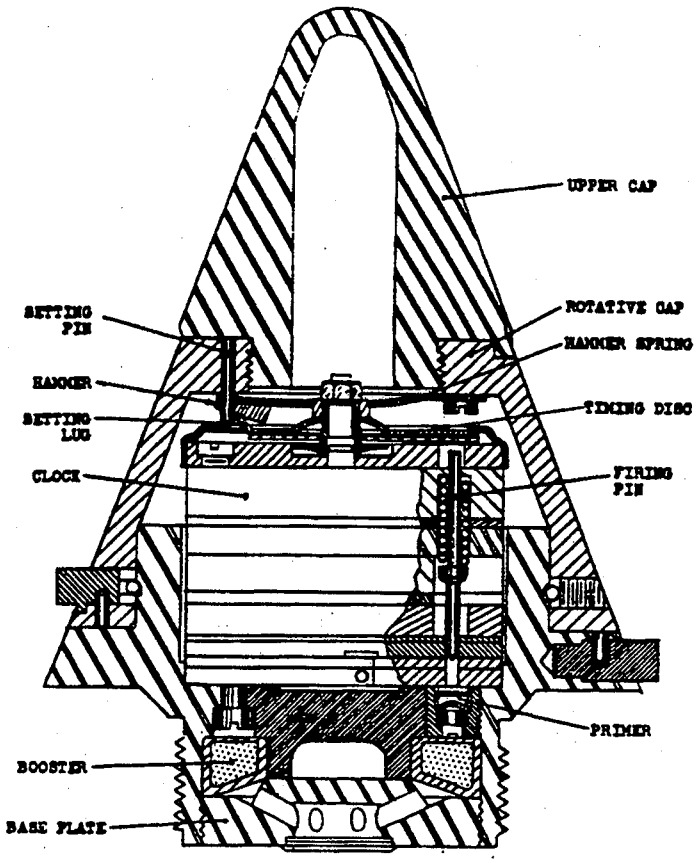

- OVERALL SIZE -	- INTRUSION -	WT: 2.33 lb (1057 g)
LG: 4.313 in (109.6 mm)	DP: 0.803 in (20.4 mm)	THD: 1.7-14NS-1RH
XSECT: 3.05 in (77.5 mm)	DIA: 1.7 in (43.2 mm)	THD DP: 0.81 in (20.6 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army, Navy
- ASSY DWG: 450 500
- PARTS LIST: Unknown
- SPEC: OS 2114
- PUB: OP 1212

NATIONAL STOCK NO:
None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 22, Mk 25, Mk 51

REPLACES:
- REPLACED BY: Mk 50

GENERAL
- WEAPON: 4-in/50, 5-in/25, 5-in/38, 5-in/51, 6-in/47, 6-in/53 guns
- AMMUNITION:
  HC, AAC, Illumination

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 210 rps
- SETBACK: 14,500 g
- VELOCITY: Unknown

- CREEP: Unknown
- FLIGHT TIME: Unknown

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: Hand

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: releases separate locks on timing disc and firing arm shaft.

SECOND SAFETY:
Spin: lever unlocks escapement; 33 rps, no arm; 100 rps, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Unknown

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
0.8 to 45 s
Junghans escapement

TARGET: Aircraft
SENSITIVITY:
Unknown

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
Time

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: FA70 primer mix

DETONATOR: None

LEAD: Black powder relay

BOOSTER: 40 grains (2.6 g) black powder

OTHER: None

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: 2.6 g
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
Rotation of the lower cap to the preset time turns the internal timing disc which is held in place on the main pinion with a friction clutch. Two setback features and one centrifugally operated mechanism maintain fuze safety until firing. On firing, setback and subsequent creep forces release the setting pin from the timing disk through the operation of the hammer weights and setting lug. A separate setback pin moves aft, unlocking the firing arm shaft. A centrifugal safety lever releases the escapement permitting the timer to start. After all safeties are removed, the pinion shaft turns by two sector gears which are powered by centrifugal weights and kick-off springs. The movement is governed by the escapement. At the preset time, a notch in the timing disk engages a lug on the firing arm shaft. The shaft rotates, clearing the firing pin safety plate and releasing the firing pin. The firing pin initiates the percussion primer which subsequently initiates the rest of the explosive train. A safety disk covers the notch in the timing disk when the fuze is set "safe" or below the minimum prescribed setting. Mk 54 AD Fuze used in HC rounds. Mod 4 made at Thos. A. Edison Co.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

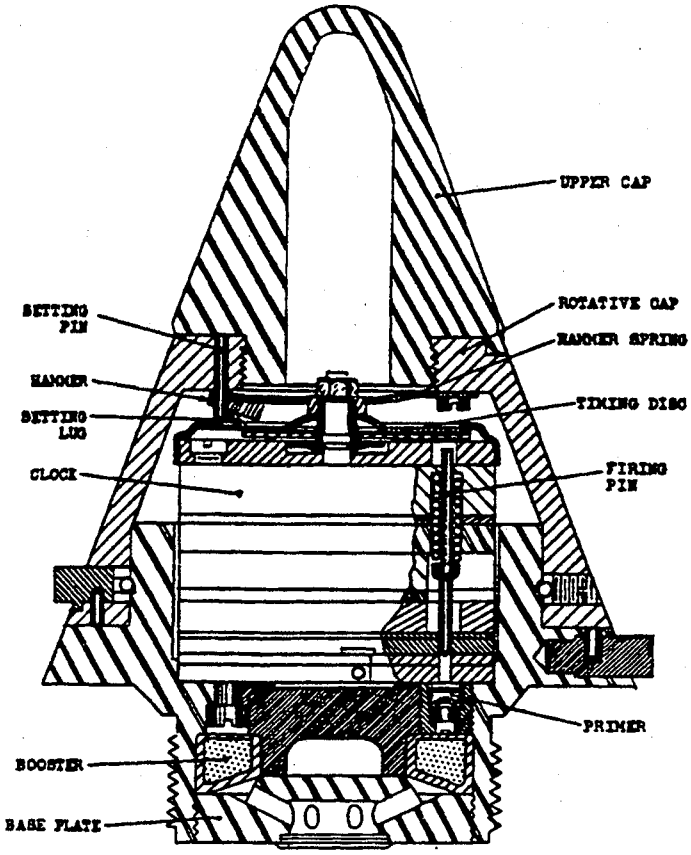

- OVERALL SIZE -	- INTRUSION -	
LG: 4.313 in (109.6 mm)	DP: 0.803 in (20.4 mm)	WT: 2.33 lb (1057 g)
XSECT: 3.05 in (77.5 mm)	DIA: 1.7 in (43.2 mm)	THD: 1.7-14NS-1RH
		THD DP: 0.81 in (20.6 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army, Navy
- ASSY DWG: 450 500
- PARTS LIST: ld 109 446
- SPEC: OS 2114
- PUB: OP 1212

- NATIONAL STOCK NO: None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 22, Mk 25, Mk 51

- REPLACES:
- REPLACED BY: Mk 50

GENERAL
- WEAPON: 4-in/50, 5-in/25, 5-in/38, 5-in/51, 6-in/47, 6-in/53 guns
- AMMUNITION: HC, AAC, Illumination

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 210 rps
- SETBACK: 14,500 g
- VELOCITY: Unknown

- CREEP: Unknown
- FLIGHT TIME: Unknown

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: Hand

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: releases separate locks on timing disc and firing arm shaft.

SECOND SAFETY:
Spin: lever unlocks escapement; 33 rps, no arm; 100 rps, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Unknown

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: FA70 primer mix

DETONATOR: None

LEAD: Black powder relay

BOOSTER: 40 grains (2.6 g) black powder

OTHER: None

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
0.8 to 45 s
Junghans escapement

TARGET: Aircraft
SENSITIVITY:
Unknown

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
Time

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: 2.6 g
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
Rotation of the lower cap to the preset time turns the internal timing disc which is held in place on the main pinion with a friction clutch. Two setback features and one centrifugally operated mechanism maintain fuze safety until firing. On firing, setback and subsequent creep forces release the setting pin from the timing disk through the operation of the hammer weights and setting lug. A separate setback pin moves aft, unlocking the firing arm shaft. A centrifugal safety lever releases the escapement permitting the timer to start. After all safeties are removed, the pinion shaft turns by two sector gears which are powered by centrifugal weights and kick-off springs. The movement is governed by the escapement. At the preset time, a notch in the timing disk engages a lug on the firing arm shaft. The shaft rotates, clearing the firing pin safety plate and releasing the firing pin. The firing pin initiates the percussion primer which subsequently initiates the rest of the explosive train. A safety disk covers the notch in the timing disk when the fuze is set "safe" or below the minimum prescribed setting. Mk 54 AD Fuze used in HC rounds. Mod 5 made at Elgin Watch Co. Waterproofed.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 19 MOD 0-3, FUZE, BD

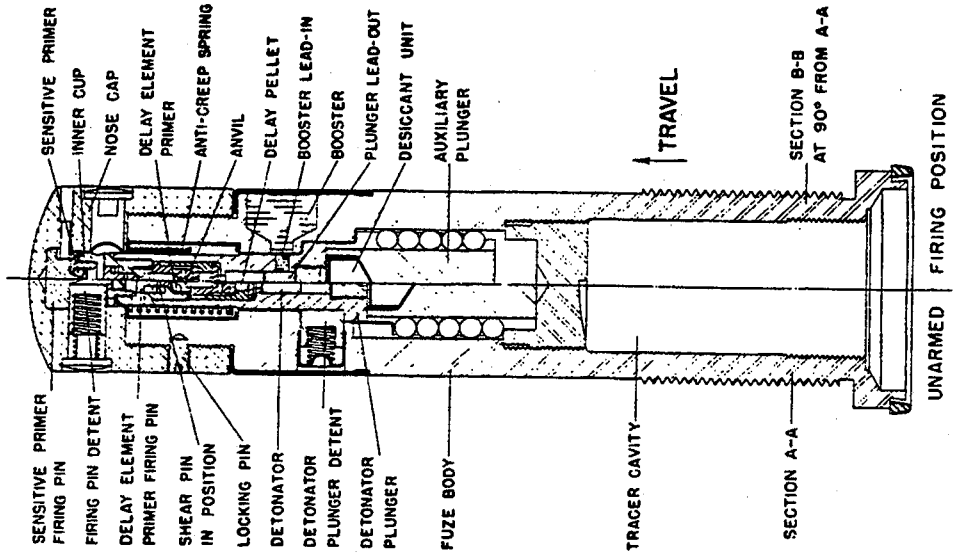

IDENTIFICATION

Agency	NSWC, Code G44 A. Munach
Status	AV 290-1970 Obsolete
Ass'y Dwg. No.	GA 562474 (MOD 3)
Parts List	LD 41222
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	6"/47 Com., 6"/16 AP
Location	Base
Use	GP, AP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 19 MOD 0-3, FUZE, BD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.87 lb
Total Length (in.)	6.67
Body Diam. (in.)	
Intrusion	6.67 in.
Thread Size	1.5-12NS-3 (LH)

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.01 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 101 MOD 0
Detonator	MK 33 MOD 0
Booster	Tetryl
Lead	Tetryl
Tracer	MK 5

REMARKS

Similar to MKS 20, 21, 28, 39, 48 and 64.
Common, SAP (Semi Armor Piercing).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M20A2, BOOSTER

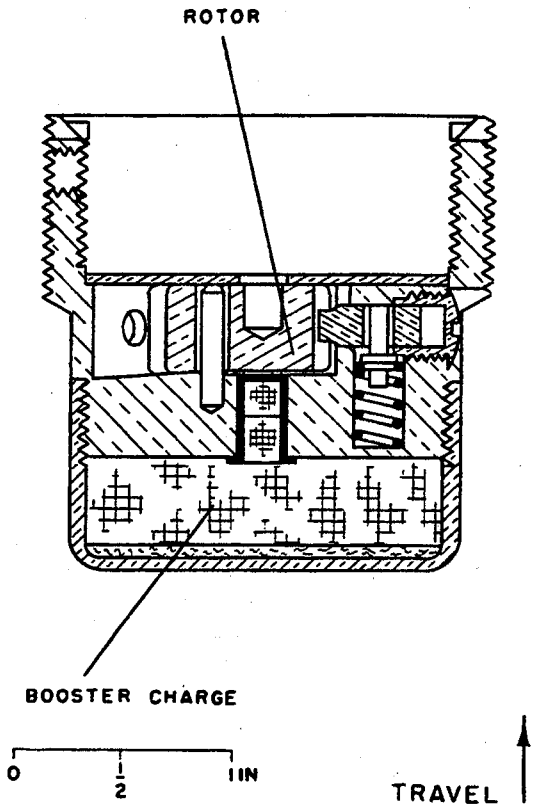

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	73-2-112
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	75-240 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M20A2, BOOSTER

ARMING DATA

Method	Spin, setback, deceleration
Delay	
Rotation (rps)	
Non-arm	25
Arm	30
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.73 lb
Total Length (in.)	2.044
Body Diam. (in.)	
Intrusion	2.044 in.
Thread Size	2-12NS-1A

FUNCTIONING DATA

Action	
Type	
Delay	Pyrotechnic
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M17
Booster	Tetryl

REMARKS

Superseded by Booster M21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 20 MOD 0-5, FUZE, BD

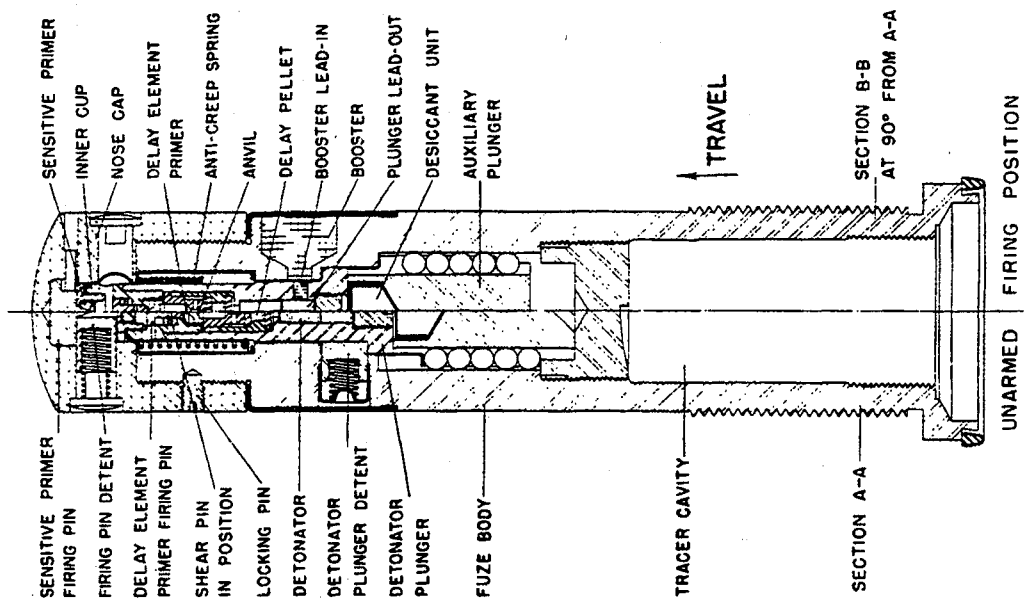

IDENTIFICATION

Agency	NSWC, G44, Klamm
Status	Obsolete
Ass'y Dwg. No.	GA 1362986 (MOD 5)
Parts List	LD 293699
Specification	OS 897
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5"/38, 5"/51, 5"/54
Location	Base
Use	HE or GP, AP
MIL-STD's	
Max Values	
Rotat. (rps)	210
Setback (g)	14,500
Velocity (fps)	1400

KEY FEATURES

Sensitive to firing on water impact

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 20 MOD 0-5, FUZE, BD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	50 **Arm** 75
Setback (g)	
Non-arm	**Arm**
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.18 lb
Total Length (in.)	6.71
Body Diam. (in.)	1.38
Intrusion	6.71 in.
Thread Size	1.5-12NF-3 (LH)

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.01 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	MS Plate
Thickness (in.)	0.375
Max Obliq. (°)	45
Velocity (fps)	1,400
Carrier	5"/54

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 102 MOD 1
Detonator	MK 33 MOD 0
Booster	Tetryl
Lead	Tetryl
Delay	Blk. powder

REMARKS

Similar to MKS 19, 21, 28, 39, 48. MODS 1, 2 are moisture proof. MOD 3 was never manufactured.

Common, SAP (Semi Armor Piercing). MOD 5 has solid base plug and O ring in tracer cavity for sealing propellant gases from fuze body.

Ass'y dwg. nos.: GA 423057 (MOD 2); GA 562475 (MOD 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M21A4 Booster
may be found in MIL-HDBK-145B.

Supersedes pages 1-35 and 1-36 of MIL-HDBK 146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 21 Mod 3 BD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-37 and 1-38 of MIL-HDBK 146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

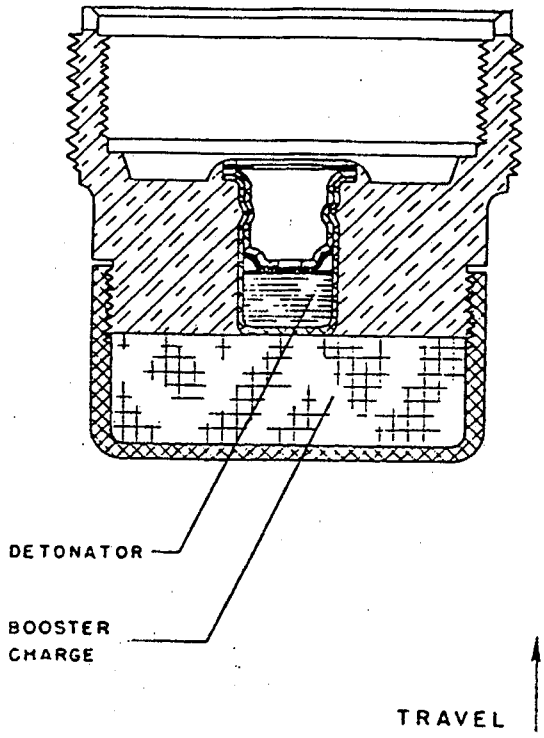

- OVERALL SIZE -	- INTRUSION -	
LG: 2.042 in (52 mm)	DP: 2.042 mm (52 mm)	WT: 0.73 lb (331 g)
XSECT: Thread	DIA: 1.72 in (43.7 mm)	THD: 2-12UNS-1A
		THD DP:

IDENTIFICATION
AGENCY: ARDEC, SMCAR-AEF-F
CONTACT: Nash, A
PHONE: DSN 880-2017
STATUS: Obsolete
USER: Army
ASSY DWG: 73-2-150
PARTS LIST:
SPEC:
PUB: TM 9-1300-203

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO: T8
SIMILAR TO: M21A4

REPLACES:
REPLACED BY:

GENERAL
WEAPON: 105-mm Howitzer

AMMUNITION:
M57 PD Fuze in chemical projextiles

LOCATION: Base of fuze
BALLISTIC LEVELS:
ROTATION: 550 rps
SETBACK: 21,000 g
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: NA

Supersedes page 1-39 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
None
Detonator and booster are in line.

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Lead azide

LEAD: Tetryl (designated a detonator assembly)

BOOSTER: Tetryl

OTHER:

FUNCTIONING DATA

MODES: PD
TYPE: Pyrotechnic
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
The M22 Booster was similar in contour to the M21A4; however, it did not have a rotor, the detonator and booster being in line. Fuzes fitted with the M22 had an aluminum safety disk inserted at the base of the fuze flash hole. Rounds were marked "MODIFIED".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

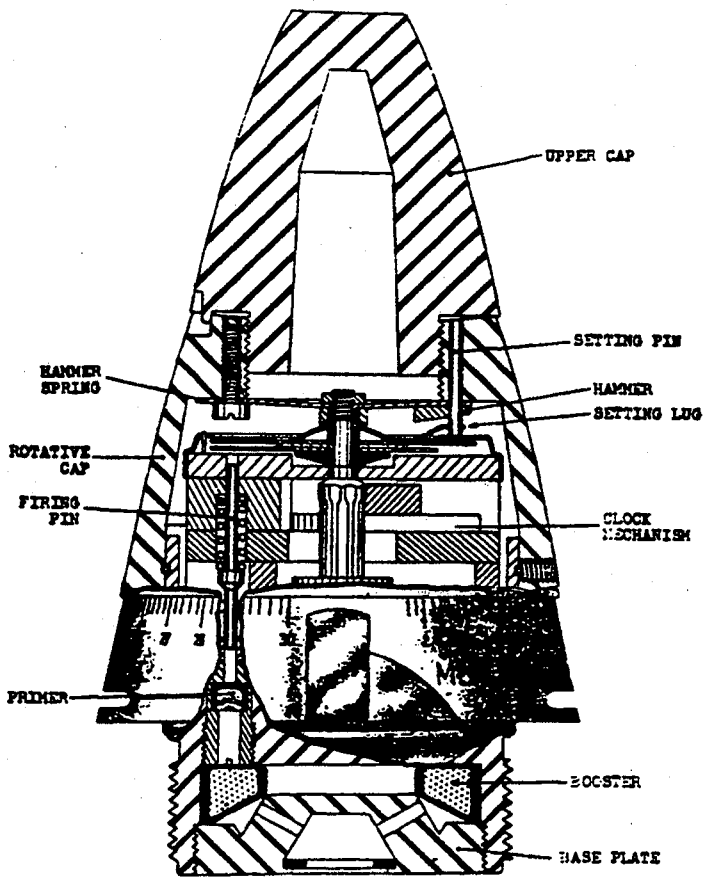

- OVERALL SIZE -	- INTRUSION -	WT: 1.38 lb (626 g)
LG: 4.55 in (115.6 mm)	DP: 0.803 in (20.4 mm)	THD: 1.7-14NS-1RH
XSECT: 2.4 in (61.0 mm)	DIA: 1.7 in (43.2 mm)	THD DP: 0.81 in (20.6 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army, Navy
- ASSY DWG: 281 980
- PARTS LIST: Unknown
- SPEC: OS 3004
- PUB: OP 1212

NATIONAL STOCK NO:
None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 18, Mk 25, Mk 50

REPLACES:
- REPLACED BY: Mk 51

GENERAL
- WEAPON: 3-in/23, 3-in/50 & 4-in/50 guns

AMMUNITION:
HC, AA, Illumination

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 338 rps
- SETBACK: 20,600 g
- VELOCITY: Unknown

- CREEP: Unknown
- FLIGHT TIME: Unknown

SAFETY STD: Doesn't meet MIL-STD-1316

SETTERS: Lower cap has slots.

Supersedes page 1-41 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: releases separate locks on timing disc and firing arm shaft.

SECOND SAFETY:
Spin: lever unlocks escapement; 33 rps, no arm; 100 rps, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Unknown

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: FA70 primer mix

DETONATOR: None

LEAD: Black powder relay

BOOSTER: 40 grains (2.6 g) black powder

OTHER: None

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
1.4 to 30 s; Junghans escapement. Movement does not have kick-spring to help start timer as does Mk 18 MT Fuze
TARGET: Aircraft
SENSITIVITY:
Unknown

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
Time

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: 2.6 g
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
Rotation of the lower cap to the preset time turns the internal timing disc which is held in place on the main pinion with a friction clutch. Two setback features and one centrifugally operated mechanism maintain fuze safety until firing. On firing, setback and subsequent creep forces release the setting pin from the timing disk through the operation of the hammer weights and setting lug. A separate setback pin moves aft, unlocking the firing arm shaft. A centrifugal safety lever releases the escapement permitting the timer to start. After all safeties are removed, the pinion shaft turns by two sector gears which are powered by centrifugal weights. The movement is governed by the escapement. At the preset time, a notch in the timing disk engages a lug on the firing arm shaft. The shaft rotates, clearing the firing pin safety plate and releasing the firing pin. The firing pin initiates the percussion primer which subsequently initiates the rest of the explosive train. A safety disk covers the notch in the timing disk when the fuze is set "safe" or below the minimum prescribed setting. Mk 54 AD Fuze used in HC rounds. Mod 0 made by NTS, Newport, RI; Mods 1, 2, & 3 by Bendix.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

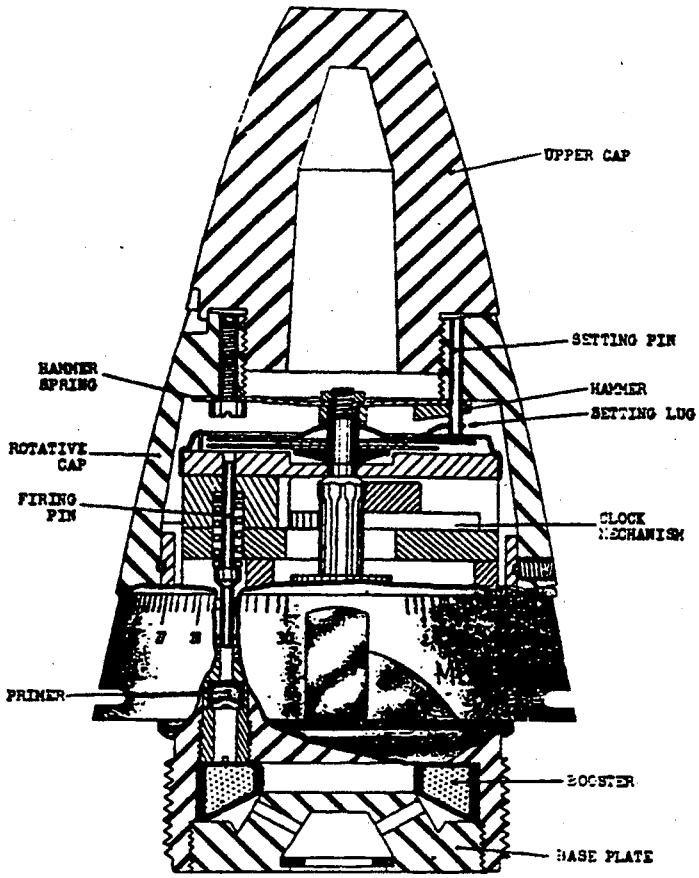

- OVERALL SIZE -	- INTRUSION -	
LG: 4.55 in (115.6 mm)	DP: 0.803 in (20.4 mm)	WT: 1.38 lb (626 g)
XSECT: 2.4 in (61.0 mm)	DIA: 1.7 in (43.2 mm)	THD: 1.7-14NS-1RH
		THD DP: 0.81 in (20.6 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army, Navy
- ASSY DWG: 439 795, -797, 561 992
- PARTS LIST: LD 109 333, -438, -512
- SPEC: OS 3004
- PUB: OP 1212

NATIONAL STOCK NO:
None
DODIC: None
PRIOR MODEL NO: None
SIMILAR TO: Mk 18, Mk 25, Mk 50

REPLACES:
REPLACED BY: Mk 51

GENERAL
- WEAPON: 3-in/23, 3-in/50 & 4-in/50 guns

AMMUNITION:
HC, AA, Illumination

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 338 rps
- SETBACK: 20,600 g
- VELOCITY: Unknown

CREEP: Unknown
FLIGHT TIME: Unknown
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: Lower cap has slots.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: releases separate locks on timing disc and firing arm shaft.

SECOND SAFETY:
Spin: lever unlocks escapement; 33 rps, no arm; 100 rps, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Unknown

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: FA70 primer mix

DETONATOR: None

LEAD: Black powder relay

BOOSTER: 40 grains (2.6 g) black powder

OTHER: None

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
0.8 to 30 s; Junghans escapement. Movement does not have kick-spring to help start timer as does Mk 18 MT Fuze
TARGET: Aircraft
SENSITIVITY:
Unknown

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
Time

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: 2.6 g
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
Rotation of the lower cap to the preset time turns the internal timing disc which is held in place on the main pinion with a friction clutch. Two setback features and one centrifugally operated mechanism maintain fuze safety until firing. On firing, setback and subsequent creep forces release the setting pin from the timing disk through the operation of the hammer weights and setting lug. A separate setback pin moves aft, unlocking the firing arm shaft. A centrifugal safety lever releases the escapement permitting the timer to start. After all safeties are removed, the pinion shaft turns by two sector gears which are powered by centrifugal weights. The movement is governed by the escapement. At the preset time, a notch in the timing disk engages a lug on the firing arm shaft. The shaft rotates, clearing the firing pin safety plate and releasing the firing pin. The firing pin initiates the percussion primer which subsequently initiates the rest of the explosive train. A safety disk covers the notch in the timing disk when the fuze is set "safe" or below the minimum prescribed setting. Mk 54 AD Fuze used in HC rounds. Mods 4, 5 & 6 made by Bendix, Elgin & Hamilton.

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-23, FUZE, PROXIMITY

IDENTIFICATION

Agency	NSWC, Code G43 T. Adams AV 290-1855
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	XV-46

GENERAL

Carriers	Projectile
Cal. — Size	5"/38
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	208
Setback (g)	12,800
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-23, FUZE, PROXIMITY

ARMING DATA

Method	Spin, setback
Delay	780-1300 ft
Rotation (rps)	
Non-arm	90 Arm 120
Setback (g)	
Non-arm	Arm 30,000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	9.0
Body Diam. (in.)	
Intrusion	5.112 in.
Thread Size	2.65-10

FUNCTIONING DATA

Action	SD, proximity
Type	Electric
Delay	0.4 sec
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	MK 12 type
Primer	MK 63 MOD 0
Detonator	MK 64
Booster	Tetryl

REMARKS

Interchangeable with Fuze MK 71

SERIES: N CHAPTER: 1
DESIGNATION: EX 23
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 23 MOD 0, FUZE, BD

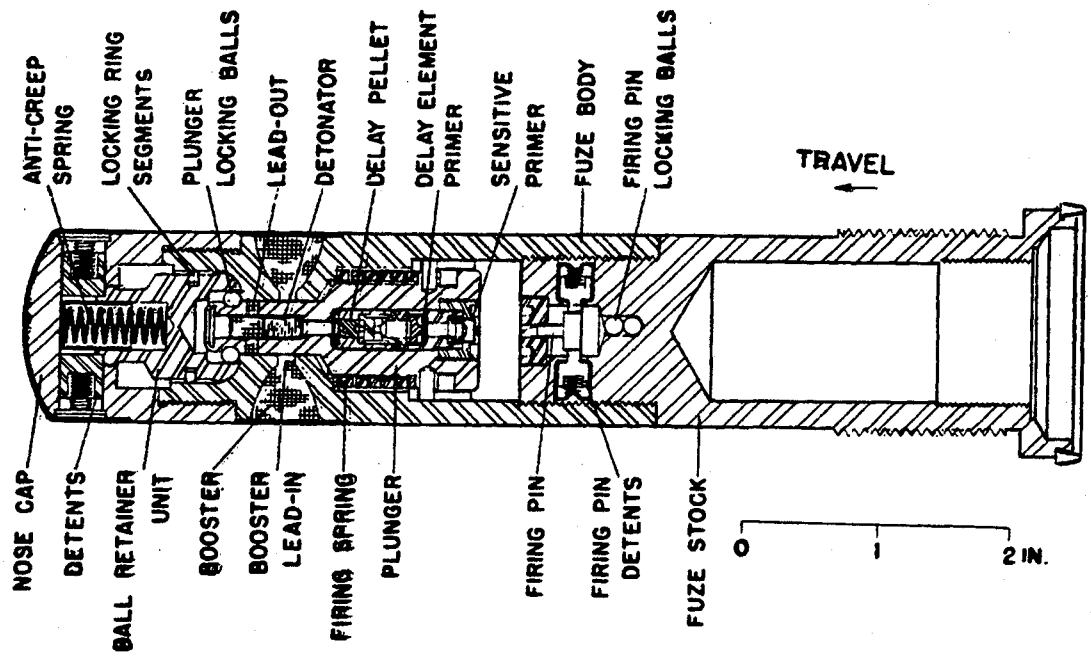

IDENTIFICATION

Agency	NSWC, Code G44 A. Munach AV 290-1970
Status	Obsolete
Ass'y Dwg. No.	GA 236870
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	8, 12, 14, 16 in.
Location	Base
Use	AP
MIL-STD's	
Max Values	
Rotat. (rps)	200
Setback (g)	9000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 23 MOD 0, FUZE, BD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	20
Arm	23
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2 lb 7 oz
Total Length (in.)	7.730
Body Diam. (in.)	
Intrusion	7.730 in.
Thread Size	1.50-12NF-3 (LH)

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.02 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl
Lead	Tetryl

REMARKS

Superseded by MK 21.

SERIES: N CHAPTER: 1
DESIGNATION: MK 23 MOD 0
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

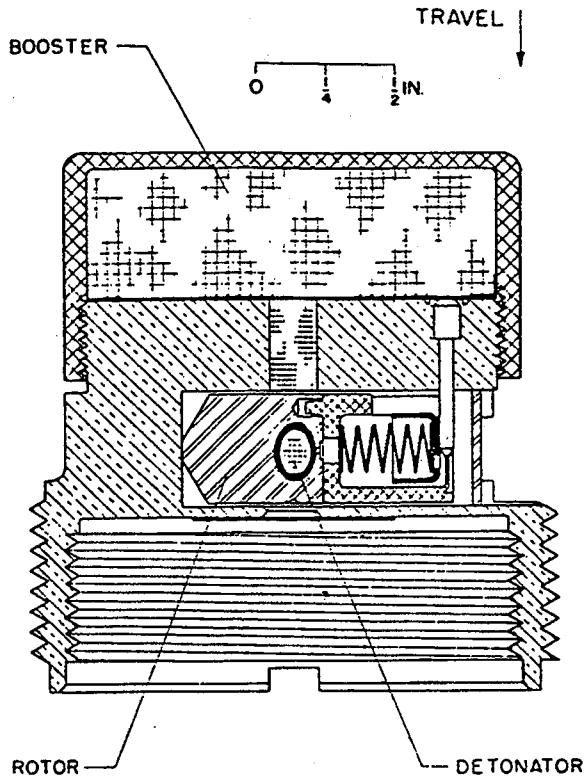

- OVERALL SIZE -	- INTRUSION -	WT: 0.70 lb (318 g)
LG: 2.042 in (52 mm)	DP: 2.042 in (52 mm)	THD: 2-12NS-1A
XSECT: Thread	DIA: 1.72 in (43.7 mm)	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT: Eckstein, G
- PHONE: DSN 880-4216
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-2-206
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: T17
- SIMILAR TO: M21A4

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 75 to 240 mm
  4.5-in rocket

- AMMUNITION:
  HE or GP

LOCATION: Base of fuze
BALLISTIC LEVELS:
- ROTATION: 550 rps
- SETBACK: 21,000 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: NA

Supersedes page 1-47 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: 25 rps no arm;
33 rps all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER:

DETONATOR: M30

LEAD: Tetryl

BOOSTER: Tetryl, 22 g

OTHER:

FUNCTIONING DATA
MODES:
TYPE: Mechanical
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Used with M48A3 Fuze to become M81A1 Fuze. On firing, centrifugal force causes a lock to move outward against a spring releasing the rotor which turns until the detonator is aligned with the flash hole and the booster lead. The rotor is then locked by a lock pin. Similar to M21A4 except the M24 has a drawn brass body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M25 Booster
may be found in MIL-HDBK-145B.

Supersedes pages 1-49 and 1-50 of MIL-HDBK 146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

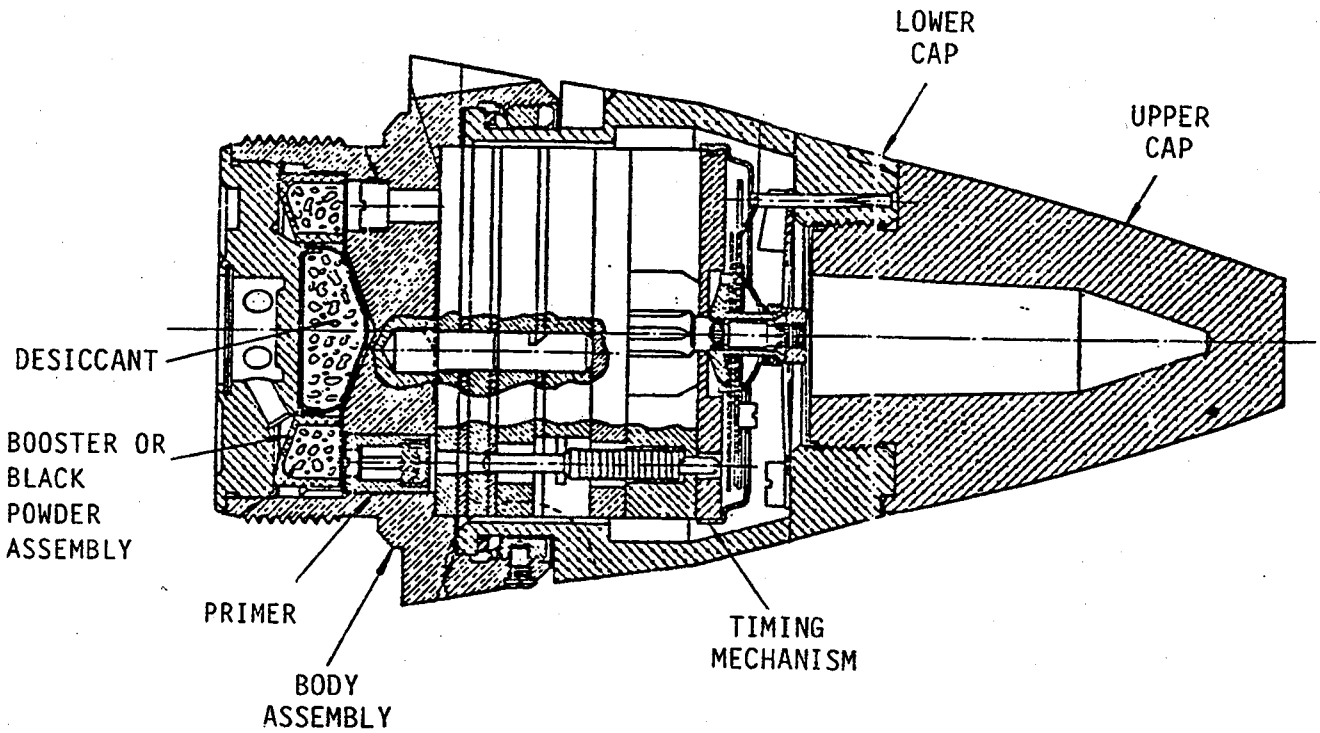

- OVERALL SIZE -	- INTRUSION -	
LG: 4.55 in (115.6 mm)	DP: 0.805 in (20.4 mm)	WT: 1.45 lb (657.7 g)
XSECT: 2.40 in (61.0 mm)	DIA:	THD: 1.70-14NS-1
		THD DP: 0.805 in (20.4 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G41
- CONTACT: Pomeroy, S
- PHONE: DSN 290-1995
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 1 378 972
- PARTS LIST: LD 293 347
- SPEC: OS 5832, OS 1 402 953
- PUB: SW030-AA-MMO-010

- NATIONAL STOCK NO: 1390-00-203-4134
- DODIC: N237
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 18, Mk 50, Mk 51, Mk 342
- REPLACES: Mk 25 Mods 0-4
- REPLACED BY: Mk 342-0

GENERAL
- WEAPON: 5-in/54, and 6-in/47 guns

- AMMUNITION: AAC, Illuminating, WP, dummy

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 254 rps
- SETBACK: 14,000 g
- VELOCITY: 2,650 ft/s

- CREEP: NA
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: Fuze wrench

Supersedes page 1-51 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 33 rps, no arm
100 rps, all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: 28.5 mg FA 70

DETONATOR: None

LEAD: None

BOOSTER: 1.944 g black powder in plastic container (dwg 1 246 291)

OTHER: None

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
Jughans escapement, settable from 0.6 to 45 s

TARGET: Aircraft, ground, ships
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG: 1.4 S
US DOT SHIP CL: C
NET EXPL WT: 0.0285 g
NET PROP WT: 1.944 g
STORAGE TEMP:

REMARKS/DESCRIPTION:
Time is set by rotating lower cap and setting pin which rotates timing disc. Upon firing, setback of the hammer spring releases the timer disc and moves the setback pin back which partially releases the firing shaft and safety lever plate. Centrifugal force releases a detent on the escapement lever and with the help of a kick-spring rotates the two drive gears which, in turn, drive the main pinion. When the timing disc has rotated to the set time, the firing shaft rotates into a notch, releasing the safety plate which releases the spring-loaded firing pin to function the primer. The primer ignites the black powder relay charge and, in turn, the aux det or magazine charge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-26, FUZE, PROXIMITY

IDENTIFICATION

Agency	NSWC, Code G43 T. Adams
Status	AV 290-1855 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	XV-59

GENERAL

Carriers	Projectile
Cal. — Size	5"/38, 5"/54
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	250
Setback (g)	12,800
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-26, FUZE, PROXIMITY

ARMING DATA

Method	Spin		
Delay	780-1300 ft		
Rotation (rps)			
Non-arm	90	Arm	180
Setback (g)			
Non-arm		Arm	30,000
Arming Wire			
External Indicat.			

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	2.125-12 (LH)

FUNCTIONING DATA

Action	BD, SD, Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 63
Detonator	MK 64
Booster	
Rear Fitting	MK 14

REMARKS

Will require a special projectile

The advent of DSET construction nullified the primary value of this fuze

SERIES: N CHAPTER: 1
DESIGNATION: EX 26
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the MK 26 Mods 0-2 PD Fuzes
may be found in Chapter 7.

Supersedes pages 1-55 and 1-56 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 28 Mod 17 BD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-57 and 1-58 of MIL-HDBK 146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

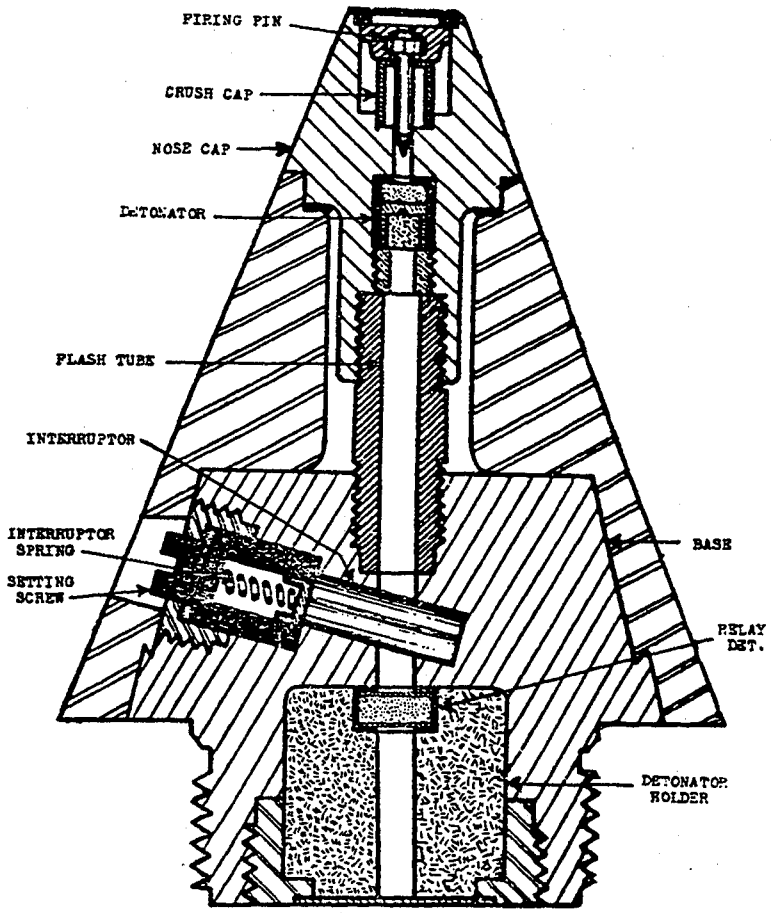

- OVERALL SIZE -	- INTRUSION -	
LG: 4.14 in (105 mm)	DP: 0.81 in (20.4 mm)	WT: 1.49 lb (676 g)
XSECT: 2.99 in (75.7 mm)	DIA: 1.70 in (43.2 mm)	THD: 1.70-14NS-1
		THD DP: 0.713 in (18.1 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G41
- CONTACT: Niemeyer, R
- PHONE: DSN 290-2750
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 328 557
- PARTS LIST: LD 91 154
- SPEC: MIL-O-18521,OS 3303,3013 & 4541
- PUB: None

- NATIONAL STOCK NO:
  1390-00-038-8652 (Mods 1 & 2)
- DODIC: N315 (Mods 1 & 2)
- PRIOR MODEL NO: XP-14A
- SIMILAR TO: Mk 30, Mk 66

- REPLACES:
- REPLACED BY: Mk 29-3

GENERAL
- WEAPON: 5"/25, 5"/38, 5"/51, 6"/47
  8"/55,12"/50,14"/45,14"/50
  16"/45 & 16"/50 guns
- AMMUNITION:
  HC, AAC, WP

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 208 rps
- SETBACK: 16,200 g
- VELOCITY: 2600 ft/s (792 m/s)

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: Doesn't meet MIL-ST-1316
SETTERS: Manually with screwdriver

Supersedes page 1-59 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 25 rps no arm,
33 rps all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: None

DETONATOR: Mk 25 Mod 0 Stab
Mk 29 Mod 0 Relay

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: PD SQ
TYPE: Mechanical
CHARACTERISTICS:
See remarks.

TARGET: Surf, Pers, Lt Material
SENSITIVITY:
1 in (25.4 mm) plywood,
Obliquity: 0 deg.
Water 45 deg obliquity
FUNCTION TEMP:
-7 to +54 deg C
MODE ON DELIVERY:
"OFF"

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0257
US HCSDS:
UN CL/DIV SCG: 1.4 B
US DOT SHIP CL: C
NET EXPL WT: 0.438 g
NET PROP WT: None
STORAGE TEMP: -7 to +54 deg C

REMARKS/DESCRIPTION:
The Mk 29 Fuze requires a Mk 54 or Mk 55 AD Fuze for handling and in-bore safety. An externally settable ON/OFF lock prevents movement of the slider in the OFF position. It must be set to ON before loading the gun, otherwise the round will dud. On firing, centrifugal force moves the slider outward against its spring unblocking the flash tube. This happens after the projectile has left the gun. On impact, the firing pin is driven into the nose detonator. The flash from the nose detonator passes down the flash tube initiating the relay detonator and, in turn, the AD Fuze and main charge. The Mk 29 Fuze is the same as the Mk 30 except for contour. All mods detonate on 3.175 mm mild steel, water, or soft and hard terrain at angles up to 82 deg. Mod 0 has green, asbestos plastic ogive. Mod 1 has yellow, chip proof, resin-impregnated cloth coverd plastic ogive. Mod 2 has strengthened flash channel. Mods 0 thru 2 are sensitive to rain.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

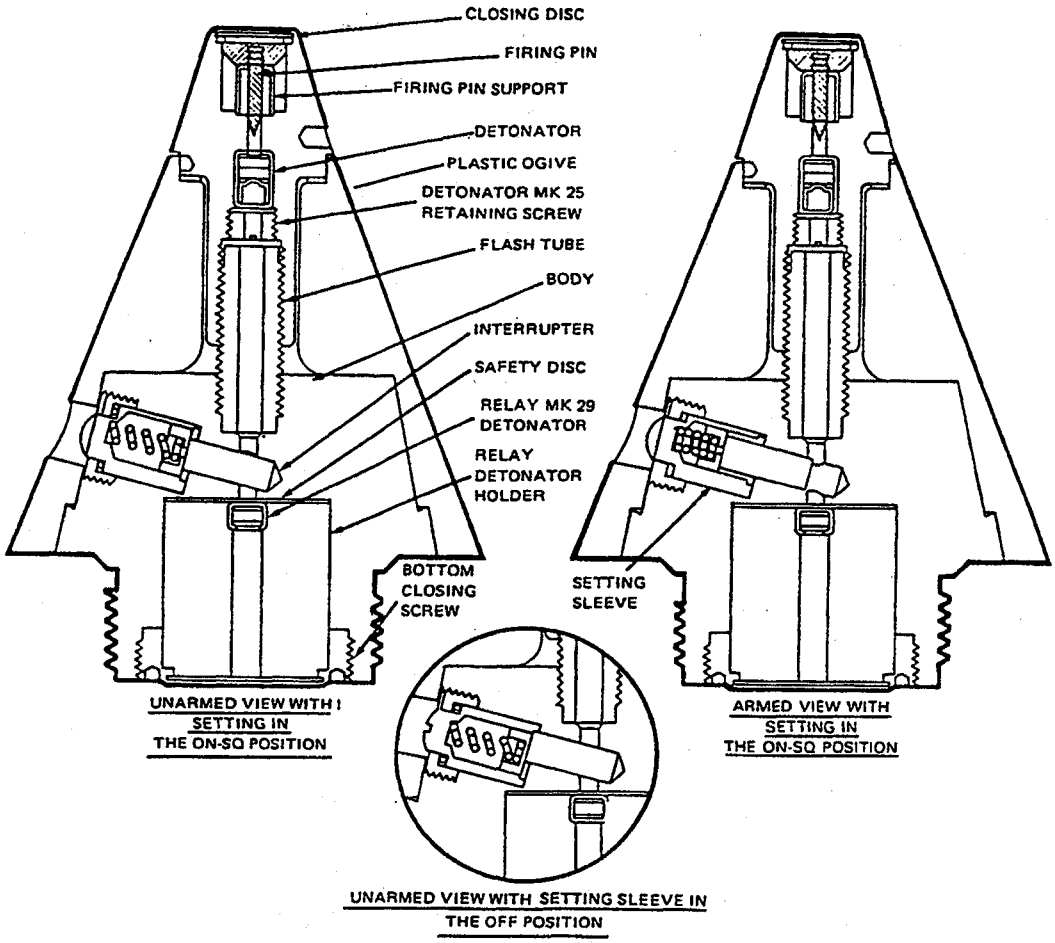

- OVERALL SIZE -	- INTRUSION -	
LG: 4.14 in (105 mm)	DP: 0.81 in (20.4 mm)	WT: 1.49 lb (676 g)
XSECT: 2.99 in (75.7 mm)	DIA: 1.70 in (43.2 mm)	THD: 1.70-14NS-1
		THD DP: 0.713 in (18.1 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G41
- CONTACT: Niemeyer, R
- PHONE: DSN 290-2750
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 422 325
- PARTS LIST: LD 109 112
- SPEC: MIL-F-18699
- PUB: None

NATIONAL STOCK NO:
1390-00-093-1245
- DODIC: N315
- PRIOR MODEL NO: XP-14A
- SIMILAR TO: Mk 30, Mk 66

- REPLACES: Mk 29 Mods 0-2
- REPLACED BY: Mk 29-3 RFM, -5

GENERAL
- WEAPON: 5-in/38, 6-in/47, 8-in/55 & 16"/50 guns; 5-in, spin-stabilized rockets
- AMMUNITION:
  - HC, AAC, WP;
  - Mk 7 Rocket

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 208 rps
- SETBACK: 16,200 g
- VELOCITY: 2600 ft/s (792 m/s)

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: Doesn't meet MIL-ST-1316

SETTERS: Manually with screwdriver

Supersedes page 1-60A of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 25 rps no arm,
33 rps all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: None

DETONATOR: Mk 25 Mod 0 Stab
Mk 29 Mod 0 Relay

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: PD SQ
TYPE: Mechanical
CHARACTERISTICS:
See remarks.

TARGET: Surf, Pers, Lt Material
SENSITIVITY:
1 in (25.4 mm) plywood,
Obliquity: 0 deg.
Water 45 deg obliquity
FUNCTION TEMP:
-7 to +54 deg C
MODE ON DELIVERY:
"OFF"

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0257
US HCSDS:
UN CL/DIV SCG: 1.4 B
US DOT SHIP CL: C
NET EXPL WT: 0.438 g
NET PROP WT: None
STORAGE TEMP: -7 to +54 deg C

REMARKS/DESCRIPTION:
The Mk 29 Fuze requires a Mk 54 or Mk 55 AD Fuze for handling and in-bore safety. An externally settable ON/OFF lock prevents movement of the slider in the OFF position. It must be set to ON before loading the gun, otherwise the round will dud. On firing, centrifugal force moves the slider outward against its spring unblocking the flash tube. This happens after the projectile has left the gun. On impact, the firing pin is driven into the nose detonator. The flash from the nose detonator passes down the flash tube initiating the relay detonator and, in turn, the AD Fuze and main charge. The Mk 29 Fuze is the same as the Mk 30 except for contour. All mods detonate on 3.175 mm mild steel, water, or soft and hard terrain at angles up to 82 deg. Mod 3 has a 0.010-in thick aluminum disk between the flash tube and relay detonator for added safety. The fuze is sensitive to rain. Remaining fuzes are being modified with a rain baffle in the nose, are then designated Mk 29 Mod 3 RFM and are identical to Mk 29 Mod 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

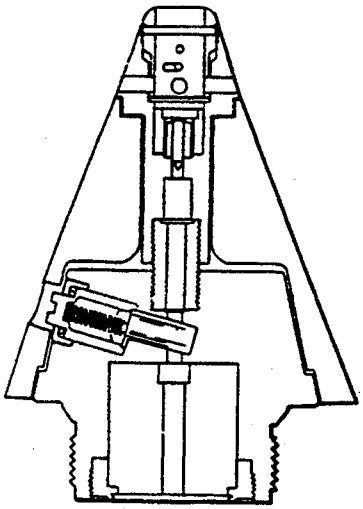

UNARMED VIEW WITH SETTING SCREW IN THE OFF POSITION

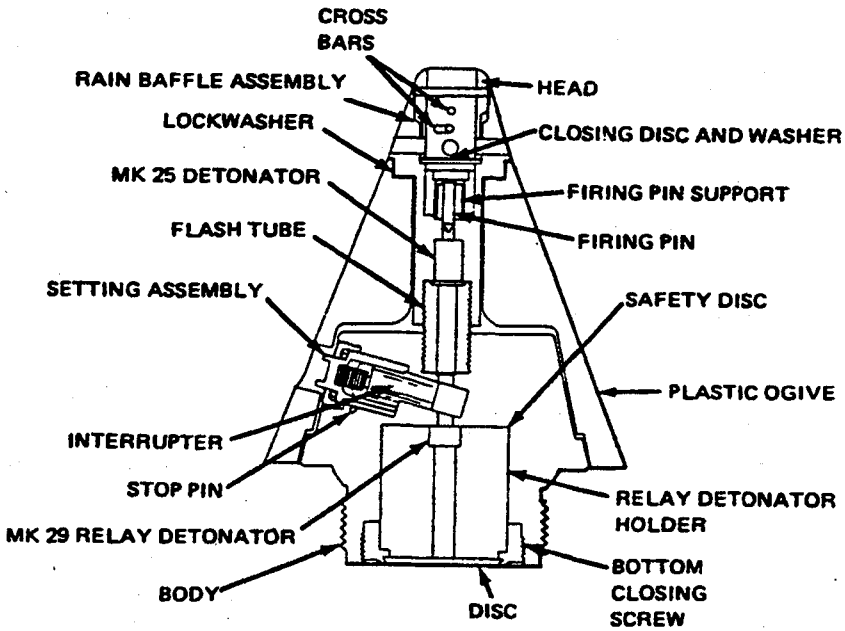

ARMED VIEW WITH SETTING SCREW IN THE ON POSITION

- OVERALL SIZE -	- INTRUSION -	WT: 1.49 lb (676 g)
LG: 4.14 in (105 mm)	DP: 0.81 in (20.4 mm)	THD: 1.70-14NS-1
XSECT: 2.99 in (75.7 mm)	DIA: 1.70 in (43.2 mm)	THD DP: 0.713 in (18.1 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G41
- CONTACT: Niemeyer, R
- PHONE: DSN 290-2750
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 2 501 613
- PARTS LIST: PL 2 401 613
- SPEC: Unknown
- PUB: SW030-AA-MMO-010

NATIONAL STOCK NO:
None
- DODIC: None
- PRIOR MODEL NO: XP-14A
- SIMILAR TO: Mk 30, Mk 66

- REPLACES: Mk 29 Mods 0-3
- REPLACED BY: Mk 29 Mod 5

GENERAL
- WEAPON: 16-in/50 Mk 7 Gun

AMMUNITION:
HC, Mk 13

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 208 rps
- SETBACK: 16,200 g
- VELOCITY: 2600 ft/s (792 m/s)

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: Doesn't meet MIL-ST-1316
SETTERS: Manually with screwdriver

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: 25 rps no arm,
33 rps all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: None

DETONATOR: Mk 25 Mod 1 Stab
Mk 29 Mod 0 Relay

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA
MODES: PD SQ
TYPE: Mechanical
CHARACTERISTICS:
See remarks.

TARGET: Surf, Pers, Lt Material
SENSITIVITY:
2 in (50.8 mm) plywood,
Obliquity: 0 deg.
Water 45 deg obliquity
FUNCTION TEMP:
-7 to +54 deg C
MODE ON DELIVERY:
"OFF"

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0257
US HCSDS:
UN CL/DIV SCG: 1.4 B
US DOT SHIP CL: C
NET EXPL WT: 0.438 g
NET PROP WT: None
STORAGE TEMP: -7 to +54 deg C

REMARKS/DESCRIPTION:
The Mk 29 Fuze requires a Mk 54, Mk 55, or Mk 379 AD Fuze for handling and in-bore safety. An externally settable ON/OFF lock prevents movement of the slider in the OFF position. It must be set to ON before loading the gun, otherwise the round will dud. On firing, centrifugal force moves the slider outward against its spring unblocking the flash tube. This happens after the projectile has left the gun. On impact, the firing pin is driven into the nose detonator. The flash from the nose detonator passes down the flash tube initiating the relay detonator and, in turn, the AD Fuze and main charge. The Mod 4 and 5 incorporate a rain baffle in the nose which prevents the fuze from functioning in heavy rain. The baffle has been incorporated in many Mod 3 fuzes which are then designated Mod 3 Rain Fix Modification (RFM). Mod 4 had an aluminum baffle found to be unsuitable for use in 5-in/38 guns. The Mk 29 Fuze is the same as the Mk 30 except for contour. Early mods detonate on 25.4 mm wood; Mods 4 and 5 on 50.8 mm wood. All mods detonate on 3.175 mm mild steel, water, or soft and hard terrain at angles up to 82 deg.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

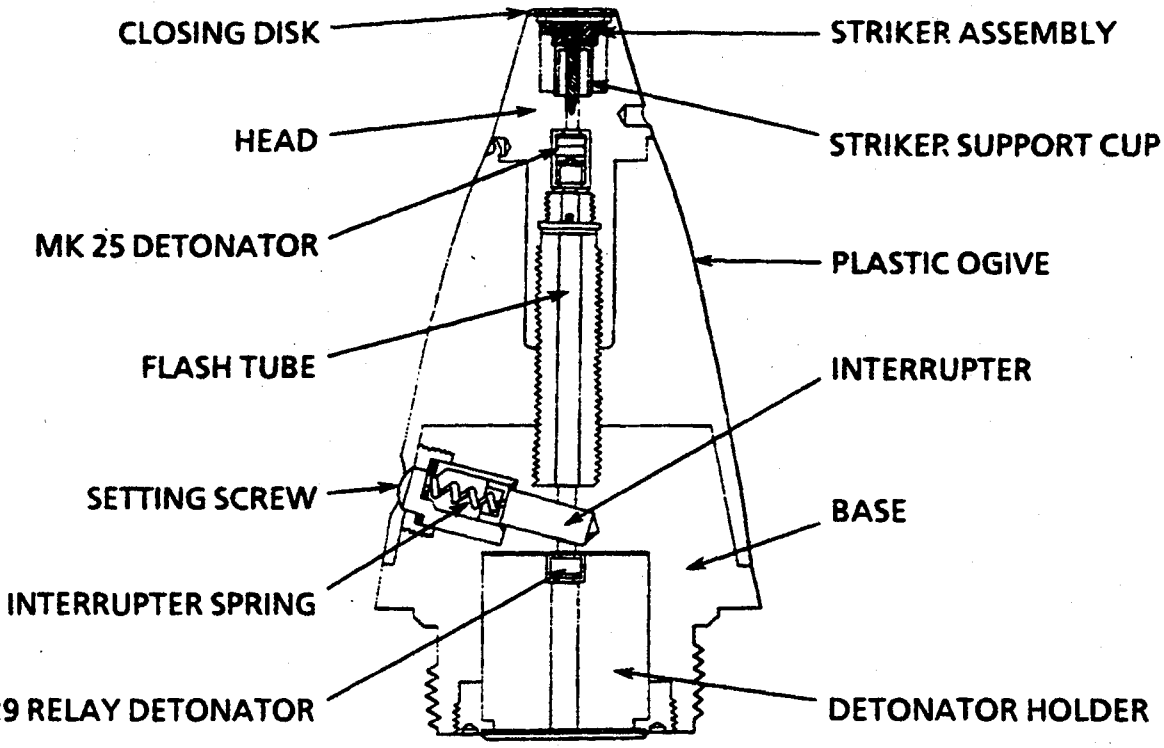

- OVERALL SIZE -	- INTRUSION -	
LG: 4.57 in (116 mm)	DP: 0.81 in (20 mm)	WT: 1.38 lb (640 g)
XSECT: 2.41 in (61 mm)	DIA: 1.70 in (43.2 mm)	THD: 1.70-14NS-1
		THD DP: 0.713 in (18.1 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 328 822
- PARTS LIST: LD 91 162
- SPEC: OS 3014
- PUB:

- NATIONAL STOCK NO:
  - None
- DODIC: None
- PRIOR MODEL NO: XP-15A, XP-16A
- SIMILAR TO: Mk 29, Mk 66

- REPLACES: Nothing
- REPLACED BY: Mk 30 Mod 3

GENERAL
- WEAPON: 3-in/23, 3-in/50, 4-in/50, 5-in/54, 6-in/47 guns

- AMMUNITION:
  - HC, AAC

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 338 rps
- SETBACK: 20,600 g
- VELOCITY: 2700 ft/s (823 m/s)

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: Doesn't meet MIL-STD-1316B
SETTERS: Manually by screwdriver

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: 25 rps no arm,
33 rps all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: None

DETONATOR: Mk 25 Mod 0 Stab
Mk 29 Mod 0 Relay

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA
MODES: SQ
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Surf, Pers, Lt Material
SENSITIVITY:
1 in (25.4 mm) plywood; obliquity,
0 deg.; Velocity, 2625 ft/s
(800 mps); Water 45 deg obliquity
FUNCTION TEMP:
-29 to +54 deg C
MODE ON DELIVERY:
OFF

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL: C
NET EXPL WT: 0.438 g
NET PROP WT: None
STORAGE TEMP: -29 to +54 deg C

REMARKS/DESCRIPTION:
The Mk 30 Fuze requires a Mk 44 or Mk 54 AD fuze in HE rounds for handling and in-bore safety. Prior to launch, the fuze is set to ON for PD SQ action. On firing, centrifugal force moves the slider outward against its spring and into the setting sleeve, unblocking the flash tube. This action takes place after the projectile has left the gun. On impact, the firing pin support collapses and the firing pin is driven into the nose detonator. The flash from the nose detonator passes down the flash tube and initiates the relay detonator which, in turn, causes the AD fuze to function and explode the burster charge of the projectile. The round will dud if fired in the OFF setting. The Mk 30 is the same as the Mk 29 except for contour. The Mk 66 is similar except for contour and the addition of an out-of-line rotor in place of the relay detonator holder. Mods 0 thru 3 were rain sensitive. Mod 0 had a dark green asbestos plastic ogive; Mod 1, a chip-proof, resin-impregnated, light green ogive; Mod 2 a strengthened flash channel.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

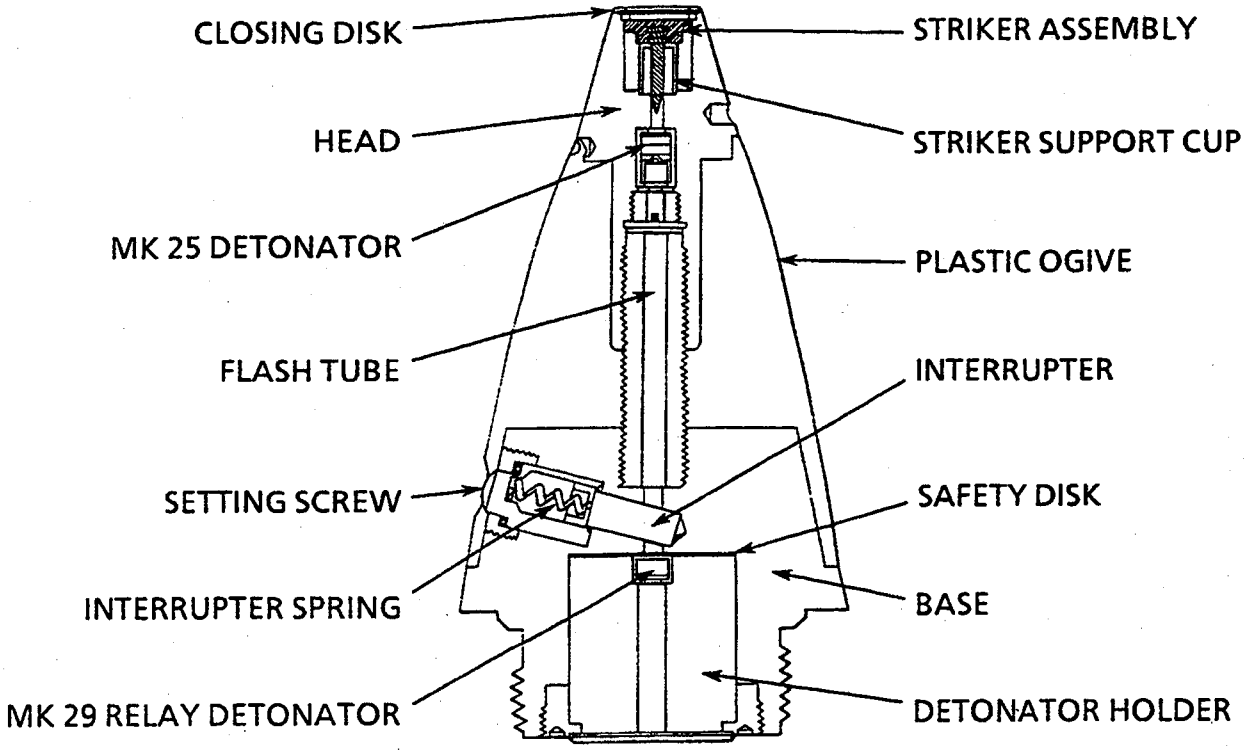

- OVERALL SIZE -	- INTRUSION -	
LG: 4.57 in (116 mm)	DP: 0.81 in (20 mm)	WT: 1.38 lb (640 g)
XSECT: 2.41 in (61 mm)	DIA: 1.70 in (43.2 mm)	THD: 1.70-14NS-1
		THD DP: 0.713 in (18.1 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 422 326
- PARTS LIST: LD 109 113
- SPEC: MIL-F-18699
- PUB: SW030-AA-MMO-010

- NATIONAL STOCK NO:
  1390-00-478-9315; 1390-00-640-8727
- DODIC: N304
- PRIOR MODEL NO: XP-15A, XP-16A
- SIMILAR TO: Mk 29, Mk 66

- REPLACES: Mk 30 Mods 0 thru 2
- REPLACED BY: Mk 30 Mod 5

GENERAL
- WEAPON: 3-in/23, 3-in/50, 4-in/50, 5-in/54, 6-in/47 guns; 5-in spin stabilized rockets
- AMMUNITION:
  HC, AAC gun projectiles;
  Mk 10, 12 & 13 Rockets

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 338 rps
- SETBACK: 20,600 g
- VELOCITY: 2700 ft/s (823 m/s)

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: Doesn't meet MIL-STD-1316B
SETTERS: Manually by screwdriver

Supersedes page 1-60G of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: 25 rps no arm,
33 rps all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: None

DETONATOR: Mk 25 Mod 1 Stab
Mk 29 Mod 0 Relay

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA
MODES: SQ
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Surf, Pers, Lt Material
SENSITIVITY:
1 in (25.4 mm) plywood; obliquity,
0 deg.; Velocity, 2625 ft/s
(800 mps); Water 45 deg obliquity
FUNCTION TEMP:
-29 to +54 deg C
MODE ON DELIVERY:
OFF

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0409
US HCSDS:
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: C
NET EXPL WT: 0.438 g
NET PROP WT: None
STORAGE TEMP: -29 to +54 deg C

REMARKS/DESCRIPTION:
The Mk 30 Fuze requires a Mk 44 or Mk 54 AD fuze in HE rounds for handling and in-bore safety. Prior to launch, the fuze is set to ON for PD SQ action. On firing, centrifugal force moves the slider outward against its spring and into the setting sleeve, unblocking the flash tube. This action takes place after the projectile has left the gun. On impact, the firing pin support collapses and the firing pin is driven into the nose detonator. The flash from the nose detonator passes down the flash tube and initiates the relay detonator which, in turn, causes the AD fuze to function and explode the burster charge of the projectile. The round will dud if fired in the OFF setting. The Mk 30 is the same as the Mk 29 except for contour. The Mk 66 is similar except for contour and the addition of an out-of-line rotor in place of the relay detonator holder. Mods 3 is rain sensitive. The fuze has a dark green, plastic ogive. A 0.01 in metal disk is has been addedbetween the relay detonator and flash channel for added safety.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 31 Mod 2 BD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-61 and 1-62 of MIL-HDBK 146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

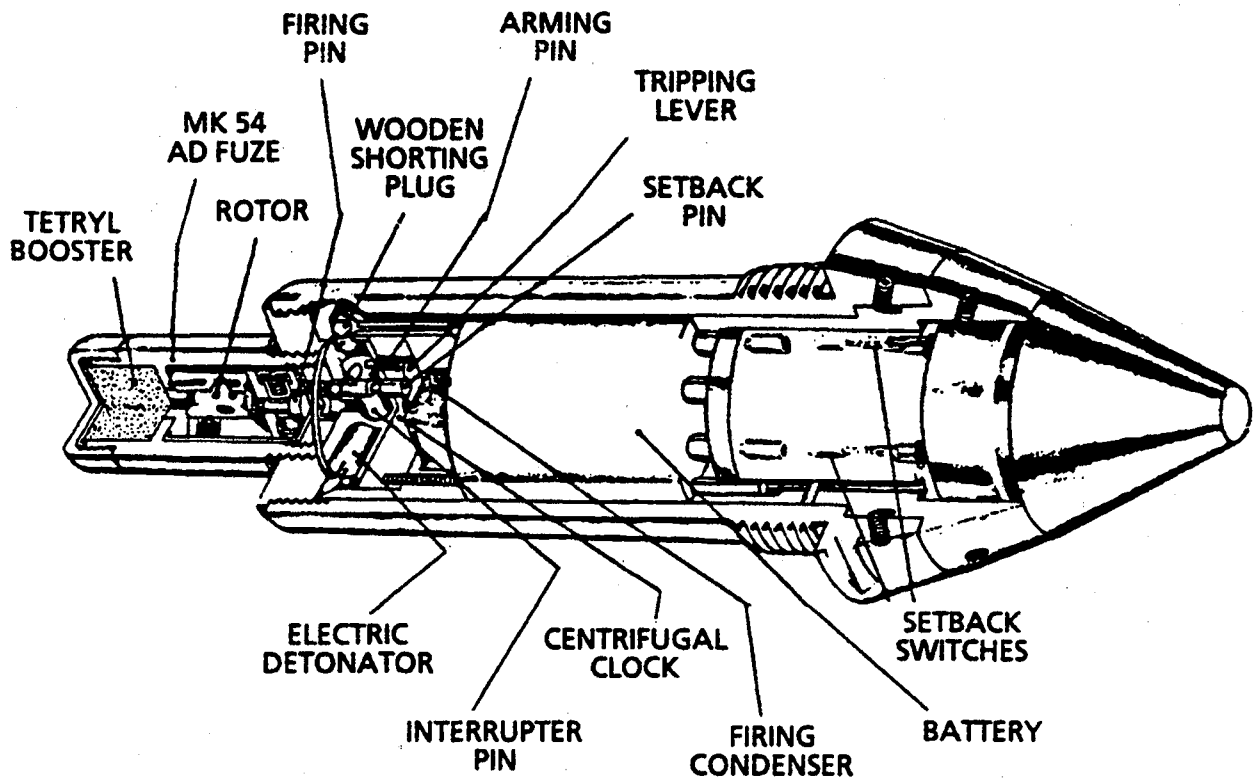

- OVERALL SIZE -	- INTRUSION -	
LG: 12 in (304.8 mm) *	DP: 8.25 in (209.6 mm)	WT: 6.81 lb (3089 g)
XSECT: 3.3 in (83.8 mm)	DIA: 2.3 in (58.4 mm)	THD: 6RH
		THD DP: 0.6 in (15.2 mm)

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G402
CONTACT: Bagnall, J
PHONE: DSN 290-2791
STATUS: Obsolete
USER: Navy
ASSY DWG:
PARTS LIST:
SPEC:
PUB:

NATIONAL STOCK NO:
None
DODIC: None
PRIOR MODEL NO: None
SIMILAR TO: Mk 40

REPLACES: Nothing
REPLACED BY: Mk 53

GENERAL
WEAPON: 5-in/25, 5-in/38, 5-in/51 caliber guns

AMMUNITION:
AAC

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION:
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback

SECOND SAFETY:
Spin: 50 rps, no arm; 75 rps, all arm (Mk 54 AD Fuze)

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
0.6 to 0.8 s for dry battery mods; 0.8 to 1.1 s for reserve energizer.

FUNCTIONING DATA

MODES: Proximity
TYPE: Electronic
CHARACTERISTICS:
1800 ft (550 m) minimum range to target. Maximum influence radius, about 60 ft (18.3 m)

TARGET: Aircraft
SENSITIVITY:
NA

FUNCTION TEMP:

MODE ON DELIVERY:
Proximity

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: Yes, composition unknown

DETONATOR: None

LEAD: None

BOOSTER: None

OTHER: None

POWER SUPPLY:

Mods 0-20 & 30, dry battery; 50% reliability after 8 months storage. Mod 40 has reserve energizer.

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
All models require Mk 54 AD Fuze. Mods 0-20 and 40 have dry batteries. On firing, acceleration causes three setback switches to close connecting the dry battery to the electrical mechanism and initiating firing condenser charging through a high resistance delay circuit. Simultaneously, the setback pin in the centrifugal clock moves back against its spring starting the clock escapement. Centrifugal force drives the clock through its 0.4-0.6 s setting after which the tripping lever moves over the spring-loaded arming pin. The arming pin moves forward, withdrawing from the interrupter cavity allowing the interrupter pin to move outward by centrifugal force. This clears to flash channel between the electric primer and AD fuze and clears the short on the primer leads. After the firing condenser is charged, the fuze is fully armed. A target detection signal fires the primer and, in turn, the AD fuze. Mod 30 has a reserve energizer with an electrolyte ampoule which is broken by setback. The electrolyte is distributed around the electrodes by centrifugal force. There is no SD feature. Mod 40 has a wave suppression feature. * Length includes Mk 54 AD Fuze.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 35 MOD 0, FUZE, BD

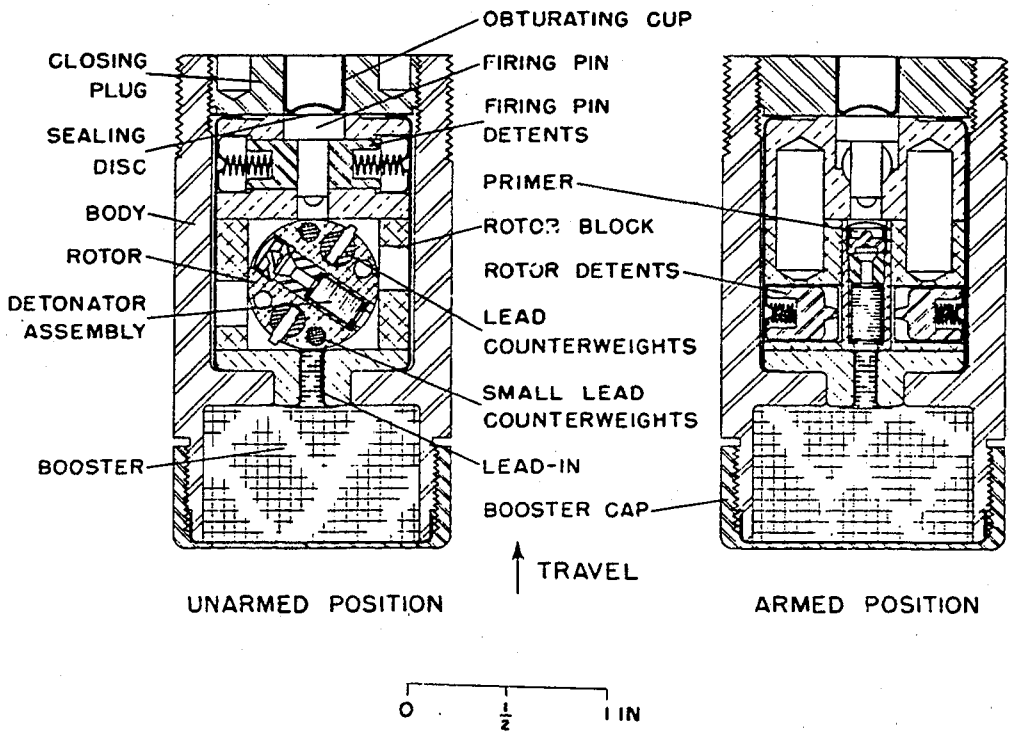

IDENTIFICATION

Agency	NSWC, Code G44 G. Warden, AV 290-1995
Status	Obsolete
Ass'y Dwg. No.	GA 329950 Rev. E
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	8, 12, 14, 16 in.
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	170
Setback (g)	7800
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 35 MOD 0, FUZE, BD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	26
Arm	31
Setback (g)	
Non-arm	
Arm	
Arming Wire	
External Indicat.	No

PHYSICAL DATA

Weight	0.76 lb
Total Length (in.)	2.50
Body Diam. (in.)	
Intrusion	
Thread Size	1.375-20NS-2 (LH)

FUNCTIONING DATA

Action	SQ, BD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl

REMARKS

MK 35 and MK 46 differ only in that MK 35 detent springs are weaker.

Superseded by Fuze MK 55 MOD 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T36E2, BOOSTER

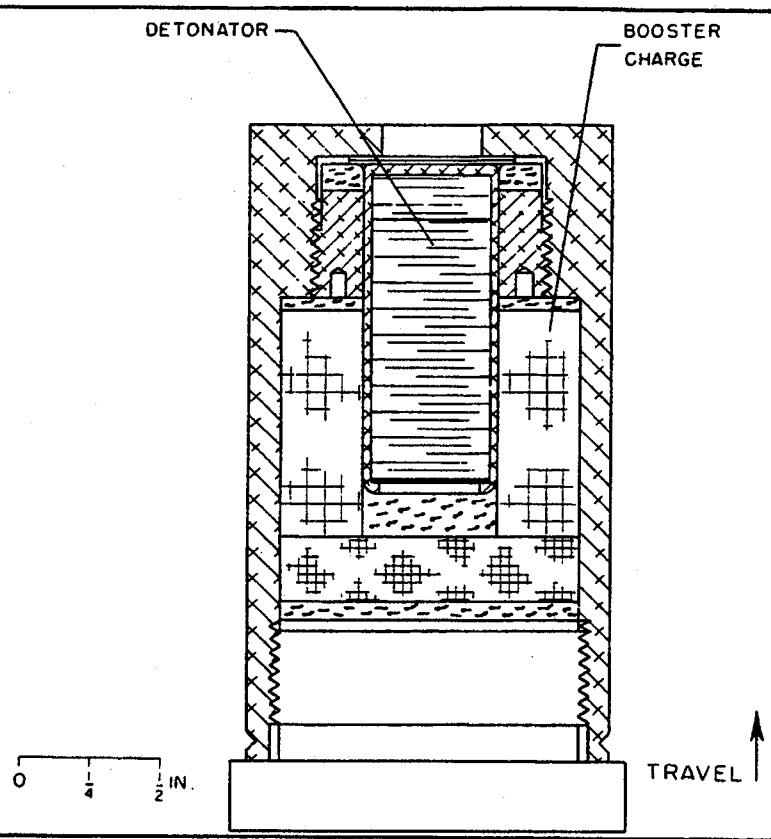

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCN-T
Status	A. Nash AV880-2017 Obsolete
Ass'y Dwg. No.	P-81939
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Recoilless Projectile
Cal. — Size	90 mm
Location	Base
Use	HEAT
MIL-STD's	331, Tests 101, 102
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T36E2, BOOSTER

ARMING DATA

Method	None
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	0.015 lb
Total Length (in.)	2.51
Body Diam. (in.)	
Intrusion	2.24 in.
Thread Size	None

FUNCTIONING DATA

Action	
Type	Pyrotechnic
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M38
Booster	Tetryl

REMARKS

Used with Fuze T209E3 (this booster is the base element).

(The T209E3 Fuze (obsolete) proven to be of poor reliability due to alignment problems encouraged the development of the M509 Fuze)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 36 MOD 0, 1, FUZE, BD

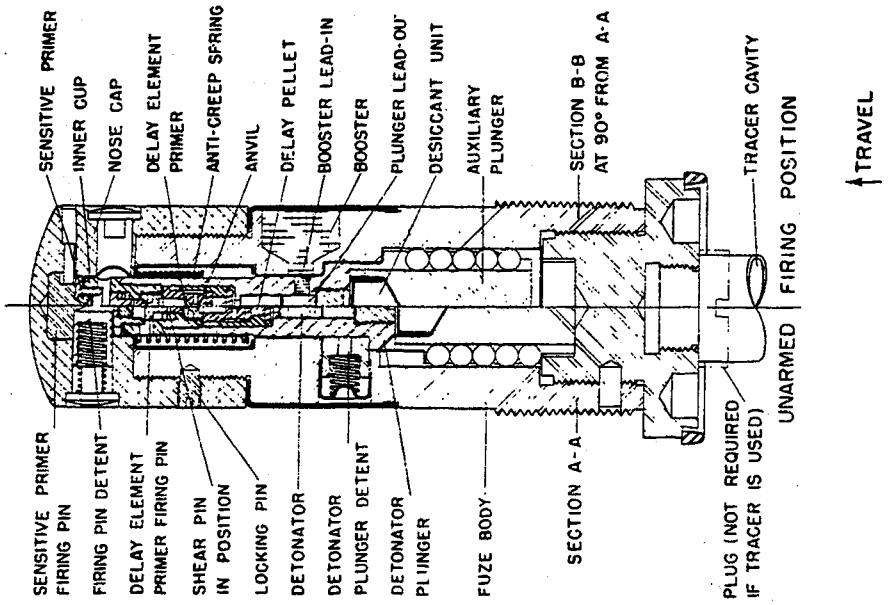

IDENTIFICATION

Agency	NSWC, G44, Klamm
Status	Obsolete
Ass'y Dwg. No.	GA 423485
Parts List	
Specification	OS 3429
Previous Number	

GENERAL

Carriers	Projectile, rocket
Cal. — Size	Projectile, 4"/50, rocket 5 in.
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	270
Setback (g)	14,500
Velocity (fps)	

KEY FEATURES

Sensitive to firing on water impact

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 36 MOD 0, 1, FUZE, BD

ARMING DATA

Method	Spin
Delay	30 ft
Rotation (rps)	
Non-arm	50 Arm 75
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.58 lb
Total Length (in.)	4.67
Body Diam. (in.)	1.38
Intrusion	4.67 in.
Thread Size	1.5-12NF-3 (LH)

FUNCTIONING DATA

Action	BD, Delay, Select
Type	Mechanical
Delay	0.01 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	MS plate
Thickness (in.)	0.375
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	Mercury fulminate
Detonator	Lead azide
Booster (2)	Tetryl (3.2 gm)
Lead	Tetryl
Delay	Black powder

REMARKS

4"/50 gun now obsolete

Fuze MK 36 MOD 0 similar to Fuze MK 31 MOD 0 except for 0.01 sec delay

MOD 1 contains 2 boosters directly initiated, and 4 auxiliary boosters.

SERIES: N CHAPTER: 1
DESIGNATION: MK 36 MOD 0,1
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M37A1 (M37A1E1), FUZE, COMBINATION

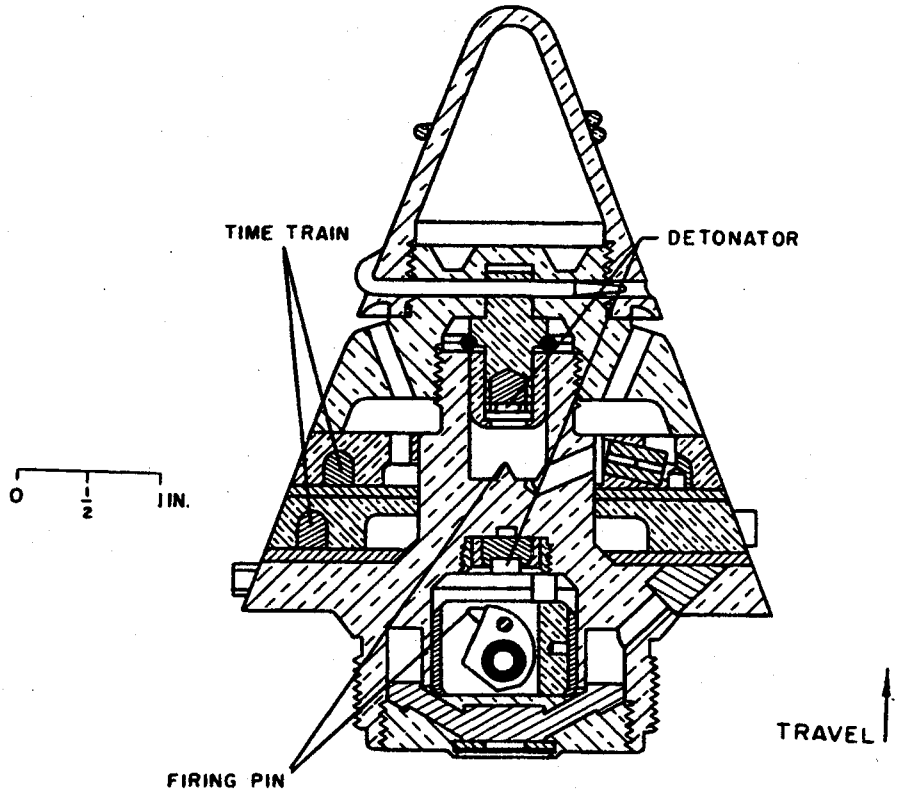

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	73-3-137 (A1) 73-3-153 (A1E1)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	155 mm, 6 in.
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	21,000
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 1
DESIGNATION: M 37A1
Time & SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M37A1 (M37A1E1), FUZE, COMBINATION

ARMING DATA

Method	Spin, setback
Delay	
Rotation (rps)	
Non-arm 30 **Arm** 40	
Setback (g)	
Non-arm **Arm**	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

	A1	A1E1
Weight	2.58 lb	3.41 lb
Total Length (in.)	4.323	5.72
Body Diam. (in.)		
Intrusion	0.81 in.	2.23 in.
Thread Size	1.7-14NS-1A (A1) 2-12NS-1A (A1E1)	

FUNCTIONING DATA

Action	Time and impact
Type	Pyrotechnic (time)
Delay	Plunger (PD)
Time Type	Pyrotechnic
Time Setting (sec)	0 to 45
Target	Antipersonnel, anti-material
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	Special
Detonator	
Booster	None (A1) M20 (A1E1)

REMARKS

Explosive train is not interrupted.

Similar to navy Fuze MK XVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M39A2, FUZE, PD

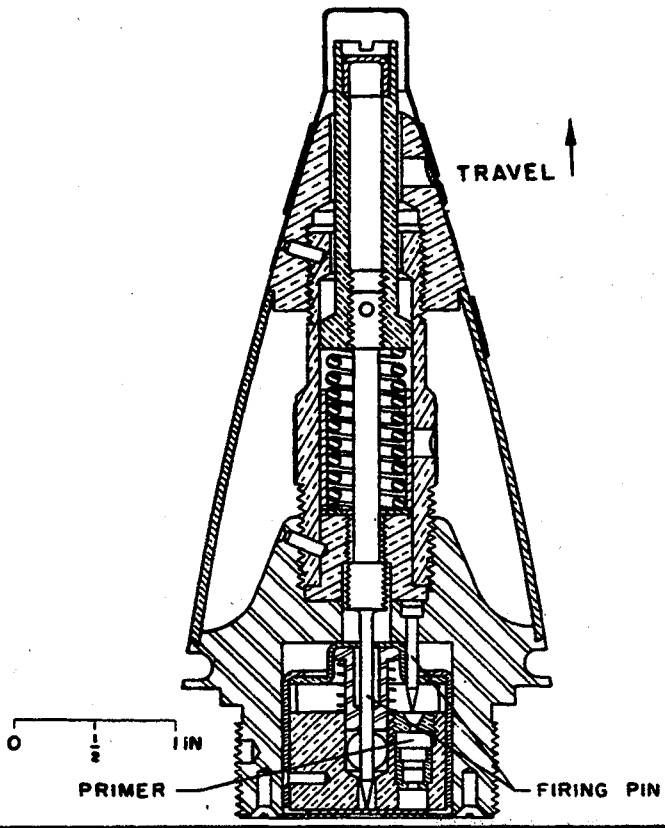

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	73-2-115
Parts List	
Specification	
Previous Number	T2

GENERAL

Carriers	Projectile
Cal. — Size	75 mm and up
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	550
Setback (g)	21,000
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 1
DESIGNATION: M 39A2
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M39A2, FUZE, PD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	25 Arm 33
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.8 lb
Total Length (in.)	5.24
Body Diam. (in.)	
Intrusion	0.86 in.
Thread Size	1.7-14NS-1A

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Explosive train is not interrupted.

Replaced by Fuze M48A3.

Same as Fuze M39A1 except it has no booster.

SERIES: A CHAPTER: 1
DESIGNATION: M 39A2
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 39 MOD 0, 1, FUZE, BD

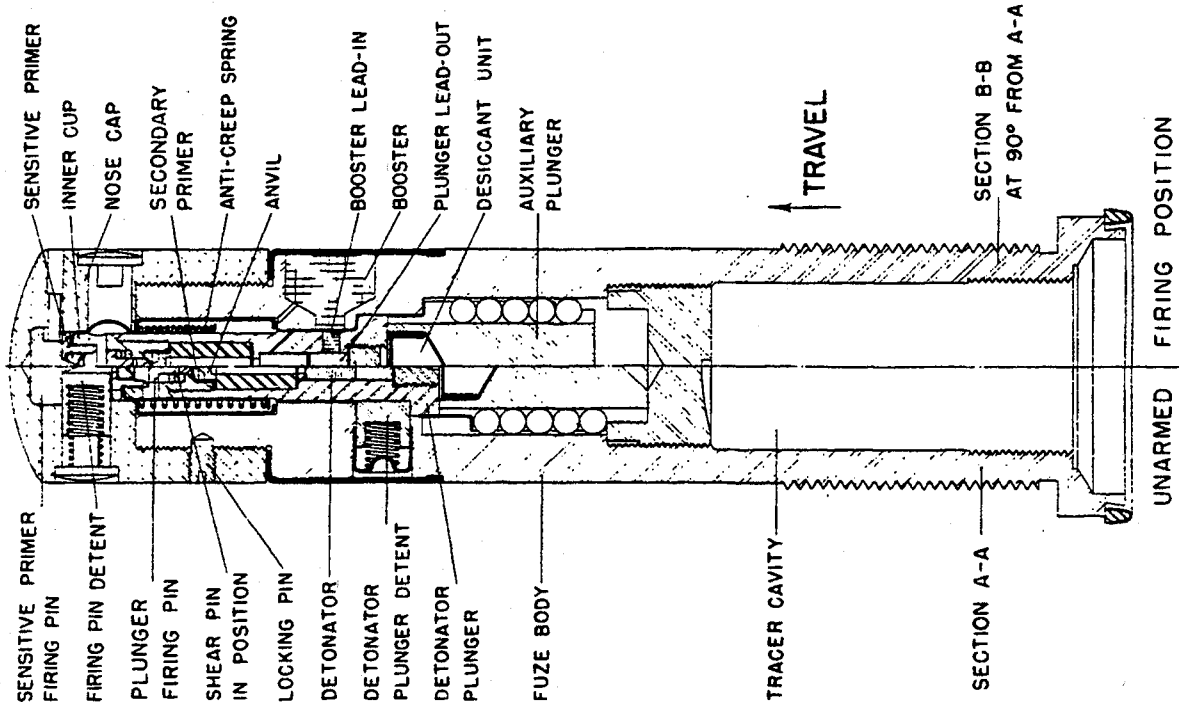

IDENTIFICATION

Agency	NSWC, Code G44 A. Munach AV 290-1970
Status	Obsolete
Ass'y Dwg. No.	GA 226148
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	8, 16 in.
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	170
Setback (g)	7800
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 39 MOD 0, 1, FUZE, BD

ARMING DATA

Method	
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.88
Total Length (in.)	6.75
Body Diam. (in.)	1.5
Intrusion	6.75 in.
Thread Size	1.5-12NF-3 (LH)

FUNCTIONING DATA

Action	BD
Type	Mechanical
Delay	0.1 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 102 MOD 1
Detonator	MK 33 MOD 0
Booster	Tetryl
Lead	Tetryl

REMARKS

MOD 0 is obsolete

Same as MK 48 without delay

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

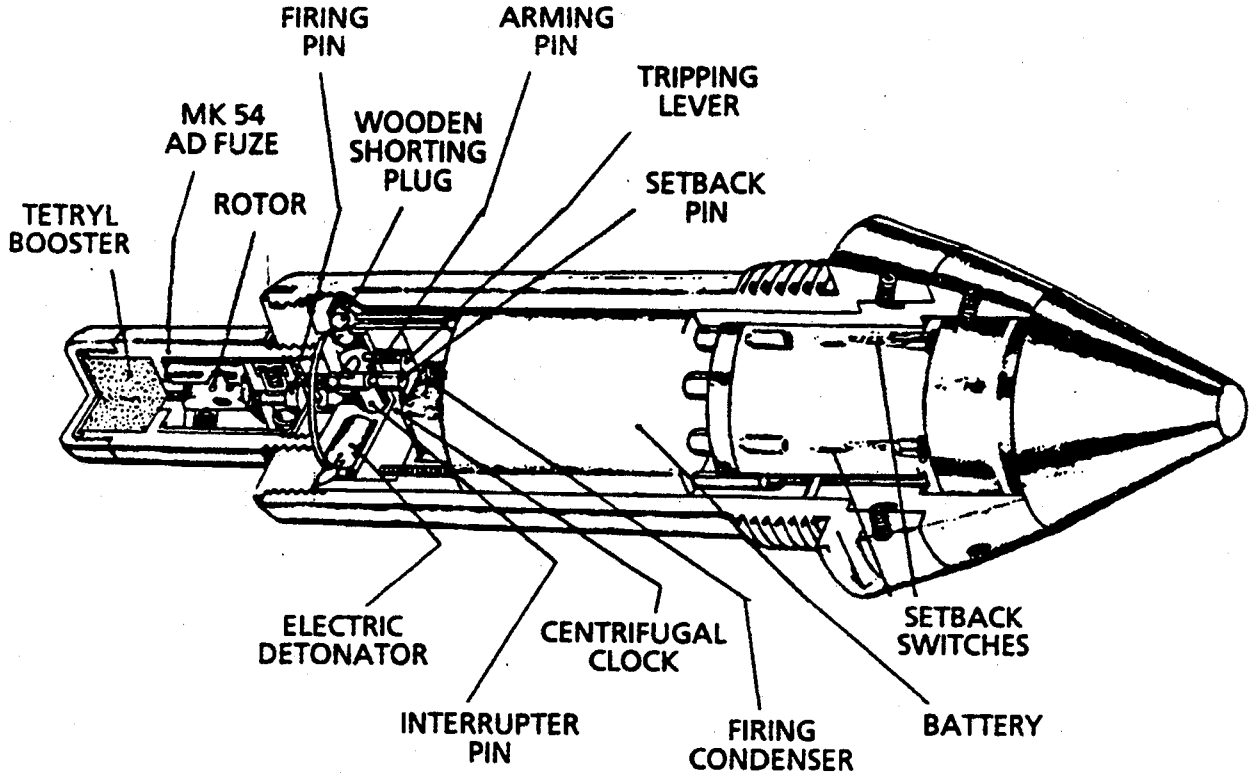

- OVERALL SIZE -
LG: 12 in (304.8 mm) *
XSECT: 3.3 in (83.8 mm)

- INTRUSION -
DP: 8.25 in (209.6 mm)
DIA: 2.3 in (58.4 mm)

WT: 6.81 lb (3089 g)
THD: 6RH
THD DP: 0.6 in (15.2 mm)

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G402
CONTACT: Bagnall, J
PHONE: DSN 290-2791
STATUS: Obsolete
USER: Navy
ASSY DWG:
PARTS LIST:
SPEC:
PUB:

NATIONAL STOCK NO:
None
DODIC: None
PRIOR MODEL NO: None
SIMILAR TO: Mk 32

REPLACES: Nothing
REPLACED BY: Mk 53

GENERAL
WEAPON: 5-in/25 & 5-in/38 caliber guns

AMMUNITION:
AAC

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION:
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback

SECOND SAFETY:
Spin: 50 rps, no arm; 75 rps, all arm (Mk 54 AD Fuze)

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
0.8 to 1.1 s

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: Yes, composition unknown

DETONATOR: None

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: Proximity
TYPE: Electronic
CHARACTERISTICS:
2400 ft (732 m) minimum range to target. Maximum influence radius, about 70 ft (21.3 m)

TARGET: Aircraft
SENSITIVITY:
NA

FUNCTION TEMP:

MODE ON DELIVERY:
Proximity

POWER SUPPLY:

Reserve energizer. Eighteen month normal shelf life.

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
The fuze requires a Mk 54 AD Fuze. On firing, setback force breaks an ampoule containing electrolyte. Centrifugal force distributes the electrolyte around the battery electrodes. Acceleration causes three setback switches to close connecting the battery to the electrical mechanism and initiating firing condenser charging through a high resistance delay circuit. Simultaneously, the setback pin in the centrifugal clock moves back against its spring starting the clock escapement. Centrifugal force drives the clock through its 0.4-0.6 s setting after which the tripping lever moves over the spring-loaded arming pin. The arming pin moves forward, withdrawing from the interrupter cavity allowing the interrupter pin to move outward by centrifugal force. This clears to flash channel between the electric primer and AD fuze and clears the short on the primer leads. After the firing condenser is charged, the fuze is fully armed. A target detection signal fires the primer and, in turn, the AD fuze. There is no SD feature. The fuze has a wave suppression feature. * Length includes Mk 54 AD Fuze.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 42,FUZE, MECH. TIME

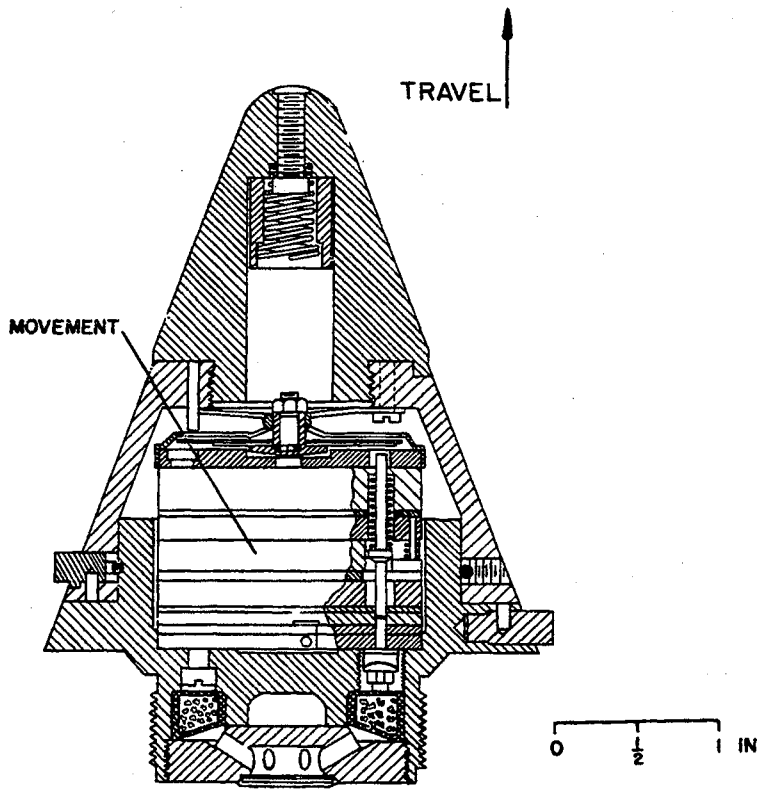

IDENTIFICATION

Agency	NSWC, Code G44 A. Munach AV 290-1970
Status	Obsolete
Ass'y Dwg. No.	
Parts List	
Specification	OS 2114
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	12, 14, 16 in.
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	105
Setback (g)	4800
Velocity (fps)	

KEY FEATURES

SERIES: N CHAPTER: 1
DESIGNATION: MK 4
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 42, FUZE, MECH. TIME

ARMING DATA

Method	Spin, Setback
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.28 lb
Total Length (in.)	4.31
Body Diam. (in.)	
Intrusion	0.803 in.
Thread Size	1.70-14NS-1

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	0.8-45
Target	Antiaircraft, ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Black powder
Aux. Det.	MK 54

REMARKS

Replaced by MK 62

SERIES: N CHAPTER: 1
DESIGNATION: MK 42
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

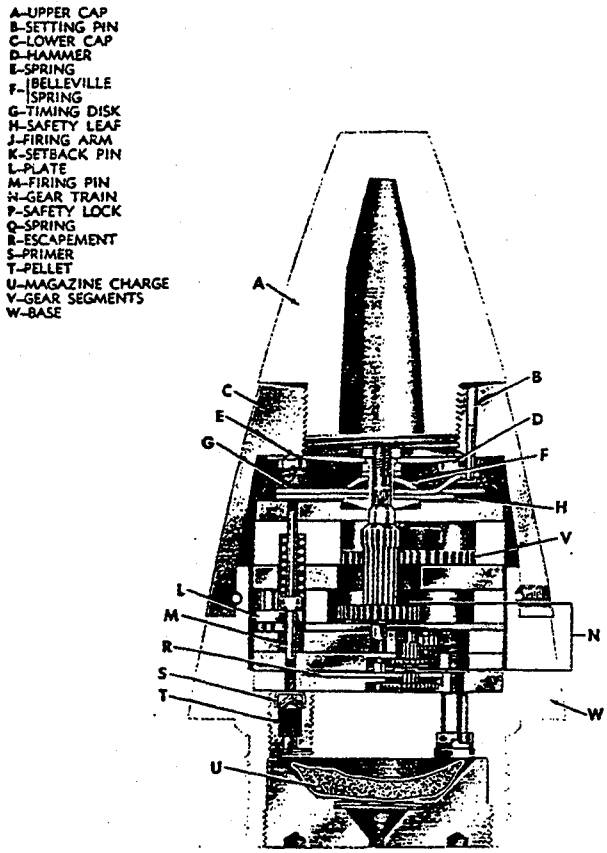

- OVERALL SIZE -	- INTRUSION -	
LG: 4.51 in (115 mm)	DP: 0.8 in (20 mm)	WT: 1.41 lb (640 g)
XSECT:	DIA:	THD: 1.7-14NS-1
		THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-
- CONTACT:
- PHONE: DSN 880-
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-7-29
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: T12
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 3-in, 90-mm & 105 mm guns

- AMMUNITION:
  - HE

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 400 rps
- SETBACK: 21,000 g
- VELOCITY: 2,700 fps (823 m)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

Supersedes page 1-77 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 1,400 g, no arm;
7,500 g, all arm

SECOND SAFETY:
Spin: 50 rps, no arm;
167 rps, all arm

OTHER SAFETY:
Arming wire in M43A1

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
4 ft

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: M29A1

DETONATOR:

LEAD:

BOOSTER: M21A4

OTHER:

FUNCTIONING DATA
MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
0 to 30 second setting;
0.6 second minimum

TARGET: Aircraft
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Centrifugal weights

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
The fuze is set by turning the lower cap which rotates the timing disk by means of the setting pin. This causes a desired change in the angular distance between the firing arm and the notch in the timing disk. On firing, setback causes the hammer on the cantilever spring to strike the upraised lug on the timing disk, flattening the lug and relasing the disk from the setting pin. At the same time, the setback pin locking the firing arm moves back, leaving the firing arm free to turn when the notch in the timing disk comes opposite the finger on the firing arm. Centrifugal force rotates and releases the safety lock on the escapement. The weighted gear segments in mesh with the main driving pinion drive the movement, the rate of rotation of the pinion and, therefore, of the timing disk governed by the escapement. When the notch in the timing disk reaches the finger of the firing arm, the firing arm turns to swing from under the firing pin flange allowing the firing pin to strike the primer initiating the firing train. The M43A2 was a dummy fuze. The M80 was a dummy for the M43A5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T44, BOOSTER

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	FC 5824
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile, Booster
Cal. — Size	4.7 in.
Location	Internal
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T44, BOOSTER

ARMING DATA

Method	Spin
Delay	8 sec
Rotation (rps)	
Non-arm	3000
Arm	3500
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.15 lb
Total Length (in.)	1.49
Body Diam. (in.)	
Intrusion	0.81 in.
Thread Size	1.7-14NS-1

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech. two center tuned
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M17
Booster	
Lead	Tetryl

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T 44
Booster

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

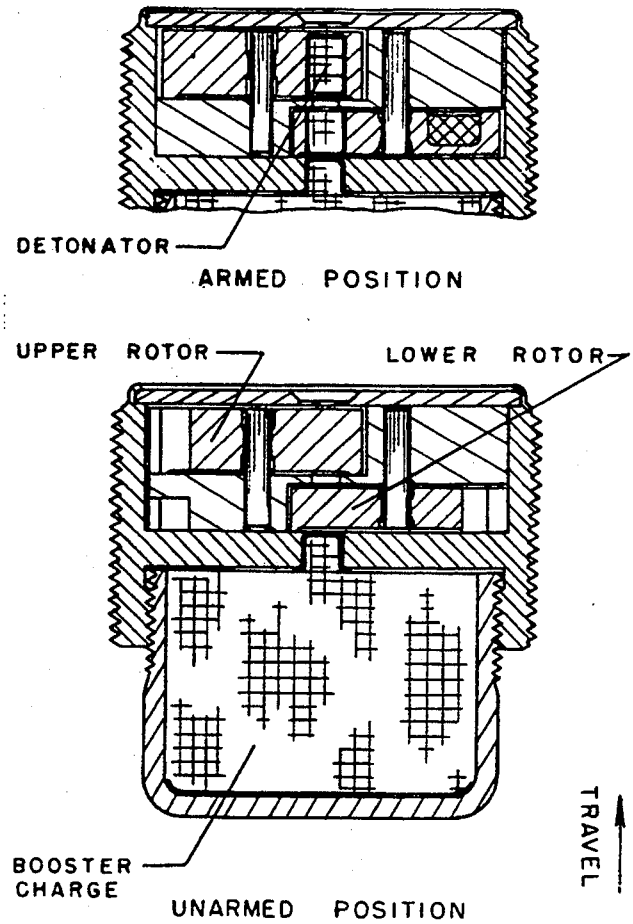

- OVERALL SIZE -	- INTRUSION -	WT: 0.471 lb (214 g)
LG: 1.819 in (46.2 mm)	DP:	THD: 1.561-20NS-2 (LH)
XSECT: 1.31 in (33.3 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G41
- CONTACT: Niemeyer, R
- PHONE: DSN 290-2750
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 1 200 862 (MOD 3)
- PARTS LIST: LD 292270 (MOD 3)
- SPEC: MIL-F-18905 (NORD)
- PUB: SW030-AA-MMO-010

- NATIONAL STOCK NO:
  1390-00-038-9769 (Mod 1)
- DODIC: N274 (Mod 1)
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 52

- REPLACES: Mk 44 Mod 0
- REPLACED BY:

GENERAL
- WEAPON: 5-in/38 & 5-in/54
  Mk 16 & Mk 18 Guns

- AMMUNITION:
  - VT-RF & VT-IR Fuzes
  - MT & PD Fuzes

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 338 rps
- SETBACK: 20,600 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316B
SETTERS:

Supersedes page 1-81 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 50 rps no arm,
75 all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
1.5 to 1.8 m
13.7 to 41.1 m

EXPLOSIVE COMPONENTS

S&A DEVICE: Spin rotors

PRIMER: None

DETONATOR: MK 37 Mod 0

LEAD: Tetryl

BOOSTER: 25 g tetryl

OTHER: None

FUNCTIONING DATA

MODES: See fuze
TYPE: Mechanical
CHARACTERISTICS:

TARGET: See fuze
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0408
US HCSDS:
UN CL/DIV SCG: 1.1 D
US DOT SHIP CL: A
NET EXPL WT: 1.6329 g
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
Used in early VT, PD, and MT nose fuzes to provide inbore safety. On firing, after setback, centrifugal force activates two center rotors. Weights in rotors tend to move them outboard overcoming springs in detents. Rotors turn until each is halted by its stop pin. In this position, each rotor has placed its explosive charge in line with booster lead-in and hole in cover disc. Rotors are held in this position by torque of weights tending to reach a position farther outboard. The torque is resisted by the stop pins. When nose fuze in projectile fires, shock wave from explosion passes through cover disc to detonator in upper rotor. The detonator initiates lead charge in lower rotor and, in turn, booster lead-in and booster charge. If either explosive charge in rotors is accidentally initiated when fuze is unarmed, booster lead-in and booster will not be activated. Mod 1 used with tube-type proximity fuzes, now replaced with Mk 18 and Mk 42 RFSDs. The Mod 2 was developed and used with M51A2 PD Army nose fuze in spin-stabilized rocket. Later used in 5-in/38 & 5-in/54 projectiles with PD and MT fuzes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M45, FUZE, PD

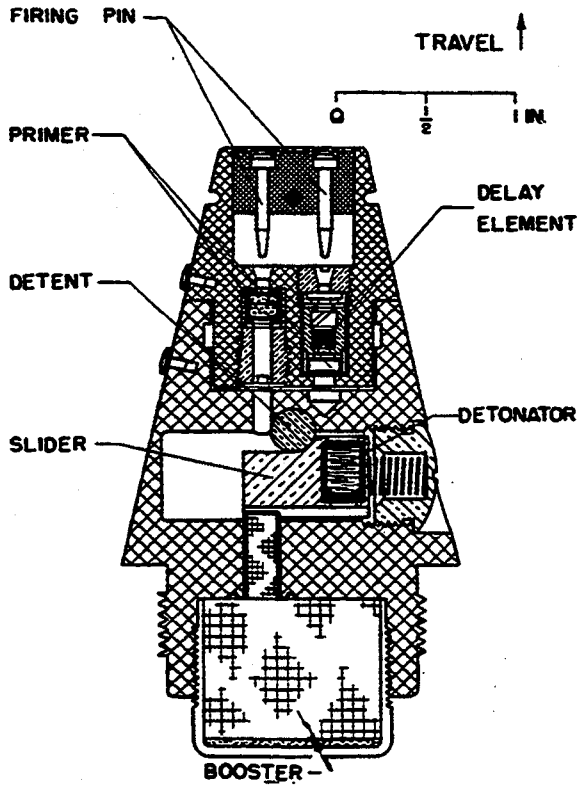

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T S. Israels AV 880-6379
Status	Obsolete
Ass'y Dwg. No.	73-1-143
Parts List	
Specification	
Previous Number	T9E5

GENERAL

Carriers	Projectile
Cal. — Size	60, 81 mm
Location	Nose
Use	HE or GP
MIL-STD's	331, Tests 101, 102
Max Values	
Rotat. (rps)	
Setback (g)	6000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M45, FUZE, PD

ARMING DATA

Method	Setback
Delay	2 - 5 ft
Rotation (rps)	No
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	300
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	0.5 lb
Total Length (in.)	3.46
Body Diam. (in.)	
Intrusion	1.12 in.
Thread Size	1.5-12NF 1A

FUNCTIONING DATA

Action	PD, SQ, delay
Type	Mechanical
Delay	0.1 sec
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

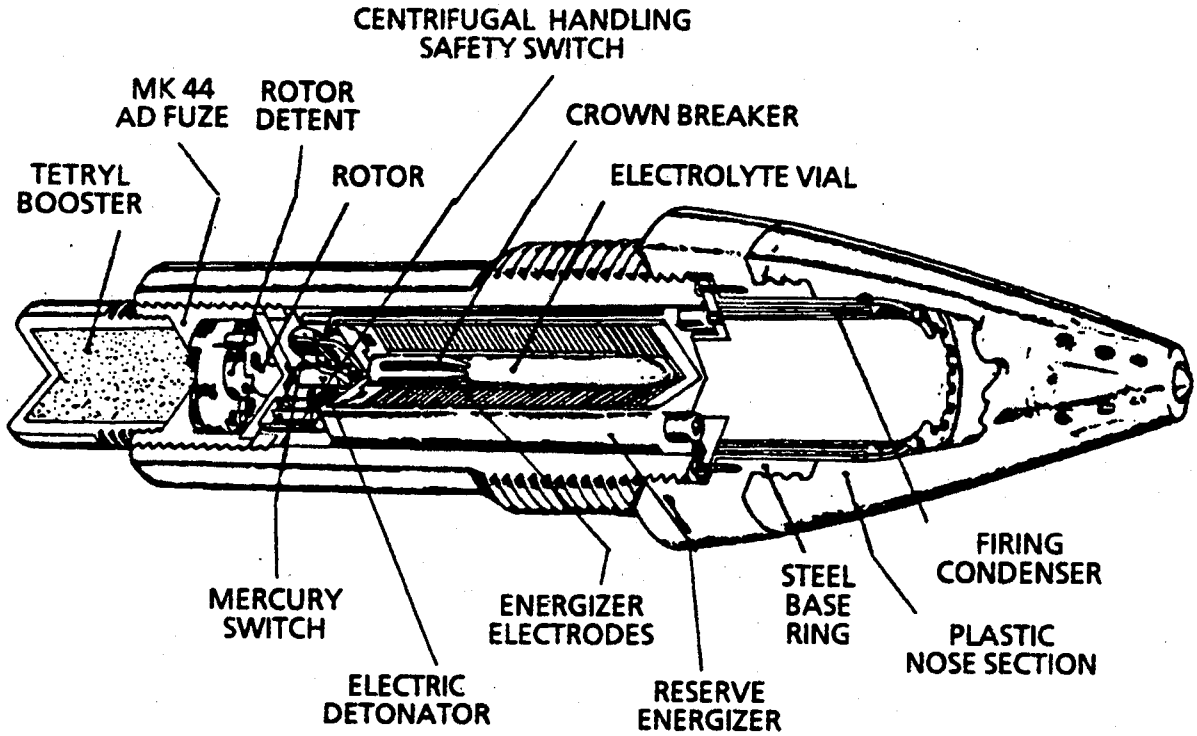

- OVERALL SIZE -	- INTRUSION -	WT: 2.72 lb (1234 g)
LG: 7.7 in (195.6 mm) *	DP:	THD: 12 RH
XSECT: 2.4 in (61.0 mm)	DIA:	THD DP: 1.0 in (25.4 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army, Navy
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB: Navy Projectiles and Fuzes, 1945

- NATIONAL STOCK NO:
  - None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 47, Mk 53, Mk 58, Mk 59
- REPLACES:
- REPLACED BY: Mk 58

GENERAL
- WEAPON: Army: 55, 90, 105, 120, 155, 240-mm & 8-in guns. Navy: 3-in/50 caliber guns
- AMMUNITION:
  - HE, AA

- LOCATION: Nose
- BALLISTIC LEVELS:
  - ROTATION:
  - SETBACK:
  - VELOCITY:

  - CREEP:
  - FLIGHT TIME:
- SAFETY STD: Doesn't meet MIL-STD-1316
- SETTERS:

Supersedes page 1-85 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback ruptures reserve energizer electrolyte ampoule.

SECOND SAFETY:
Spin distributes electrolyte around battery electrodes and removes short from primer.

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
2100 ft (640 m)
0.6 to 1.0 s

EXPLOSIVE COMPONENTS

S&A DEVICE: None, requires Mk 44 AD Fuze for bore safety.
PRIMER: Yes, composition unknown
DETONATOR: None
LEAD: None
BOOSTER: None
OTHER: None

FUNCTIONING DATA

MODES: Proximity
TYPE: Electronic
CHARACTERISTICS:
50 ft (15 m) maximum influence radius; 1800 ft (550 m) minimum range.

TARGET: Aircraft
SENSITIVITY:
NA

FUNCTION TEMP:

MODE ON DELIVERY:
Proximity

POWER SUPPLY:

Reserve energizer.

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:

On firing, acceleration causes the fingers of the crown breaker to open up, allowing the electrolyte vial to break against the bottom of the breaker. Centrifugal force distributes the electrolyte throughout the energizer, activating it in 0.2 to 0.3 s. Centrifugal force also opens the handling safety switch, which previously had been shorting the firing condenser. The firing condenser begins to accumulate a charge through its high resistance electrical delay and current is supplied to the VT element. Centrifugal force causes the mercury switch to open a short across the primer leads. The fuze is fully armed in 0.6 to 1.0 s. On target approach, the reflected electromagnetic signal causes the VT element to discharge the firing condenser through the electric primer. The output of the primer functions the Mk 44 AD Fuze and, in turn, the projectile main charge. Mk 45 and Mk 58 Fuzes have single mercury switches; Mk 47, Mk 53 and Mk 59 have two. * Length includes Mk 44 AD Fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M46, FUZE, PD

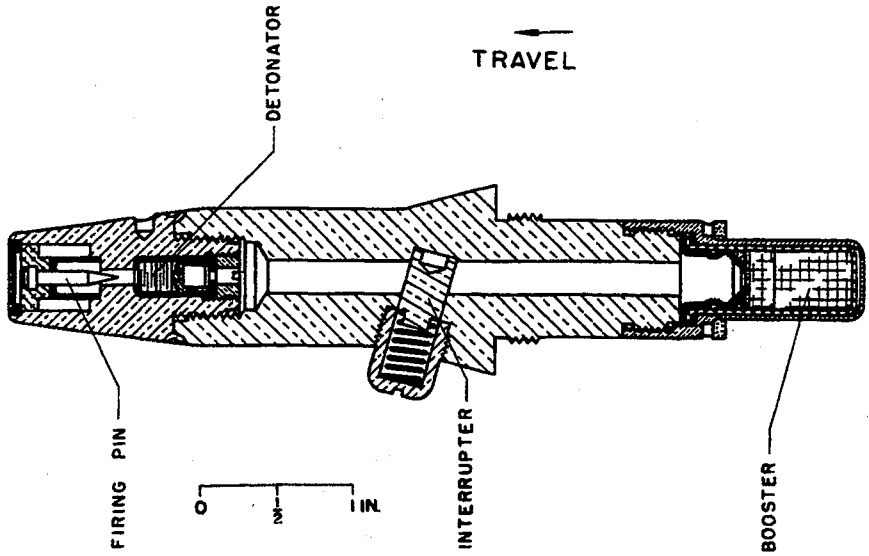

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Obsolete
Ass'y Dwg. No.	73-2-126
Parts List	
Specification	
Previous Number	T19

GENERAL

Carriers	Projectile
Cal. — Size	75, 155, 240 mm; 2.95, 8, 10, 12 in.
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M46, FUZE, PD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm 21	Arm 30
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.72 lb
Total Length (in.)	5.66
Body Diam. (in.)	
Intrusion	2.65 in.
Thread Size	0.69-24NS-1A

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	Wood screen
Thickness (in.)	1
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	Special (M24 type)
Booster	MK 2A

REMARKS

WWI French (contour, long and slender).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 46, FUZE, AUX. DET.

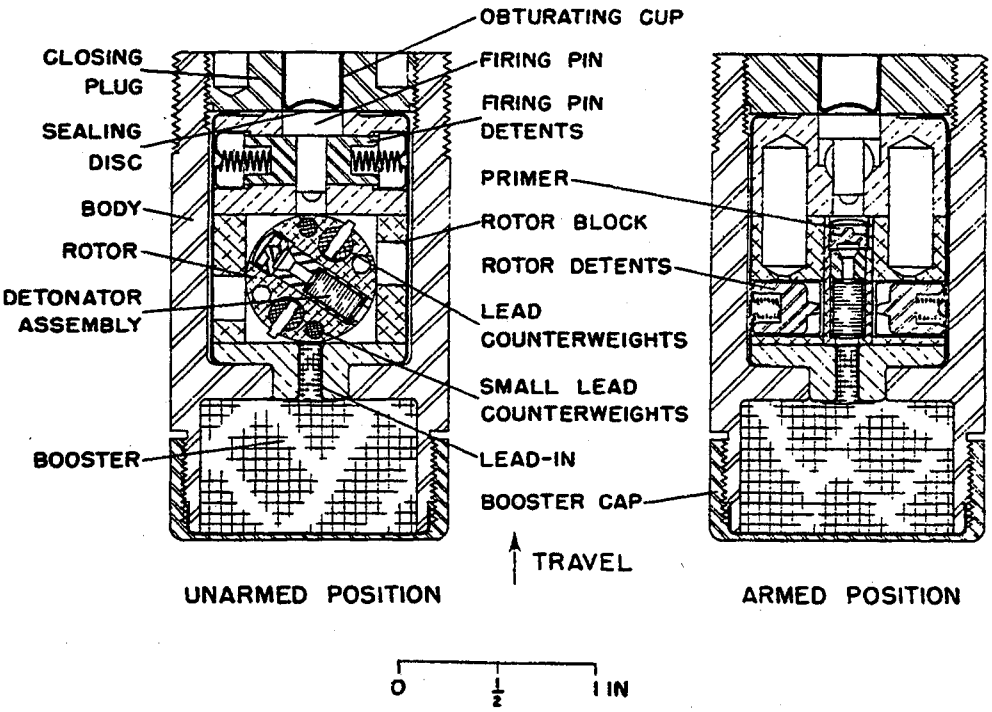

IDENTIFICATION

Agency NSWC, G44 G. KLAMM AV 290-1970
Status Obsolete
Ass'y Dwg. No. GA 329950 REVE
Parts List
Specification
Previous Number

GENERAL

Carriers Projectile
Cal. — Size 3, 5, 6 in.
Location Nose
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps) 340
Setback (g) 21,000
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 46, FUZE, AUX. DET.

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	50 Arm 75
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	2.50
Body Diam. (in.)	
Intrusion	0.77 in.
Thread Size	1 3/8-20NS-2

FUNCTIONING DATA

Action	SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl
Lead	Tetryl

REMARKS

Replaced MK 7

M46 replaced by MK 54

SERIES: N CHAPTER: 1
DESIGNATION: MK 46
Aux Det Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M47, FUZE, PD

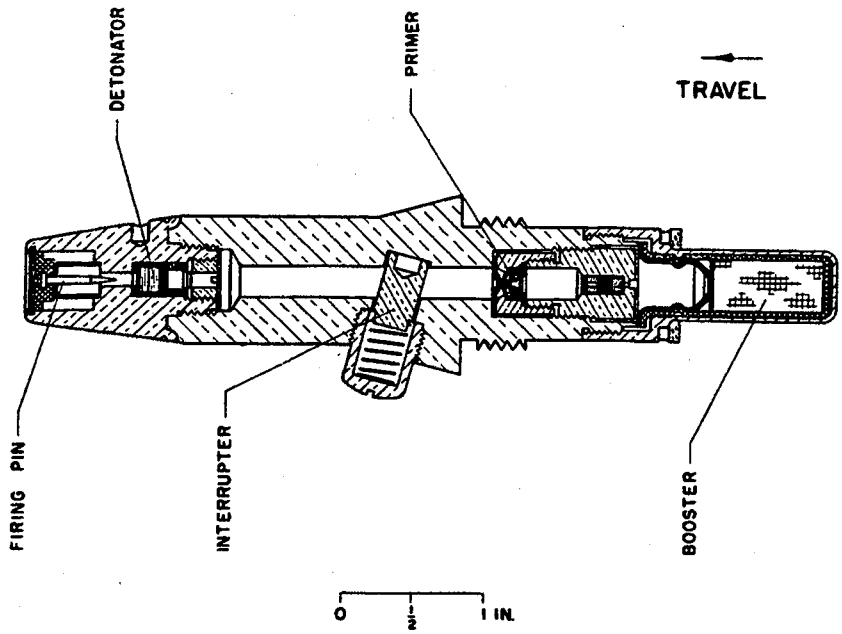

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Obsolete
Ass'y Dwg. No.	78-2-157
Parts List	
Specification	
Previous Number	T21

GENERAL

Carriers	Projectile
Cal. — Size	75 mm and up
Location	Nose
Use	GP, chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M47, FUZE, PD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	21.6 Arm 30
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.67 lb
Total Length (in.)	5.66
Body Diam. (in.)	
Intrusion	1.262 in.
Thread Size	Lowenherz

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target Sensitivity	Antipersonnel, screening
Material	Wood screen
Thickness (in.)	1
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M 27
Detonator	
Booster	MK 2A

REMARKS

Replaced by Fuze M48A3.

SERIES: A CHAPTER: 1
DESIGNATION: M 47
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

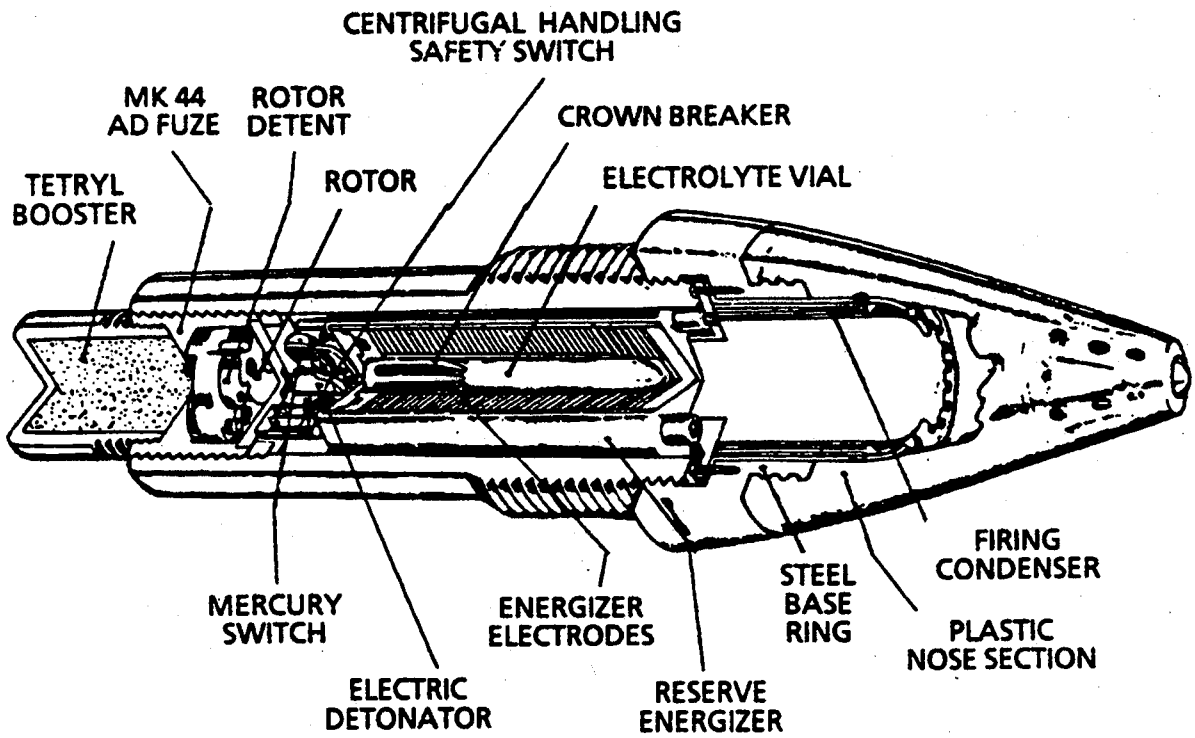

- OVERALL SIZE -	- INTRUSION -	WT: 4.28 lb (1941 g)
LG: 8.9 in (226.1 mm) *	DP:	THD: 6 RH
XSECT: 3.3 in (83.8 mm)	DIA:	THD DP: 0.5 in (12.7 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB: Navy Projectiles and Fuzes, 1945
- NATIONAL STOCK NO: None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 45, Mk 53, Mk 58, Mk 59
- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 6-in/47 caliber guns
- AMMUNITION: HE
- LOCATION: Nose
- BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:
- CREEP:
- FLIGHT TIME:
- SAFETY STD: Doesn't meet MIL-STD-1316
- SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback ruptures reserve energizer electrolyte ampoule.

SECOND SAFETY:
Spin distributes electrolyte around battery electrodes and removes short from primer.

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
2100 ft (640 m)
0.6 to 1.0 s

EXPLOSIVE COMPONENTS

S&A DEVICE: None, requires Mk 44 AD Fuze for bore safety.
PRIMER: Yes, composition unknown

DETONATOR: None

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: Proximity
TYPE: Electronic
CHARACTERISTICS:
2400 ft (732 m) minimum range.

TARGET: Shore bombardment
SENSITIVITY:
NA

FUNCTION TEMP:

MODE ON DELIVERY:
Proximity

POWER SUPPLY:

Reserve energizer.

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, acceleration causes the fingers of the crown breaker to open up, allowing the electrolyte vial to break against the bottom of the breaker. Centrifugal force distributes the electrolyte throughout the energizer, activating it in 0.2 to 0.3 s. Centrifugal force also opens the handling safety switch, which previously had been shorting the firing condenser. The firing condenser begins to accumulate a charge through its high resistance electrical delay and current is supplied to the VT element. Centrifugal force causes the mercury switch to open a short across the primer leads. The fuze is fully armed in 0.6 to 1.0 s. On target approach, the reflected electromagnetic signal causes the VT element to discharge the firing condenser through the electric primer. The output of the primer functions the Mk 44 AD Fuze and, in turn, the projectile main charge. Mk 45 and Mk 58 Fuzes have single mercury switches; Mk 47, Mk 53 and Mk 59 have two. * Length includes Mk 44 AD Fuze.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M48A3 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-93and 1-94 of MIL-HDBK 146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M48A3E2, FUZE, PD

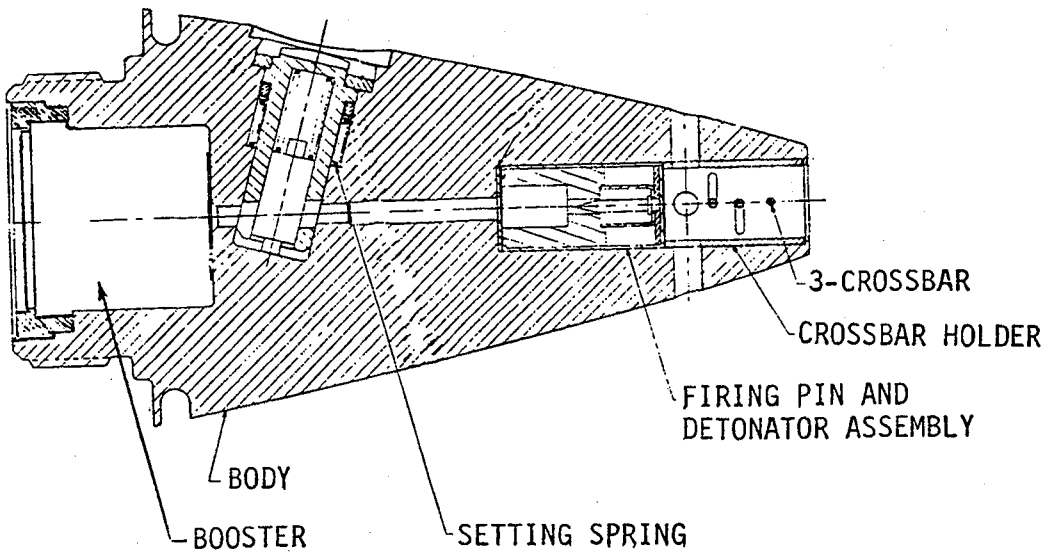

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T G. Eckstein AV 880-5468
Status	Cancelled
Ass'y Dwg. No.	9231837
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	175 mm
Location	Nose
Use	Smoke and chemical
MIL-STD's	
Max Values	
Rotat. (rps)	550
Setback (g)	21,000
Velocity (fps)	3000

KEY FEATURES

Single piece, all aluminum body, to increase structural integrity of fuze. Also includes density integrating head to improve reliability in heavy rain and improved jungle penetration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M48A3E2, FUZE, PD

ARMING DATA

Method	Spin
Delay	200 ft
Rotation (rps)	
Non-arm	16
Arm	33
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.63 lb
Total Length (in.)	4.55
Body Diam. (in.)	2.412
Intrusion	
Thread Size	1.7-14UNS

FUNCTIONING DATA

Action	PD, SQ and delay
Type	Mechanical
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target Sensitivity	Antipersonnel, screening, marking
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M24
Booster	None
Delay Plunger	M1 (0.05 sec)

REMARKS

Designated M572E1 when assembled with Booster M125A1.

Product improvement of M48A3 fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 48 Mod 4 BD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-97 and 1-98 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

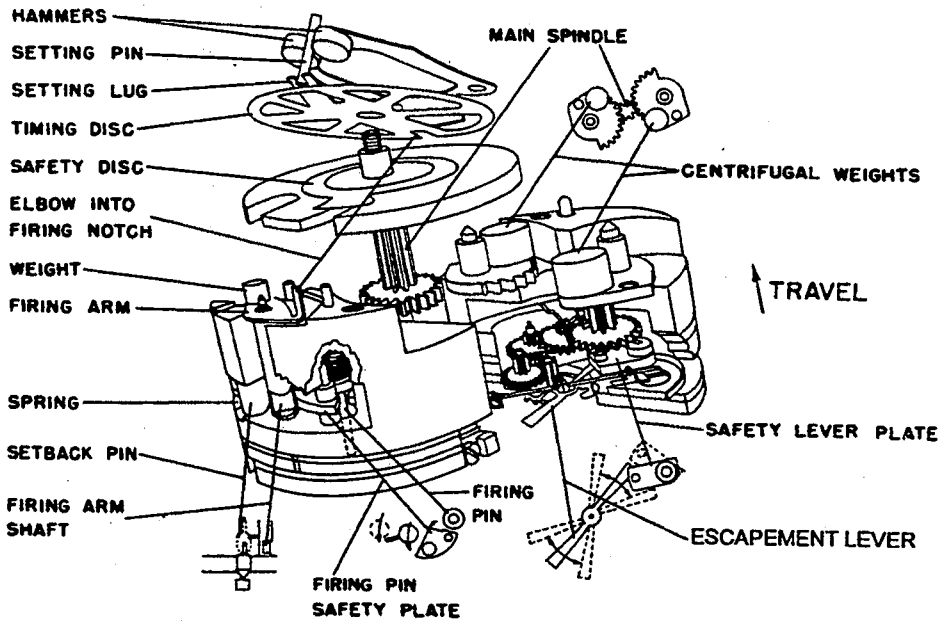

- OVERALL SIZE -	- INTRUSION -	WT: 2.280 lb (1034 g)
LG: 4.308 in (109.5 mm)	DP: 0.803 in (20.4 mm)	THD: 1.700-14NS-1
XSECT: 2.98 in (75.7 mm)	DIA: 1.700 in (43.2 mm)	THD DP: 0.724 in (18.4 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G41
- CONTACT: Niemeyer, R
- PHONE: DSN 290-2750
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 1 378 979 (Mod 8)
- PARTS LIST: LD 295 860 (Mod 8)
- SPEC: RTP 1 418 645 (Mod 8)
- PUB: SW030-AA-MMO-010

- NATIONAL STOCK NO: 1390-00-203-4304
- DODIC: N240
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 25-5, 51-5, 61-1, Mk 342-0, Mk 349-1
- REPLACES: Mk 50-0 thru 7
- REPLACED BY: Mk 349

GENERAL
- WEAPON: 5-in/38 gun

- AMMUNITION: ACC, Mk 34, Mk 35; WP Mk 74-1; Chaff Mk 78-0; HE; Illum; Dummy

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 208 rps
- SETBACK: 16,000 g
- VELOCITY: 2,600 ft/sec (792 m/s)

- CREEP: NA
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316

SETTERS: Hand

Supersedes page 1-99 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 33 rps, no arm
100 rps, all arm *

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
No

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: Mk 104-0

DETONATOR: None

LEAD: None

BOOSTER: 2.59 g Black powder

OTHER: Mk 44 ADF required for HE projectiles

POWER SUPPLY:

Helper spring

FUNCTIONING DATA

MODES: Time, settable
TYPE: Mechanical
CHARACTERISTICS:
0.8 to 45 s delay

TARGET: Aircraft, ground
SENSITIVITY:
NA

FUNCTION TEMP:

MODE ON DELIVERY:
Safe (S)

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0257
US HCSDS:
UN CL/DIV SCG: 1.4 B
US DOT SHIP CL: A
NET EXPL WT: 0.028 g
NET PROP WT: 2.59 g
STORAGE TEMP:

REMARKS/DESCRIPTION:
The Mk 50 Fuze was used with a Mk 44 Aux Det Fuze to provide handling and in-bore safety. Time is set by rotating lower cap and setting pin which rotates timing disc. Upon firing, setback of the hammer spring releases the timer disc and moves the setback pin back which partially releases the firing shaft and safety lever plate. Centrifugal force releases a detent on the escapement lever and with the help of a kick-spring rotates the two drive gears which, in turn, drive the main pinion. When the timing disc has rotated to the set time, the firing shaft rotates into a notch, releasing the safety plate which releases the spring-loaded firing pin to function the primer. The primer ignites the relay charge and, in turn, the aux det or magazine charge. In an HE-loaded projectile, this fuze must be used with an aux det fuze.
* This safety feature relates to the fuze timer only. Explosive train interruption must be provided by a separate aux det fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M51A5 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-101and 1-102 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M51A5 MOD 3, FUZE, PD

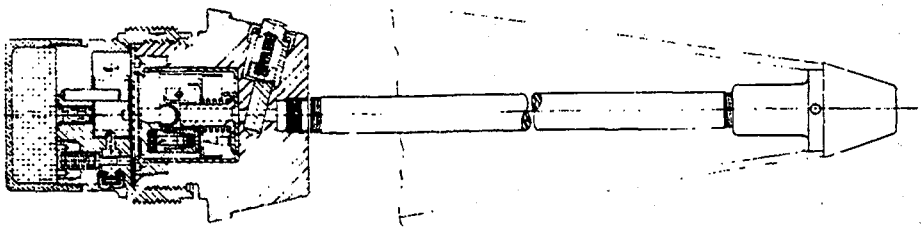

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T
Status	G. Eckstein AV 880-5468 Standard LCC-B
Ass'y Dwg. No.	73-2-163
Parts List	73-2-163A
Specification	MIL-F-10373
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	8 in.
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	550
Setback (g)	21,000
Velocity (fps)	2000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M51A5 MOD 3, FUZE, PD

ARMING DATA

Method	Spin, setback
Delay	200 ft
Rotation (rps)	
Non-arm 25	Arm 33
Setback (g)	
Non-arm	Arm 1000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.47 lb
Total Length (in.)	17.43
Body Diam. (in.)	2.412
Intrusion	2.21 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, SQ, delay
Type	Mechanical
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	Wood screen
Thickness (in.)	1
Max Obliq. (°C)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M24
Booster	M21A4
Delay Plunger	M1

REMARKS

Similar to Fuze M51A5 except longer ogive for use in 8 in. weapon.

SERIES: A CHAPTER: 1
DESIGNATION: M 51A5-3
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

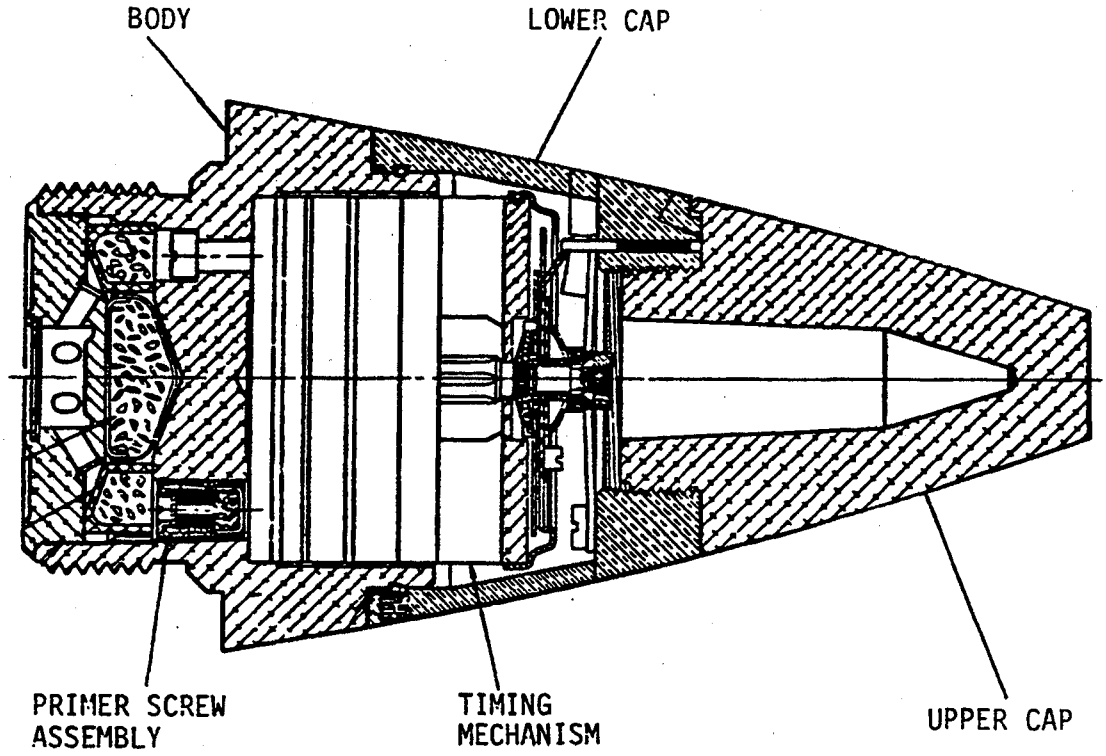

- OVERALL SIZE -	- INTRUSION -	
LG: 4.54 in (118 mm)	DP: 0.803 in (20 mm)	WT: 1.3 lb (599 g)
XSECT: 2.4 in (61 mm)	DIA: 1.700 in (43.2 mm)	THD: 1.70-14NS-1
		THD DP: 0.724 in (18.4 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G41
- CONTACT: Pomeroy, S
- PHONE: DSN 290-1995
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 1 475 145
- PARTS LIST: LD 299218
- SPEC: OS 7165
- PUB: SW030-AA-MMO-010

- NATIONAL STOCK NO: 1390-00-540-9201
- DODIC: N247
- PRIOR MODEL NO:
- SIMILAR TO: Mk 50, Mk 25, Mk 342

- REPLACES: Mods 0-4
- REPLACED BY: Mk 342

GENERAL
- WEAPON: 3-in/50 Mk 21 & 22 Guns

- AMMUNITION: AA Mk 27, Ill Mk 25

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 338 rps
- SETBACK: 21,000 g
- VELOCITY: 2700 ft/s (823 m/s)

- CREEP: NA
- FLIGHT TIME: 30 s

SAFETY STD: Doesn't meet MIL-STD-1316B
SETTERS: Hand set

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: 33 rps, non-function
100 rps, all-function *

SECOND SAFETY:

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
None

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: Mk 104

DETONATOR:

LEAD:

BOOSTER: 2.59 g Black powder,
Aux Det Fuze Mk 54
required for HE Proj.

OTHER:

FUNCTIONING DATA
MODES: Time, Settable
TYPE: Mechanical, Junghans Escapement
CHARACTERISTICS:
Settable from 1 to 30 s
in 0.20 s increments

TARGET: Surface - ship
SENSITIVITY:
NA

FUNCTION TEMP:
-29 to +54 deg C
MODE ON DELIVERY:
Safe (

POWER SUPPLY:

Helper spring

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0349
US HCSDS: 40455
UN CL/DIV SCG: 1.4 S
US DOT SHIP CL: C
NET EXPL WT: 0.028 g
NET PROP WT: 2.59 g
STORAGE TEMP: -29 to +54 deg C

REMARKS/DESCRIPTION:
The Mk 51 Fuze was used with a Mk 54 Aux Det Fuze to provide handling and in-bore safety in HE projectiles. Time is set by rotating lower cap and setting pin which rotates timing disc. Upon firing, setback of the hammer spring releases the timer disc and moves the setback pin back which partially releases the firing shaft and safety lever plate. Centrifugal force releases a detent on the escapement lever and with the help of a kick-spring rotates the two drive gears which, in turn, drive the main pinion. When the timing disc has rotated to the set time, the firing shaft rotates into a notch, releasing the safety plate which releases the spring-loaded firing pin to function the primer. The primer ignites the relay charge and, in turn, the aux det or magazine charge. In an HE-loaded projectile, this fuze must be used with an aux det fuze.
* This safety feature relates to the fuze timer only. Explosive train interruption must be provided by a separate aux det fuze.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M52A2 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-105 and 1-106 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 52 Mod 0 AD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-107 and 1-108 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M53A1, FUZE, PD

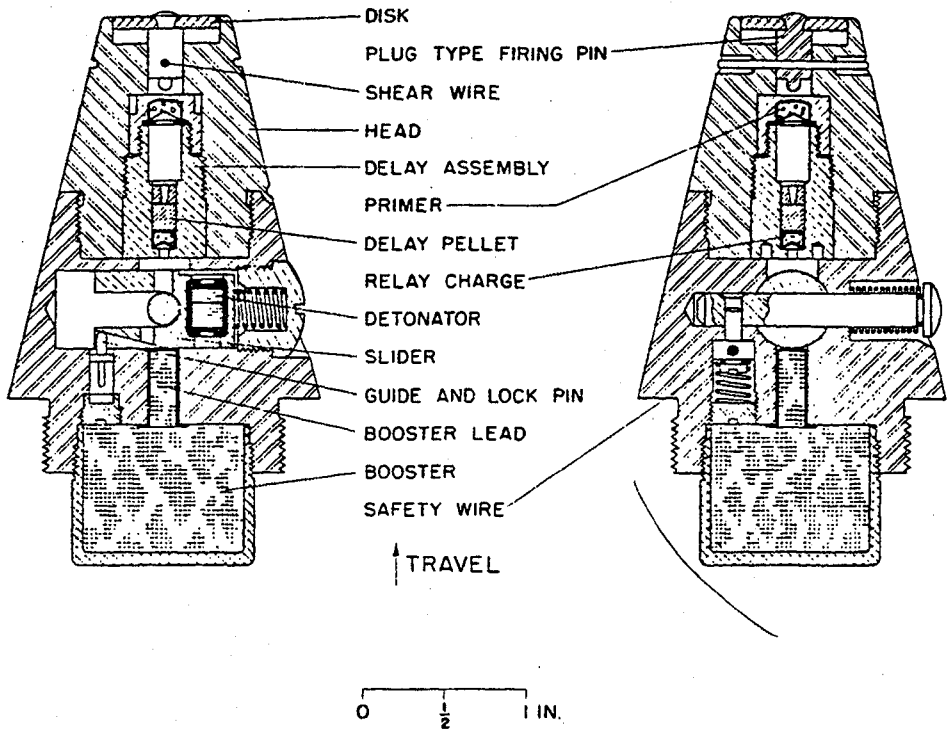

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T
Status A. Nash AV 880-2017
Standard LCC-B
Ass'y Dwg. No. 73-1-165
Parts List
Specification
Previous Number T29

GENERAL

Carriers Mortar projectile
Cal. — Size 81 mm, 3 in.
Location Nose
Use HE, smoke
MIL-STD's 331, Tests 101, 102
Max Values
Rotat. (rps)
Setback (g) 6000
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M53A1, FUZE, PD

ARMING DATA

Method	Setback
Delay	2-5 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 300
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	1.06 lb
Total Length (in.)	3.49
Body Diam. (in.)	
Intrusion	1.12 in.
Thread Size	1.5-12NF-1A

FUNCTIONING DATA

Action	PD, delay
Type	Pyrotechnic, mechanical
Delay	0.1 sec
Time Type	
Time Setting (sec)	
Target	Antipersonnel, screening
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M17
Booster	Tetryl
Delay	Black powder
Relay	Lead Azide

REMARKS

The M53A1 is essentially Fuze M5A2 with a modified head to give impact delay.

Spring loaded slider with bore riding pin. Steel construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

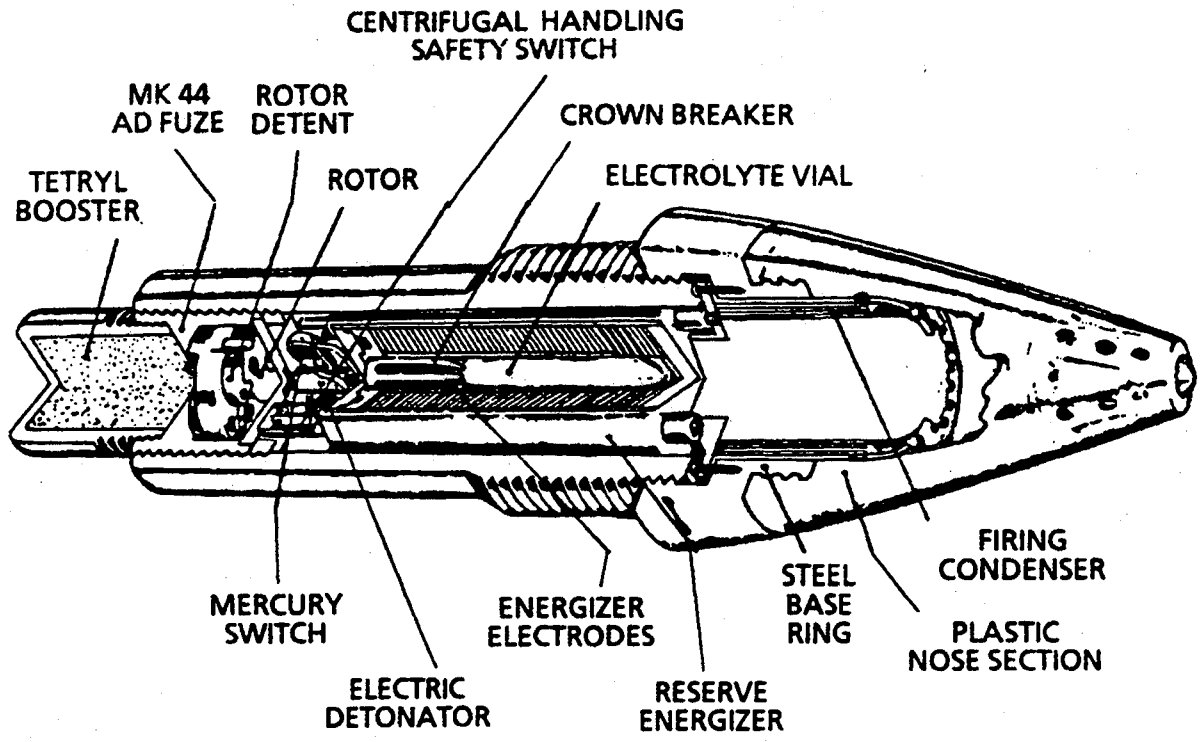

- OVERALL SIZE -	- INTRUSION -	
LG: 9.0 in (228.6 mm) *	DP: 5.1 in (129.5 mm)	WT: 4.79 lb (2172 g)
XSECT: 3.31 in (84.1 mm)	DIA:	THD: 2.65-10NS-2
		THD DP: 0.5 in (12.7 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 584 004
- PARTS LIST:
- SPEC:
- PUB: Navy Projectiles and Fuzes, 1945

- NATIONAL STOCK NO:
  - None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 45, Mk 47, Mk 58, Mk 59
- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 5-in/25, 5-in/38, 5-in/51 caliber guns

- AMMUNITION:
  - AA

- LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

Supersedes page 1-111 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback ruptures reserve energizer electrolyte ampoule.

SECOND SAFETY:
Spin distributes electrolyte around battery electrodes and removes short from primer.

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
2100 ft (640 m)
0.6 to 1.0 s

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 8 RFSD

PRIMER: Yes, composition unknown

DETONATOR: None

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: Proximity
TYPE: Electronic
CHARACTERISTICS:
2100 ft (640 m) minimum range, Mods 0-2; 1500 ft (457 m) minimum range, Mods 3 and up.
80 ft (24.4 m) influence radius.
TARGET: Aircraft
SENSITIVITY:
NA

FUNCTION TEMP:

MODE ON DELIVERY:
Proximity

POWER SUPPLY:

Reserve energizer.

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, acceleration causes the fingers of the crown breaker to open up, allowing the electrolyte vial to break against the bottom of the breaker. Centrifugal force distributes the electrolyte throughout the energizer, activating it in 0.2 to 0.3 s. Centrifugal force also opens the handling safety switch, which previously had been shorting the firing condenser. The firing condenser begins to accumulate a charge through its high resistance electrical delay and current is supplied to the VT element. Centrifugal force causes the mercury switch to open a short across the primer leads. The fuze is fully armed in 0.6 to 1.0 s. On target approach, the reflected electromagnetic signal causes the VT element to discharge the firing condenser through the electric primer. The output of the primer functions the Mk 44 AD Fuze and, in turn, the projectile main charge. Mk 45 and Mk 58 Fuzes have single mercury switches; Mk 47, Mk 53 and Mk 59 have two. * Length includes Mk 44 AD Fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

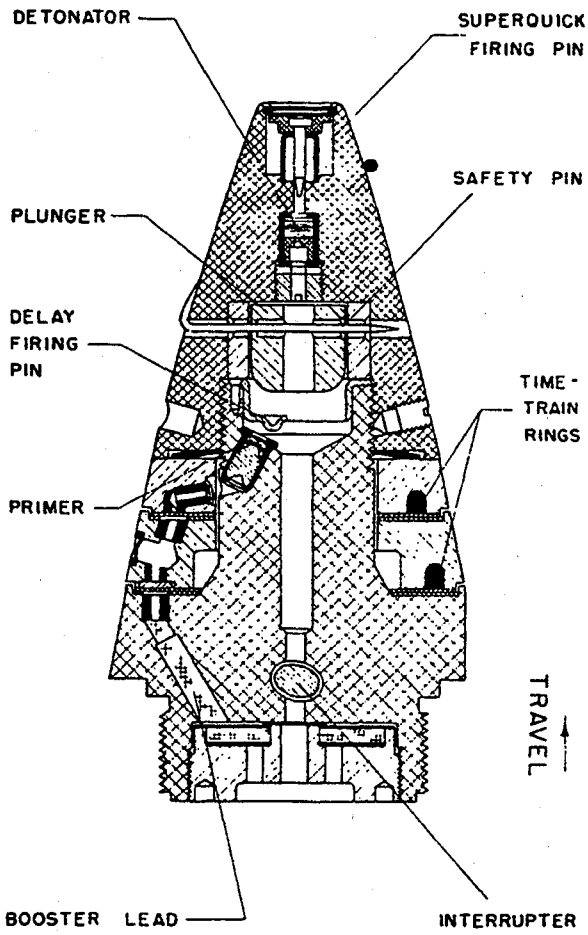

- OVERALL SIZE -	- INTRUSION -	
LG: 4.59 in (117 mm)	DP: 0.81 in (21 mm)	WT: 1.42 lb (644 g)
XSECT:	DIA:	THD: 1.7-14NS-2A
		THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-
- CONTACT:
- PHONE: DSN 880-
- STATUS:
- USER: Army
- ASSY DWG: 73-3-154
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO: 1390-00-028-5059
- DODIC: N502
- PRIOR MODEL NO: T14
- SIMILAR TO: M55

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 75-mm to 240-mm guns

- AMMUNITION: Smoke, illumination

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 550 rps
- SETBACK: 21,000 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

Supersedes page 1-113 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 25 rps, no arm;
33 rps, all arm

SECOND SAFETY:
Arming wire

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: M39

DETONATOR: M24

LEAD:

BOOSTER:

OTHER: Two pyrotechnic timer rings

FUNCTIONING DATA

MODES: Time, PD SQ settable
TYPE: Mechanical
CHARACTERISTICS:
Pyrotechnic timer, 0.4 to 25 s,
0.2 s increments.
Functions PD SQ backup

TARGET: Personnel, material
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:
Safe (S)

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, setback causes the time action plunger to shear the shear wire and force the strker against the primer. Primer flash ignites the black pellet and train in the upper time ring. If the fuze is not set safe, flame from the upper ring ignites the pellet of the lower time ring. Burning of the lower pellet and graduated time ring determine the function time. If the fuze is set less than 0.4 s, the flame is interrupted before making contact with the body pellet and time action is stopped. Otherwise, the body pellet is ignited at the set time and transmits the flame to the body charge and magazine charge. The SQ action arms when sufficient rotational speed has been established to force the slider of the interrupter outward against the resistance of its spring. On impact, the firing pin support collapses and the firing pin strikes the SQ detonator. Action of the detonator is transmitted through the uninterrupted flash hole. The fuze will function SQ on impact if time of flight is greater than the set time. The M55 is the same except it includes an M21A4 Booster.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-54A, FUZE, TIME

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	3"/70, 3"/50
Location	Nose
Use	
MIL-STD's	
Max Values	
Rotat. (rps)	625
Setback (g)	25,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-54A, FUZE, TIME

ARMING DATA

Method	
Delay	780-1300
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.8 lb
Total Length (in.)	7.23
Body Diam. (in.)	
Intrusion	3.49 in.
Thread Size	2.0-12NS-2

FUNCTIONING DATA

Action	PD, SQ, time, select
Type	Electric
Delay	
Time Type	Electric
Time Setting (sec)	0.5-30
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 63
Booster	Tetryl

REMARKS

SERIES: N CHAPTER: 1
DESIGNATION: XP- 54A
ET Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

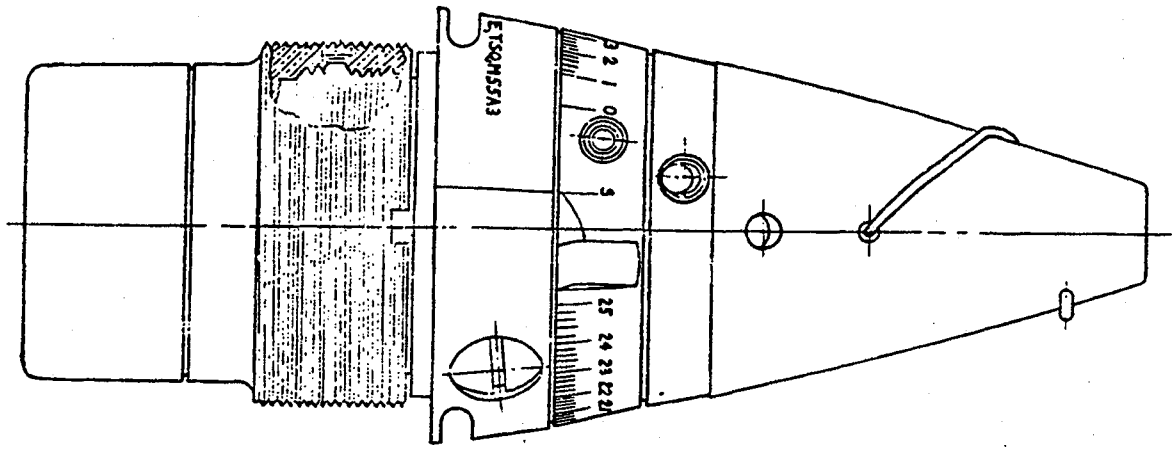

- OVERALL SIZE -	- INTRUSION -	WT: 2.16 lb (980 g)
LG: 5.99 in (152 mm)	DP: 2.21 in (56 mm)	THD: 2-12NS-1A
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-
- CONTACT:
- PHONE: DSN 880-
- STATUS:
- USER: Army
- ASSY DWG: 73-3-155
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:
  1315-00-892-5000 (round)
- DODIC: C443 (round)
- PRIOR MODEL NO: T14
- SIMILAR TO: M54

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 75-mm to 155-mm guns

- AMMUNITION:
  HE, M1 projectile

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 550 rps
- SETBACK: 21,000 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

Supersedes page 1-117 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: 25 rps, no arm;
33 rps, all arm

SECOND SAFETY:
Arming wire

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: M39

DETONATOR: M24

LEAD:

BOOSTER: M21A4

OTHER: Two pyrotechnic timer rings

FUNCTIONING DATA
MODES: Time, PD SQ settable
TYPE: Mechanical
CHARACTERISTICS:
Pyrotechnic timer, 0.4 to 25 s,
0.2 s increments.
Functions PD SQ backup

TARGET: Personnel, material
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:
Safe (S)

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, setback causes the time action plunger to shear the shear wire and force the strker against the primer. Primer flash ignites the black pellet and train in the upper time ring. If the fuze is not set safe, flame from the upper ring ignites the pellet of the lower time ring. Burning of the lower pellet and graduated time ring determine the function time. If the fuze is set less than 0.4 s, the flame is interrupted before making contact with the body pellet and time action is stopped. Otherwise, the body pellet is ignited at the set time and transmits the flame to the body charge and magazine charge. The SQ action arms when sufficient rotational speed has been established to force the slider of the interrupter outward against the resistance of its spring. On impact, the firing pin support collapses and the firing pin strikes the SQ detonator. Action of the detonator is transmitted through the uninterrupted flash hole. The fuze will function SQ on impact if time of flight is greater than the set time. The M54 is the same except it does not have an M21A4 Booster.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 55 Mod 0 AD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-119 and 1-120 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-56A, FUZE, BD

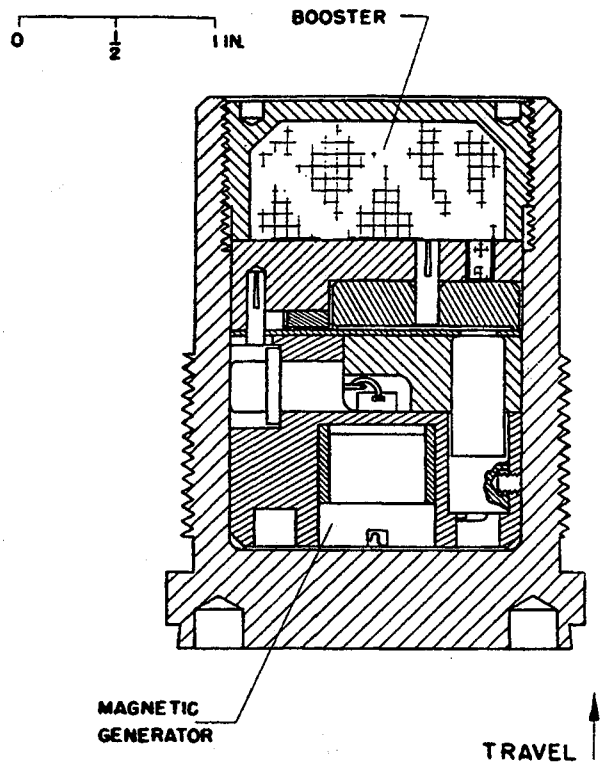

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs
Status	AV 290-1529 Terminated
Ass'y Dwg. No.	GA SK356323
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5"/38, 5"/54, 6"/47
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	250
Setback (g)	15,000
Velocity (fps)	1400

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-56A, FUZE, BD

ARMING DATA

Method	Spin
Delay	300-800
Rotation (rps)	
Non-arm	50 Arm 80
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	2.562
Body Diam. (in.)	
Intrusion	2.562 in.
Thread Size	2.125-12NS

FUNCTIONING DATA

Action	BD, Delay
Type	Electric
Delay	0.003-0.007 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.125
Max Obliq. (°)	
Velocity (fps)	1400
Carrier	5"/38 Proj.

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl

REMARKS

Similar to XP-57A, but has elec. delay switch only
Mech. delayed arming device omitted

SERIES: N CHAPTER: 1
DESIGNATION: XP- 56A
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

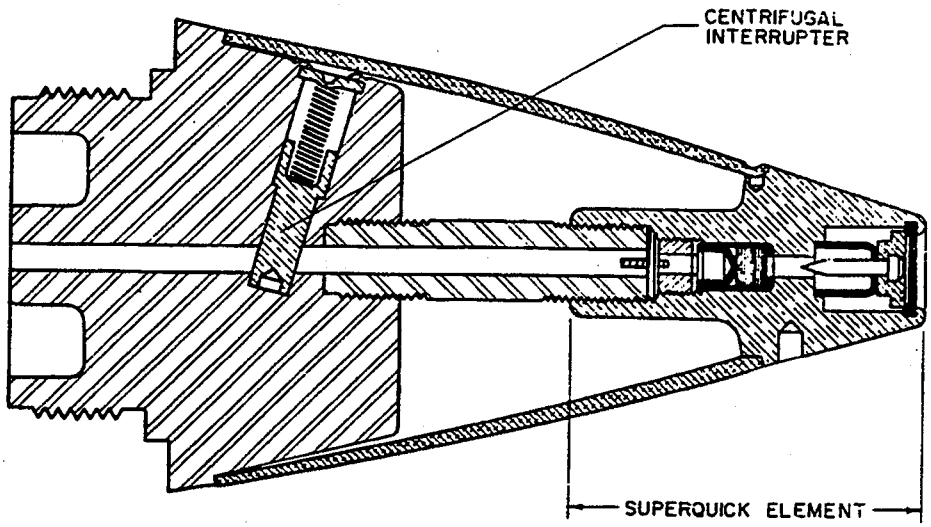

- OVERALL SIZE -	- INTRUSION -	WT: 1.41 lb (640 g)
LG: 4.53 in (115 mm)	DP: 0.81 in (20.6 mm)	THD: 1.7-14UNS-1A
XSECT: 2.38 in (61.3 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT: Eckstein, G
- PHONE: DSN 880-4216
- STATUS: Obsolete
- USER: NATO
- ASSY DWG: 73-2-138
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-204

- NATIONAL STOCK NO: 1390-00-935-2095
- DODIC: N303, N320
- PRIOR MODEL NO: T18E2
- SIMILAR TO: M48A3, M51A5, M557, M572

- REPLACES: M48A3 for Chem Proj
- REPLACED BY:

GENERAL
- WEAPON: 90 mm Tank Gun & 105 mm Howitzer

- AMMUNITION:
  - 90 mm Cart Smoke WP M313
  - 105 mm Cart Smoke WP M60A3

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 550 rps
- SETBACK: 21,000 g
- VELOCITY: 3100 ft/s (945 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316

SETTERS: None

Supersedes page 1-123 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 25 rps no arm, 33 all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
0.2 m approx
Bore safe only

EXPLOSIVE COMPONENTS

S&A DEVICE: Spin interrupter

PRIMER: None

DETONATOR: M24 Stab

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: SQ
TYPE: Mechanical
CHARACTERISTICS:
170 microseconds SQ

TARGET: Ground - screening
SENSITIVITY:
1 in (25.4 mm) wood screen

FUNCTION TEMP:
-40 to +52 deg C
MODE ON DELIVERY:
SQ

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0106
US HCSDS:
UN CL/DIV SCG: 1.1 B
US DOT SHIP CL: C
NET EXPL WT: 0.253 g
NET PROP WT: None
STORAGE TEMP: -62 deg C 3 days max
+71 deg C 4 hrs/day max

REMARKS/DESCRIPTION:
Fuze safety is obtained by means of a crush cup under the firing pin and an angled interrupter in the flash tube. On firing, acceleration keeps the interrupter in the inward, rearward position. After setback is finished, centrifugal force moves the interrupter outward against its spring, opening the SQ flash tube. On impact, the firing pin is forced rear- ward crushing the support cup and functioning the M24 Detonator which flashes down the tube to the explosive components in the projectile. For some projectiles, the M57 must use a booster pellet and the M21A4 Booster is used. The M57 is the same as the M48A3 except that it does not have the M1 Delay Plunger and is SQ only. The later M508A1 was an M57 Fuze with an M125A1 Booster.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

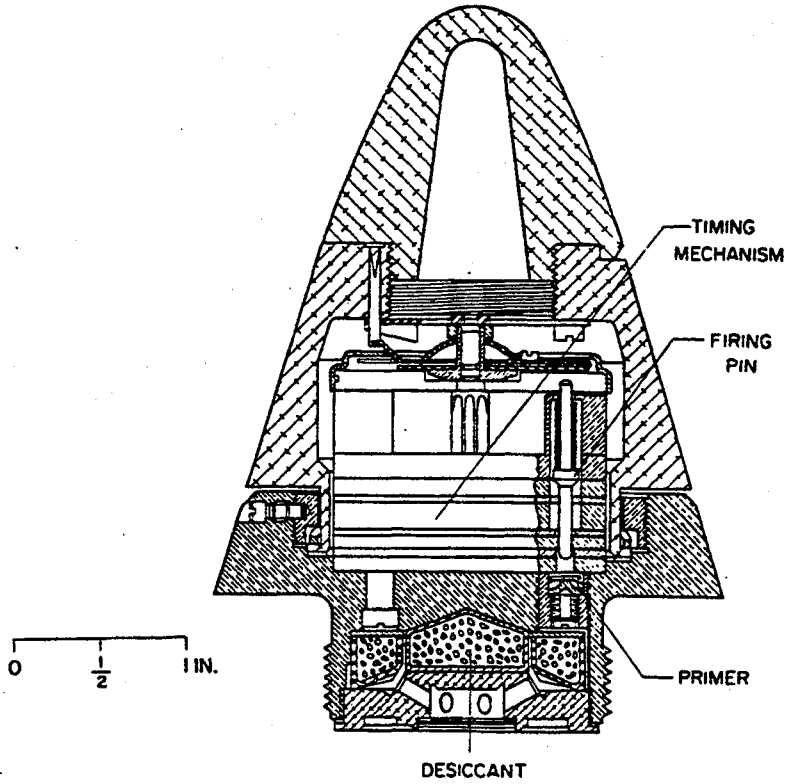

- OVERALL SIZE -	- INTRUSION -	
LG: 4.335 in (110.1 mm)	DP: 0.805 in (20.4 mm)	WT: 1.92 lb (871 g)
XSECT: 2.98 in (75.7 mm)	DIA:	THD: 1.70-14NS-1
		THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G41
- CONTACT: Pomeroy, S
- PHONE: DSN 290-1995
- STATUS: Obsolete
- USER:
- ASSY DWG: 863 160 (Mod 2)
- PARTS LIST: LD 272 859,LD 299 837
- SPEC: OS 6583
- PUB:

- NATIONAL STOCK NO:
  1390-00-038-9721 (Mod 2)
- DODIC: N241
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 8-in/55 Gun

- AMMUNITION:
  HE or GP

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 170 rps
- SETBACK: 7800 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 1-125 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: Setback
28 rps no arm, 100 all arm

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER: Black powder

OTHER: Mk 55 Aux Det

FUNCTIONING DATA
MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
Mech., Junghans Esc.
0.8 - 45 s

TARGET: Antiaircraft, ground
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0257
US HCSDS:
UN CL/DIV SCG: 1.4 B
US DOT SHIP CL: C
NET EXPL WT: 3.23865 g
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Mod 3 has setback pin, slider escapement release, hardened firing arm and premature trap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

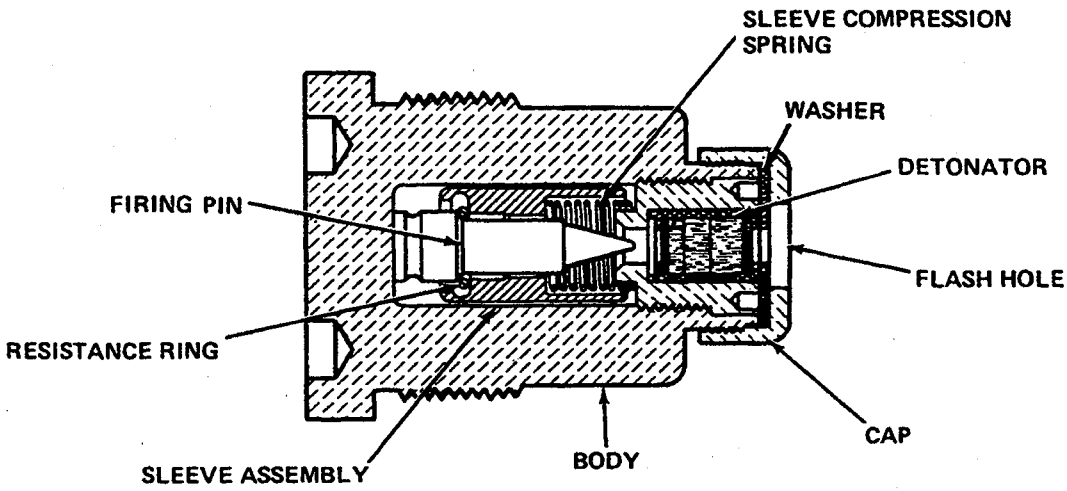

- OVERALL SIZE -	- INTRUSION -	WT: 0.29 lb (131.5 g)
LG: 1.61 in (40.9 mm)	DP: 1.39 in (35.3 mm)	THD: 1.02-18NS-3(LH)
XSECT: 1.0 in (25.4 mm)	DIA: 0.94 in (23.9 mm)	THD DP: 0.50 in (12.7 mm)

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-1-191
- PARTS LIST:
- SPEC:
- PUB: TM 43-0001-28

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO: M58 (HE)

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: M3A1 and M6 37 mm Guns

- AMMUNITION:
  - M63 Mod 1 Practice Shell

LOCATION: Base
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 1-127 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 8,000 g no arm
13,000 g all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
None

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: M18

LEAD: None

BOOSTER: None (HE version had tetryl)

OTHER: None

FUNCTIONING DATA

MODES: BD
TYPE: Mechanical
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:
-40 to +52 deg C
MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT: 0.337 g
NET PROP WT:
STORAGE TEMP: -62 deg C, 3 days max
+71 deg C, 4 hr/day max

REMARKS/DESCRIPTION:
Setback from weapon firing forces the resistance ring back over the shoulder of the firing pin and into a groove near the back of the firing pin, locking the pin in a more forward position in the sleeve. During the flight of the projectile, the combined firing pin and sleeve assembly is held out of contact with the detonator by the sleeve compression spring. On impact, inertia of the sleeve and firing pin overcomes the spring and drives the pin into the detonator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

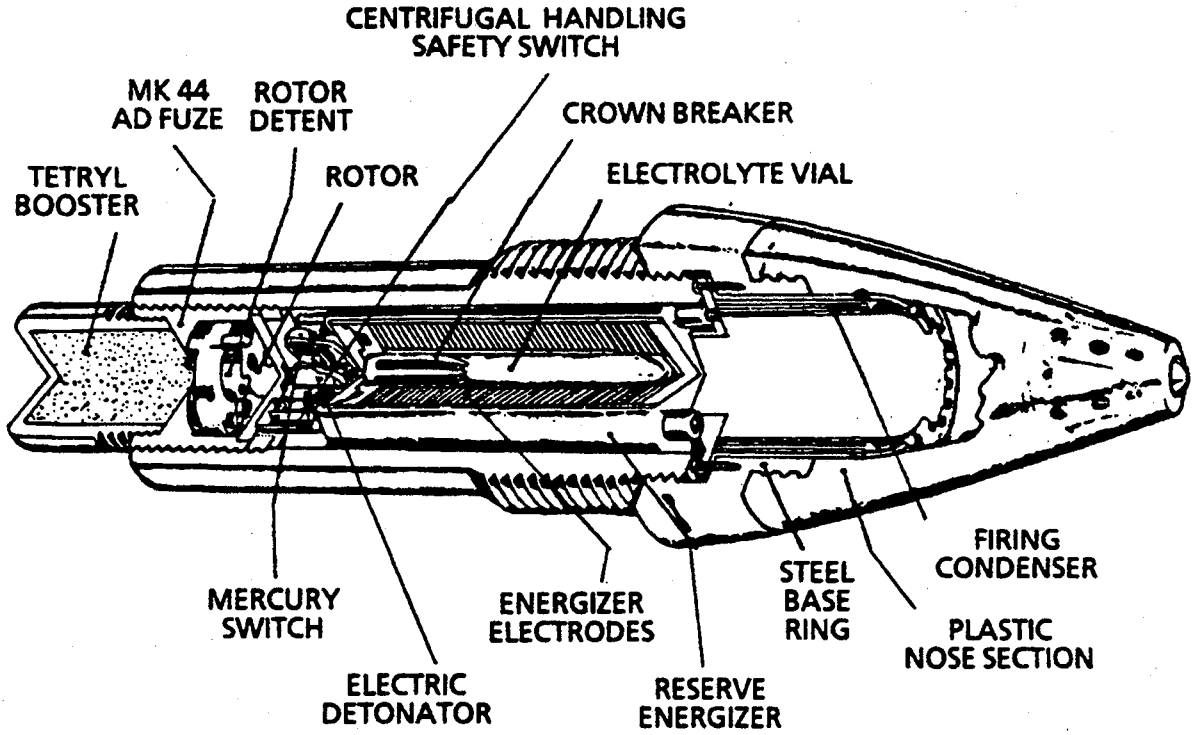

- OVERALL SIZE -	- INTRUSION -	WT: 1.98 lb (898.1 g)
LG: 8.5 in (215.9 mm) *	DP:	THD: 12 RH
XSECT: 2.4 in (61.0 mm)	DIA:	THD DP: 1.0 in (25.4 mm)

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G402
CONTACT: Bagnall, J
PHONE: DSN 290-2791
STATUS: Obsolete
USER: Navy
ASSY DWG:
PARTS LIST:
SPEC:
PUB: Navy Projectiles and Fuzes, 1945

NATIONAL STOCK NO:
None
DODIC: None
PRIOR MODEL NO: None
SIMILAR TO: Mk 45, Mk 47, Mk 53, Mk 59
REPLACES:
REPLACED BY:

GENERAL
WEAPON: 3-in/50 caliber guns

AMMUNITION:
AA

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION:
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback ruptures reserve energizer electrolyte ampoule.

SECOND SAFETY:
Spin distributes electrolyte around battery electrodes and removes short from primer.

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
1500 ft (457 m)

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 8 RFSD

PRIMER: Yes, composition unknown

DETONATOR: None

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: Proximity
TYPE: Electronic
CHARACTERISTICS:
1500 ft (457 m) minimum range.
40 to 100 ft (12 to 30 m) influence radius.

TARGET: Aircraft
SENSITIVITY:
NA

FUNCTION TEMP:

MODE ON DELIVERY:
Proximity

POWER SUPPLY:

Reserve energizer.

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, acceleration causes the fingers of the crown breaker to open up, allowing the electrolyte vial to break against the bottom of the breaker. Centrifugal force distributes the electrolyte throughout the energizer, activating it in 0.2 to 0.3 s. Centrifugal force also opens the handling safety switch, which previously had been shorting the firing condenser. The firing condenser begins to accumulate a charge through its high resistance electrical delay and current is supplied to the VT element. Centrifugal force causes the mercury switch to open a short across the primer leads. The fuze is fully armed in 0.6 to 1.0 s. On target approach, the reflected electromagnetic signal causes the VT element to discharge the firing condenser through the electric primer. The output of the primer functions the Mk 44 AD Fuze and, in turn, the projectile main charge. Mk 45 and Mk 58 Fuzes have single mercury switches; Mk 47, Mk 53 and Mk 59 have two. * Length includes Mk 44 AD Fuze.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-58A, FUZE, BD

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs
Status	AV 290-1529 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5"/38, 5"/54, 6"/47
Location	Base
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	254
Setback (g)	1500
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-58A, FUZE, BD

ARMING DATA

Method	Spin
Delay	300-800
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight
Total Length (in.)
Body Diam. (in.)
Intrusion
Thread Size

FUNCTIONING DATA

Action	BD, Delay
Type	Electric
Delay	0.003-.007 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device
Primer
Detonator
Booster

REMARKS

SERIES: N CHAPTER: 1
DESIGNATION: XP- 58A
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

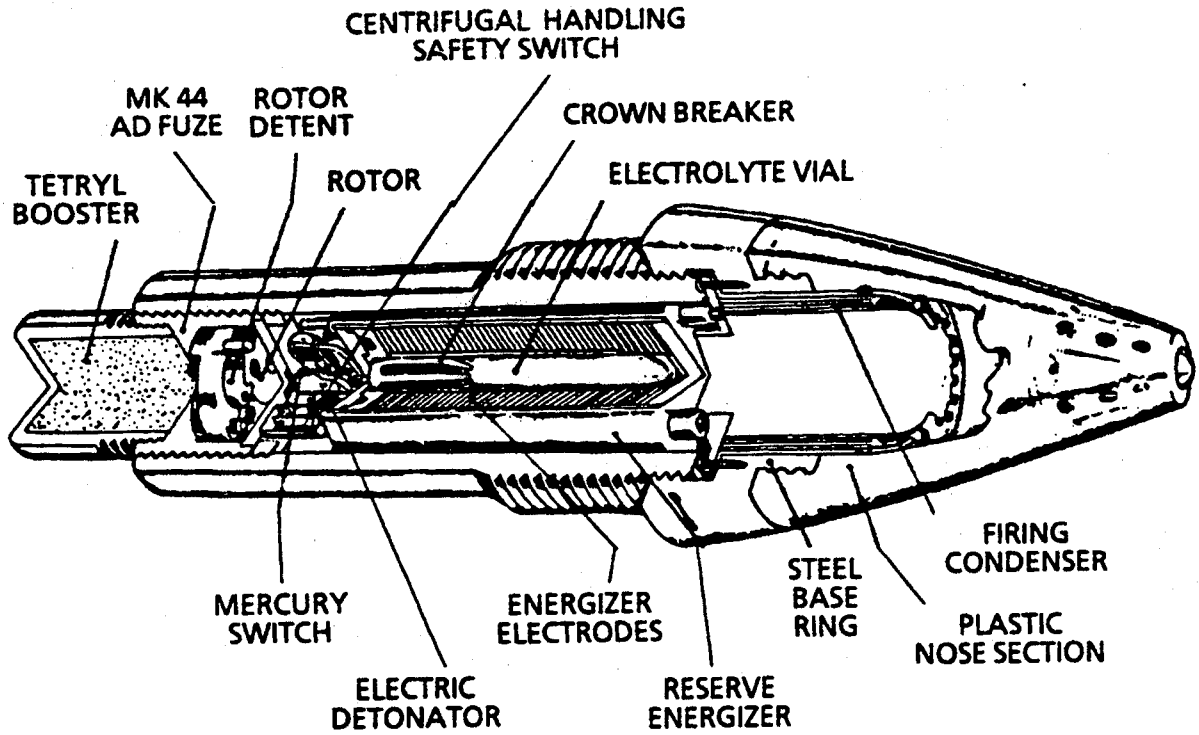

- OVERALL SIZE -	- INTRUSION -	WT: 4.05 lb (1837 g)
LG: 9.8 in (248.9 mm) *	DP: 5.0 in (127 mm)	THD: 2.35-10-2
XSECT: 2.71 in (68.8 mm)	DIA: 2.0 in (50.8 mm)	THD DP: 0.5 in (12.7 mm)

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G402
CONTACT: Bagnall, J
PHONE: DSN 290-2791
STATUS: Obsolete
USER: Navy
ASSY DWG: 459 699
PARTS LIST:
SPEC:
PUB: Navy Projectiles and Fuzes, 1945

NATIONAL STOCK NO:
None
DODIC: None
PRIOR MODEL NO: None
SIMILAR TO: Mk 45, Mk 47, Mk 53, Mk 58
REPLACES:
REPLACED BY:

GENERAL
WEAPON: 5-in/54 caliber guns

AMMUNITION:
HC

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION:
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

Supersedes page 1-131 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback ruptures reserve energizer electrolyte ampoule.

SECOND SAFETY:
Spin distributes electrolyte around battery electrodes and removes short from primer.

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
1500 ft (457 m)

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 8 RFSD

PRIMER: Yes, composition unknown

DETONATOR: None

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: Proximity
TYPE: Electronic
CHARACTERISTICS:
1500 ft (457 m) minimum range.

TARGET: Shore bombardment
SENSITIVITY:
NA

FUNCTION TEMP:

MODE ON DELIVERY:
Proximity

POWER SUPPLY:

Reserve energizer.

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, acceleration causes the fingers of the crown breaker to open up, allowing the electrolyte vial to break against the bottom of the breaker. Centrifugal force distributes the electrolyte throughout the energizer, activating it in 0.2 to 0.3 s. Centrifugal force also opens the handling safety switch, which previously had been shorting the firing condenser. The firing condenser begins to accumulate a charge through its high resistance electrical delay and current is supplied to the VT element. Centrifugal force causes the mercury switch to open a short across the primer leads. The fuze is fully armed in 0.6 to 1.0 s. On target approach, the reflected electromagnetic signal causes the VT element to discharge the firing condenser through the electric primer. The output of the primer functions the Mk 44 AD Fuze and, in turn, the projectile main charge. Mk 45 and Mk 58 Fuzes have single mercury switches; Mk 47, Mk 53 and Mk 59 have two. * Length includes Mk 44 AD Fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M60, FUZE, BD

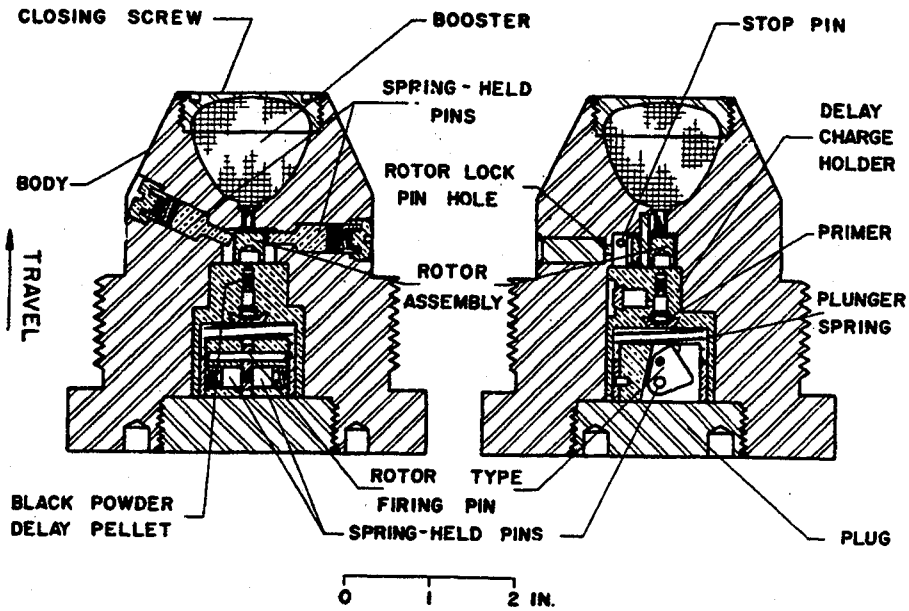

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Obsolete
Ass'y Dwg. No.	73-2-165
Parts List	73-2-165B
Specification	MIL-F-20461
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	155 mm 6 in.
Location	Base
Use	AP
MIL-STD's	331, Tests 101, 102
Max Values	
Rotat. (rps)	220
Setback (g)	11,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M60, FUZE, BD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	13
Arm	24
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	9.22 lb
Total Length (in.)	4.28
Body Diam. (in.)	
Intrusion	3.55 in.
Thread Size	3.6-6NS-2

FUNCTIONING DATA

Action	BD, delay
Type	Mechanical
Delay	0.04-0.06 sec
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M21
Booster	Tetryl

REMARKS

Identical to Fuze MK10.

SERIES: A CHAPTER: 1
DESIGNATION: M 60
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 60 MOD 1, FUZE, PROXIMITY

IDENTIFICATION

Agency	NSWC, Code G44 T. Ethridge AV 290-1970
Status	Obsolete
Ass'y Dwg. No.	GA 177517
Parts List	LD 177517
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5"/54
Location	Nose
Use	
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 60 MOD 1, FUZE, PROXIMITY

ARMING DATA

Method

Delay

Rotation (rps)

Non-arm **Arm**

Setback (g)

Non-arm **Arm**

Arming Wire

External Indicat.

PHYSICAL DATA

Weight 4.16 lb

Total Length (in.)

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action Proximity

Type

Delay

Time Type

Time Setting (sec)

Target

Sensitivity

Material

Thickness (in.)

Max Obliq. (°)

Velocity (fps)

Carrier

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

SERIES: N CHAPTER: 1
DESIGNATION: MK 60 MOD 1
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

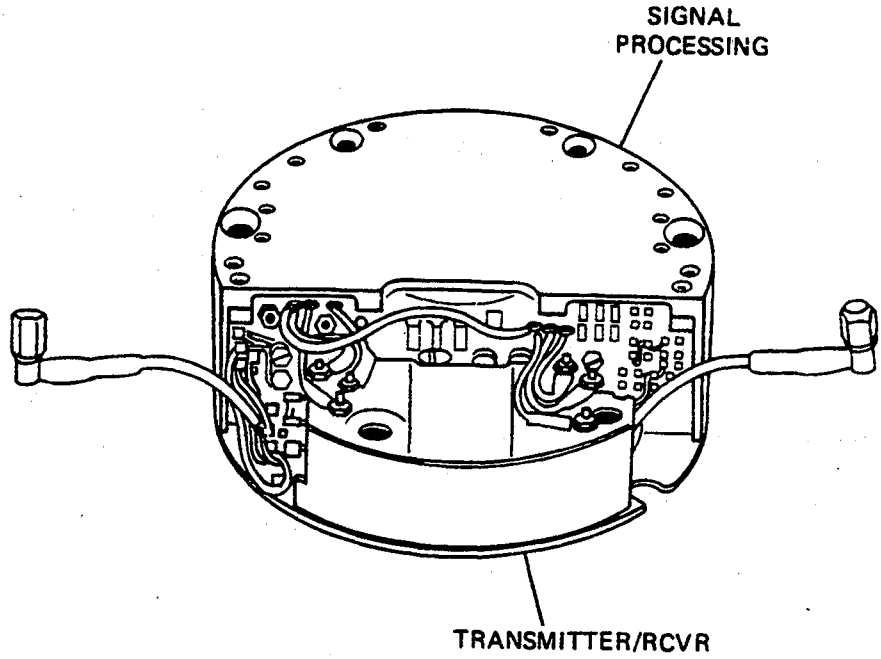

- OVERALL SIZE -	- INTRUSION -	WT: 1.3 lb (590 g)
LG: 1.5 in (38.1 mm)	DP: NA	THD: NA
XSECT: 4 in (101.6 mm)	DIA: NA	THD DP:

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G402
CONTACT: Bagnall, J
PHONE: DSN 290-2791
STATUS: Terminated
USER: Navy
ASSY DWG: 5 510 310
PARTS LIST:
SPEC: XWS 16699(GP)
PUB:

NATIONAL STOCK NO:
Not yet assigned
DODIC: Not yet assigned
PRIOR MODEL NO: EX-406 Fuze
SIMILAR TO:

REPLACES: Nothing
REPLACED BY:

GENERAL
WEAPON: 5-in/54 Mk 18 & 19 Guns

AMMUNITION:
HE, Ex 106
IR-guided projectile

LOCATION: Base of Warhead
BALLISTIC LEVELS:
ROTATION: 20 rps
SETBACK: 7,500 g
VELOCITY: 2030 ft/s (619 m/s)

CREEP: NA
FLIGHT TIME: NA
SAFETY STD: NA
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Safety provided by EX-18 ASD (not in TDD)

SECOND SAFETY:
Magnetic impulse sensors sense gun ejection

OTHER SAFETY:
Contains logic circuitry for second environmental safety in EX-18 ASD

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: EX-18 ASD (not in TDD)

PRIMER: NA

DETONATOR: NA

LEAD: NA

BOOSTER: NA

OTHER: No explosives in TDD, electrical output only

FUNCTIONING DATA

MODES: Proximity/PD

TYPE: RF

CHARACTERISTICS:
Short range radar senses approach to target

TARGET: Air Targets

SENSITIVITY:

FUNCTION TEMP:
-7 to +54 deg C

MODE ON DELIVERY:
Prox, PD backup

POWER SUPPLY:

Uses guided projectile system

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT: None
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
Radar sensor detects near approach to air target and delivers electrical firing pulse to warhead detonator (not in TDD). Electronics package is mounted on warhead bulkhead in mid-section of guided projectile and attached to wrap-around antenna by two short coaxial cables. Antenna is 2 mm thick, 127 mm diameter, and 152 mm long. Input/output cabling is permanently attached to the electronics package.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

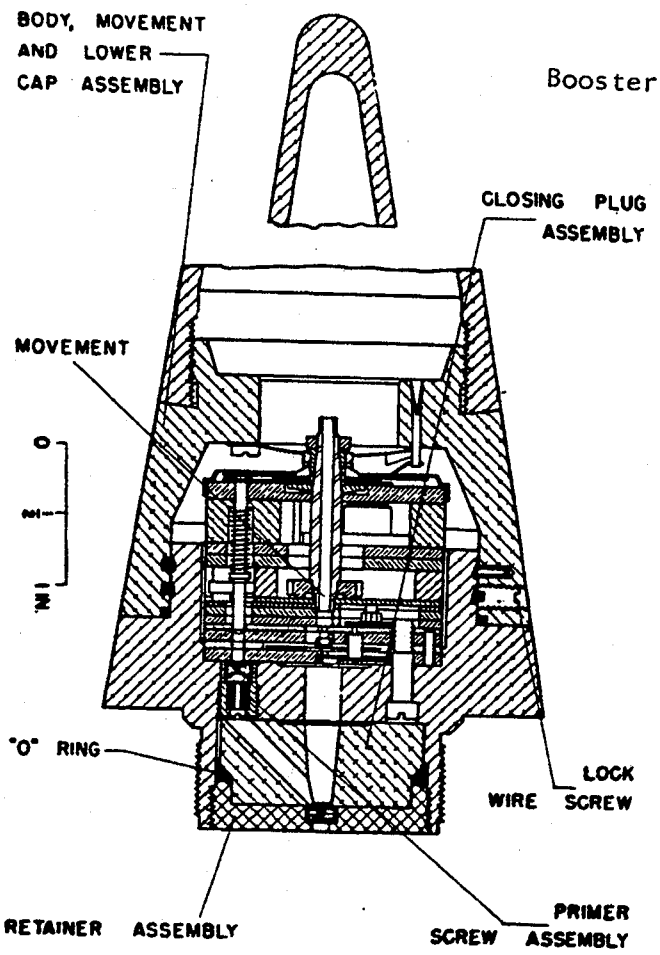

- OVERALL SIZE -	- INTRUSION -	
LG: 9.88 in (251 mm)	DP: 2.21 in (56 mm)	WT: 2.35 lb (1066 g)
XSECT:	DIA:	THD: 1.7-14NS-1
		THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-
- CONTACT:
- PHONE: DSN 880-
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-7-147, 73-7-71
- PARTS LIST:
- SPEC: RP-PD-34
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: T31E2
- SIMILAR TO: M43A4

- REPLACES:
- REPLACED BY: M506

GENERAL
- WEAPON: 120-mm gun

- AMMUNITION:
  - HE, GP

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 475 rps
- SETBACK: 30,000 g
- VELOCITY: 2,500 fps (762 m)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

Supersedes page 1-137 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 1,400 g, no arm;
7,500 g, all arm

SECOND SAFETY:
Spin: 50 rps no arm;
167 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
4 ft

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: M29A1

DETONATOR: M7 Relay

LEAD:

BOOSTER: M21A4

OTHER: None

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
0.8 to 30 s

TARGET: Aircraft
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
The fuze is set by turning the lower cap which rotates the timing disk by means of the setting pin. This causes a desired change in the angular distance between the firing arm and the notch in the timing disk. On firing, setback causes the hammer on the cantilever spring to strike the upraised lug on the timing disk, flattening the lug and relasing the disk from the setting pin. At the same time, the setback pin locking the firing arm moves back, leaving the firing arm free to turn when the notch in the timing disk comes opposite the finger on the firing arm. Centrifugal force rotates and releases the safety lock on the escapement. The weighted gear segments in mesh with the main driving pinion drive the movement, the rate of rotation of the pinion and, therefore, of the timing disk governed by the escapement. When the notch in the timing disk reaches the finger of the firing arm, the firing arm turns to swing from under the firing pin flange allowing the firing pin to strike the primer initiating the firing train. The M79 was a dummy fuze. Similar to M43A4, except M61A2 has long ogive, M7 Relay and M21A4 Booster instead of magazine charge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 61 Mod 0-1 MT Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-139 and 1-140 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

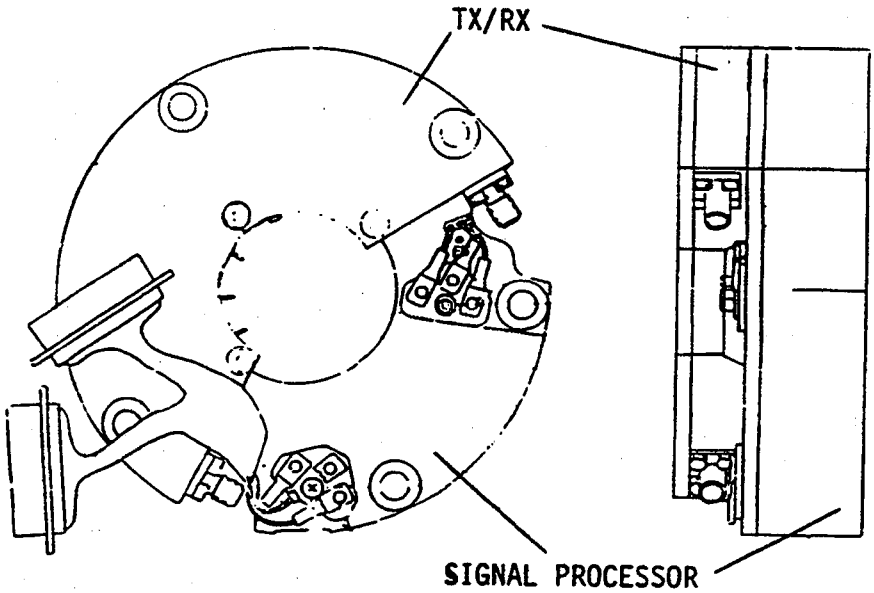

- OVERALL SIZE -	- INTRUSION -	WT: 1.0 lb (454 g)
LG: 1.5 in (38.1 mm)	DP: NA	THD: NA
XSECT: 4. in (101.6 mm)	DIA: NA	THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Terminated
- USER: Navy
- ASSY DWG: 5 258 395
- PARTS LIST:
- SPEC: XWS 16699(GP)
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: EX-406 Fuze
- SIMILAR TO:

- REPLACES: None
- REPLACED BY:

GENERAL
- WEAPON: 5-in/54 Mk 18 & 19 Guns

- AMMUNITION:
  - HE, Ex 105
  - SAL guided projectile

LOCATION: Mid-body
BALLISTIC LEVELS:
- ROTATION: 20 rps
- SETBACK: 7,500 g
- VELOCITY: 2030 ft/s (619 m/s)

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: NA
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Safety provided by EX 18 ASD (not in TDD)
1000 g setback

SECOND SAFETY:
Magnetic impulse sensors sense gun ejection

OTHER SAFETY:
Contains logic circuitry for second environmental safety in EX 18 ASD.

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
None

EXPLOSIVE COMPONENTS

S&A DEVICE: EX 18 ASD (in system)

PRIMER: NA

DETONATOR: NA

LEAD: NA

BOOSTER: NA

OTHER: No explosive in TDD
Electrical output only

FUNCTIONING DATA

MODES: Proximity/PD

TYPE: RF

CHARACTERISTICS:
Shor-range radar senses approach to surface target

TARGET: Surface

SENSITIVITY:

FUNCTION TEMP:
-7 to +54 deg C

MODE ON DELIVERY:
Prox with PD backup

POWER SUPPLY:

Uses guided projectile system

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT: None
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
Radar sensor detects near approach to surface target and delivers electrical firing pulse to warhead detonator (not in TDD). Guided projectile system may be electrically set to preclude radar fuzing, providing impact mode only from trembler switches in TDD package. Electronic package is mounted on warhead bulkhead in midsection of guided projectile, and attached to wrap-around antenna by two short coaxial cables. Antenna is 2 mm thick, 127 mm in diameter, and 152 mm long. Input and output cabling is permanently attached to the electronics package.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

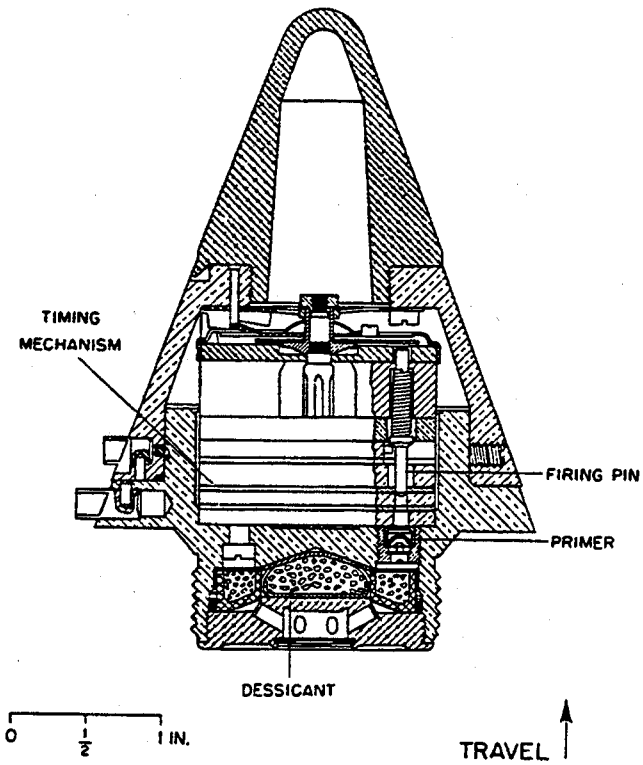

- OVERALL SIZE -	- INTRUSION -	WT: 2.28 lb (1034 g)
LG: 4.31 in (109.5 mm)	DP: 0.803 in (20.4 mm)	THD: See GA 561 996
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G41
- CONTACT: Pomeroy, S
- PHONE: DSN 290-1995
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 561 996, 561 519
- PARTS LIST: LD 165 620 (Mod 0)
- SPEC: LD 165 255 (Mod 1)
- PUB:

- NATIONAL STOCK NO: 1390-00-038-9725
- DODIC: N243
- PRIOR MODEL NO:
- SIMILAR TO: Mk 61 Mod 2

- REPLACES: Mk 42
- REPLACED BY: XP-69, 70 (Mod 1)

GENERAL
- WEAPON: 8-, 12- and 14-in Guns

- AMMUNITION: HE or GP

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 170 rps
- SETBACK: 7,800 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 1-141 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin, setback

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: Mk 104 Mod 0

LEAD:

BOOSTER: Black powder

OTHER:

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
Junghans escapement 0.8 to 45 s

TARGET: Antiaircraft, ground
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0257
US HCSDS: None
UN CL/DIV SCG: 1.4 B
US DOT SHIP CL: C
NET EXPL WT: 3.23865 g
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Has safety post under hammer spring. Fuze must be set before hammer spring will operate. Requires Mk 55 ADF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 63 MOD 0, FUZE, MECH. TIME

IDENTIFICATION

Agency	NSWC, G44, Klamm
Status	Obsolete
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5"/38, 8, 12, 14, 16 in.
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	210
Setback (g)	14,500
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 63 MOD 0, FUZE, MECH. TIME

ARMING DATA

Method	Spin, Setback
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.28 lb
Total Length (in.)	4.31
Body Diam. (in.)	
Intrusion	0.803 in.
Thread Size	1.70-14NS-1

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	
Target	Antiaircraft, ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

Similar to Fuze MK 61 MOD 1 except for spin rate

SERIES: N CHAPTER: 1
DESIGNATION: MK 63 MOD 0
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-63A, FUZE, BD

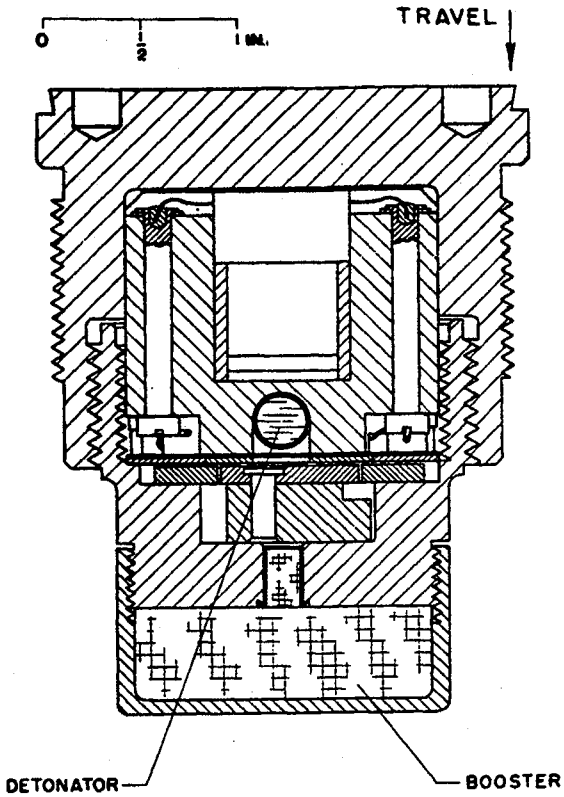

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs
Status	AV 290-1529 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5"/38, 5"/54, 6"/47
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	254
Setback (g)	15,000
Velocity (fps)	1200

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-63A, FUZE, BD

ARMING DATA

Method	Spin
Delay	500-800 ft
Rotation (rps)	
Non-arm / Arm	75
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	3.343
Body Diam. (in.)	
Intrusion	3.343 in.
Thread Size	2.375-12NS (LH)

FUNCTIONING DATA

Action	BD, Delay
Type	Electric
Delay	0.003-0.007 sec
Time Type	Army T23 escapement
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.125
Max Obliq. (°)	
Velocity (fps)	1200
Carrier	5"/36

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

SERIES: N CHAPTER: 1
DESIGNATION: XP- 63A
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 64 Mods 2, 3 BD Fuzes
may be found in MIL-HDBK-145B.

Supersedes pages 1-147 and 1-148 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-64A, FUZE, BD

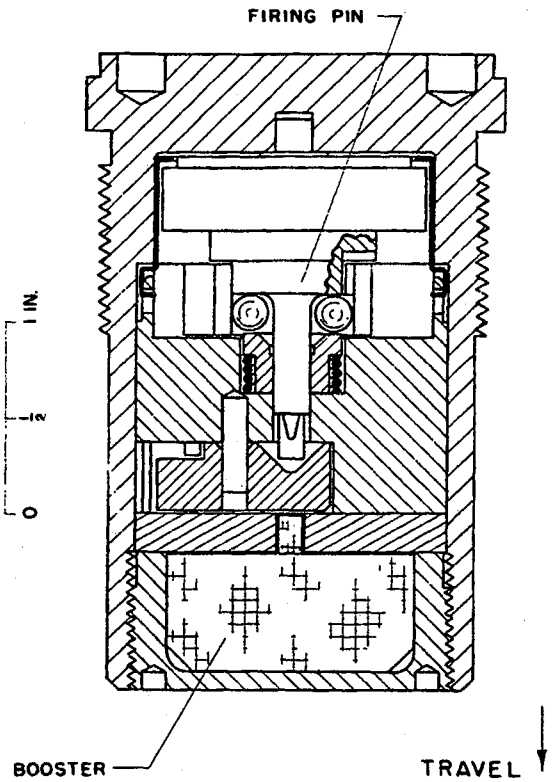

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5"/38, 5"/54, 6"/47
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	254
Setback (g)	15,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-64A, FUZE, BD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	3.338
Body Diam. (in.)	
Intrusion	3.338 in.
Thread Size	2-12N (LH)

FUNCTIONING DATA

Action	BD
Type	Mechanical
Delay	0.003 in.
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

SERIES: N CHAPTER: 1
DESIGNATION: XP- 64A
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M65A1 Time Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-151 and 1-152 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

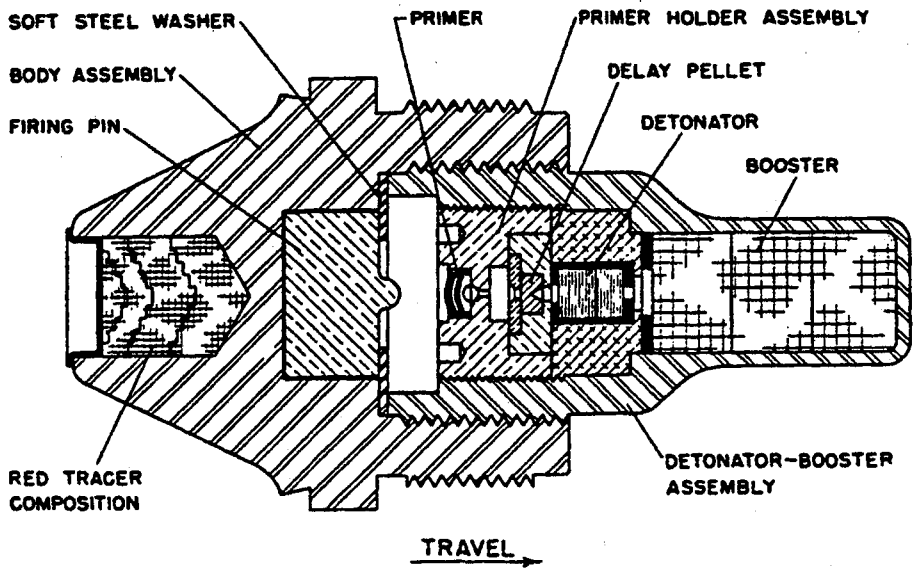

- OVERALL SIZE -	- INTRUSION -	WT: 1.040 lb (471 g)
LG: 3.532 in (89.7 mm)	DP: 2.156 in (54.8 mm)	THD: 1.650-10NS-1 (LH)
XSECT: 1.798 in (45.7 mm)	DIA: 1.65 in (41.9 mm)	THD DP: 0.70 in (17.8 mm)

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G41
CONTACT: Bagnall, J
PHONE: DSN 290-2791
STATUS: Obsolete
USER: Navy
ASSY DWG: 73-2-178 (M66A2)
PARTS LIST: 73-2-158A (M66A2)
SPEC: MIL-F-20455 (M66A2)
PUB: SW030-AA-MMO-010

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO: T8
SIMILAR TO: M68A1

REPLACES: M66
REPLACED BY:

GENERAL
WEAPON: 3

AMMUNITION:
AP, Mk 29

LOCATION: Base
BALLISTIC LEVELS:
ROTATION: 338 rps
SETBACK: 21,000 g
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Safety disc between firing pin and primer. Fuze is always armed. In-line firing train.

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: None, in-line train

PRIMER: No. 26 (FA 70)

DETONATOR: M71

LEAD: None

BOOSTER: Tetryl

OTHER: Black powder delay, Tracer

FUNCTIONING DATA

MODES: BD
TYPE: Mechanical
CHARACTERISTICS:
0.016 s delay

TARGET: Armor
SENSITIVITY:
0.5 in (12.7 mm) special-treated steel (STS) at 20 deg obiquity 1400 ft/s (427 m/s)
FUNCTION TEMP:

MODE ON DELIVERY:
Impact

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
The fuze has an in-line explosive train and is always armed. On impact, the heavy firing pin is driven forward, overcoming a safety disc between itself and the primer. The point of the firing pin drives against the percussion primer, pressing the primer mixture against the anvil. This fires the primer and the primer ignites the delay element. The black powder burns through its length and initiates the detoantor. The explosion of the detonator develops enough shock and heat to initiate the booster. Dimensions given on the illustration are for the M66A2. Length of the M66A1 is 3.458 in (87.8 mm). The M66A1 and M66A2 are similar except the M66A1 has an integral tracer and the M66A2 tracer is a separate, threaded device. The fuze is not bore safe, and should be used only in case of emergency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

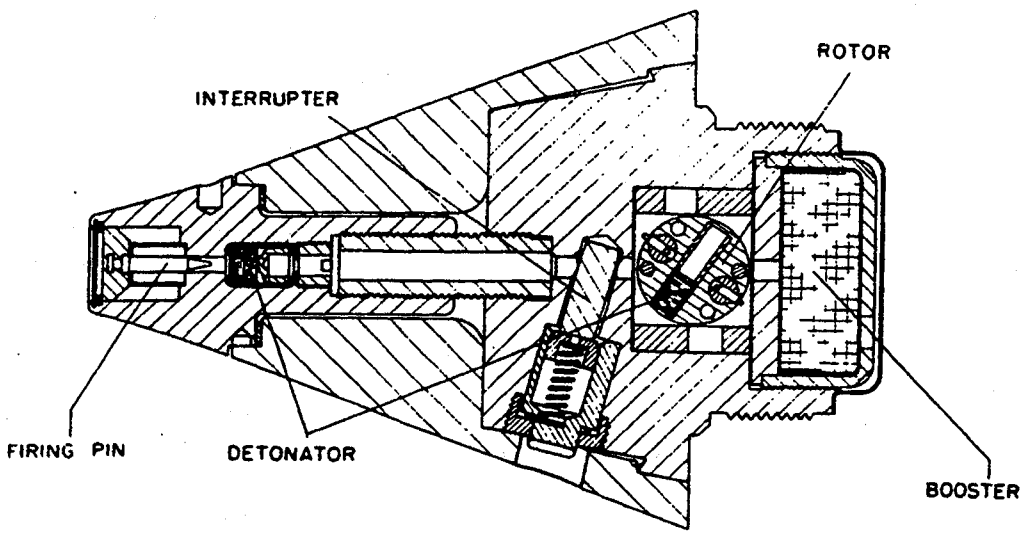

- OVERALL SIZE -	- INTRUSION -	WT: 1.54 lb (699 g)
LG: 4.400 in (111.8 mm)	DP: 1.075in (27.3 mm)	THD: 1.70-14NS-1
XSECT:	DIA: 1.70 in (43.2 mm)	THD DP: 0.713 in (18.1 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 562 461
- PARTS LIST: LD 165566
- SPEC: MIL-F-18701
- PUB: SW030-AA-MMO-010

- NATIONAL STOCK NO: 1390-00-038-9726
- DODIC: N615
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 29-3, Mk 30

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 5-in/38 Mk 12 Gun

- AMMUNITION: WP Mk 73 Mod 0

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 210 rps
- SETBACK: 16,200 g
- VELOCITY: 2600 ft/s (792 m/s)

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: Doesn't meet MIL-STD-1316B
SETTERS: Screwdriver

Supersedes page 1-155 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 50 rps no arm,
75 rps all arm

SECOND SAFETY:
Out-of-line interrupter and rotor

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
1.5 m from muzzle
Bore safe only

FUNCTIONING DATA

MODES: SQ
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Ground or water
SENSITIVITY:
1/8 in (3.175 mm) mild steel,
20 deg obliq., 1500 ft/s (457 m/s)

FUNCTION TEMP:
-7 to +54 deg C
MODE ON DELIVERY:
Safe (

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: Mk 25 Mod 0 Stab
Mk 48 Mod 0 Relay

LEAD:

BOOSTER: 6.7 g black powder
(expellant charge)

OTHER: None

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0349
US HCSDS:
UN CL/DIV SCG: 1.4 S
US DOT SHIP CL: C
NET EXPL WT: 0.459 g
NET PROP WT: 6.700 g
STORAGE TEMP: -7 to +54 deg C

REMARKS/DESCRIPTION:
The Mk 66 Fuze is made bore safe by having a spring-loaded interrupter and an out-of-line detonator in a rotor. The Mk 66 is normally set to the OFF position with the interrupter bearing against one shoulder of the setting sleeve locking it in position and blocking the flash tube. For SQ PD action, fuze is set to ON. This frees the interrupter, allowing it to move outward with sufficient spin, freeing the flash tube and partially arming the fuze. Initially, the longitudinal axis of the rotor is 55 deg to the longitudinal axis of the fuze, held in position by two spring-loaded rotor detents. On firing, detents move outward with spin, releasing the rotor so it can align itself with the booster lead-in and flash tube, arming the fuze. Arming occurs several feet beyond the muzzle of the gun. On impact, the firing pin is driven into the nose detonator. The explosion passes down the flash tube, initiating the relay in the rotor, and, in turn, the magazine charge. The flash from the maga- zine charge of black powder passes through six holes in the magazine cover initiat- ing the expelling charge of the projectile. The Mod 0 is sensitive to rain.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M67A3, FUZE, MT

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Obsolete
Ass'y Dwg. No.	73-7-97
Parts List	
Specification	
Previous Number	T17

GENERAL

Carriers	Projectile
Cal. — Size	90 mm, 155 mm - 240 mm
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M67A3, FUZE, MT

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Safety wire for shipping
External Indicat.	No

PHYSICAL DATA

Weight	2.14 lb
Total Length (in.)	5.93
Body Diam. (in.)	2.4
Intrusion	2.19 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	No
Time Type	Mechanical, two center tuned
Time Setting (sec)	1.5 - 75
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Centrifugal weight

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Replaced by M500 fuze.

Replaces M55 fuze.

Similar to M43 fuze except for "time" (75 vs 30 sec.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

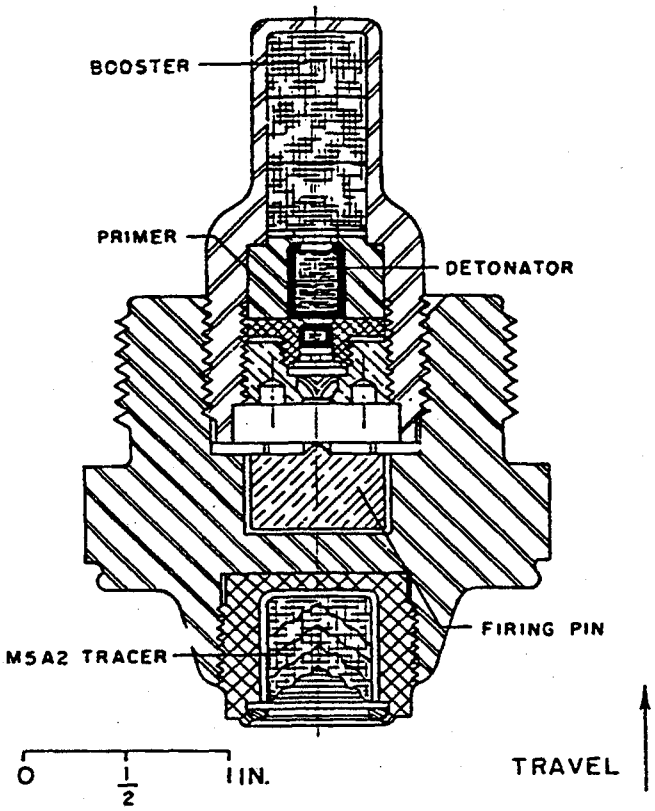

- OVERALL SIZE -	- INTRUSION -	WT: 1.44 lb (654.5 g)
LG: 3.527 in (89.6 mm)	DP: 0.845 in (21.5 mm)	THD: 2.0-10NS-1(LH)
XSECT: 2.285 in (58.0 mm)	DIA: 1.85 in (47.0 mm)	THD DP: 0.772 in (19.6 mm)

IDENTIFICATION
AGENCY: ARDEC, SMCAR-AEF-C
CONTACT: Bisson, E
PHONE: DSN 880-5591
STATUS: Obsolete
USER: Army
ASSY DWG: 73-2-181
PARTS LIST:
SPEC:
PUB: TM 43-0001-28

NATIONAL STOCK NO:
1315-00-028-4452
DODIC: C260
PRIOR MODEL NO: T8
SIMILAR TO: M66A2

REPLACES:
REPLACED BY:

GENERAL
WEAPON: 90 mm gun

AMMUNITION:
Armor-piercing cupped w/tracer (APC-T), M28 Cartridge

LOCATION: Base
BALLISTIC LEVELS:
ROTATION:
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 1-159 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
None

EXPLOSIVE COMPONENTS

S&A DEVICE: In-line explosive train

PRIMER: No. 31

DETONATOR: M17

LEAD: None

BOOSTER: Tetryl

OTHER: M5 Tracer, black powder delay pellet

FUNCTIONING DATA

MODES: BD, Delay
TYPE: Mechanical
CHARACTERISTICS:
0.01 s delay

TARGET: Tank
SENSITIVITY:

FUNCTION TEMP:
-40 to0 + 52 deg C
MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP: -62 deg C, 3 days max
+71 deg C, 4 hr/day max

REMARKS/DESCRIPTION:
The tracer composition in the base of the fuze is ignited by the flash of the propelling charge and provides a visible trace for at least 3 s. There is no other action until impact, when the inertia of the firing pin breaks the soft steel washer, and the firing pin point strikes the primer. The primer flash ignites the black powder delay pellet. After a burning time of 0.01 s, the delay pellet ignites the detonator which fires the booster charge to detonate the filler of the projectile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-68B, FUZE, BD

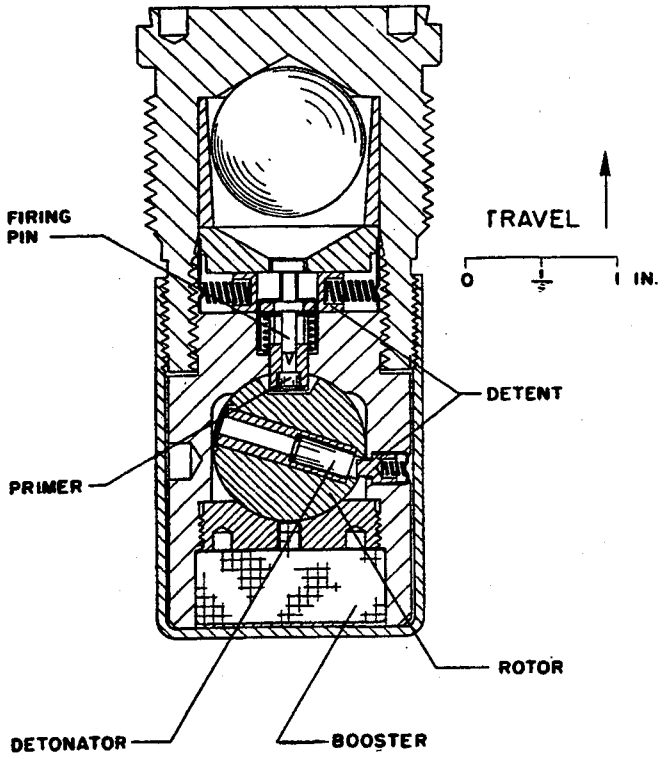

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Terminated
Ass'y Dwg. No.	GA 1240586
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5"/38, 5"/54, 6"/47
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	250
Setback (g)	15,000
Velocity (fps)	1400

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-68B, FUZE, BD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	4.25
Body Diam. (in.)	
Intrusion	4.25 in.
Thread Size	1.875-12NS (LH)

FUNCTIONING DATA

Action	BD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	1/4
Max Obliq. (°)	
Velocity (fps)	1400
Carrier	5"/38

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 102 MOD 1
Detonator	MK 50
Booster	Tetryl

REMARKS

Competed with XP-57 as replacement for MK 28

SERIES: N CHAPTER: 1
DESIGNATION: XP- 68B
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 69, FUZE, PROXIMITY

IDENTIFICATION

Agency	NSWC, Code G44 T. Ethridge AV 290-1970
Status	Obsolete
Ass'y Dwg. No.	GA 459726
Parts List	LD 177522
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	6"/47 dual purpose
Location	Nose
Use	
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 69, FUZE, PROXIMITY

ARMING DATA

Method

Delay

Rotation (rps)

Non-arm **Arm**

Setback (g)

Non-arm **Arm**

Arming Wire

External Indicat. No

PHYSICAL DATA

Weight 4.3 lb

Total Length (in.) 9.7

Body Diam. (in.)

Intrusion 5.0 in.

Thread Size 2.350-10NS-2

FUNCTIONING DATA

Action Proximity

Type Electric

Delay

Time Type

Time Setting (sec)

Target Ground

Sensitivity

Material

Thickness (in.)

Max Obliq. (°)

Velocity (fps)

Carrier

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

Rear Fitting MK 8

REMARKS

Similar to Fuze MK 47

Designed specifically for 6"/47 dual purpose guns

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-69A & B, FUZE, MECH. TIME

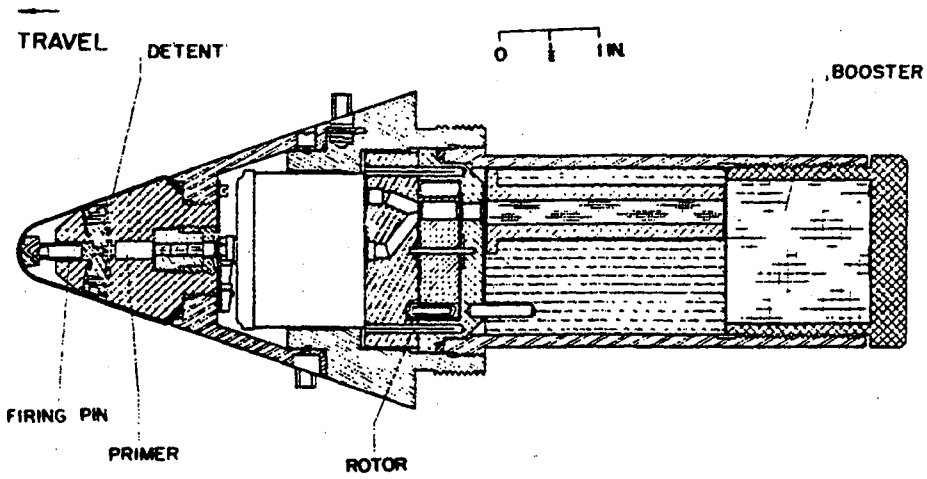

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs
Status	AV 290-1529 Terminated
Ass'y Dwg. No.	A1442860, B-1518756
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5"/38, 6"/47, single purpose
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	210
Setback (g)	14,300
Velocity (fps)	1200

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-69A & B, FUZE, MECH. TIME

ARMING DATA

Method	Spin, setback
Delay	100-150
Rotation (rps)	
Non-arm	40
Arm	80
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	5.39 lb
Total Length (in.)	9.21
Body Diam. (in.)	
Intrusion	5.11 in.
Thread Size	2.65-10NS-2

FUNCTIONING DATA

Action	PD, time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	0.8-45
Target	
Sensitivity	
Material	Dural
Thickness (in.)	0.032
Max Obliq. (°)	
Velocity (fps)	1200
Carrier	5"/38 HC

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 125
Detonator	MK 23
Booster	Tetryl

REMARKS

Interchangeable with proximity fuze

Will replace MK 50 MTF and Aux. Det. MK 54 at service velocity, and MK 61 MTF and Aux. Det. MK 54 at reduced velocities

SERIES: N CHAPTER: 1
DESIGNATION: XP- 69A,B
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M70, FUZE, PD

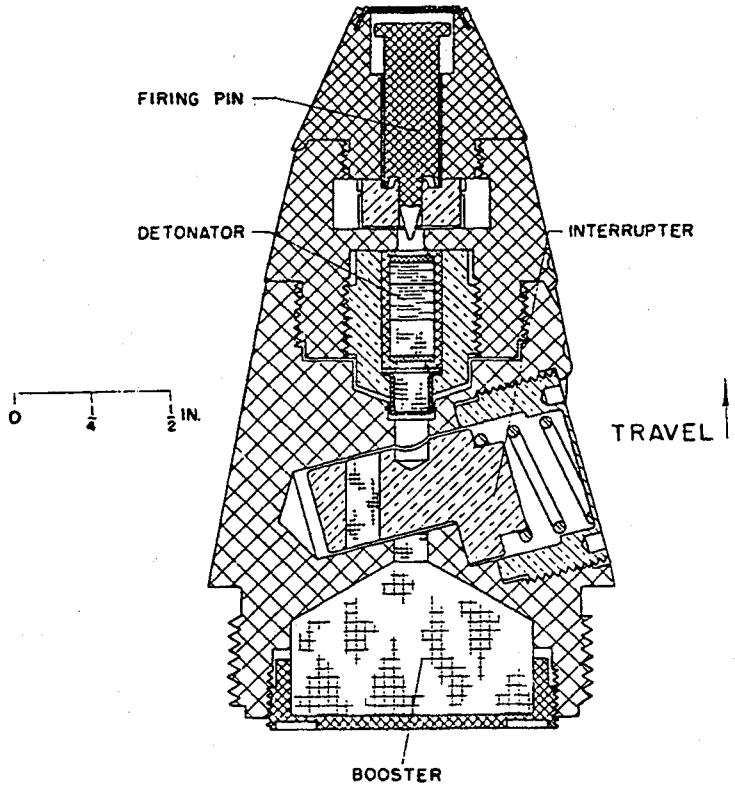

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T R. Trifiletti, AV 880-6984
Status	Obsolete
Ass'y Dwg. No.	73-2-192
Parts List	
Specification	
Previous Number	T47, T48

GENERAL

Carriers	Projectile
Cal. — Size	37, 40 mm
Location	Nose
Use	HE or GP
MIL-STD's	331, Tests 101, 102
Max Values	
Rotat. (rps)	900
Setback (g)	30,000
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 1
DESIGNATION: M70
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M70, FUZE, PD

ARMING DATA

Method	Spin, deceleration
Delay	
Rotation (rps)	
Non-arm	66
Arm	133
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	2.387
Body Diam. (in.)	
Intrusion	0.47 in.
Thread Size	1.125-20NS-1A

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	Aluminum
Thickness (in.)	0.012
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M23
Booster	Tetryl
Lead	Tetryl

REMARKS

The M70 is basically Fuze M56 with different overall contour.

SERIES: A CHAPTER: 1
DESIGNATION: M70
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-70A & B, FUZE, MECH. TIME

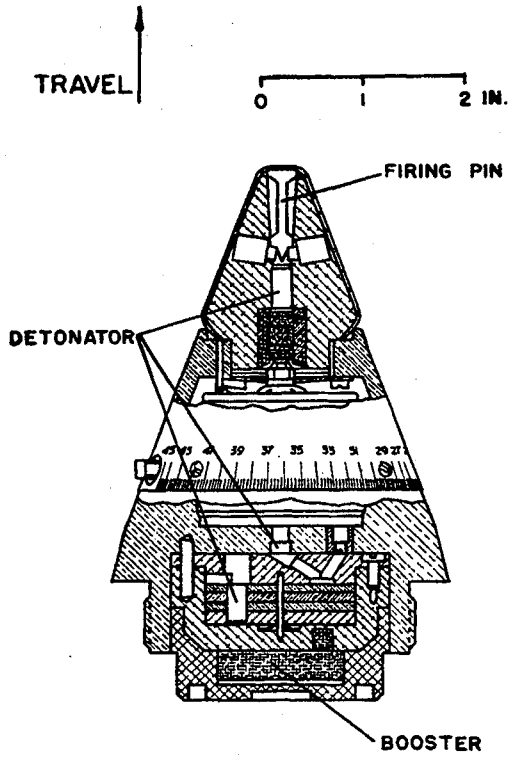

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Terminated
Ass'y Dwg. No.	1442862-A, 1518757-B
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5"/38, 6"/47
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	210
Setback (g)	14,300
Velocity (fps)	1200

KEY FEATURES

SERIES: N CHAPTER: 1
DESIGNATION: XP- 70A,B
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-70A & B, FUZE, MECH. TIME

ARMING DATA

Method	Spin, setback
Delay	100-150
Rotation (rps)	
Non-arm	40
Arm	80
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	6.4
Body Diam. (in.)	
Intrusion	2.32 in.
Thread Size	2.65-10NS-2

FUNCTIONING DATA

Action	PD, time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	0.8-45
Target	
Sensitivity	
Material	Dural
Thickness (in.)	0.032
Max Obliq. (°)	
Velocity (fps)	1200
Carrier	5"/38 WP

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 125
Detonator	MK 23
Booster	Black powder

REMARKS

Was to replace MK 50 and MK 61
Mechanical time fuzes

SERIES: N CHAPTER: 1
DESIGNATION: XP- 70A,B
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 71 Mods 11 & 12 VT-RF Fuzes
may be found in MIL-HDBK-145B.

Supersedes pages 1-171 and 1-172 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-71A & B, FUZE, MECH. TIME

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs
Status	AV 290-1529 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5"/38(A), 6"/47(B)
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	200
Setback (g)	14,300
Velocity (fps)	

KEY FEATURES

SERIES: N CHAPTER: 1
DESIGNATION: XP- 71A,B
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XP-71A & B, FUZE, MECH. TIME

ARMING DATA

Method	Spin, setback
Delay	100-150
Rotation (rps)	
Non-arm	40 Arm 80
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	6.40(A), 8.16(B)
Body Diam. (in.)	
Intrusion	2.32(A), 4.08(B)in.
Thread Size	2.65-10NS-2

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	0.8-45
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 125
Detonator	MK 23
Booster	Black powder
A. Det.	MK 49
B. Det.	MK 50

REMARKS

Was to replace MK 50 in illuminating projectiles

Same as XP 70A except for blank nose

SERIES: N CHAPTER: 1
DESIGNATION: XP- 71A,B
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M72, FUZE, BD

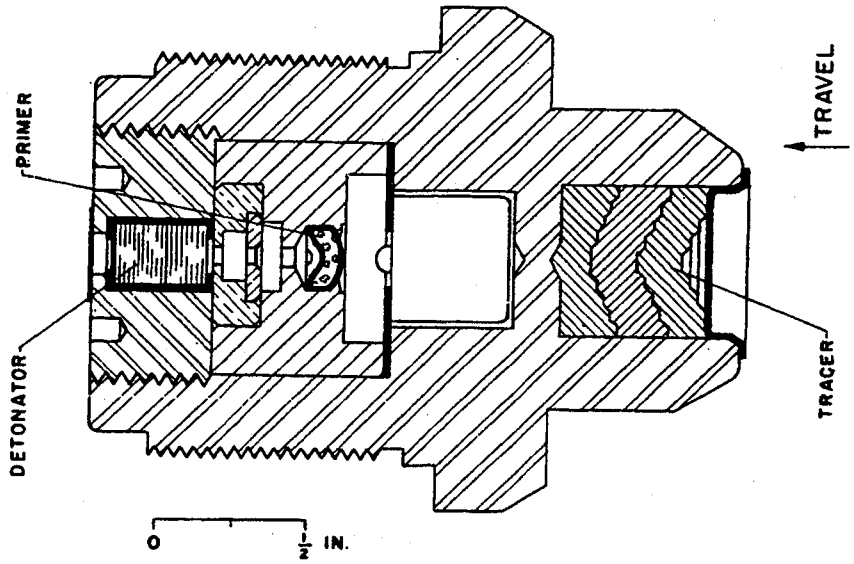

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Obsolete
Ass'y Dwg. No.	73-2-197
Parts List	
Specification	
Previous Number	T56

GENERAL

Carriers	Projectile
Cal. — Size	57 mm
Location	Base
Use	AP
MIL-STD's	331, Tests 101, 102
Max Values	
Rotat. (rps)	480
Setback (g)	26,500
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M72, FUZE, BD

ARMING DATA

Method

Delay

Rotation (rps)

Non-arm **Arm**

Setback (g)

Non-arm **Arm**

Arming Wire No

External Indicat. No

PHYSICAL DATA

Weight 0.86 lb

Total Length (in.) 2.167

Body Diam. (in.)

Intrusion 2.167 in.

Thread Size 1.375-10NS-2A

FUNCTIONING DATA

Action BD, delay

Type Mechanical

Delay

Time Type

Time Setting (sec)

Target Armour

Sensitivity

Material

Thickness (in.)

Max Obliq. (°)

Velocity (fps)

Carrier

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer No.26(A-131)

Detonator M17

Booster None

Tracer

REMARKS

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

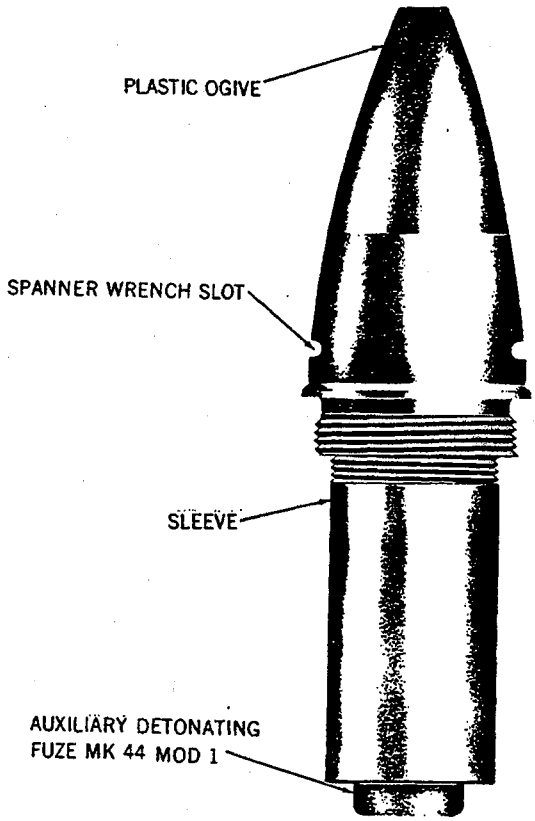

- OVERALL SIZE -	- INTRUSION -	
LG: 9.75 in (248 mm)	DP: 5.1 in (130 mm)	WT: 4.89 lb (2218 g)
XSECT:	DIA:	THD: 2.35-10NS-2RH
		THD DP: 0.5 in (13 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 779 583 (0), 779 591 (1)
- PARTS LIST: LD 267 105 (0), 106 (1)
- SPEC: OS 5918, 5976, 5941
- PUB: NAVORD OP 2215, Vol. 1

- NATIONAL STOCK NO: 1390-00-203-4128; -4129; -038-9748
- DODIC: N626
- PRIOR MODEL NO:
- SIMILAR TO: Mk 70 Series low-mod VT-RF Fuzes
- REPLACES:
- REPLACED BY: Nothing

GENERAL
- WEAPON: 6-in/47 caliber guns

- AMMUNITION: HE or GP

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 213 rps
- SETBACK: 9,050 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS: None

Supersedes page 1-177 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback:

SECOND SAFETY:
Spin: 50 rps, no arm
120 rps, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
1,500 to 2,400 ft

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 12 Mod 1 RFSD
(Mod 1 Fuze)
PRIMER: Mk 121 Mod 0

DETONATOR: Mk 54 Mod 0

LEAD:

BOOSTER: Mk 44 Mod 1 Aux Det Fuze

OTHER:

FUNCTIONING DATA
MODES: Proximity, SD
TYPE: Electrical
CHARACTERISTICS:
SD, 12,500 to 18,600 yd
(11,430 to 17,008 m)

TARGET: Aircraft
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Mk 7 Mod 4 Reserve Energizer

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0409
US HCSDS:
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: C
NET EXPL WT: 2.045016 g
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, setback shatters an ampoule in the reserve energizer, releasing electrolyte. Centrifugal force distributes electrolyte activating the battery. Spin also opens a reed switch, which is present only in fuzes with self-destruct feature, removing a short across the firing capacitor. Setback unlocks a pin in the clock of the RFSD. Spin releases two detents holding the clock mechanism, rotates a cam shaft to the rotor release position, and arms rotor breaking the shorter wire across the electric detonator. When armed, radio signals are emitted. On close proximity to the target, reflected signals reach the required amplitude, causing an SCR to discharge the firing capacitor through the detonator. This, in turn, initiates the lead, booster, and main projectile charge. Mod 0 has self-destruct capability; Mod 1 does not and is used for shore bombardment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

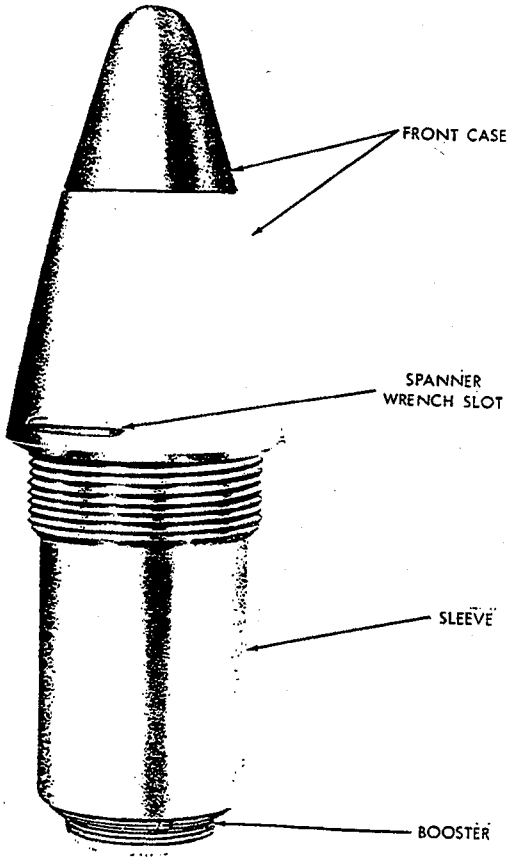

- OVERALL SIZE -	- INTRUSION -	
LG: 7.28 in (185 mm)	DP: 3.57 in (91 mm)	WT: 2.68 lb (1216 g)
XSECT:	DIA:	THD: 2.0-12UN-2A
		THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 880-
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 1 310 904 (Mod 5)
- PARTS LIST: 292 396 (Mod 5)
- SPEC: 8112 (Mods 4 & 5)
- PUB: NAVORD OP 2215

- NATIONAL STOCK NO:
  1390-00-714-9035, -9036, -203-4133
- DODIC: N432, N433, N627
- PRIOR MODEL NO: EX 20
- SIMILAR TO: Mk 70 Series low-mod VT-RF fuzes.
- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 3-in/70 gun

- AMMUNITION:
  - HE or GP

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 625 rps
- SETBACK: 25,000 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS: None

Supersedes page 1-179 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback:

SECOND SAFETY:
Spin: 50 rps, no arm
100 rps, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 18 Mod 4 RFSD
(Mods 4 and 5)
PRIMER: Mk 121 Mod 0

DETONATOR: Mk 54 Mod 0

LEAD:

BOOSTER: Mk 39 Mod 0 (Mods 4 and 5);
Mk 44 Mod 3 Aux Det Fuze
(Mods 1-3
OTHER:

FUNCTIONING DATA
MODES: Proximity, PD backup
TYPE: Electrical
CHARACTERISTICS:
Mods 2 and 4 have 11 to 17 s
self-destruct

TARGET: Aircraft
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Mk 7 Mod 0 Reserve Energizer
(Mods 4 and 5)

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0409
US HCSDS:
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL:
NET EXPL WT: 15.6942 g
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, setback shatters an ampoule in the reserve energizer, releasing electrolyte. Centrifugal force distributes electrolyte activating the battery. Spin also opens a reed switch, which is present only in fuzes with self-destruct feature, removing a short across the firing capacitor. Setback unlocks a pin in the clock of the RFSD. Spin releases two detents holding the clock mechanism, rotates a cam shaft to the rotor release position, and arms rotor breaking the shorter wire across the electric detonator. When armed, radio signals are emitted. On close proximity to the target, reflected signals reach the required amplitude, causing an SCR to discharge the firing capacitor through the detonator. This, in turn, initiates the lead, booster, and main projectile charge. Dimensional data are for Mods 4 & 5. Mods 1-3 weigh 2.68 lb (1216 g) and have a 2-12NS-2RH thread.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 76 MODS 0-3, FUZE, PROXIMITY

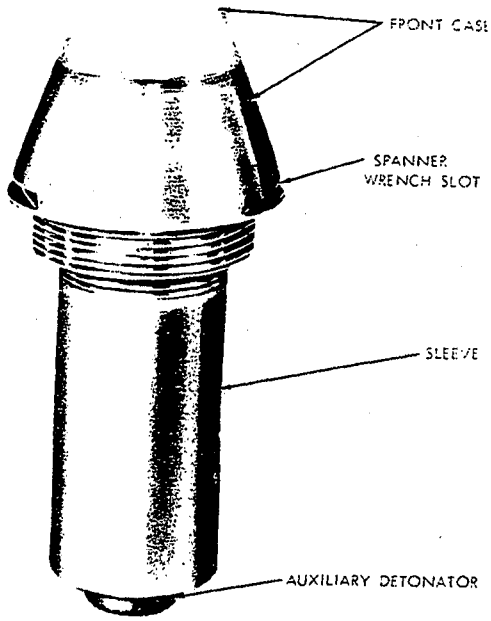

IDENTIFICATION

Agency	NSWC, G44, Klamm
Status	Obsolete
Ass'y Dwg. No.	GA 1310641 (MOD 3)
Parts List	
Specification	OS 5918, OS 5976
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	8"/55
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	162
Setback (g)	6300
Velocity (fps)	

KEY FEATURES

Mods without SD will burst above land or water when no aerial target is encountered; they are used for shore bombardment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 76 MODS 0-3, FUZE, PROXIMITY

ARMING DATA

Method	Spin, setback
Delay	780 - 1500 ft
Rotation (rps)	
Non-arm 50 Arm 120	
Setback (g)	
Non-arm Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	5.5 lb
Total Length (in.)	9.1
Body Diam. (in.)	
Intrusion	5.1 in.
Thread Size	2.65-10NS-2

FUNCTIONING DATA

Action	SD, proximity, PD
Type	Electrical
Delay Time Type	(SD) 12,500-15,500 yd at 20°
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Reserve energizer MK 7 MOD 5

EXPLOSIVE TRAIN

S&A Device	Rear fitting MK 12 MOD 13
Primer	MK 114 MOD 1
Detonator	MK 54 MOD 0
Booster	
Aux. Det.	MK 44 MOD 1

REMARKS

MOD 1 and 3 do not have SD.

MODS 2 and 3 have PD, DSOT construction.

Dwgs: MOD 0 GA 795193
MOD 1 GA 795194
MOD 2 GA 1310640

SERIES: N CHAPTER: 1
DESIGNATION: MK 76 MOD 0,3
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M77 Time/PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-183 and 1-184 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 2.72 lb (1234 g)
LG: 7.677 in (195 mm)	DP: 0.81 in (21 mm)	THD: 2-12NS-1
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 72-5-12
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 120mm gun

- AMMUNITION:
  - M15 Dummy Projectile

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK: NA
- VELOCITY: NA

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: NA
SETTERS: None

Supersedes page 1-185 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
NA

SECOND SAFETY:
NA

OTHER SAFETY:
NA

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: NA

PRIMER: NA

DETONATOR: NA

LEAD: NA

BOOSTER: NA

OTHER: NA

FUNCTIONING DATA

MODES: Dummy
TYPE: NA
CHARACTERISTICS:
NA

TARGET: Target practice
SENSITIVITY:
NA

FUNCTION TEMP:
NA
MODE ON DELIVERY:
NA

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: NA
US HCSDS: NA
UN CL/DIV SCG: NA
US DOT SHIP CL: NA
NET EXPL WT: None
NET PROP WT: None
STORAGE TEMP: NA
NA

REMARKS/DESCRIPTION:
The M79 is a dummy fuze for the M61 series fuzes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

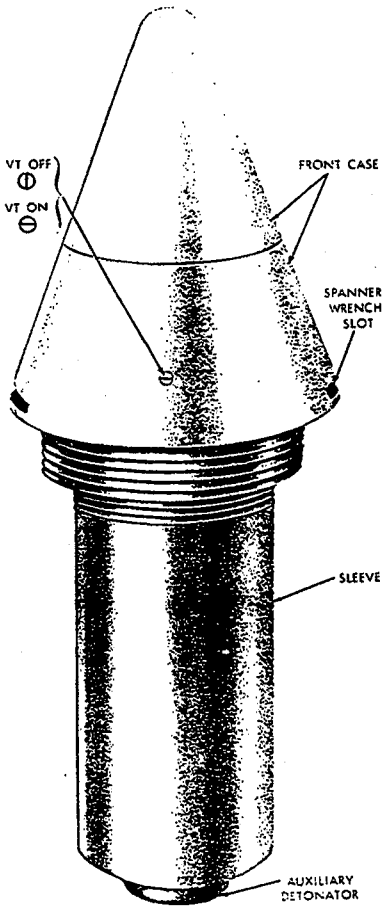

- OVERALL SIZE -	- INTRUSION -	
LG: 9.1 in (231 mm)	DP: 5.1 in (130 mm)	WT: 5.58 lb (2531 g)
XSECT:	DIA:	THD: 2.65-10-2
		THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 795 325 (Mod 1)
- PARTS LIST: LD 267 279 (Mod 1)
- SPEC:
- PUB: NAVORD OP 2215, Vol. 1

- NATIONAL STOCK NO:

- DODIC: N629
- PRIOR MODEL NO:
- SIMILAR TO: Mk 70 series low-mod VT-RF fuzes
- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 6-inch/47 caliber guns

- AMMUNITION:
  - HE and GP

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 213 rps
- SETBACK: 9,500 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 1-187 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback:

SECOND SAFETY:
Spin: 50 rps, no arm;
120 rps, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
780 to 1500 ft (238 to 457 m)

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 12 Mod 12 RFSD

PRIMER: Mk 121 Mod 0

DETONATOR: Mk 54 Mod 0

LEAD:

BOOSTER: Mk 44 Mod 1 Aux Det Fuze

OTHER:

FUNCTIONING DATA
MODES: Proximity, PD
TYPE: Electrical
CHARACTERISTICS:
Mod 0 has self-destruct at 9,000 to 16,500 yd (8,230 to 15,088 m) at 25 degrees elevation

TARGET: Aircraft
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Mk 7 Mod 5 Reserve Energizer

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0409
US HCSDS:
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, setback shatters an ampoule in the reserve energizer, releasing electrolyte. Centrifugal force distributes electrolyte activating the battery. Spin also opens a reed switch, which is present only in fuzes with self-destruct feature, removing a short across the firing capacitor. Setback unlocks a pin in the clock of the RFSD. Spin releases two detents holding the clock mechanism, rotates a cam shaft to the rotor release position, and arms rotor breaking the shorter wire across the electric detonator. When armed, radio signals are emitted. On close proximity to the target, reflected signals reach the required amplitude, causing an SCR to discharge the firing capacitor through the detonator. This, in turn, initiates the lead, booster, and main projectile charge. Mod 0 data: has self-destruct, dwg. 795 323, LD 267 278.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 80 MOD 0, FUZE, PD

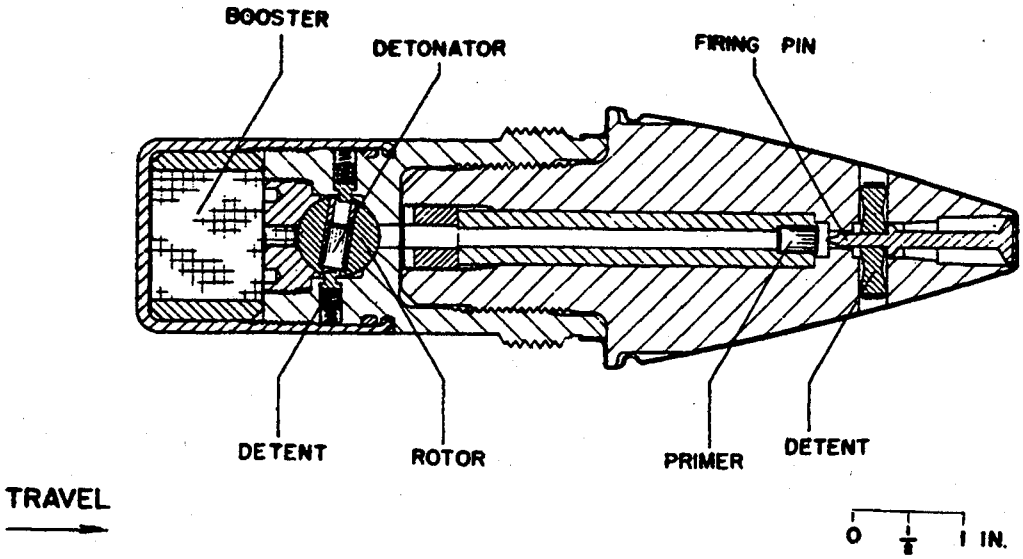

IDENTIFICATION

Agency	NSWC, Code G44 A. Munach AV 290-1970
Status	Obsolete
Ass'y Dwg. No.	GA 1369958
Parts List	
Specification	
Previous Number	XP-61

*Released for production, never built

GENERAL

Carriers	Projectile
Cal. — Size	3"/50
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	340
Setback (g)	20,600
Velocity (fps)	1000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 80 MOD 0, FUZE, PD

ARMING DATA

Method	Spin
Delay	75-190 ft
Rotation (rps)	
Non-arm	50 Arm 100
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.78 lb
Total Length (in.)	7.980
Body Diam. (in.)	
Intrusion	4.240 in.
Thread Size	2-12NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	Aluminum
Thickness (in.)	0.032
Max Obliq. (°)	80
Velocity (fps)	1000
Carrier	3"/50

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 25 MOD 1
Detonator	MK 50
Booster	Tetryl
Lead	Tetryl

REMARKS

Interchangeable with proximity fuze

Replaces PD MK 30 and Aux. Det. MK 54 for 3"/50 HC application

SERIES: N CHAPTER: 1
DESIGNATION: MK 80 MOD 0
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M81A1, FUZE, PD

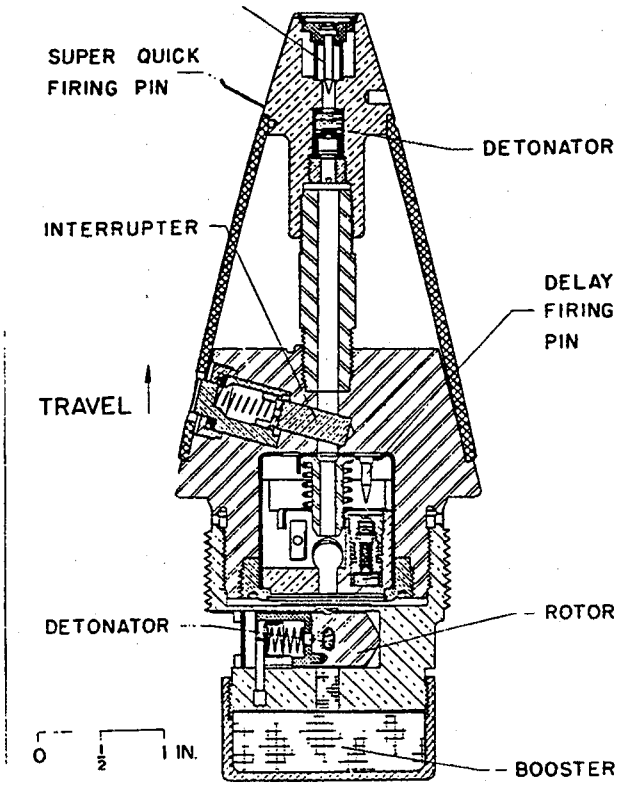

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T
Status	A. Nash, AV 880-2017. procurement Std*
Ass'y Dwg. No.	73-2-251
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile, rocket
Cal. — Size	75 - 240 mm, 4.5 in
Location	Nose
Use	GP
MIL-STD's	331, Tests 101 & 102
Max Values	
Rotat. (rps)	550
Setback (g)	21,000
Velocity (fps)	

REMARKS

*but not procured since WW II

SERIES: A CHAPTER: 1
DESIGNATION: M81A1
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M81A1, FUZE, PD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm 25 Arm 33	
Setback (g)	
Non-arm Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PD, SQ, delay
Type	Mechanical
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M24
Booster	M24 or M24B1

REMARKS

Consists of Fuze M48A3 with M24 or M24B1 booster.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

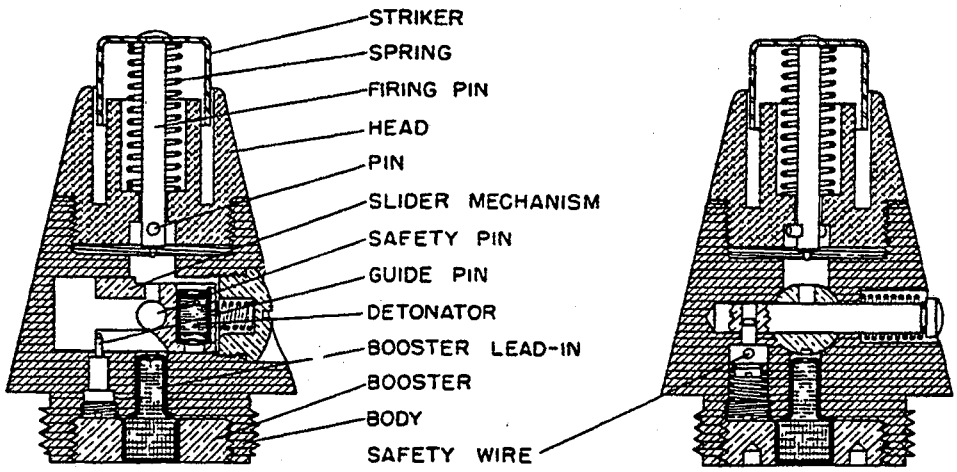

- OVERALL SIZE -	- INTRUSION -	WT: 0.47 lb (213 g)
LG: 2.9 in (74 mm)	DP: 0.5 in (13 mm)	THD: 1.5-12NF-A (non-std)
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT: Schifrien, L
- PHONE: DSN 880-2019
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-1-195
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO: M52A1B1

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 60 & 81 mm mortar

- AMMUNITION:
  - Smoke, M302

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION:
- SETBACK: 6,000 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

Supersedes page 1-193 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 300 g all arm

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
Yes

ARMING TIME OR DISTANCE:
2-5 ft

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: M18 in M82, M44 in M82A1

LEAD:

BOOSTER: 10 grain (0.6 g) tetryl

OTHER:

FUNCTIONING DATA
MODES: PD, SQ
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Screening
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Safety is maintained by a bore-riding pin which holds a slider and its detonator out-of-line. On firing, the setback pin is forced back against its spring and free of the bore-riding pin. The bore-riding pin is ejected by its spring after the fuze has passed the muzzle. This allows the slider spring to move the slider and align the detonator with the firing pin and lead. On impact, the striker drives the firing pin against its spring and into the detonator, initiating the explosive train. M82 has brass slider; M82A1, aluminum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 82 MOD 0, FUZE, AUX. DET.

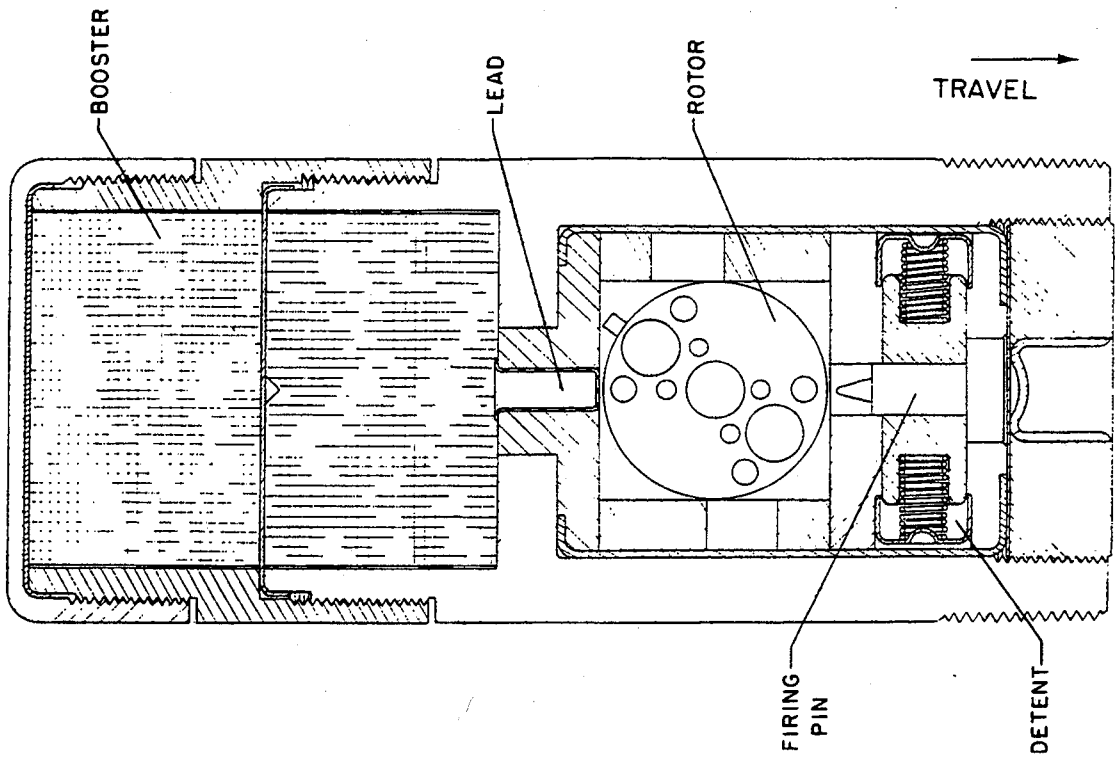

IDENTIFICATION

Agency	NSWC, G44, G. Klamm
Status	Obsolete
Ass'y Dwg. No.	GA 1442989
Parts List	LD 299186
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	16 in.
Location	Base
Use	Spotting round
MIL-STD's	
Max Values	
Rotat. (rps)	168
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 82 MOD 0, FUZE, AUX. DET.

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm / Arm	60
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	0.92 lb
Total Length (in.)	3.200
Body Diam. (in.)	1.400
Intrusion	
Thread Size	1.375-20NS (LH)

FUNCTIONING DATA

Action	Mechanical
Type	
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 28
Booster	Tetryl (2)
Lead	Tetryl

REMARKS

Similar to Fuze MK 55 MOD 0

SERIES: N CHAPTER: 1
DESIGNATION: MK 82 MOD 0
Aux Det Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M83, FUZE, CP

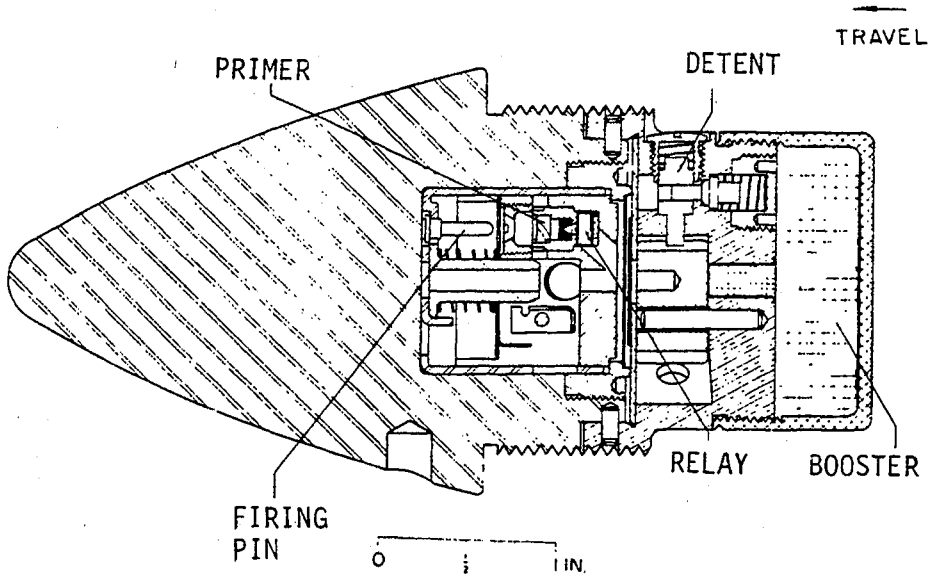

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T
A. Nash, AV 880-2017

Status procurement Std*

Ass'y Dwg. No. 73-2-232

Parts List

Specification

Previous Number

GENERAL

Carriers Projectile

Cal. — Size 105, 155 mm, 8 in.

Location Nose

Use HE, GP, concrete piercing

MIL-STD's 331, Tests 101, 102

Max Values

Rotat. (rps) 550

Setback (g) 21,000

Velocity (fps)

REMARKS

This is an M78 with an M25 Booster
*but not procured since WW II

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M83, FUZE, CP

ARMING DATA

Method	Spin, setback
Delay	
Rotation (rps)	Yes
Non-arm	12.5 Arm 33
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.74 lb
Total Length (in.)	4.87
Body Diam. (in.)	
Intrusion	2.20 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	0.025 sec
Time Type	
Time Setting (sec)	
Target	Concrete
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	M25
Delay Plunger	M1 with M2 delay element

REMARKS

This is Fuze M78 with assembled booster.

SERIES: A CHAPTER: 1
DESIGNATION: M 83
CP Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 83 Mod 0 BD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-199 and 1-200 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M85, FUZE, PD

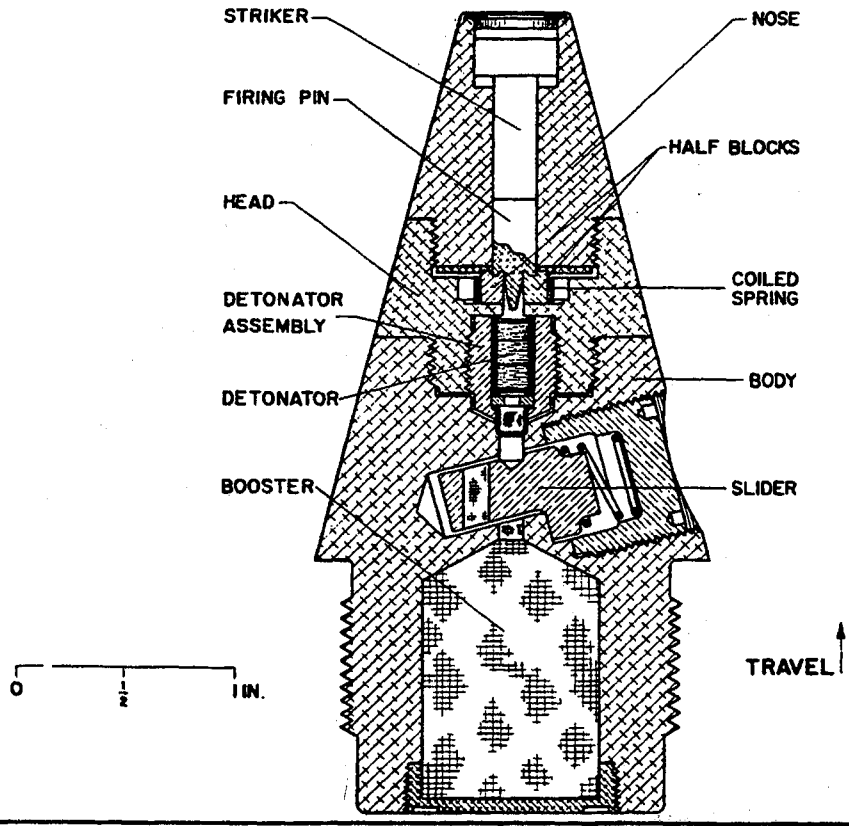

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Obsolete
Ass'y Dwg. No.	73-2-215
Parts List	
Specification	
Previous Number	T82

GENERAL

Carriers	Projectile
Cal. — Size	57 mm
Location	Nose
Use	GP, HE-T
MIL-STD's	
Max Values	
Rotat. (rps)	530
Setback (g)	27,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M85, FUZE, PD

ARMING DATA

Method	Spin, setback
Delay	
Rotation (rps)	
Non-arm	66
Arm	133
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.42 lb
Total Length (in.)	3.72
Body Diam. (in.)	
Intrusion	1.11 in.
Thread Size	1.5-12NF-1A

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	Aluminum
Thickness (in.)	0.012
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M23
Booster	

REMARKS

Embodies characteristics of Fuze M5t
It has the same contour as Fuze M86.
Replaced by Fuze M503.

SERIES: A
CHAPTER: 1
DESIGNATION: M 85
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M86E1, FUZE, PD

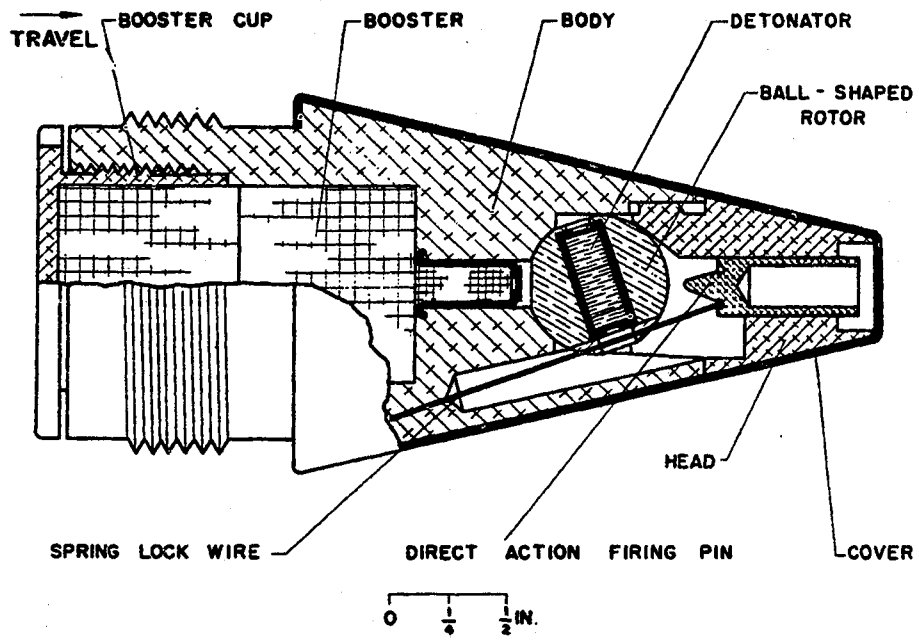

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash
Status	AV 880-2017 Obsolete
Ass'y Dwg. No.	73-2-221
Parts List	
Specification	
Previous Number	T86

GENERAL

Carriers	Projectile
Cal. — Size	57 mm (gun)
Location	Nose
Use	HE or GP, HE-T
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	27,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M86E1, FUZE, PD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	116
Arm	232
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.34 lb
Total Length (in.)	3.69
Body Diam. (in.)	
Intrusion	1.11 in.
Thread Size	1.5-12NF-1A

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M37
Booster	Tetryl

REMARKS

Dummy fuze is T203.

Uses ball rotor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

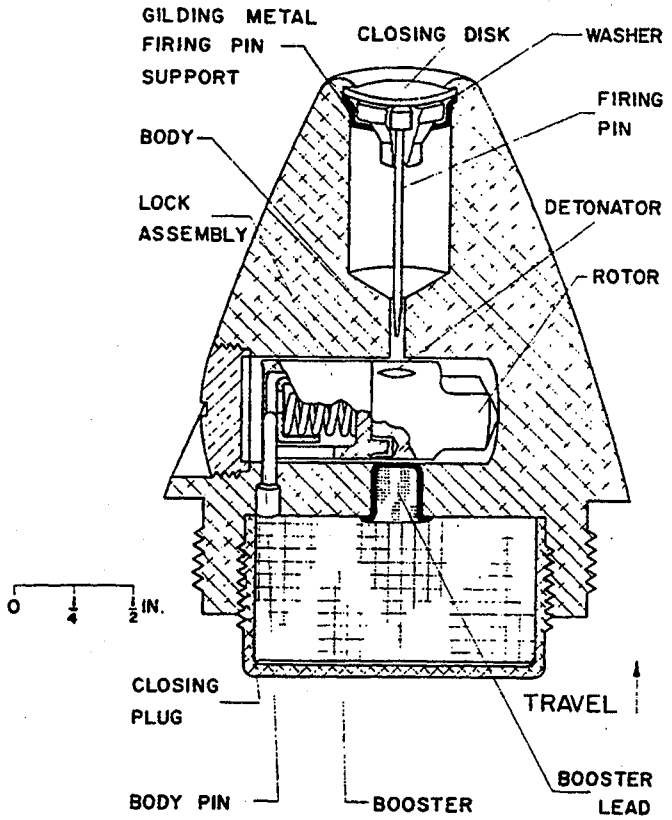

- OVERALL SIZE -	- INTRUSION -	WT: 0.37 lb (168 g)
LG: 2.525 in (64 mm)	DP: 0.8 in (20 mm)	THD: 1.7-14NS-1A
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-
- CONTACT:
- PHONE: DSN 880-
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-2-233
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: T119
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 57-mm recoilless rifle

- AMMUNITION:
  - HE, GP, chemical

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 210 rps
- SETBACK: 9,000 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 1-205 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: 50 rps, no arm
100 rps, all arm

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: M29

LEAD: Tetryl

BOOSTER: 13 g, tetryl

OTHER:

FUNCTIONING DATA
MODES: PD, SQ
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Personnel
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, spin causes the lock to move outward against the tension of the lock spring, releasing the rotor. After setback, the rotor turns to the armed position with the detonator parallel to the fuze axis, aligned with the firing pin. This position is retained until impact when the aluminum closing disk is perforated or crushed and the firing pin is driven through its cup support and against the detonator. Action of the detonator is transmitted throudh the lead charge to the booster charge, the latter causing functioning of the shell burster charge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 89 Mod 0 AD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-207 and 1-208 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

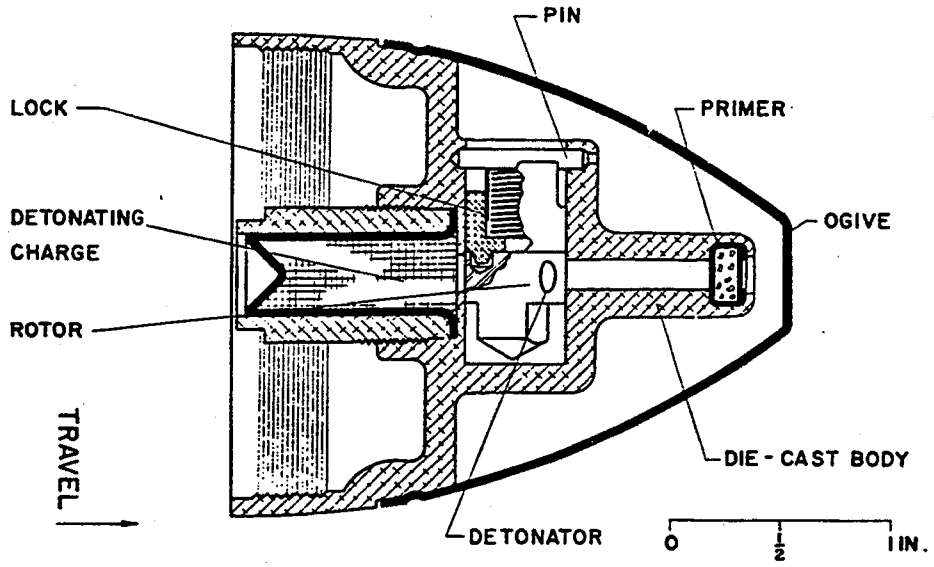

- OVERALL SIZE -	- INTRUSION -	
LG: 2.52 in (64.0 mm)	DP: 0.4 in (10.2 mm)	WT: 0.256 in (116 g)
XSECT:	DIA:	THD: 2.095-18NS-1
		THD DP:

IDENTIFICATION
AGENCY: ARDEC, SMCAR
CONTACT:
PHONE: DSN 880-
STATUS: Obsolete
USER: Army, Navy
ASSY DWG: 73-2-236
PARTS LIST:
SPEC: 50-40-16
PUB: TM 9-1300-204, 43-0001-28

NATIONAL STOCK NO:
1310-00-028-4588 (Ctg)
DODIC: B587 (Ctg)
PRIOR MODEL NO: T123
SIMILAR TO: M89

REPLACES:
REPLACED BY:

GENERAL
WEAPON: 57 mm gun and recoilless rifle

AMMUNITION:
HEAT, M307A1 Cartridge

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: 214 rps
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 1-209 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 50 rps no arm,
100 rps all arm

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: M56

DETONATOR: M30A1

LEAD:

BOOSTER: M122

OTHER:

FUNCTIONING DATA

MODES: PI SQ
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Arm vehc, light structure
SENSITIVITY:
2 in (50.8 mm) wood screen

FUNCTION TEMP:
-40 to +52 deg C
MODE ON DELIVERY:
SQ

POWER SUPPLY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0006 (cartridge)
US HCSDS:
UN CL/DIV SCG: 1.1 E (cartridge)
US DOT SHIP CL:
NET EXPL WT: 2.863 g
NET PROP WT: None
STORAGE TEMP: -62 deg C, 3 days max
+71 deg C, 4 hr/day max

REMARKS/DESCRIPTION:
The M90 and M90A1 have an internal thread for mounting over the projectile. On firing, centrifugal force causes the rotor lock to move outward against the lock spring. The rotor cannot move while setback forces are present, but after setback, it turns to the armed position aligning the detonator with the primer and booster. On impact, the thin steel ogive is crushed firing the primer and, in turn the other explosive components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 90 Mod 1 VT-IR Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-211 and 1-212 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 91 Mod 1 VT-IR Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-213 and 1-214 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

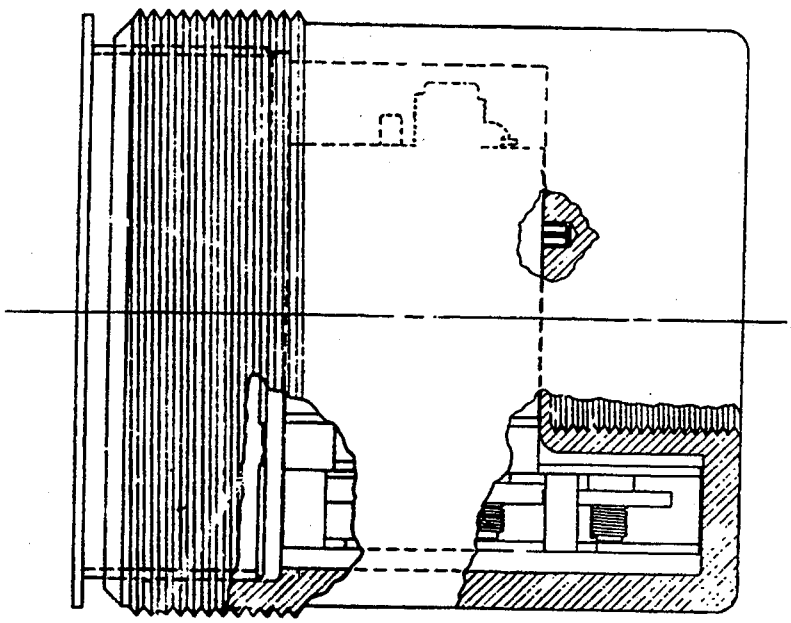

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARL
- CONTACT: Tokarcik, J
- PHONE: DSN 290-2704
- STATUS: Redesignated part of M532
- USER:
- ASSY DWG: 10 967 792
- PARTS LIST:
- SPEC: MIL-D-60 484
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 81 mm mortar

- AMMUNITION:
  - HE

LOCATION:
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 300 g no arm
500 g all arm

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
7-11 s

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

POWER SUPPLY:

FUNCTIONING DATA
MODES:
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 92 Mod 1 VT-IR Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-217 and 1-218 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

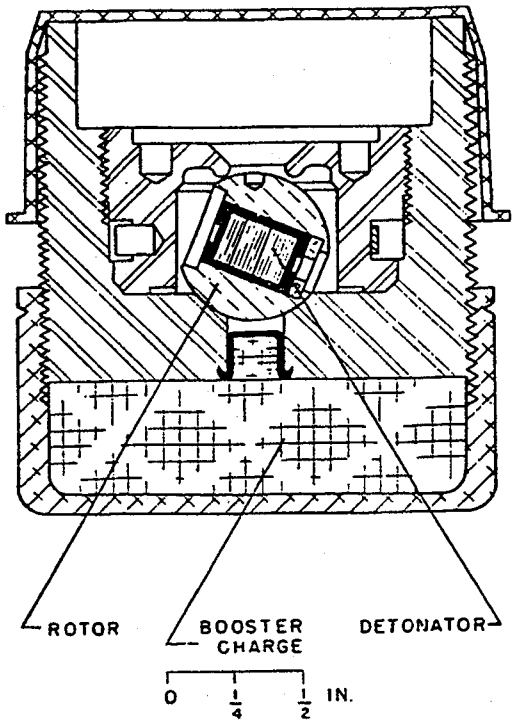

- OVERALL SIZE -	- INTRUSION -	WT: 0.6 lb 272 g
LG: 1.88 in (48 mm)	DP: 1.88 in (48 mm)	THD: 1.6-20NS-2A
XSECT:	DIA:	THD DP:

IDENTIFICATION
AGENCY: ARDEC, SMCAR-AEF-F
CONTACT: Eckstein, G
PHONE: DSN 880-4216
STATUS: Obsolete
USER: Army
ASSY DWG: 8 866 759 (73-2-356)
PARTS LIST:
SPEC:
PUB:

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO: T35E7
SIMILAR TO:

REPLACES:
REPLACED BY:

GENERAL
WEAPON:

AMMUNITION:
Use in M507 and M535 Fuzes

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: 550 rps
SETBACK: 21,000 g
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD:
SETTERS:

Supersedes page 1-219 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 25 rps, no arm
66 rps, all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
40 to 100 ft (12 to 30 m)

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: M19A2

LEAD: Tetryl

BOOSTER: 330 grains (21.4 g) Tetryl

OTHER: None

FUNCTIONING DATA

MODES: PD
TYPE: Mechanical
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:
Safe

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
The four detents which lock the ball rotor move outward under centrifugal force as soon as the projectile begins to rotate, thereby moving the rotor. The rotor does not move immediately; however, since it is held against the spherical seat in the booster body by its own inertial resistance to the acceleration of the projectile. When the projectile begins to decelerate, the ball rotor begins to turn toward the armed position. As the ball rotor arms, the counterbore forward of the detonator cavity drops over the annular projection of the flash hole entrance of the retainer. The inertial weight of the ball rotor brought to bear by this deceleration of the projectile serves to lock the rotor in this position. The booster is then armed and will function by a flash from either the superquick detonator or the delay element of the fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
AGENCY: ARDEC, SMCAR-
CONTACT:
PHONE:
STATUS: Obsolete
USER: Army
ASSY DWG: P-73422
PARTS LIST:
SPEC:
PUB:

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY:

GENERAL
WEAPON: 57-mm recoiless rifle

AMMUNITION:
M306 TP Cartridge

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: NA
SETBACK: NA
VELOCITY: NA

CREEP: NA
FLIGHT TIME: NA
SAFETY STD: NA
SETTERS: None

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
NA

SECOND SAFETY:
NA

OTHER SAFETY:
NA

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: NA

PRIMER: NA

DETONATOR: NA

LEAD: NA

BOOSTER: NA

OTHER: NA

FUNCTIONING DATA

MODES: Dummy
TYPE: NA
CHARACTERISTICS:
NA

TARGET: Target practice
SENSITIVITY:
NA

FUNCTION TEMP:
NA
MODE ON DELIVERY:
NA

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: NA
US HCSDS: NA
UN CL/DIV SCG: NA
US DOT SHIP CL: NA
NET EXPL WT: None
NET PROP WT: None
STORAGE TEMP: NA
NA

REMARKS/DESCRIPTION:
The T126 dummy fuze simulates the M89 Fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T155E2, FUZE, PD

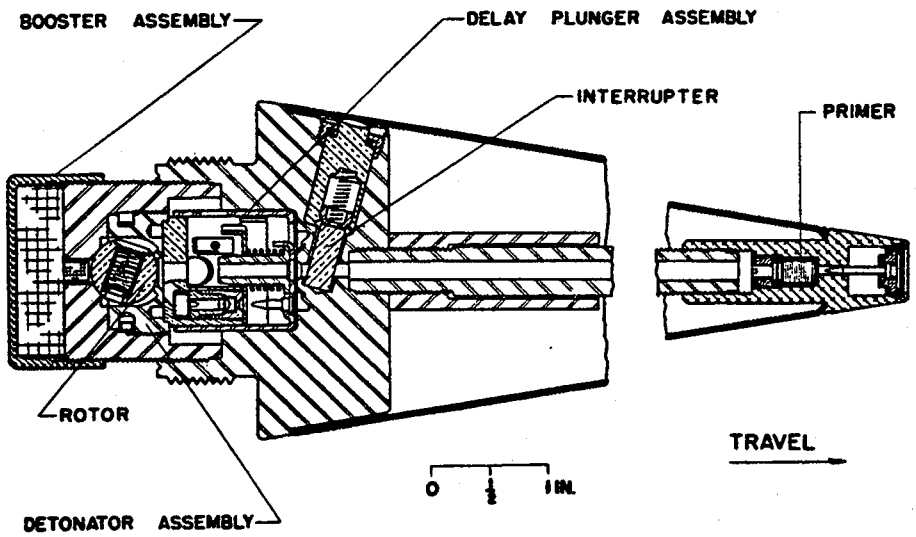

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	73-2-343 (P-82572)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	110, 156, 175 & 280 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	550
Setback (g)	22,500
Velocity (fps)	3500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T155E2, FUZE, PD

ARMING DATA

Method	Spin
Delay	100-1000 ft
Rotation (rps)	
Non-arm	25 Arm 42
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.15 lb
Total Length (in.)	7.45
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, SQ, Delay, Select
Type	Mechanical
Delay	SQ, 0.025 sec.
Time Type	
Time Setting (sec)	
Target	Personnel, light structures
Sensitivity	
Material	Gravel
Thickness (in.)	
Max Obliq. (°)	60
Velocity (fps)	3500
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M24
Booster	M124

REMARKS

T144 is Dummy Fuze simulating T153 & T155

Fuze T155 less booster is T251

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T165E7, FUZE, BD

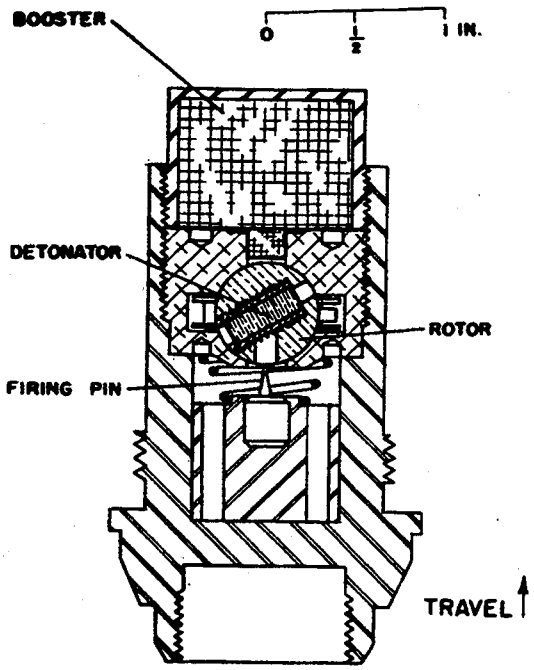

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	73-2-336, -337, -338
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	75, 90, 105 mm
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	400
Setback (g)	20,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T165E7, FUZE, BD

ARMING DATA

Method	Spin
Delay	50-70 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.444 lb
Total Length (in.)	3.4
Body Diam. (in.)	
Intrusion	
Thread Size	1.5-12-NS1 (LH)

FUNCTIONING DATA

Action	BD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Tanks & armored vehicles
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T31
Booster	Tetryl

REMARKS

Was to replace Fuzes M91 and M91A1

Differs from Fuze T257 primarily in external contour

Ball rotor with plunger type firing pin

SERIES: A CHAPTER: 1
DESIGNATION: T165E7
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T175E3, FUZE, CP

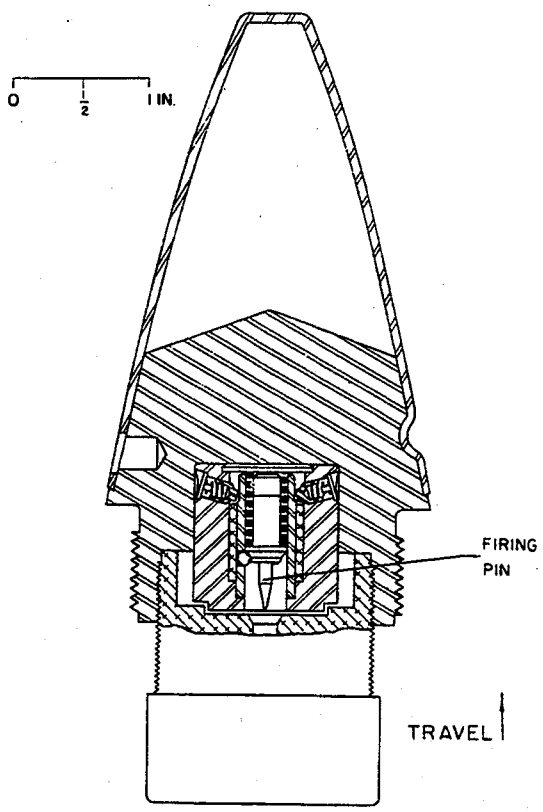

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	P-81387, P-81320
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	75-290 mm
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	250
Setback (g)	30,000
Velocity (fps)	2800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T175E3, FUZE, CP

ARMING DATA

Method	Spin
Delay	100 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.75 lb
Total Length (in.)	5.97
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, Delay
Type	Pyrotechnic or Mechanical
Delay	0.025 sec
Time Type	
Time Setting (sec)	
Target	Concrete, Fortification
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	M124

REMARKS

Heavy steel construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T183E4, FUZE, PD

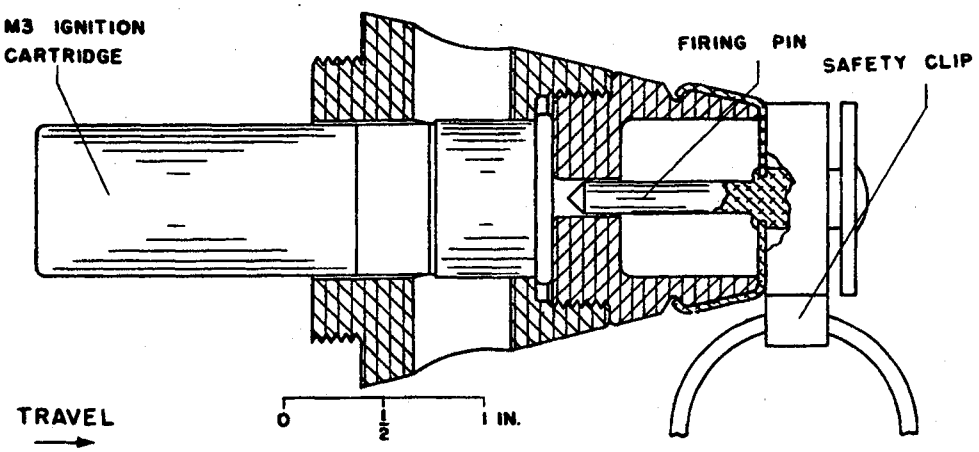

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
	AV 880-2017
Status	Terminated
Ass'y Dwg. No.	P-84733
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	60,81 mm
Location	Nose
Use	Practice
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T183E4, FUZE, PD

ARMING DATA

Method	Removal of safety pin
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	4.20
Body Diam. (in.)	
Intrusion	1.70 in.
Thread Size	1.5-12NF

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	
Ignition cartridge	M3

REMARKS

Explosive train is not interrupted

SERIES: A CHAPTER: 1
DESIGNATION: T183E4
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T184E11, FUZE, PD

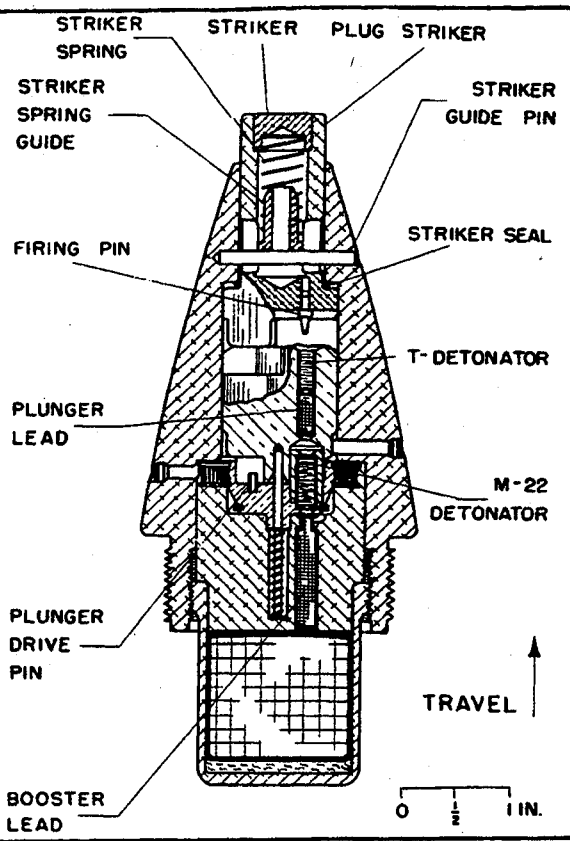

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	P-84741, P-83614
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	81,105 mm
Location	Nose
Use	GP, chemical, practice
MIL-STD's	331, tests, 101-104, 107
Max Values	
Rotat. (rps)	25
Setback (g)	7400
Velocity (fps)	140 min.

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T184E11, FUZE, PD

ARMING DATA

Method	Setback
Delay	1.25-2.25 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	70 Arm 165*
Arming Wire	No
External Indicat.	No

*Applied instantaneously

PHYSICAL DATA

Weight	1.27 lb
Total Length (in.)	5.96
Body Diam. (in.)	
Intrusion	2.21
Thread Size	2-12-UNS-1A

FUNCTIONING DATA

Action	PD, SQ, Graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Personnel, bunkers
Sensitivity	
Material	Ground
Thickness (in.)	
Max Obliq. (°)	75
Velocity (fps)	140 min
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T33E1, T34E1
Booster	Tetryl
Lead	Plunger

REMARKS

Replaced by Fuze M524

SQ only, not selectable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T188, FUZE, PD, PRACTICE

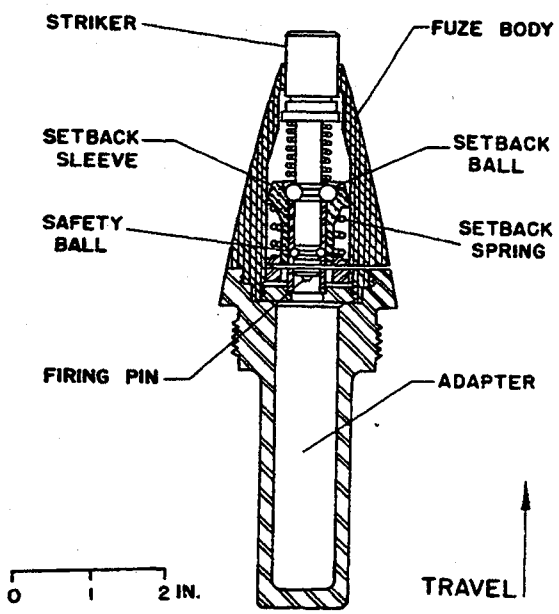

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
	AV 880-2017
Status	Terminated
Ass'y Dwg. No.	PX-82-740
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	81, 105 mm
Location	Nose
Use	Practice
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	550
Velocity (fps)	200

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T188, FUZE, PD, PRACTICE

ARMING DATA

Method	Setback
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	100 / 200
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.25 lb
Total Length (in.)	3.81
Body Diam. (in.)	
Intrusion	.48 in.
Thread Size	2-12-UNS-1A

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	
Ignition cartridge	M3

REMARKS

Explosive train is not interrupted

SERIES: A CHAPTER: 1
DESIGNATION: T188
PD Practice Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T191E6, FUZE, PD

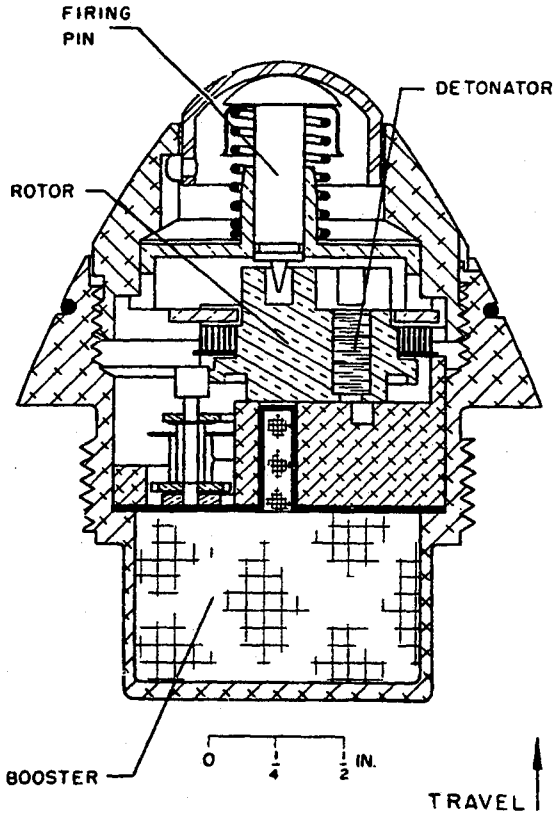

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	SK-2625-B (Bristol)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	60mm-81mm
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	9000
Velocity (fps)	200-600

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T191E6, FUZE, PD

ARMING DATA

Method	Setback
Delay	0.75 sec
Rotation (rps)	
Non-arm	450
Arm	6900
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	.28 lb
Total Length (in.)	2.42
Body Diam. (in.)	
Intrusion	1.12 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Personnel
Sensitivity	
Material	Plyboard
Thickness (in.)	0.25
Max Obliq. (°)	
Velocity (fps)	200-600
Carrier	60 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T33E1
Booster	Tetryl, 200 gr
Lead	RDX

REMARKS

Dummy fuze is the T192E1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T193, FUZE, PD

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
	AV 880-2017
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	60 mm
Location	Nose
Use	Practice
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	6900
Velocity (fps)	200-500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T193, FUZE, PD

ARMING DATA

Method		
Delay		
Rotation (rps)		
	Non-arm	Arm
Setback (g)		
	Non-arm 575	Arm
Arming Wire	No	
External Indicat.	No	

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	1.5-12UNS-1A

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T193
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T194, FUZE, PD

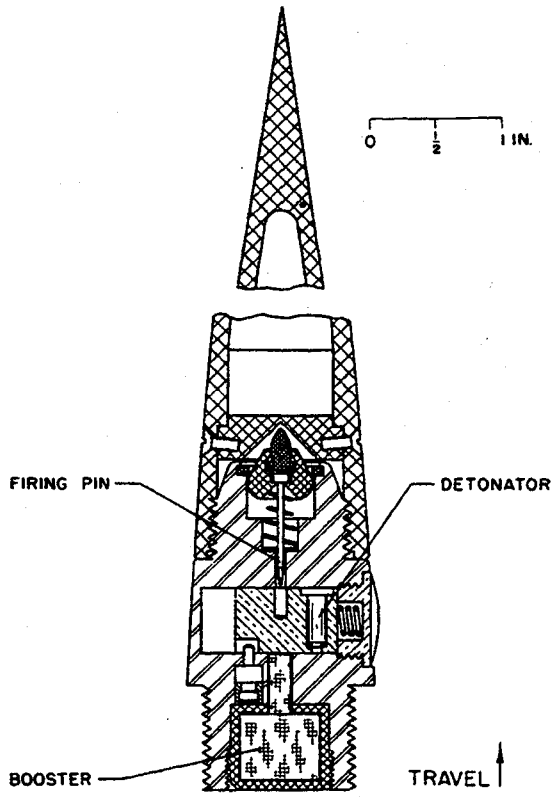

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	P81426
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	90/40 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	35,000
Velocity (fps)	4200

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T194, FUZE, PD

ARMING DATA

Method	Setback
Delay	1000 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.782 lb
Total Length (in.)	7.508
Body Diam. (in.)	
Intrusion	0.81 in.
Thread Size	1.125-12NF-3

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Aircraft, light ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M18
Booster	Tetryl, 157 gr.

REMARKS

Test fuze for T82 series (Arrow) being designed as fin-stabilized, discarding sabot projectiles for 90 mm gun M1A2, M2A1 (rifled)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T198E1, FUZE, PD

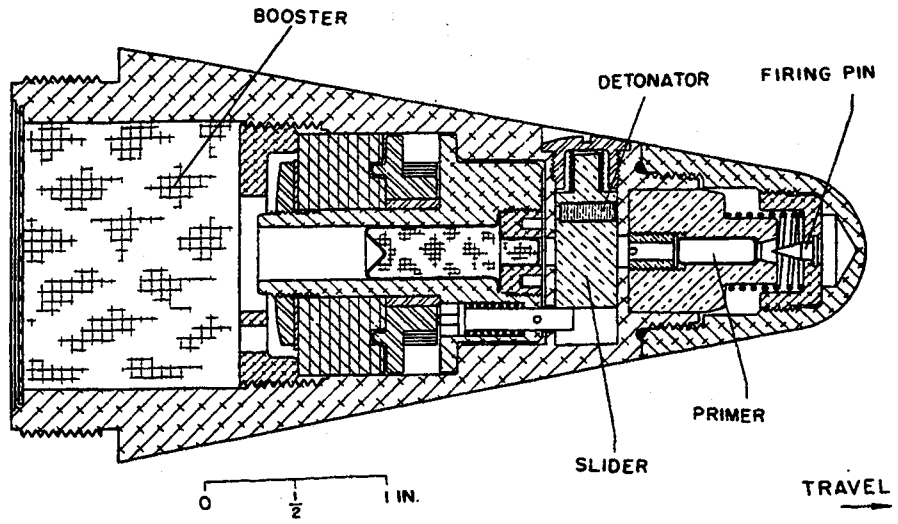

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	P-84913
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	105 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	20,000
Velocity (fps)	1500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T198E1, FUZE, PD

ARMING DATA

Method	Spin
Delay	0.02-0.03 sec
Rotation (rps)	
Non-arm / Arm	4000
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.15 lb
Total Length (in.)	5.97
Body Diam. (in.)	
Intrusion	0.744 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	SQ, delay, select, PD graze
Type	Mechanical
Delay	0.03 millisec
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	Wood
Thickness (in.)	1
Max Obliq. (°)	60
Velocity (fps)	1500
Carrier	105 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Originally a PI fuze for HEAT stabilized shell then changed to superquick, graze sensitive fuze for HE ammunition

Replaced by Fuze T248.

SERIES: A CHAPTER: 1
DESIGNATION: T198E1
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T199E5, FUZE, BD

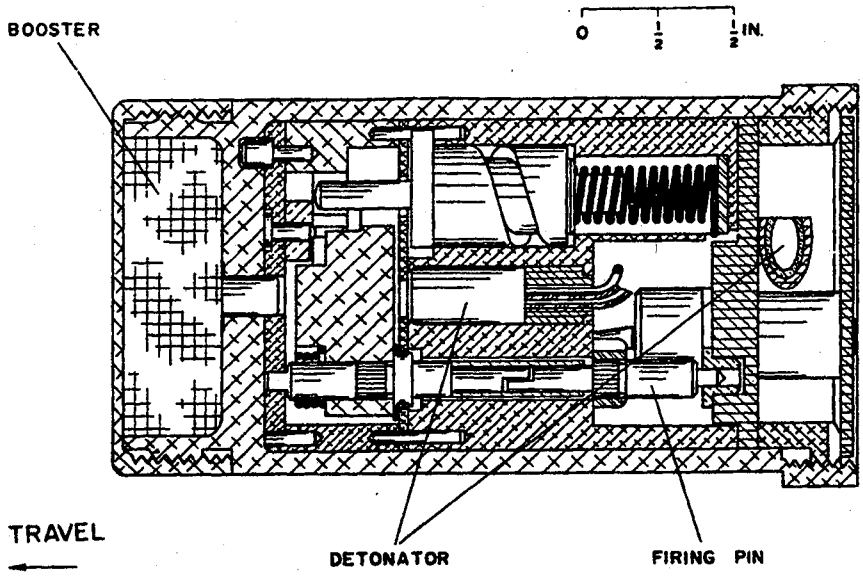

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	P85673(E1)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	57, 76, 90, 106, 120 mm
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	50
Setback (g)	25,000
Velocity (fps)	1650

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T199E5, FUZE, BD

ARMING DATA

Method	Setback
Delay	40-60 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	3500
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.237 lb
Total Length (in.)	2.5
Body Diam. (in.)	
Intrusion	2.25 in
Thread Size	

FUNCTIONING DATA

Action	PI, BD, SQ, Graze
Type	Electrical, Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Tanks, armored vehicles
Sensitivity	
Material	Wood
Thickness (in.)	1.0
Max Obliq. (°)	65
Velocity (fps)	M1650
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M51, T59
Booster	Tetryl 110 gm

REMARKS

Fin stabilized round

To withstand 45,000 g for 90 mm-T300 cartridge

SERIES: A CHAPTER: 1
DESIGNATION: T199E5
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T202, FUZE, PROXIMITY

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi
Status	AV 290-2400 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	81 mm Mortar
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	8000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T202, FUZE, PROXIMITY

ARMING DATA

Method	Setback, Mech. time
Delay	6 sec after firing
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	400 / 500
Arming Wire	No
External Indicat.	

PHYSICAL DATA

Weight	1.28 lb
Total Length (in.)	6.19
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12NS-1A

FUNCTIONING DATA

Action	Proximity
Type	Electrostatic
Delay	0.001 sec
Time Type	Explosive
Time Setting (sec)	
Target	Ground & water
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Thermal Battery

EXPLOSIVE TRAIN

S&A Device	Yes
Primer	
Detonator	M36A1
Booster	Tetryl

REMARKS

Dust dispenser for charging carrier

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T204, FUZE, PD

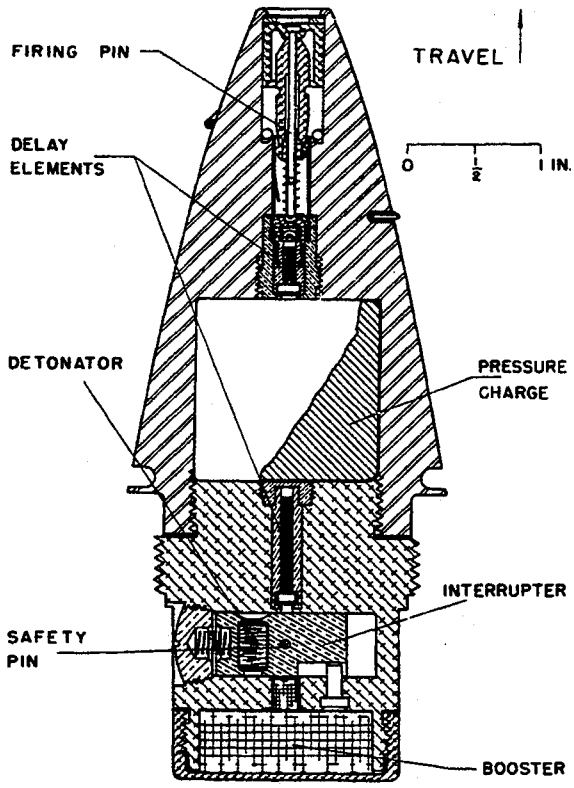

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	P-80336, P-84165
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	81,105 mm
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	7090
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 1
DESIGNATION: T204
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T204, FUZE, PD

ARMING DATA

Method	Setback, Deceleration
Delay	125 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.25 lb
Total Length (in.)	5.96
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12UNS-1A

FUNCTIONING DATA

Action	PD, Delay
Type	Mechanical
Delay	0.15 sec
Time Type	
Time Setting (sec)	
Target	Personnel, bunkers
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T204
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T206E4, FUZE, PD

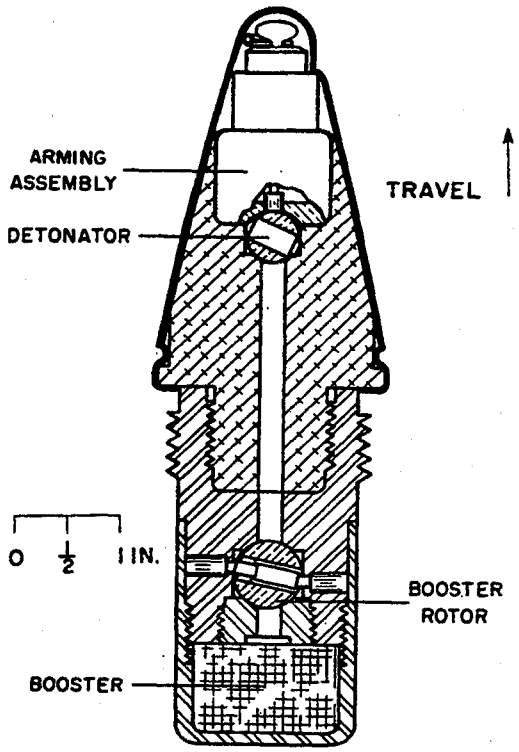

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	D-5203 (Parke-Thompson)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	3"/70 Navy Gun
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	670
Setback (g)	28,000
Velocity (fps)	3340

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T206E4, FUZE, PD

ARMING DATA

Method	Spin
Delay	300-600 ft
Rotation (rps)	
Non-arm	350
Arm	500
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.68 lb
Total Length (in.)	7.3
Body Diam. (in.)	
Intrusion	3.56 in.
Thread Size	2-12NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	0.001 sec
Time Type	
Time Setting (sec)	
Target	Aircraft & light surface targets
Sensitivity	
Material	Chipboard
Thickness (in.)	0.125
Max Obliq. (°)	60
Velocity (fps)	3340
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M42
Booster	Tertry

REMARKS

Similar to Fuze T219 except it is mechanical

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T209E3, FUZE, PIBD

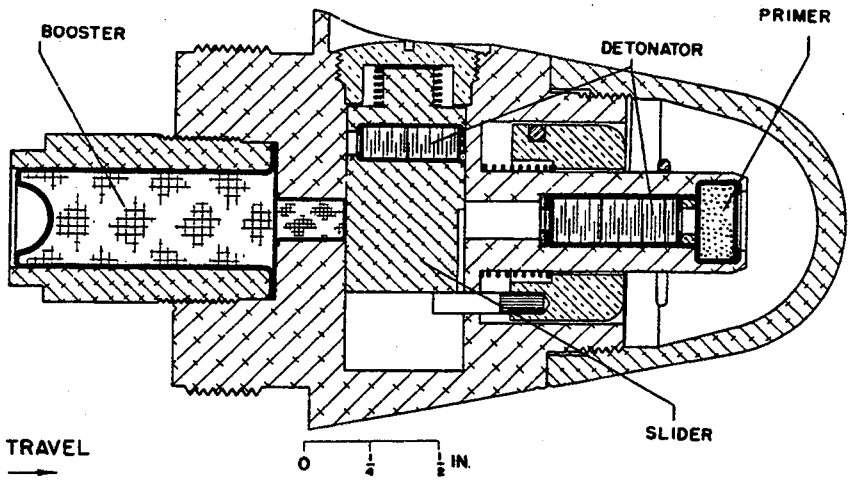

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	P81377
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	90 mm
Location	Nose, base
Use	HEAT
MIL-STD's	331, tests 101, 102
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T209E3, FUZE, PIBD

ARMING DATA

Method	Setback	
Delay		
Rotation (rps)	No	
Non-arm	Arm	
Setback (g)		
Non-arm	Arm	20,000
Arming Wire	No	
External Indicat.	No	

PHYSICAL DATA

Weight	0.302 lb
Total Length (in.)	3.106
Body Diam. (in.)	
Intrusion	1.126 in.
Thread Size	1.325-24NS-2

FUNCTIONING DATA

Action	PI, BD	
Type	Mechanical	
Delay		
Time Type		
Time Setting (sec)		
Target		
Sensitivity		
Material	Steel plate	
Thickness (in.)	3	
Max Obliq. (°)	60	
Velocity (fps)		
Carrier		

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M56
Detonator	M29
Booster	Aux. M122

REMARKS

Replaced by Fuze M509

SERIES: A CHAPTER: 1
DESIGNATION: T209E3
PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T210E2, FUZE, PD

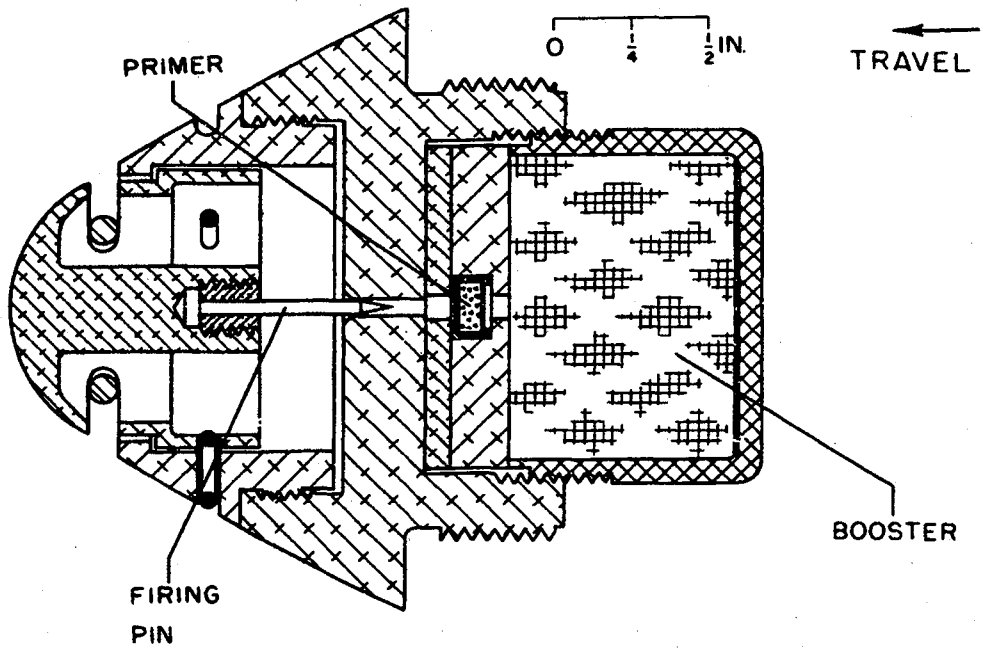

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880 2017
Status	Terminated
Ass'y Dwg. No.	P-85758
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	60 mm
Location	Nose
Use	GP, test fuze
MIL-STD's	Nose
Max Values	
Rotat. (rps)	
Setback (g)	7250
Velocity (fps)	400

KEY FEATURES

SERIES: A CHAPTER: 1
DESIGNATION: T210E2
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T210E2, FUZE, PD

ARMING DATA

Method	*
Delay	None
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

*Arms when drop safety wire is removed; shear wire provides bore safety

PHYSICAL DATA

Weight	0.28 lb
Total Length (in.)	2.465
Body Diam. (in.)	
Intrusion	1.2 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Test fuze only
Sensitivity	
Material	Earth
Thickness (in.)	
Max Obliq. (°)	60
Velocity (fps)	400
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	
Booster	

Loose blk. powder

blk. powder pellet in shell

REMARKS

Explosive train is not interrupted

SERIES: A CHAPTER: 1
DESIGNATION: T210E2
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T212, FUZE, PD

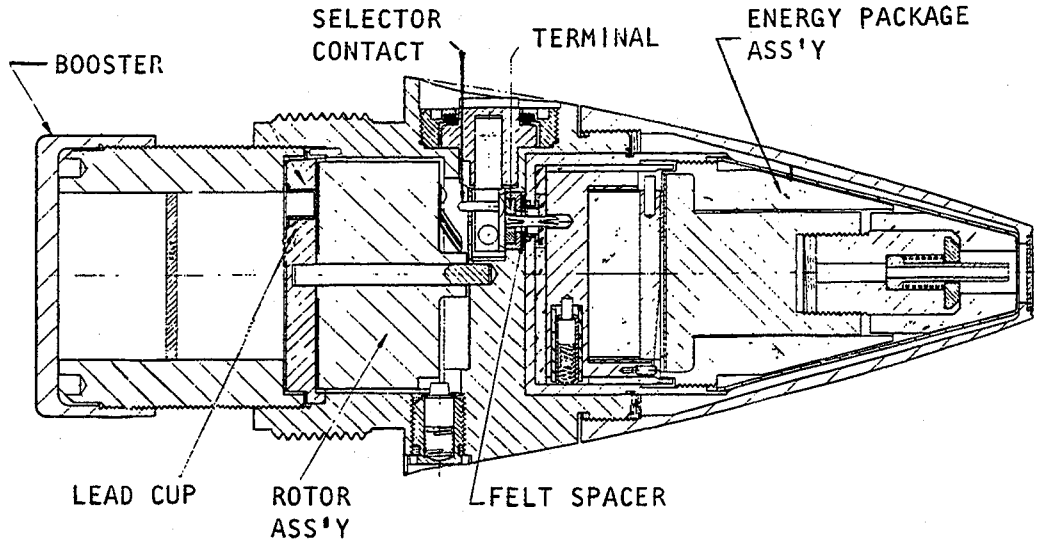

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T, G. Eckstein, AV 880-5468
Status Terminated
Ass'y Dwg. No. J965102 (Magnavox)
Parts List
Specification
Previous Number

GENERAL

Carriers	Projectile
Cal. — Size	75 - 240 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	580
Setback (g)	30,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T212, FUZE, PD

ARMING DATA

Method	Spin, setback
Delay	75 - 150 ft
Rotation (rps)	
Non-arm	25
Arm	33
Setback (g)	
Non-arm	
Arm	100
Arming Wire	No
External Indicat.	

PHYSICAL DATA

Weight	2.15 lb
Total Length (in.)	5.97
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12-NS

FUNCTIONING DATA

Action	PD, SQ, delay, graze
Type	Mechanical
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	Chipboard
Thickness (in.)	0.125
Max Obliq. (°)	60
Velocity (fps)	
Carrier	

POWER SUPPLY

Piezoelectric

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	XM65 (SQ) XM88 (delay)
Booster	

REMARKS

Was to replace Fuzes M51A1 and T177E3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T216, FUZE, PD

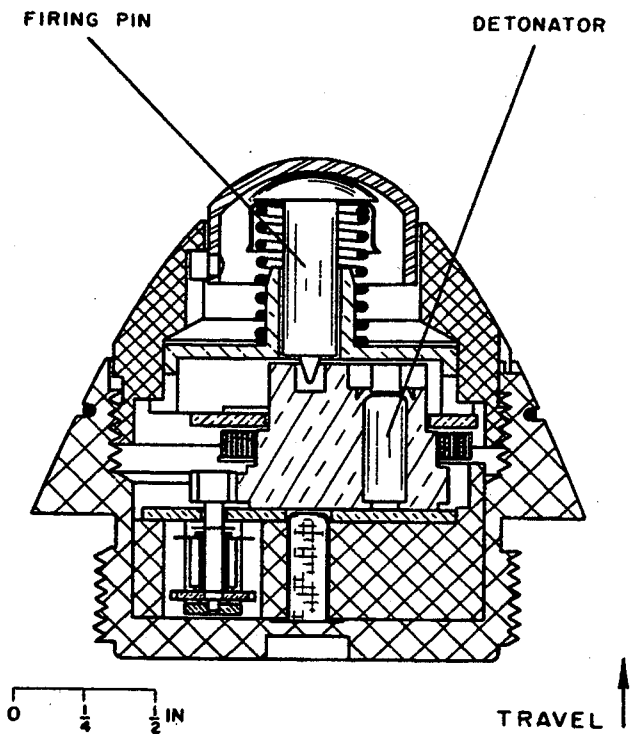

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
Status	AV 880-2017
	Terminated
Ass'y Dwg. No.	SK-2626-A
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	60 mm
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	9000
Velocity (fps)	520

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T216, FUZE, PD

ARMING DATA

Method	Setback, mechanical train
Delay	0.75 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	450 / 6900
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.28 lb
Total Length (in.)	1.82
Body Diam. (in.)	
Intrusion	0.52 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	PD, SQ, Delay, Graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	Plywood
Thickness (in.)	1/4
Max Obliq. (°)	
Velocity (fps)	520
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T33E1
Booster	

Lead RDX

REMARKS

Dummy fuze is the T192E1

SERIES: A CHAPTER: 1
DESIGNATION: T216
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T219, FUZE, PDSD

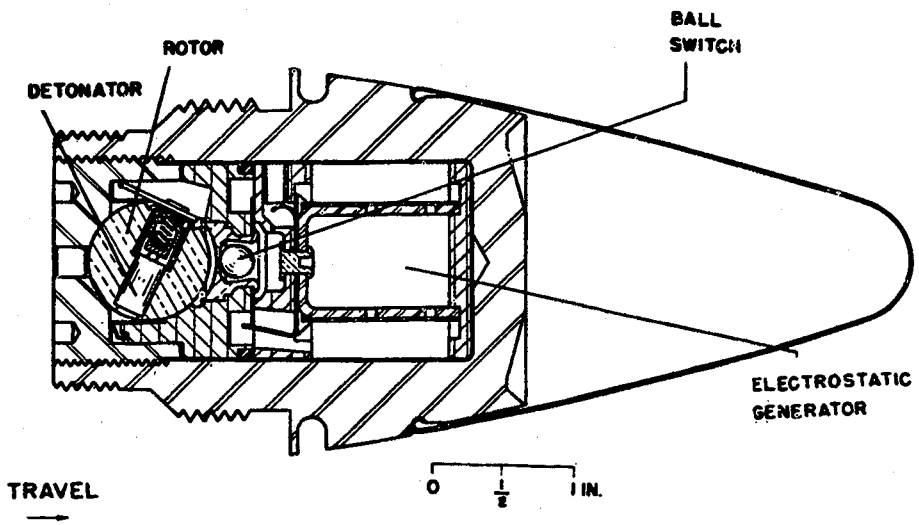

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
Status	AV 880-2017
	Terminated
Ass'y Dwg. No.	R4320 (Parke-Thompson)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	75 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	460
Setback (g)	28,700
Velocity (fps)	2820

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T219, FUZE, PDSD

ARMING DATA

Method	Spin
Delay	60-200 ft
Rotation (rps)	Yes
Non-arm	83 Arm 167
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.15 lb
Total Length (in.)	5.97
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, SD
Type	Electrical
Delay	0.0008 sec
Time Type	
Time Setting (sec)	
Target	Aircraft and light ground
Sensitivity	
Material	24ST Aluminum
Thickness (in.)	0.040
Max Obliq. (°)	90
Velocity (fps)	2820
Carrier	75 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T25E1
Booster	

REMARKS

Fuze T234 is mechanical counterpart

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T221, FUZE, BD

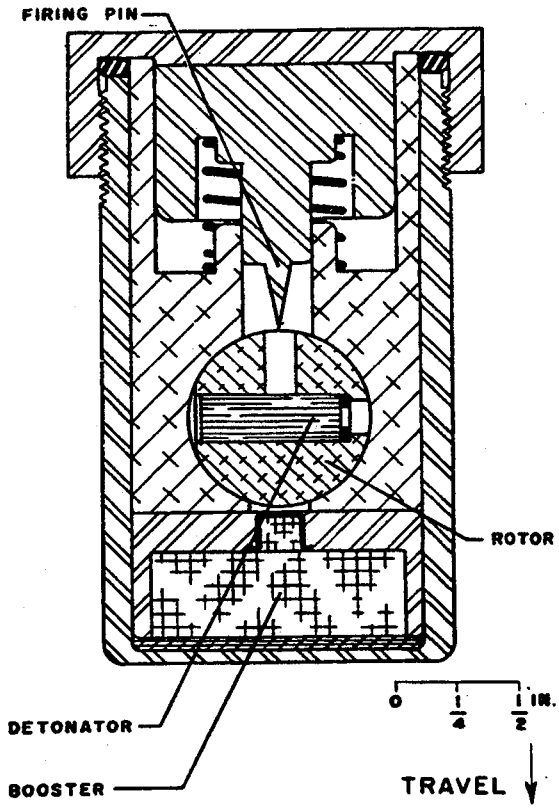

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	P82880
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	90 mm
Location	Base
Use	HEP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	25,000
Velocity (fps)	2400

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T221, FUZE, BD

ARMING DATA

Method	Setback
Delay	12 ft
Rotation (rps)	No
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	Arm 4000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	BD, Delay, Graze
Type	Mechanical inertia
Delay	
Time Type	
Time Setting (sec)	
Target	Fortifications, tanks
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M20
Booster	Tetryl

REMARKS

Contains release mechanism of Fuze M509 with stab-type detonator in rotor, in lieu of electric det. fuze for non-rotated HEP shell

SERIES: A CHAPTER: 1
DESIGNATION: T221
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T224, FUZE, PIBD

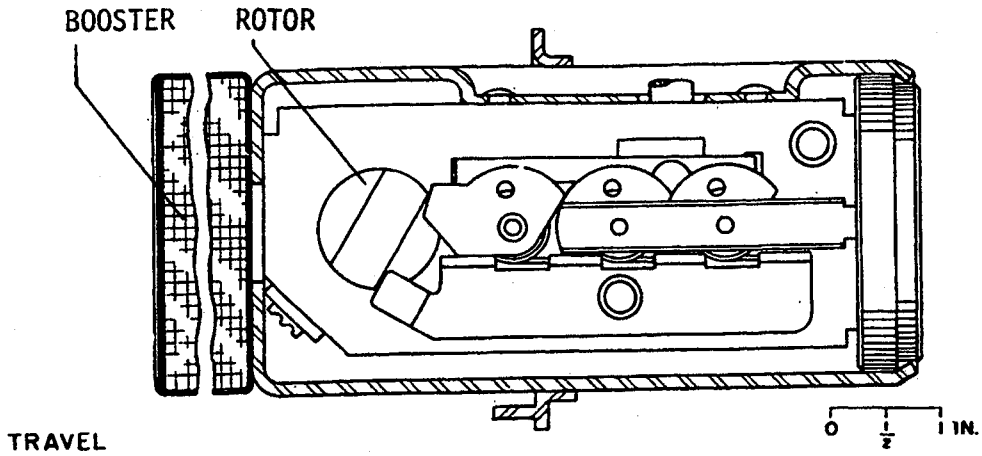

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi AV 290-2400
Status	Terminated
Ass'y Dwg. No.	16E-52-091
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	57, 75 mm
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	500
Setback (g)	15,000
Velocity (fps)	1200

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T224, FUZE, PIBD

ARMING DATA

Method	Setback
Delay	25-75 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	4000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	2.514
Body Diam. (in.)	
Intrusion	1.443 in.
Thread Size	

FUNCTIONING DATA

Action	PI, BD, SQ, Graze
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Piezoelectric Element

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl 0.966D by 0.505L

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T224
PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T228, FUZE, PD

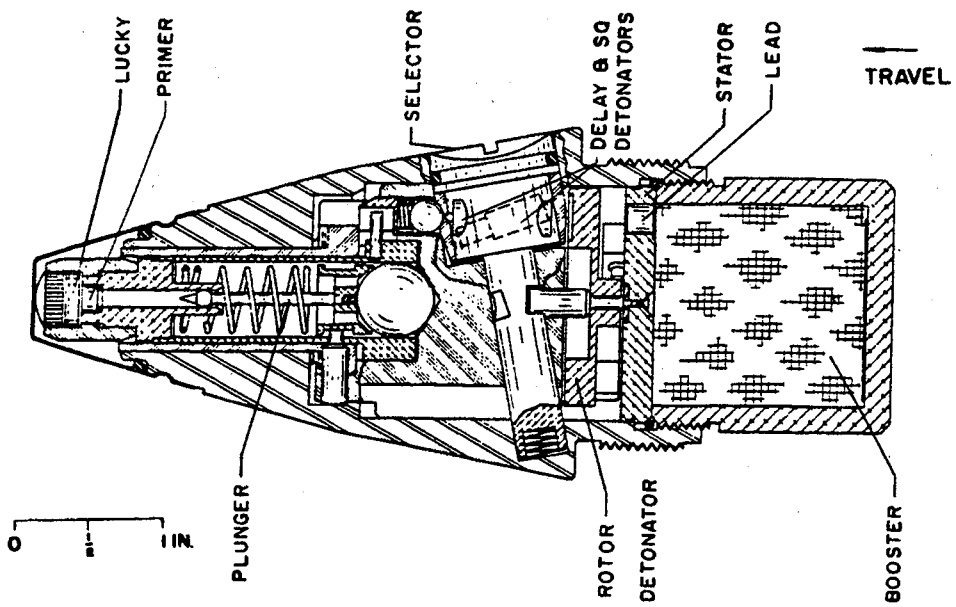

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	TD-0464 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	75-240 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	600
Setback (g)	30,000
Velocity (fps)	500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T228, FUZE, PD

ARMING DATA

Method	Spin
Delay	75-150 ft
Rotation (rps)	Yes
Non-arm	25 Arm 34
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2 lb
Total Length (in.)	5.97
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12NS-2

FUNCTIONING DATA

Action	PD, SQ, Delay, Select, Graze
Type	See remarks
Delay	0.00001, 0.05 sec
Time Type	
Time Setting (sec)	
Target	Personnel and structure
Sensitivity	
Material	Chipboard
Thickness (in.)	1/8
Max Obliq. (°)	45
Velocity (fps)	500
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T21E2
Booster	Tetryl

REMARKS

Both electric and pyrotechnic functioning were considered

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T230, FUZE, PD

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	127/60 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	50
Setback (g)	33,000
Velocity (fps)	4075

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T230, FUZE, PD

ARMING DATA

Method	Setback
Delay	
Rotation (rps)	
Non-arm / Arm	33
Setback (g)	
Non-arm / Arm	10,000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.38 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	1.60 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, SD, Delay
Type	Mechanical
Delay	0.0006 sec
Time Type	
Time Setting (sec)	
Target	Aircraft & light surface targets
Sensitivity	
Material	Al or Aluminum Alloy
Thickness (in.)	0.065
Max Obliq. (°)	75
Velocity (fps)	9075
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T230
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T234E2, FUZE, PD, SD

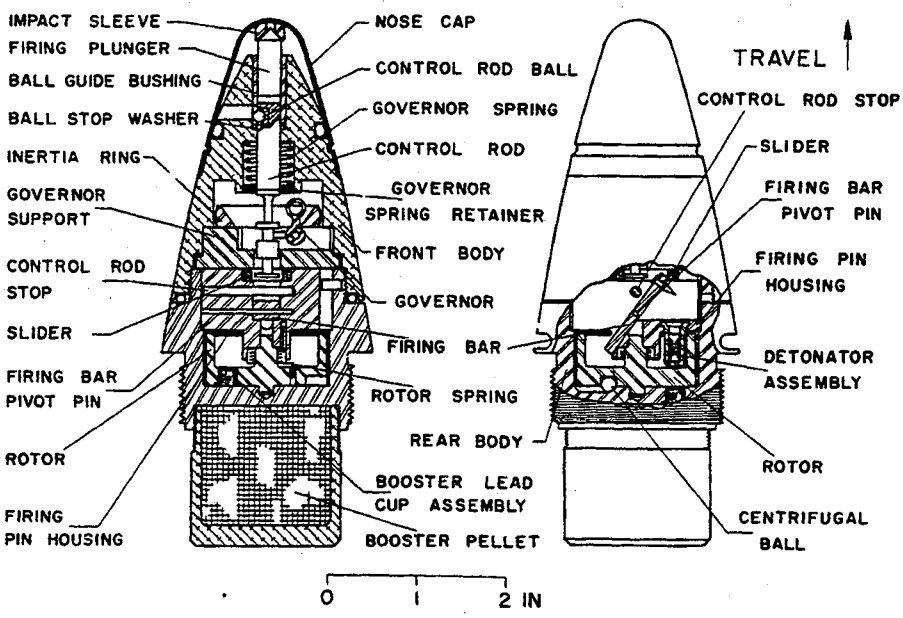

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T
A. Nash, AV 880-2017

Status Obsolete

Ass'y Dwg. No. 73-2-374

Parts List

Specification

Previous Number

GENERAL

Carriers	Projectile
Cal. — Size	75 mm
Location	Nose
Use	HE or GP
MIL-STD's	331, Tests 101, 102
Max Values	
Rotat. (rps)	460
Setback (g)	22,000
Velocity (fps)	2800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T234E2, FUZE, PD, SD

ARMING DATA

Method	Spin
Delay	60-200 ft
Rotation (rps)	
Non-arm / Arm	425
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.03 lb
Total Length (in.)	5.97
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, SD, graze
Type	Mechanical
Delay	0.001 sec
Time Type	
Time Setting (sec)	
Target	Terrestrial air defense
Sensitivity	
Material	24ST Aluminum
Thickness (in.)	0.04
Max Obliquity	60
Velocity (fps)	2800
Carrier	75 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T33E1
Booster	Tetryl

REMARKS

Fuze T219 is the electric counterpart. The T234E2 differs from Fuze T273 in SD time only.

Self destruct is by spin decay.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T235, FUZE, PIBD

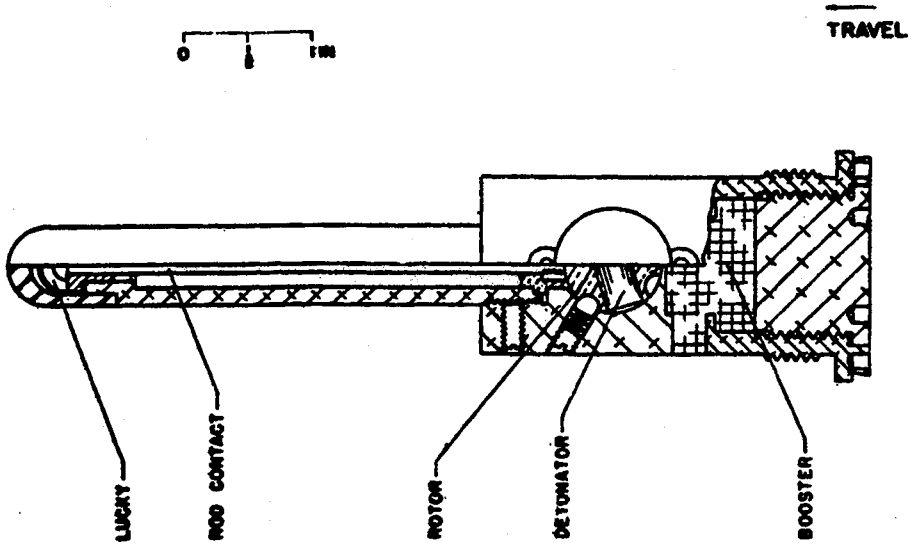

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	GA D1-10,010
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	75, 76, 90, 105, 155, 175 mm
Location	Base
Use	HEP
MIL-STD's	
Max Values	
Rotat. (rps)	420
Setback (g)	20,000
Velocity (fps)	1800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T235, FUZE, PIBD

ARMING DATA

Method	Spin
Delay	25-75 ft
Rotation (rps)	Yes
Non-arm	25 Arm 33
Setback (g)	
Non-arm	3000 Arm 4000
Arming Wire	No
External Indicat	NO

PHYSICAL DATA

Weight	
Total Length (in.)	6.453
Body Diam. (in.)	
Intrusion	6.2 in.
Thread Size	2 1/4-12

FUNCTIONING DATA

Action	PI, BD, Delay, Graze
Type	Electric, Mechanical
Delay	0.0005 sec
Time Type	
Time Setting (sec)	
Target	Fortification, tanks
Sensitivity	
Material	Armor plate
Thickness (in.)	4
Max Obliq. (°)	65
Velocity (fps)	1800
Carrier	75 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 102 MOD 0
Detonator	M48
Booster	Tetryl

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T235
PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T236, FUZE, PIBD

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
	AV 880-2017
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	105, 106 mm
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T236, FUZE, PIBD

ARMING DATA

Method

Delay

Rotation (rps)

Non-arm	Arm

Setback (g)

Non-arm	Arm

Arming Wire No

External Indicat. No

PHYSICAL DATA

Weight

Total Length (in.)

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action PI, BD

Type Electrical

Delay

Time Type

Time Setting (sec)

Target Antitank

Sensitivity

- **Material**
- **Thickness (in.)**
- **Max Obliq. (°)**
- **Velocity (fps)**
- **Carrier**

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T236
PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T240, FUZE, MTSQ

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T S. Honickman AV 880-3174
Status	Terminated
Ass'y Dwg. No.	FB30006
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	81, 105 mm
Location	Nose
Use	GP
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	
Setback (g)	10,000
Velocity (fps)	1000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T240, FUZE, MTSQ

ARMING DATA

Method	Setback
Delay	300-500 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 249 / Arm 250	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.25 lb*
Total Length (in.)	5.96*
Body Diam. (in.)	
Intrusion	2.21 in.*
Thread Size	2-12NS-1

*Includes booster

FUNCTIONING DATA

Action	PD, SQ, Time, Select
Type	Mechanical
Delay	
Time Type	Two center tuned
Time Setting (sec)	1.2-45
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device
Primer
Detonator
Booster

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T240
MT SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T244, FUZE, PD

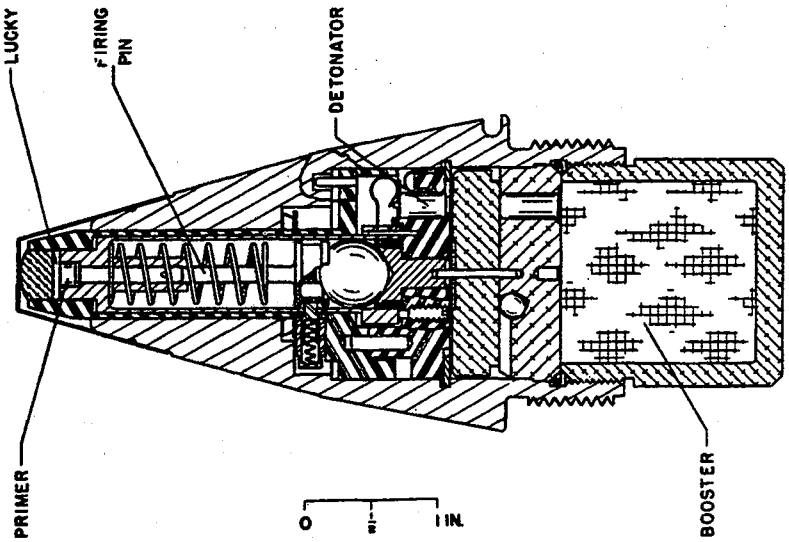

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	XD-1540, XA-15001 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	105, 155 mm, How. 4.2 in. mort., 155 mm gun
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	20
Setback (g)	5000
Velocity (fps)	500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T244, FUZE, PD

ARMING DATA

Method	Spin, setback
Delay	600 - 1000 ft
Rotation (rps)	
Non-arm	25 Arm 33
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.15 lb
Total Length (in.)	5.97
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12-NS2

FUNCTIONING DATA

Action	PD, SQ, graze
Type	Electromechanical
Delay	SQ
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	Chipboard
Thickness (in.)	1/8
Max Obliq. (°)	45
Velocity (fps)	500
Carrier	

POWER SUPPLY

Piezoelectric

EXPLOSIVE TRAIN

S&A Device	
Primer	M26 (graze only)
Detonator	T74
Booster	Tetryl

REMARKS

Was to replace Fuze T237 for use in chemical shell.

SERIES: A CHAPTER: 1
DESIGNATION: T244
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T246, FUZE, PD

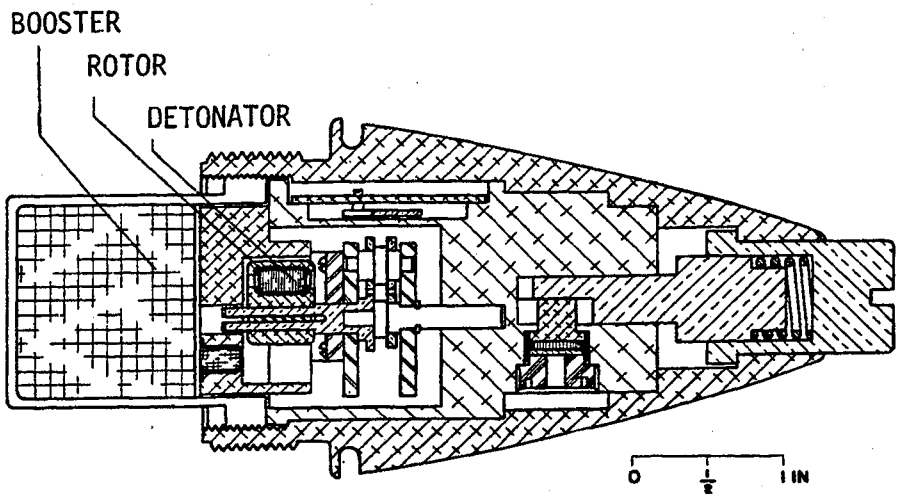

TRAVEL

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi AV 290-2400
Status	terminated
Ass'y Dwg. No.	0-302115
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar
Cal. — Size	81, 105 mm
Location	Nose
Use	GP
MIL-STD's	331, Tests 101-107
Max Values	
Rotat. (rps)	25
Setback (g)	9280
Velocity (fps)	925

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T246, FUZE, PD

ARMING DATA

Method	Setback
Delay	1.25-2.25 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 330
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1.25 lb
Total Length (in.)	5.96
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12-NS1

FUNCTIONING DATA

Action	PD, SQ, Delay, Select Graze
Type	Electrical
Delay	Less than 0.00005 sec
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	Normal soil
Thickness (in.)	
Max Obliq. (°)	75
Velocity (fps)	925
Carrier	

POWER SUPPLY

Power source, Fuze, T7

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T2E1, T65
Booster	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T250E1, FUZE, MTSQ

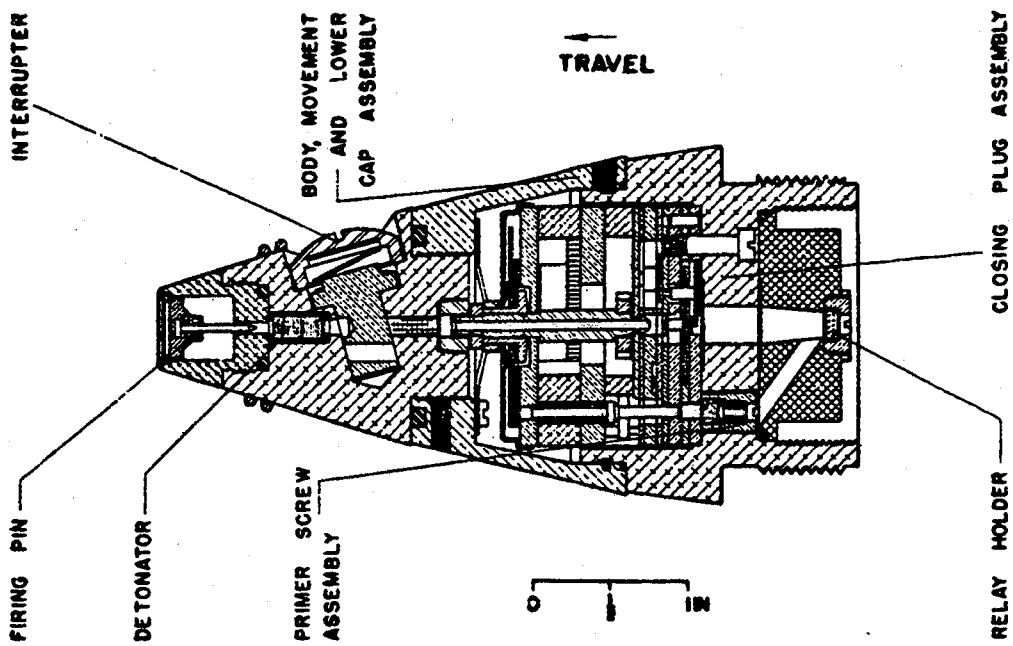

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T S. Honickman AV 880-3174
Status	Terminated
Ass'y Dwg. No.	(FA) FF4326 (T250)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	4.2 in.
Location	Nose
Use	GP
MIL-STD's	331, Test 101-105
Max Values	
Rotat. (rps)	475
Setback (g)	30,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T250E1, FUZE, MTSQ

ARMING DATA

Method	Spin, Setback
Delay	40-80 ft
Rotation (rps)	
Non-arm	25
Arm	33
Setback (g)	
Non-arm	300
Arm	900
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.15 lb*
Total Length (in.)	5.95*
Body Diam. (in.)	
Intrusion	2.21*
Thread Size	2-12NS-1

*Includes booster

FUNCTIONING DATA

Action	PD, SQ, Time, Select
Type	Mechanical
Delay	0.000025 sec
Time Type	Mech. two center tuned
Time Setting (sec)	0.8-45
Target	Ground
Sensitivity	
Material	Chipboard
Thickness (in.)	0.138
Max Obliq. (°)	
Velocity (fps)	1900
Carrier	75 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M29A1
Detonator	M18
Booster	T35E7
Relay	M7
Lead	Tetryl

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T250E1
MT SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T252, FUZE, MT

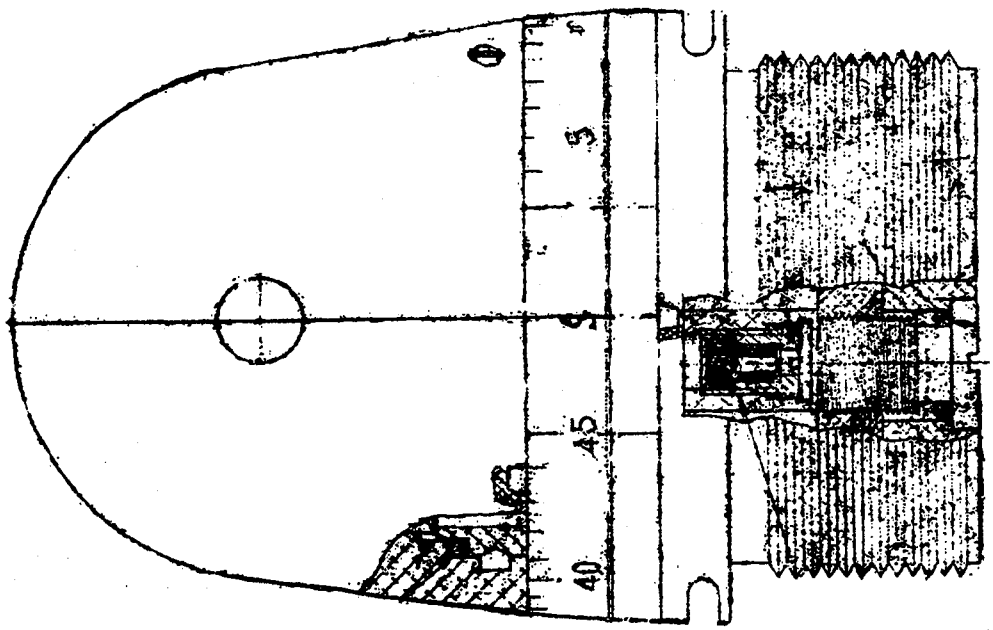

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T S. Honickman AV 880-3174
Status	Terminated
Ass'y Dwg. No.	FC 5627 (contour)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	81 mm mortar
Location	Nose
Use	Illuminating shell, T214
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	
Setback (g)	12,000
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 1
DESIGNATION: T252
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T252, FUZE, MT

ARMING DATA

Method	Setback
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 300 / Arm 350	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.75 lb
Total Length (in.)	3.58
Body Diam. (in.)	
Intrusion	.885 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech. two center tuned
Time Setting (sec)	2-45
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T252
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T257, FUZE, BD

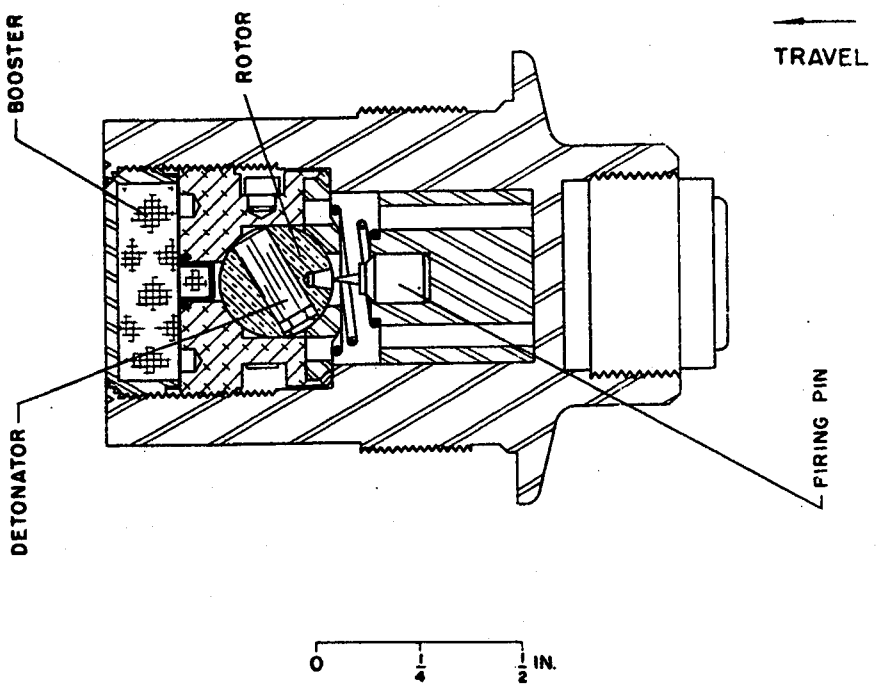

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	P 83361
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	57 mm
Location	Base
Use	HEP
MIL-STD's	
Max Values	
Rotat. (rps)	200
Satback (g)	20,000
Velocity (fps)	1100

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T257, FUZE, PD

ARMING DATA

Method	Spin
Delay	100 ft
Rotation (rps)	Yes
Non-arm 33 Arm 83	
Setback (g)	
Non-arm Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	2.98
Body Diam. (in.)	
Intrusion	1.93 in.
Thread Size	1.7-14NS-1

FUNCTIONING DATA

Action	BD, delay
Type	Mechanical
Delay	0.3 - 0.6 msec
Time Type	
Time Setting (sec)	
Target	Hard & soft ground
Sensitivity	
Material	Armor plate
Thickness (in.)	2
Max Obliq. (°)	60
Velocity (fps)	1100
Carrier	57 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Charge
Tracer	

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T257
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T265, FUZE, PD

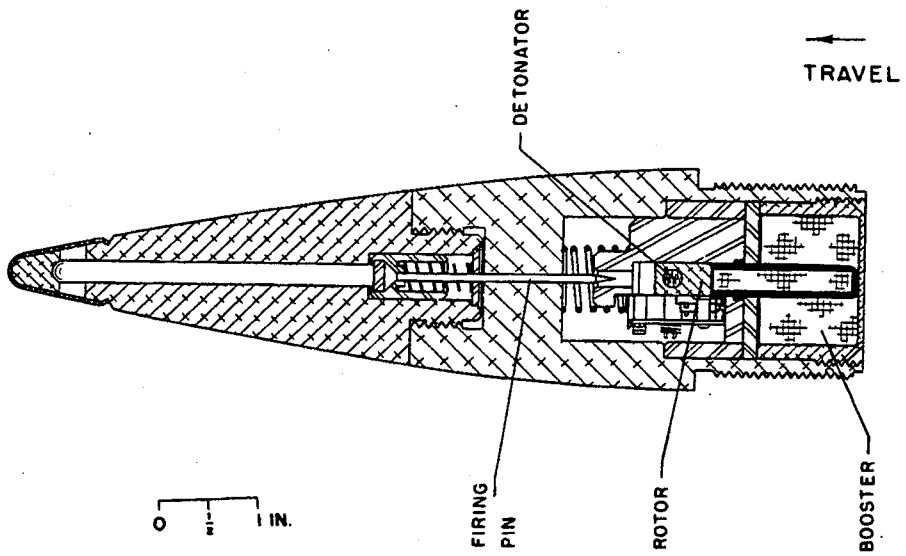

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	P82204, P-82893
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	127/60 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	50
Setback (g)	35,000
Velocity (fps)	4075

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T265, FUZE, PD

ARMING DATA

Method	Setback
Delay	400-600 ft
Rotation (rps)	
Non-arm	Arm 33
Setback (g)	
Non-arm 3000	Arm 4000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.38 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	106 in.
Thread Size	2-12NS-2

FUNCTIONING DATA

Action	PD, Graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft, ground
Sensitivity	
Material	Aluminum
Thickness (in.)	0.04
Max Obliq. (°)	
Velocity (fps)	4075
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M20
Booster	Tetryl

REMARKS

Test fuze for conducting shell tests

SERIES: A CHAPTER: 1
DESIGNATION: T265
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T267, FUZE, PIBD

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	IRC-374-1 (Firestone)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	106 mm recoilless rifle
Location	Nose, base
Use	GP, HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	(10)
Setback (g)	30,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T267, FUZE, PIBD

ARMING DATA

Method	Setback
Delay	10 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	No threads

FUNCTIONING DATA

Action	SQ, PI, BD
Type	Electromechanical
Delay	0.01 msec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Wood (pine)
Thickness (in.)	1
Max Obliq. (°)	75
Velocity (fps)	1500
Carrier	106

POWER SUPPLY

Piezoelectric

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Fuze T267 consists of the T208E7 base element and a packaged piezoelectric element in the nose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T271, FUZE, PDSD

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	PX-99-1107
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	60 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	1170
Setback (g)	40,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T271, FUZE, PDSD

ARMING DATA

Method	Spin, setback
Delay	100-200 ft
Rotation (rps)	
Non-arm / Arm	34
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.50 lb
Total Length (in.)	4.22
Body Diam. (in.)	
Intrusion	0.8 in.
Thread Size	1.25-12NS-1

FUNCTIONING DATA

Action	PD, SD, SQ, Delay
Type	Electric, Select, Graze
Delay	SQ, 0.0008 sec
Time Type	
Time Setting (sec)	
Target	Aircraft, light surface targets
Sensitivity	
Material	Al or Aluminum Alloy
Thickness (in.)	0.04
Max Obliq. (°)	
Velocity (fps)	3400
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T271
PD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T272, FUZE, PDSD

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	P-85249
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	120 mm, AA
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	460
Setback (g)	24,000
Velocity (fps)	2800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T272, FUZE, PDSD

ARMING DATA

Method	Spin
Delay	60-200 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.6 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, SD, Delay, Graze
Type	Mechanical
Delay	0.001 sec
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	Chipboard
Thickness (in.)	0.125
Max Obliq. (°)	60
Velocity (fps)	2800
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T33E1
Booster	Tetryl

REMARKS

Counterpart of Fuze T234E2
Differs in SD time only

SERIES: A CHAPTER: 1
DESIGNATION: T272
PD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T273, FUZE, PDSD

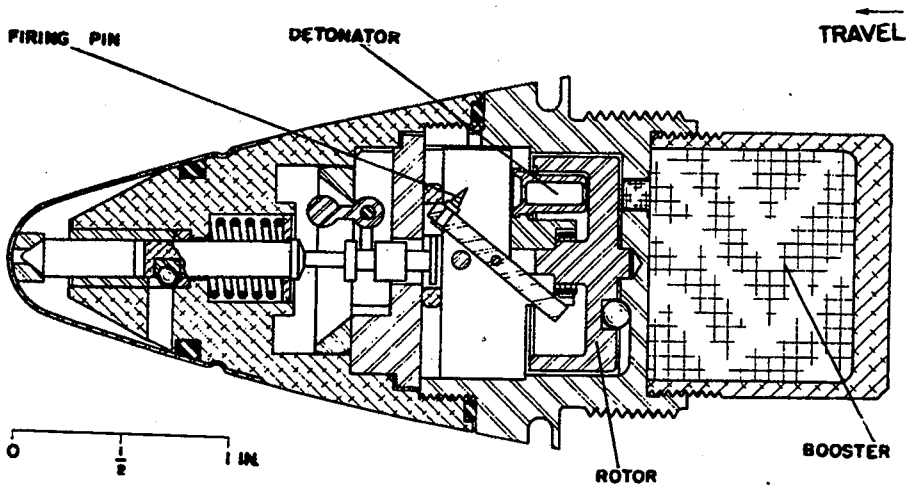

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	XD 22000 Rev 8 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	90 mm
Location	
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	460
Setback (g)	24,000
Velocity (fps)	2825

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T273, FUZE, PDSD

ARMING DATA

Method	Spin
Delay	60-200 ft
Rotation (rps)	Yes
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.15 lb
Total Length (in.)	5.97
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, SD, Delay, Graze
Type	Mechanical
Delay	0.001 sec
Time Type	
Time Setting (sec)	
Target	Light targets, personnel
Sensitivity	
Material	Chipboard
Thickness (in.)	0.125
Max Obliq. (°)	45
Velocity (fps)	2825
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T33E1
Booster	Tetryl

REMARKS

Same as Fuze T234 except for SD time

SERIES: A CHAPTER: 1
DESIGNATION: T273
PD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T277, FUZE, PIBD

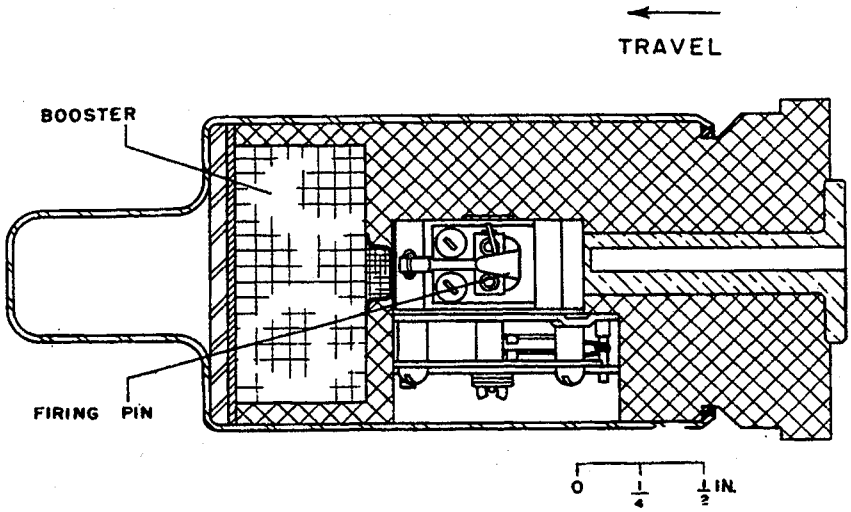

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	P-83915
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	76, 90, 105, 120 mm
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	50
Setback (g)	25,000
Velocity (fps)	2800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T277, FUZE, PIBD

ARMING DATA

Method	Setback
Delay	50-75 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	4000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.3 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	None

FUNCTIONING DATA

Action	PI, BD, SQ, Graze
Type	Electrical
Delay	0.000050 sec
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	Armor plate
Thickness (in.)	
Max Obliq. (°)	65
Velocity (fps)	2800
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M48
Booster	Tetryl

REMARKS

Characteristics are same as those of Fuze M509
Fuze M530 is parallel development

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T279, FUZE, PROXIMITY

IDENTIFICATION

Agency	NSWC, Code G43 T. Adams
Status	AV 290-1855 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	EX-22

GENERAL

Carriers	Projectile
Cal. — Size	75 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	455
Setback (g)	23,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T279, FUZE, PROXIMITY

ARMING DATA

Method	Spin, setback
Delay	400-700
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.95 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	2.2 in.
Thread Size	2.0-12NS

FUNCTIONING DATA

Action	PD, SD, Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Was to replace Fuze T73

T279 MOD 0 to be assembled in standard fashion

T279 MOD 1 to be assembled automatically to be directly interchangeable with Fuze M51A5

SERIES: N CHAPTER: 1
DESIGNATION: T279
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T280, FUZE, PIBD

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi AV 290-2400
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	105 mm
Location	Nose, Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	50
Setback (g)	15,000
Velocity (fps)	1850

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T280, FUZE, PIBD

ARMING DATA

Method	Setback
Delay	25-75 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	4000 / 7000
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PI, BD, SQ, Graze
Type	Electric
Delay	10 microsec
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	Plywood
Thickness (in.)	0.25
Max Obliq. (°)	70
Velocity (fps)	1850
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T21E1
Booster	

REMARKS

A telescoping probe is ejected from the nose to provide 24 in. standoff to obtain superior performance of aluminum liners

Probe ejection releases rotor to allow arming

Basic probe design has been applied to mortar round to provide burst height of 1-1/2 to 2 feet

SERIES: A CHAPTER: 1
DESIGNATION: T280
PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T282, FUZE, ETSQ

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	75 mm to 280 mm
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	500
Setback (g)	30,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T282, FUZE, ETSQ

ARMING DATA

Method	Spin
Delay	100-300 ft
Rotation (rps)	
Non-arm	25 Arm 33
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.4 lb
Total Length (in.)	4.625
Body Diam. (in.)	
Intrusion	0.885 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	SQ, Time, Select
Type	Electromechanical
Delay	0.00002 sec
Time Type	Electric
Time Setting (sec)	2-100
Target	General purpose
Sensitivity	
Material	Wood, burst, scr.
Thickness (in.)	1
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

RC oscillator using transistors

SERIES: A CHAPTER: 1
DESIGNATION: T282
ET SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T284, FUZE, MTSQ

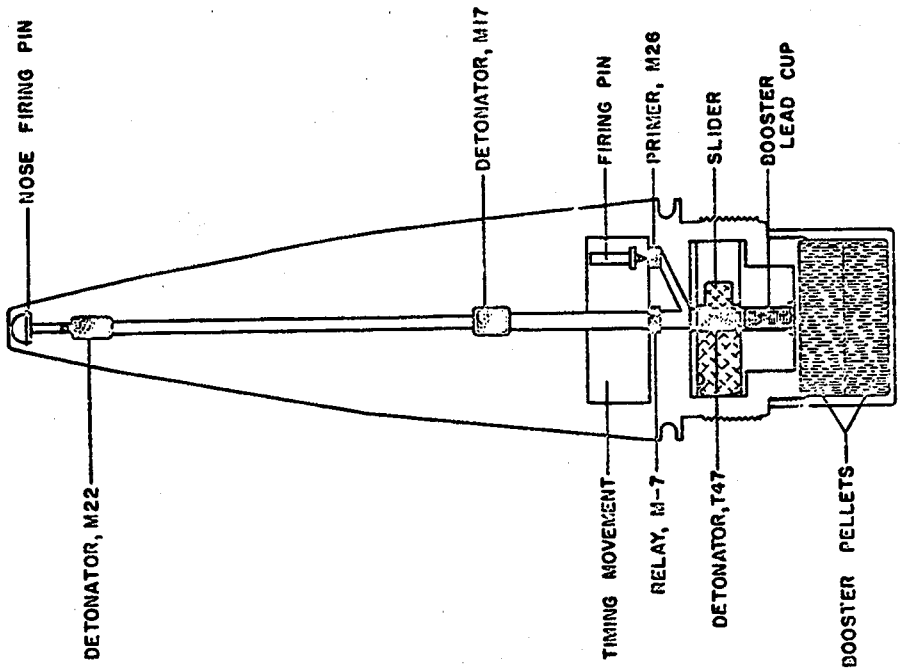

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	FD 16774
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	127/60 mm
Location	Nose
Use	GP
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T284, FUZE, MTSQ

ARMING DATA

Method	Setback
Delay	1.5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 10,000 / Arm 14,000	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.38 lb*
Total Length (in.)	8.86*
Body Diam. (in.)	
Intrusion	2.21* in.
Thread Size	2-12NS-1

*Includes booster

FUNCTIONING DATA

Action	PD, SQ, Time, Select
Type	Mechanical
Delay	0.000025 sec
Time Type	Mech. two center tuned
Time Setting (sec)	1.4-45
Target	Antiaircraft
Sensitivity	
Material	24ST Aluminum
Thickness (in.)	0.04
Max Obliq. (°)	80
Velocity (fps)	
Carrier	127 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	M22, M17, T47
Booster	
Relay	M7

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T284
MT SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T285, FUZE, PD

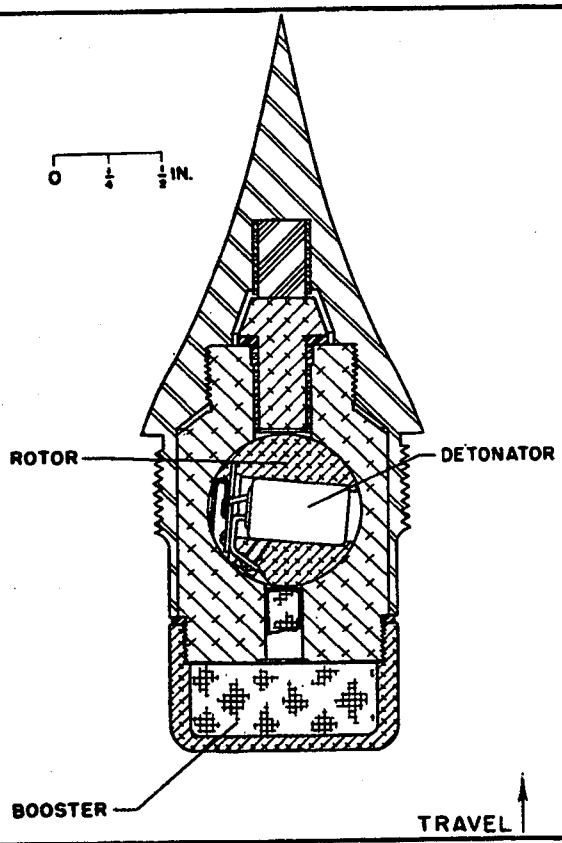

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	P-84287
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile, rocket
Cal. — Size	90 mm
Location	Nose
Use	GP, HE
MIL-STD's	
Max Values	
Rotat. (rps)	80
Setback (g)	33,000
Velocity (fps)	4400

KEY FEATURES

SERIES: A CHAPTER: 1
DESIGNATION: T285

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T285, FUZE, PD

ARMING DATA

Method	Setback
Delay	100-600 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	4000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	1.53 in.
Thread Size	

FUNCTIONING DATA

Action	PD, SQ
Type	Electrical
Delay	
Time Type	
Time Setting (sec)	
Target	Light targets and vehicles
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M48
Booster	

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T285
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T287, FUZE, PD

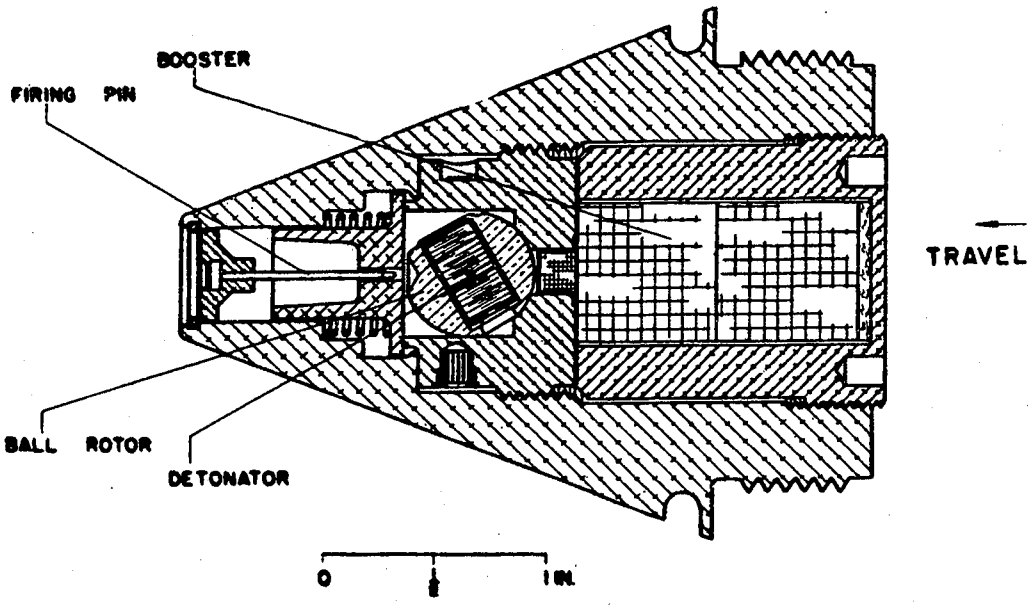

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	FF 6807 (FA)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	75, 105 mm Recoiless rifle
Location	Nose
Use	GP, Chemical
MIL-STD's	.331, Tests 101-105
Max Values	
Rotat. (rps)	300
Setback (g)	10,000
Velocity (fps)	1100

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T287, FUZE, PD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	33
Arm	100
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.75 lb
Total Length (in.)	3.17
Body Diam. (in.)	
Intrusion	0.86 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, Graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Light armor
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M42
Booster	

REMARKS

Modified M503 fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T289, FUZE, MTSQ

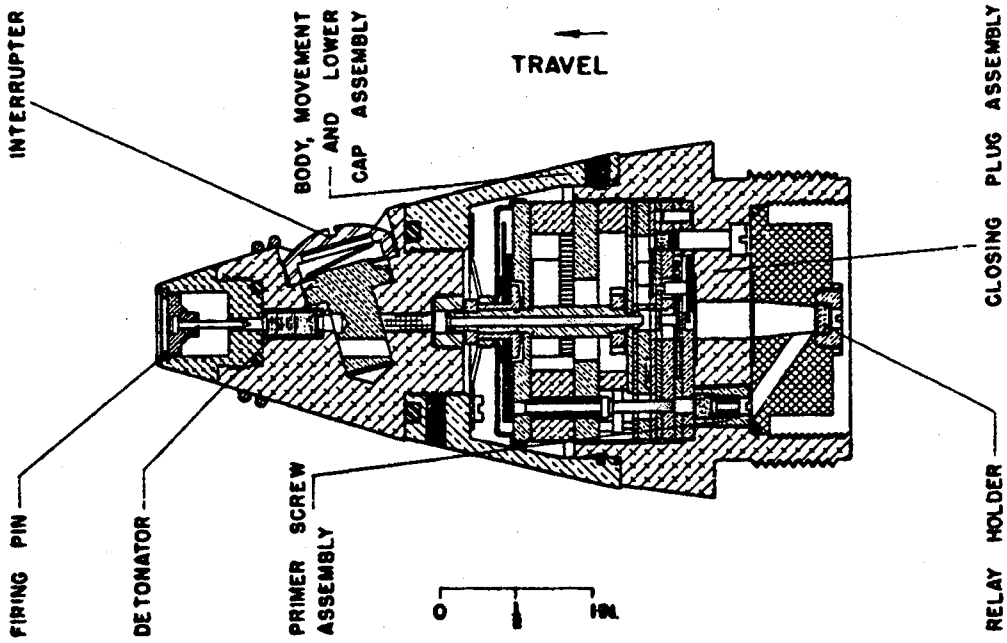

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T S. Honickman AV 880-3174
Status	Terminated
Ass'y Dwg. No.	FF 6616 (FA) for T289
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	Large caliber ammo.
Location	Nose
Use	GP
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	475
Setback (g)	30,000
Velocity (fps)	2800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T289, FUZE, MTSQ

ARMING DATA

Method	Spin, Setback
Delay	40-80 ft
Rotation (rps)	
Non-arm	16
Arm	33
Setback (g)	
Non-arm	30
Arm	900
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.06*
Total Length (in.)	5.95*
Body Diam. (in.)	
Intrusion	2.21* in.
Thread Size	2-12NS-1

*Includes booster

FUNCTIONING DATA

Action	PD, SQ, Time, Select
Type	Mechanical
Delay	0.000025 sec
Time Type	Mech. two center tuned
Time Setting (sec)	2-100
Target	Ground
Sensitivity	
Material	Chipboard
Thickness (in.)	0.14
Max Obliq. (°)	70
Velocity (fps)	2800
Carrier	155 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M29A1
Detonator	M18
Booster	T35E7
Relay	M7
Lead	Tetryl

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T289
MT SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T291E3, FUZE, PD

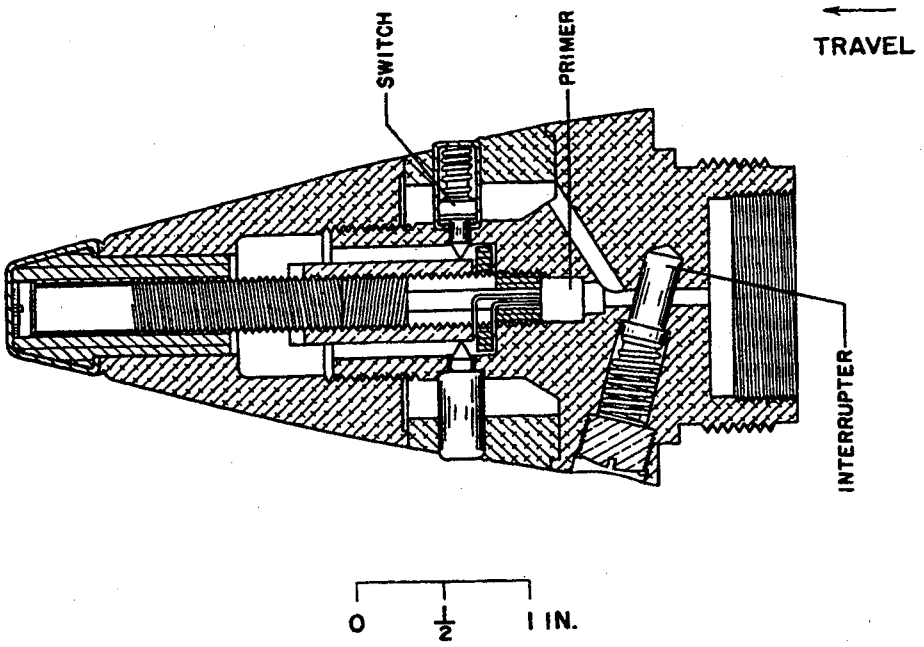

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	FXP 87790
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	105 mm
Location	Nose
Use	Test vehicle*
MIL-STD's	
Max Values	
Rotat. (rps)	235
Setback (g)	13,500
Velocity (fps)	

* to test rectifiers and time delay

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T291E3, FUZE, PD

ARMING DATA

Method	Spin, setback
Delay	10 ft
Rotation (rps)	
Non-arm	25
Arm	35
Setback (g)	
Non-arm	
Arm	1100
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.85 lb
Total Length (in.)	5.431*
Body Diam. (in.)	
Intrusion	2.201
Thread Size	2-12UNS-1A

*includes booster

FUNCTIONING DATA

Action	PD, delay
Type	Electric
Delay	0.00065, 0.059 sec
Time Type	
Time Setting (sec)	
Target	Test fuze
Sensitivity	
Material	Plywood
Thickness (in.)	1
Max Obliq. (°)	0
Velocity (fps)	M1525
Carrier	105 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T21E1
Booster	M21A4

REMARKS

Fuze T291E2, Dwg. P-87077, is similar to Fuze T291E3, but is used as a test vehicle for testing sensitivity of piezoelectric elements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T293, FUZE, PROXIMITY

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi AV 290-2400
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar
Cal. — Size	81, 105 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	20
Setback (g)	8000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T293, FUZE, PROXIMITY

ARMING DATA

Method	Setback, Mech. time
Delay	6 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	350 / 600
Arming Wire	No
External Indicat.	No

Pull pin allows arming cycle to start after setback

PHYSICAL DATA

Weight	600 gm
Total Length (in.)	5.990
Body Diam. (in.)	
Intrusion	2.210 in.
Thread Size	2-12-UNS-1A

FUNCTIONING DATA

Action	SQ, Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Thermal battery

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M51
Booster	Tetryl

REMARKS

SQ in case of proximity dud

Development suspended in favor of T305 fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T294, FUZE, PROXIMITY

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	76, 90, 105, 120 mm
Location	Nose
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	50
Setback (g)	35,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T294, FUZE, PROXIMITY

ARMING DATA

Method	
Delay	50 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Proximity
Type	
Delay	
Time Type	
Time Setting (sec)	
Target	Tanks and armored vehicles
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T294
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T296, FUZE, BD

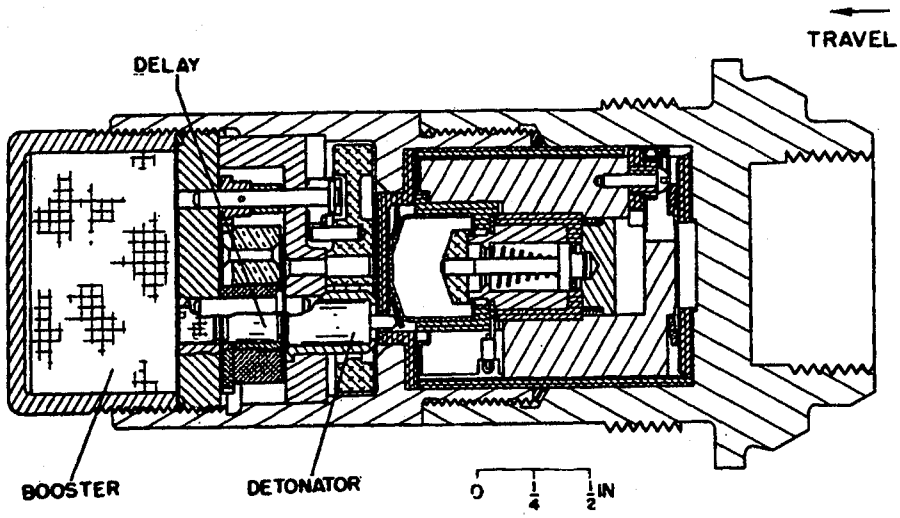

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	KR-6225 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	75-175 mm
Location	Base
Use	HEP
MIL-STD's	
Max Values	
Rotat. (rps)	418
Setback (g)	25,000
Velocity (fps)	1200-2600

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T296, FUZE, BD

ARMING DATA

Method	Spin
Delay	50-150 ft
Rotation (rps)	
Non-arm	33
Arm	83
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External indicat.	No

PHYSICAL DATA

Weight	1.07 lb
Total Length (in.)	3.357
Body Diam. (in.)	
Intrusion	2.47 in.
Thread Size	1.5-12NS-1

FUNCTIONING DATA

Action	BD
Type	Electrical
Delay	0.0004 sec
Time Type	
Time Setting (sec)	
Target	Fortifications, tanks
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Functioning delay time varies directly with impact velocity

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T297, FUZE, PD

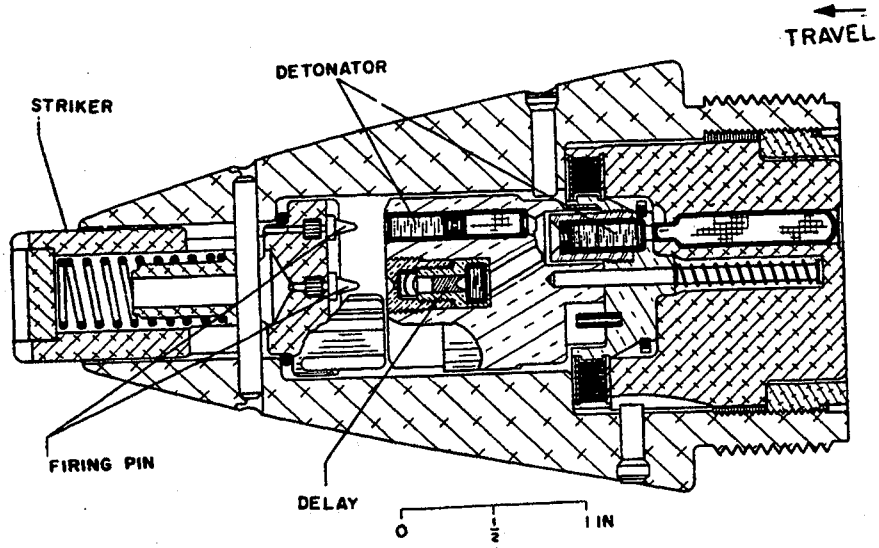

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	P-89187, PX-99-1198
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	90 mm recoiless
Location	Nose
Use	Chemical
MIL-STD's	331, tests 101-104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	1000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T297, FUZE, PD

ARMING DATA

Method	Setback
Delay	0.27 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	20 Arm 140
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.25 lb
Total Length (in.)	5.96
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12UNS-1A

FUNCTIONING DATA

Action	PD, SQ, Delay, Select
Type	Mechanical
Delay	SQ, 0.05 sec
Time Type	
Time Setting (sec)	
Target	Personnel, screening
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T33E1
Booster	None

REMARKS

Similar to Fuze T186 except without booster charge

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T298, FUZE, PD

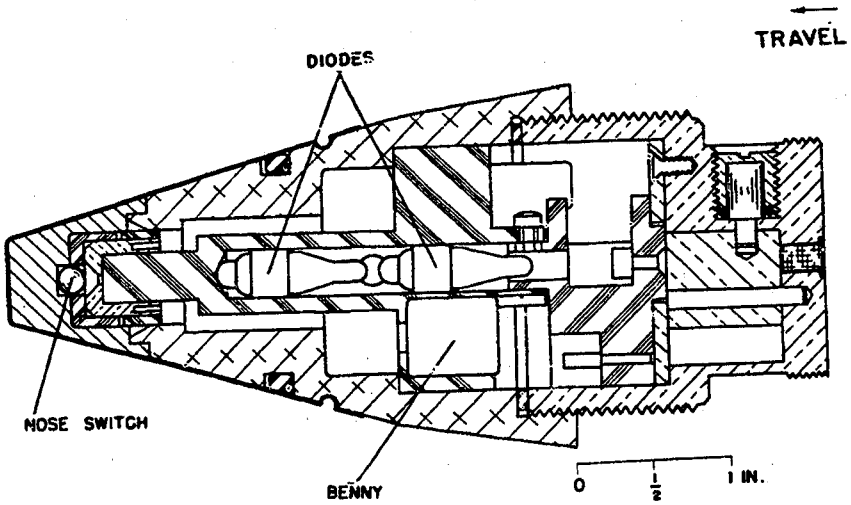

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	P-81019
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	105, 155 mm, 8" howitzer, 155 mm gun, 4.2" mortar
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	225
Setback (g)	15,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T298, FUZE, PD

ARMING DATA

Method	Spin, setback, deceleration, electric time
Delay	1.25 sec
Rotation (rps)	
Non-arm	25
Arm	35
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.14 lb
Total Length (in.)	5.79
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12NS

FUNCTIONING DATA

Action	PD, SQ
Type	Electrical
Delay	Less than 50 µsec
Time Type	
Time Setting (sec)	
Target	Personnel, screening
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T21E1
Booster	

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T299, FUZE, BD

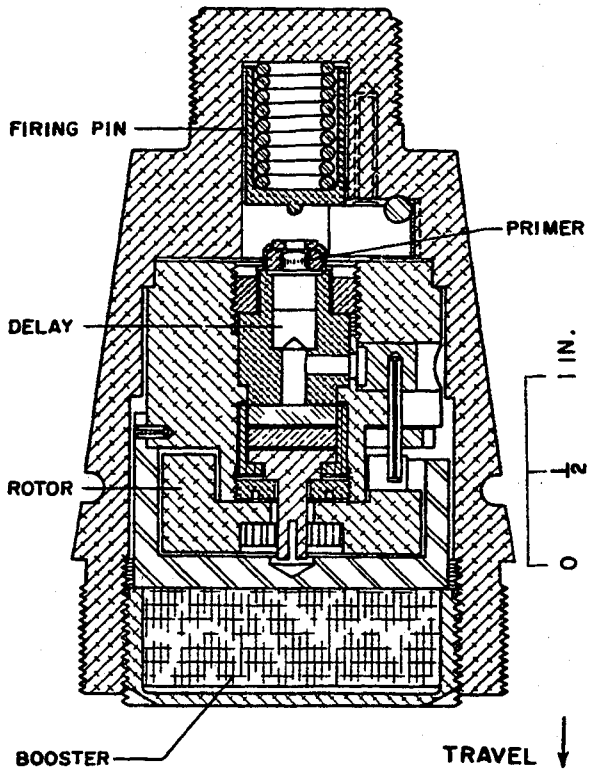

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	P-84987, P-85093
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	81 mm
Location	Base
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T299, FUZE, BD

ARMING DATA

Method	Setback, bore pressure and pyrotechnic
Delay	2-4 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 330
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	3.597
Body Diam. (in.)	
Intrusion	0.693 in.
Thread Size	2.25-24NS-2A

FUNCTIONING DATA

Action	BD, Graze
Type	Electrical
Delay	SQ, .05 sec
Time Type	
Time Setting (sec)	
Target	Personnel, bunkers
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T74
Booster	
Lead	Tetryl

REMARKS

Test fuze to investigate the feasibility of base fuzing for mortar ammunition

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T302, FUZE, MTSQ

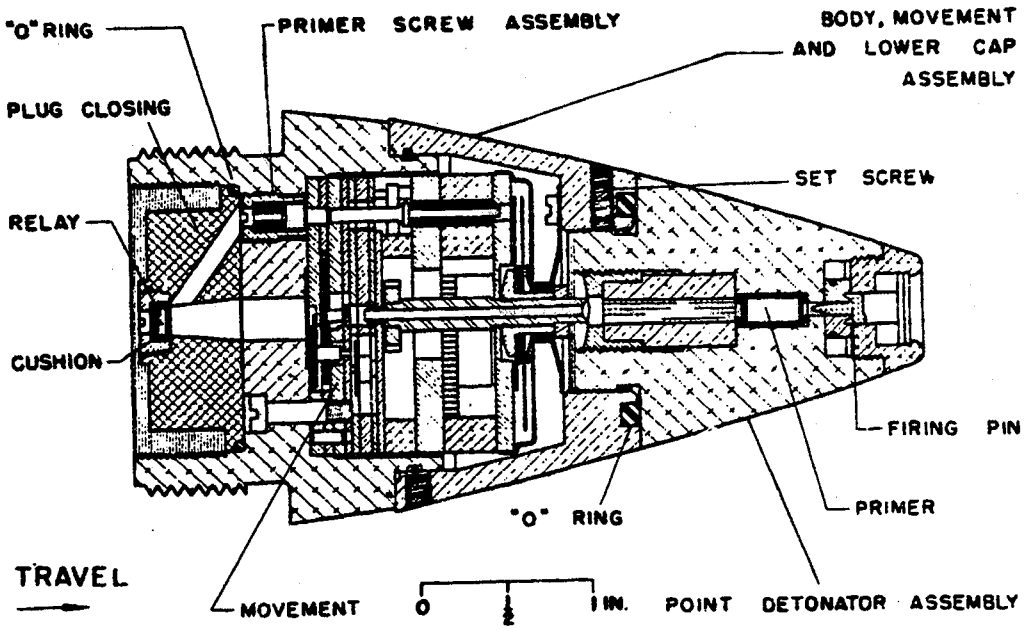

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T S. Honickman AV 880-3174
Status	Terminated
Ass'y Dwg. No.	FF 6788 (FA)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	90 mm AA gun
Location	Nose
Use	GP
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	475
Setback (g)	30,000
Velocity (fps)	2700

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T302, FUZE, MTSQ

ARMING DATA

Method	Spin, Setback		
Delay			
Rotation (rps)			
Non-arm	33	Arm	250
Setback (g)			
Non-arm	1400	Arm	7500
Arming Wire	No		
External Indicat.	No		

PHYSICAL DATA

Weight	2.06 lb*
Total Length (in.)	5.95
Body Diam. (in.)	
Intrusion	2.21* in.
Thread Size	2-12NS-1

*Includes booster

FUNCTIONING DATA

Action	PD, SQ, Time, Select
Type	Mechanical
Delay	0.000025 sec
Time Type	Mech. two center tuned
Time Setting (sec)	0.8-30
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M29A1
Detonator	M23
Booster	T35E7
Relay	M7
Lead	Tetryl

REMARKS

Clockwise setting

Similar to Fuze M502 except setting is clockwise and max. time is 30 sec instead of 45 sec

SERIES: A CHAPTER: 1
DESIGNATION: T302
MT SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T303, FUZE, BD

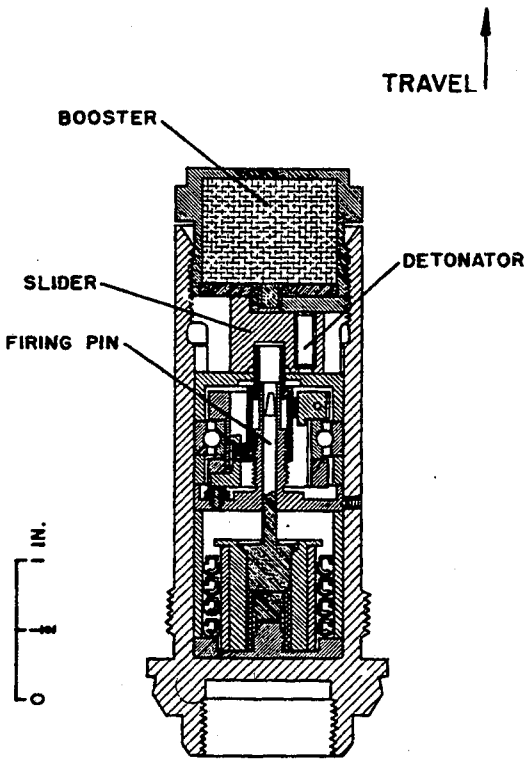

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	4020X255, D4072X238
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	75-175 mm
Location	Base
Use	HEP
MIL-STD's	
Max Values	
Rotat. (rps)	420
Setback (g)	25,000
Velocity (fps)	1200-2600

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T303, FUZE, BD

ARMING DATA

Method	Spin
Delay	50-150 ft
Rotation (rps)	Yes
Non-arm 33.3 Arm 83.4	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.07 lb
Total Length (in.)	4.26
Body Diam. (in.)	
Intrusion	3.565 in.
Thread Size	1.5-12NS-1

FUNCTIONING DATA

Action	BD, Delay, Graze
Type	Mechanical
Delay	0.0003 sec
Time Type	
Time Setting (sec)	
Target	Fortifications, tanks
Sensitivity	
Material	Armor plate
Thickness (in.)	3-7
Max Obliq. (°)	65
Velocity (fps)	1200-2600
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T83
Booster	Tetryl

REMARKS

Functioning delay time varies directly with impact velocity

SERIES: A CHAPTER: 1
DESIGNATION: T303
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T305, FUZE, PROXIMITY, MORTAR

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi AV 290-2400
Status	Terminated
Ass'y Dwg. No.	G 709354 (Bell Labs)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	81, 105 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	20
Setback (g)	8000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T305, FUZE, PROXIMITY, MORTAR

ARMING DATA

Method	Setback, Mech. time
Delay	8-25 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	350 / 600
Arming Wire	Safety pin
External Indicat.	No

PHYSICAL DATA

Weight	600 gm
Total Length (in.)	5.990
Body Diam. (in.)	
Intrusion	2.210 in.
Thread Size	2-12-UNS-1A

FUNCTIONING DATA

Action	Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

PS201

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T24E1
Booster	Tetryl, .175Dx4L

REMARKS

Pull pin allows arming cycle to start after setback

Delay is obtained by setback wound clock and is proportional to firing charge

Uses all solids for active electronic devices

SERIES: A CHAPTER: 1
DESIGNATION: T305
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T311, FUZE, PD

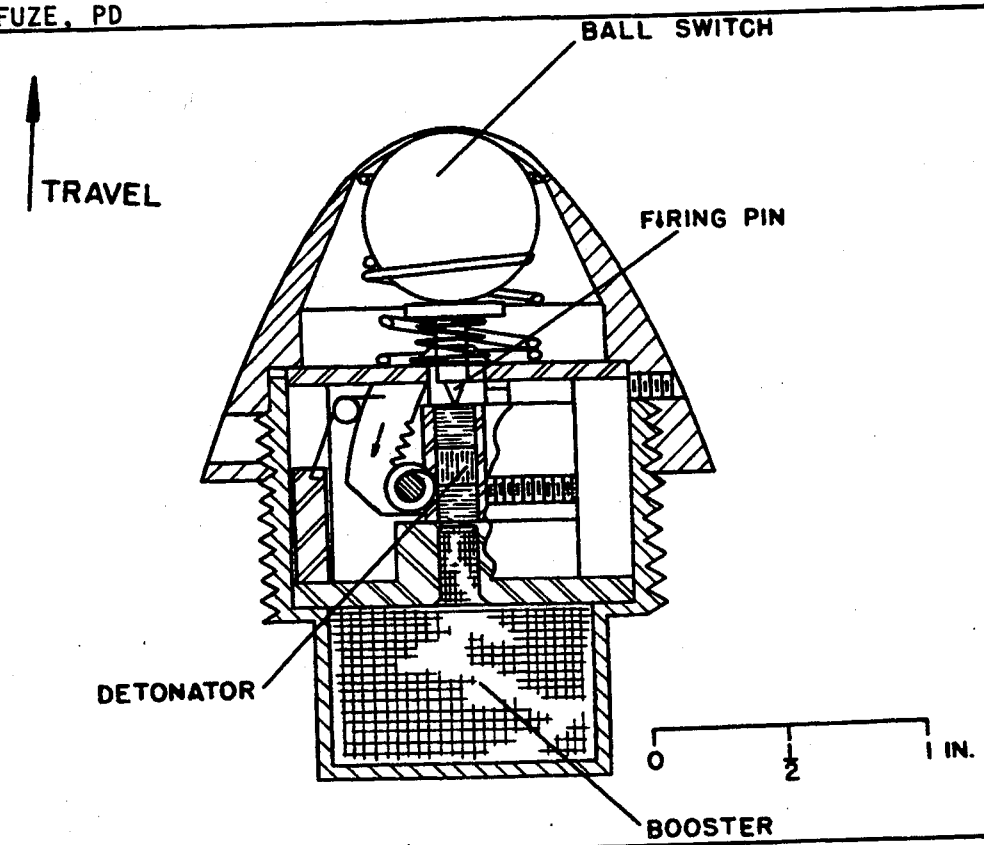

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	19-D-673
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	60, 81 mm
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	9000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T311, FUZE, PD

ARMING DATA

Method	Setback
Delay	100 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.28 lb
Total Length (in.)	2.42
Body Diam. (in.)	
Intrusion	1.12 in.
Thread Size	1.5-12NF

FUNCTIONING DATA

Action	PD, SQ, Graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Personnel, light structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T33E1
Booster	Tetryl
Lead	RDX

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T311
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T312, FUZE, PD

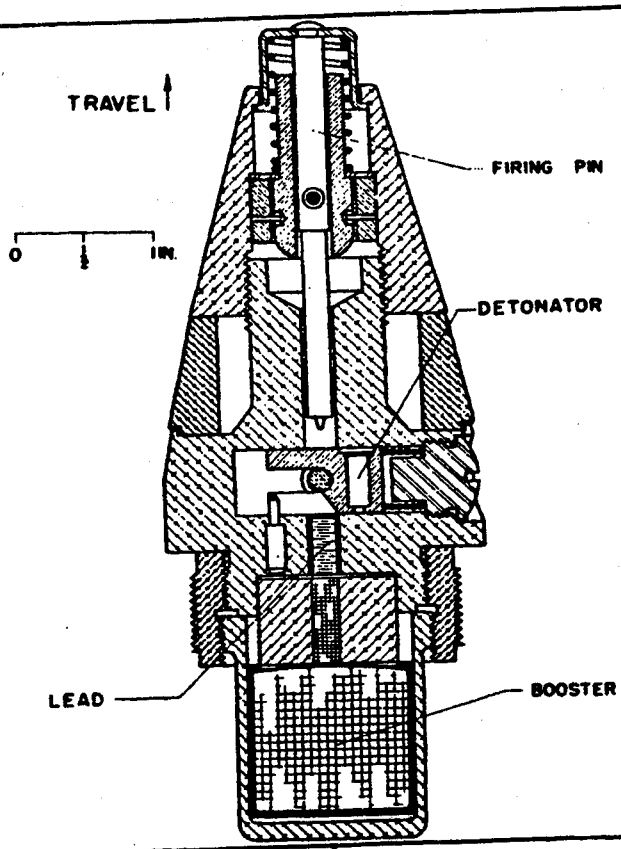

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
Status	A. Nash AV 880-2017 Terminated
Ass'y Dwg. No.	P-85661, P-85661A, P-85662, P-85698
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	81 mm
Location	Nose
Use	GP, Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	100-1000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T312, FUZE, PD

ARMING DATA

Method	Setback
Delay	30 ft approx.
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 500
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1.25 lb
Total Length (in.)	6.1
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12UNS-1A

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Personnel, screening
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Fuze T312 is a modification of Fuze M77, and intended for use in testing T28 and T30 series mortar (81 mm) shell only

SERIES: A CHAPTER: 1
DESIGNATION: T312
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T313, FUZE, PD

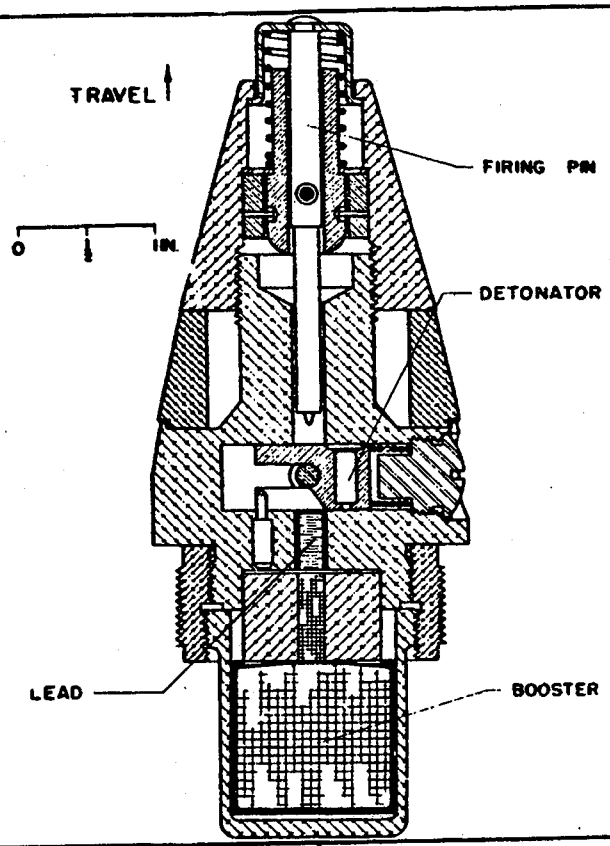

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	P-85661, P-85661A, P-85662, P-85698
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	105 mm
Location	Nose
Use	GP, Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	100-1000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T313, FUZE, PD

ARMING DATA

Method	Setback
Delay	30 ft approx.
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	500
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1.25 lb
Total Length (in.)	6.1
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12UNS-1A

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Personnel, screening
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl

REMARKS

Modification of Fuze M77 intended for use in testing 105 mm T53 and T54 series mortar shell only

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T314, FUZE, PD

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
Status	AV 880-2017
	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	60,81 mm
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	9000
Velocity (fps)	200-600

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T314, FUZE, PD

ARMING DATA

Method	Setback
Delay	100 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.28 lb
Total Length (in.)	2.42
Body Diam. (in.)	
Intrusion	1.12 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	PD, SQ, Graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Personnel, screening
Sensitivity	
Material	Plyboard
Thickness (in.)	0.25
Max Obliq. (°)	90
Velocity (fps)	200-600
Carrier	60 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T33E1
Booster	
Lead	RDX

REMARKS

Improvement of Fuze T216 based on Fuze T191

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T315, FUZE, PD

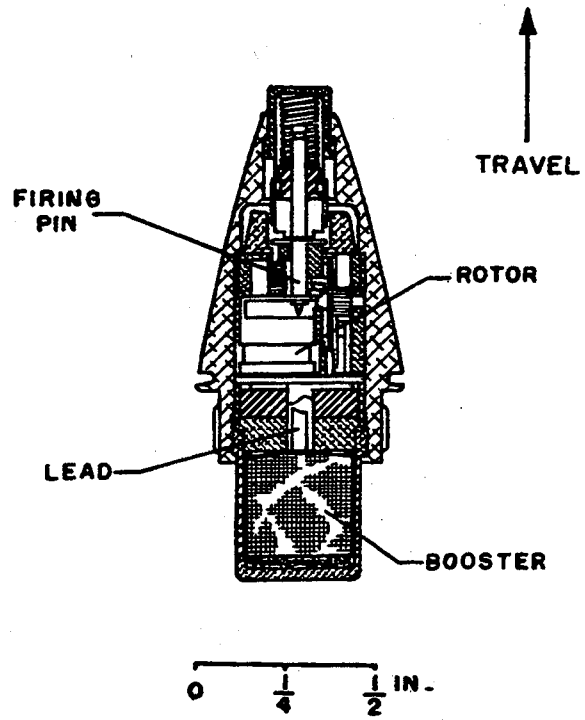

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
Status	AV 880-2017
	Terminated
Ass'y Dwg. No.	19-J-112
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	81,105 mm
Location	Nose
Use	GP, Chemical
MIL-STD's	331, tests 101-107
Max Values	
Rotat. (rps)	25
Setback (g)	8000
Velocity (fps)	100-1000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T315, FUZSE, PD

ARMING DATA

Method	Setback
Delay	150 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.25 lb
Total Length (in.)	5.96
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, SQ, Delay, Select, Graze
Type	Mechanical
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target	Personnel, light targets
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T33E1 and T34E1
Booster	Tetryl
Lead	RDX
Delay element	M2

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T324, FUZE, PIBD

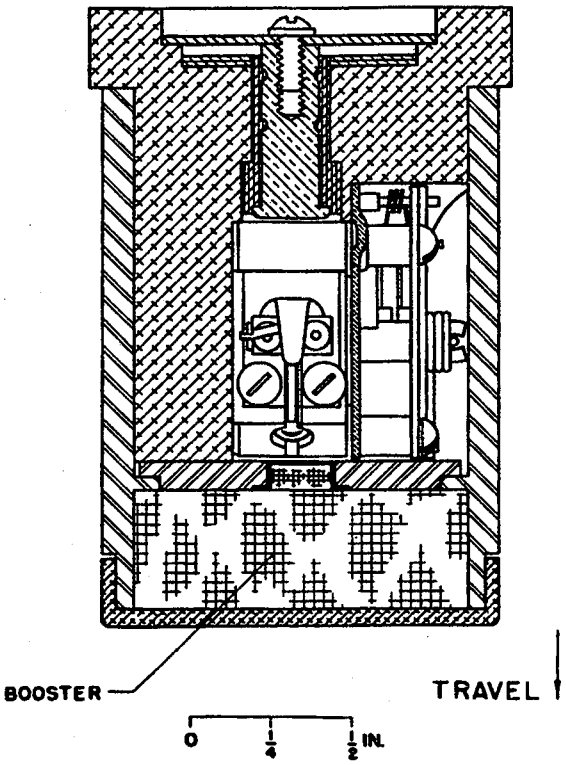

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	73-1-232
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	90 mm
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	50
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T324, FUZE, PIBD

ARMING DATA

Method	Setback
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	3500
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.23 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	None

FUNCTIONING DATA

Action	PI, BD
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M48
Booster	Tetryl

REMARKS

Identical to Fuze M509 with the exception of a more sensitive arming device

Test fuze for T249 HEAT Cartridge

SERIES: A CHAPTER: 1
DESIGNATION: T324
PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T325, FUZE, BD

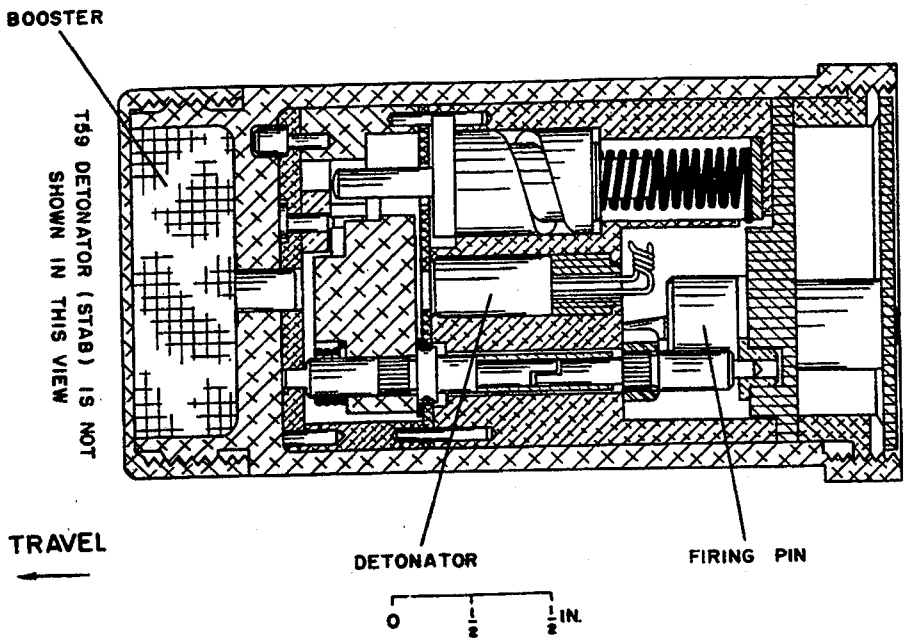

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	PX-151-170
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	90 mm
Location	Base
Use	HEP
MIL-STD's	
Max Values	
Rotat. (rps)	50
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T325, FUZE, BD

ARMING DATA

Method	Setback	
Delay		
Rotation (rps)	No	
Non-arm	Arm	
Setback (g)		
Non-arm	Arm	3500
Arming Wire	No	
External Indicat.	No	

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	None

FUNCTIONING DATA

Action	BD, Delay, Graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Fortification, tanks
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M51, T59
Booster	Tetryl

REMARKS

Identical to Fuze T199E1 except that the electric detonator is made inactive by shorting the leads

Functioning occurs through the inertia system providing some delay

Test fuze for nonrotated HEP Shell where only low setback is available

SERIES: A CHAPTER: 1
DESIGNATION: T325
BD Fuze

Source: https://assist.dla.mil-Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T326, FUZE, BD

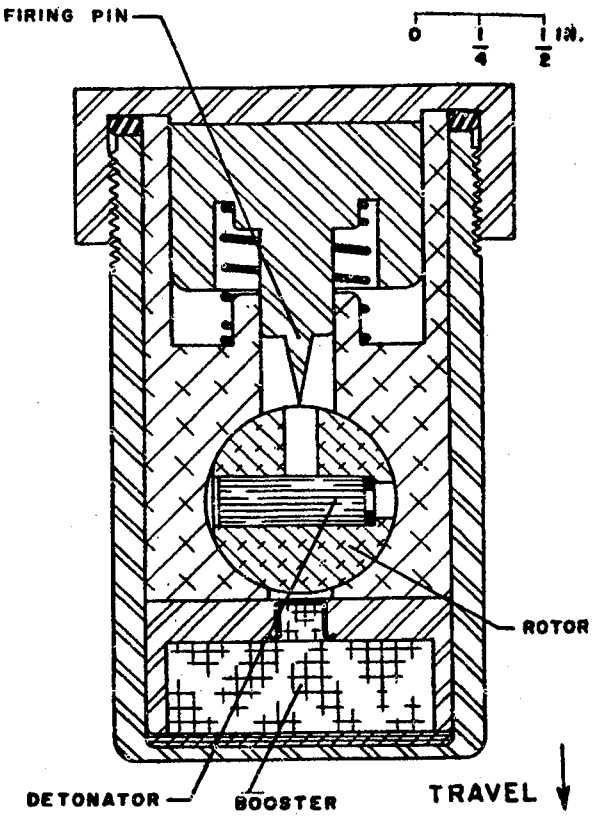

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	P-82880
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	90 mm
Location	Base
Use	HEP
MIL-STD's	
Max Values	
Rotat. (rps)	50
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T326, FUZE, BD

ARMING DATA

Method	Setback
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 3500
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	None

FUNCTIONING DATA

Action	BD, Delay, Graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Fortifications, tanks
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M20
Booster	Tetryl

REMARKS

Identical to Fuze T221 with the exception of a more sensitive arming device.

That fuze for nonrotated HEP shell where only law setback is available

SERIES: A CHAPTER: 1
DESIGNATION: T326
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T327E1, FUZE, BD

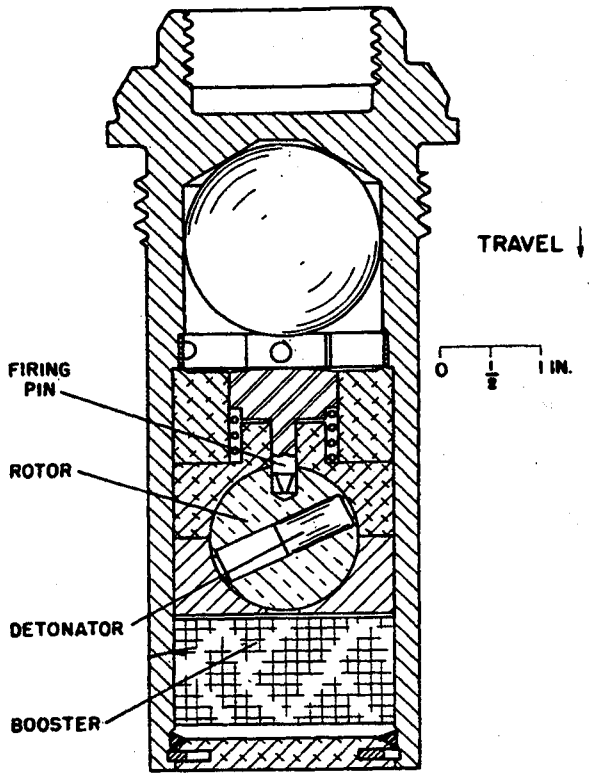

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	KD-8275 Rev. A (Bulova) XR-32000 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	75-175 mm
Location	Base
Use	HEP
MIL-STD's	
Max Values	
Rotat. (rps)	418
Setback (g)	25,000
Velocity (fps)	200-2600

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T327E1, FUZE, BD

ARMING DATA

Method	Spin
Delay	50-150 ft
Rotation (rps)	Yes
Setback (g) Non-arm	33.3
Setback (g) Arm	83.4
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.4 lb
Total Length (in.)	4.019
Body Diam. (in.)	
Intrusion	3.325 in.
Thread Size	1.5-12NS-1

FUNCTIONING DATA

Action	BD, Delay, Graze
Type	Mechanical
Delay	0.0002 sec
Time Type	
Time Setting (sec)	
Target	Fortifications, tanks
Sensitivity	
Material	Armor plate
Thickness (in.)	3-7
Max Obliq. (°)	65
Velocity (fps)	200-2600
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T82
Booster	Tetryl

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T327E1
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T331, FUZE, PD

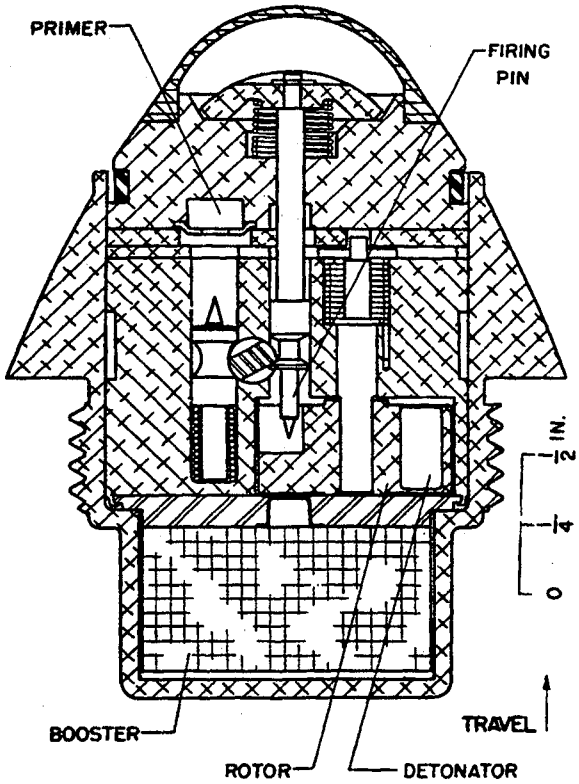

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T
	A. Nash
Status	AV 880-2017
	Terminated
Ass'y Dwg. No.	FG-1161
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mortar projectile
Cal. — Size	60 mm
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	100

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T331, FUZE, PD

ARMING DATA

Method	Setback
Delay	0.75 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.28 lb
Total Length (in.)	2.42
Body Diam. (in.)	
Intrusion	1.12 in.
Thread Size	1.5-12UNF-1A

FUNCTIONING DATA

Action	PD, SQ, Graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Personnel, light structure
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	M47
Booster	Tetryl, 160 g
Lead	Tetryl, 0.538 g
Delay element	
Graze primer	M26

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T335, FUZE, PROXIMITY, MORTAR

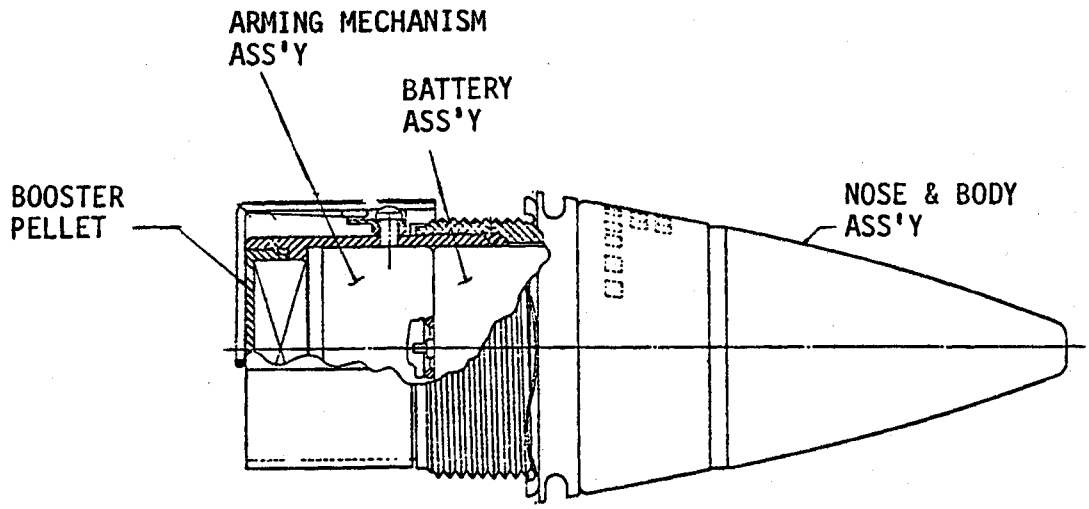

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi
Status	AV 290-2400 Terminated
Ass'y Dwg. No.	TL 22F271
Parts List	EPL TL22C290
Specification	
Previous Number	

GENERAL

Carriers	Mortar
Cal. — Size	105 mm (T53)
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	20
Setback (g)	6700
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T335, FUZE, PROXIMITY

ARMING DATA

Method	Setback
Delay	1.5, 4.0 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	350 Arm 600
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.26 lb
Total Length (in.)	6.19
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12UNS-1A

FUNCTIONING DATA

Action	Proximity with PD back-up
Type	Electrical
Delay	0.002 sec
Time Type	Electrical, Chemical
Time Setting (sec)	(thermal)
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

PS 201

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M36A1
Booster	Tetryl, .415L, 1.375D

REMARKS

Arming delay is 1.5 sec min. for SQ function; 4.0 sec for proximity function

Design is very similar to M517 fuze, many parts interchangeable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 336 MOD 0, FUZE, MECH. TIME

IDENTIFICATION

Agency	NSWC, G44, Klamm
Status	Obsolete
Ass'y Dwg. No.	2428122
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5"/54
Location	
Use	Reduced and service charge
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

SERIES: N CHAPTER: 1
DESIGNATION: MK 336 MOD 0
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 336 MOD 0, FUZE, MECH. TIME

ARMING DATA

Method

Delay

Rotation (rps)

Non-arm **Arm**

Setback (g)

Non-arm **Arm**

Arming Wire

External Indicat.

PHYSICAL DATA

Weight 1.41 lb

Total Length (in.)

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action

Type

Delay

Time Type

Time Setting (sec) 45 max.

Target antiaircraft, ground

Sensitivity

Material

Thickness (in.)

Max Obliq. (°)

Velocity (fps)

Carrier

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

Combination of MT Fuze MK 25 MOD 5 and MK 57 MOD 2.

SERIES: N CHAPTER: 1
DESIGNATION: MK 336 MOD 0
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T337, FUZE, BD

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	90, 105 mm
Location	Base
Use	GP, HEP, HE
MIL-STD's	331 Tests, 101-107, 207, 208, 108, 115
Max Values	
Rotat. (rps)	
Setback (g)	8000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T337, FUZE, BD

ARMING DATA

Method	Setback
Delay	25 - 100 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PI, BD, SQ, delay, select, graze
Type	Electric
Delay	0.002 - 0.005, 0.05 sec
Time Type	
Time Setting (sec)	
Target	Hard-soft surfaces
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: T337
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-337 MOD 0, FUZE, PROXIMITY

IDENTIFICATION

Agency	NSWC, G44, Klamm
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile (RAP)
Cal. — Size	5"/54
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

SERIES: N CHAPTER: 1
DESIGNATION: EX 337 MOD 0
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-337 MOD 0, FUZE, PROXIMITY

ARMING DATA

Method	Spin, setback, clock
Delay	3-5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	CVT, PD
Type	Electric, mechanical
Delay	
Time Type	Mechanical
Time Setting (sec)	10-95 sec by 1 sec
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 64 MOD 0 (perc.) MK 63 MOD 0 (elec.)
Booster	MK 39
Rear Fitting	MK 32 MOD 0

REMARKS

Similar to Fuze MK 338 MOD 0 except for projectile compatability

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T338, FUZE, PD

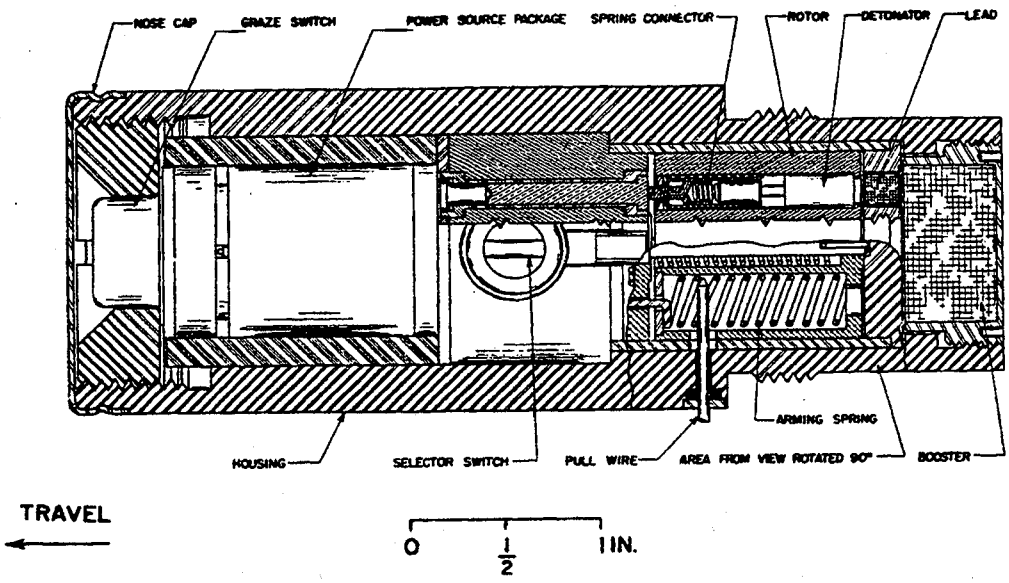

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	XD19Y2338 (Magnavox)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	90 and 105 mm
Location	Nose
Use	HE or GP
MIL-STD's	331, Tests 101-105, 107, 108, 115
Max Values	
Rotat. (rps)	50
Setback (g)	25,000
Velocity (fps)	M2500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T338, FUZE, PD

ARMING DATA

Method	Setback
Delay	25 - 100 ft
Rotation (rps)	No
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	4000 / 8000
Arming Wire	
External Indicat.	No

PHYSICAL DATA

Weight	2.5 lb
Total Length (in.)	5.032
Body Diam. (in.)	
Intrusion	1.494 in.
Thread Size	1.5-12UNF-2A

FUNCTIONING DATA

Action	PD, SQ, delay, graze
Type	Electrical
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target	Antipersonnel & soft
Sensitivity	
Material	Chipboard
Thickness (in.)	1/8
Max Obliq. (°)	
Velocity (fps)	M2500
Carrier	90 mm

POWER SUPPLY

Piezoelectric

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T65
Booster	Tetryl

REMARKS

Fuze T338 is identical to Fuze T339 except it includes a booster.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 338 MOD 0, FUZE, PROXIMITY

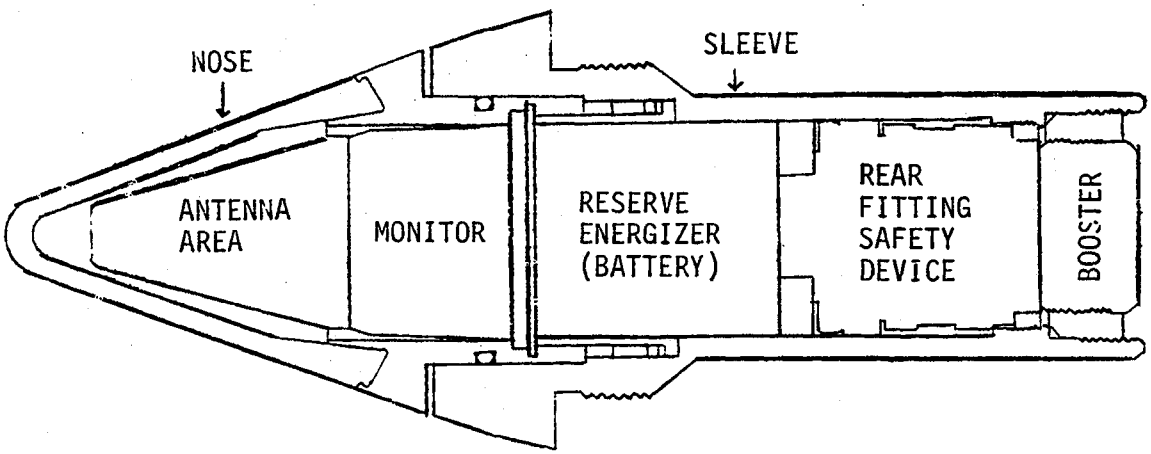

IDENTIFICATION

Agency	NSWC, G44, Klamm
Status	Obsolete
Ass'y Dwg. No.	2501151
Parts List	LD 292441
Specification	WS 7803
Previous Number	EX 338

GENERAL

Carriers	Projectile, rocket assisted
Cal. — Size	5"/38
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Monitor Fuze MK 23 MOD 0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 338 MOD 0, FUZE, PROXIMITY

ARMING DATA

Method	Spin, setback, clock
Delay	3 - 5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	NO

PHYSICAL DATA

Weight	5.0 lb (MOD 0) 3.5 lb (MOD 1)
Total Length (in.)	8.92
Body Diam. (in.)	3.310
Intrusion	4.849 in.
Thread Size	2.650-10UNS-2A

FUNCTIONING DATA

Action	CVT, PD
Type	Electric, mechanical
Delay	
Time Type	Clockwork
Time Setting (sec)	10-95 x 1 sec for CVT
Target	Shore bombardment at extended ranges
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Reserve energizer MK 36 MOD 0

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 64 MOD 0 (percus.) MK 63 MOD 0 (elect.)
Booster	MK 39
Rear fitting	MK 32 MOD 0

REMARKS

SERIES: N CHAPTER: 1
DESIGNATION: MK 338 MOD 0
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T339, FUZE, PD

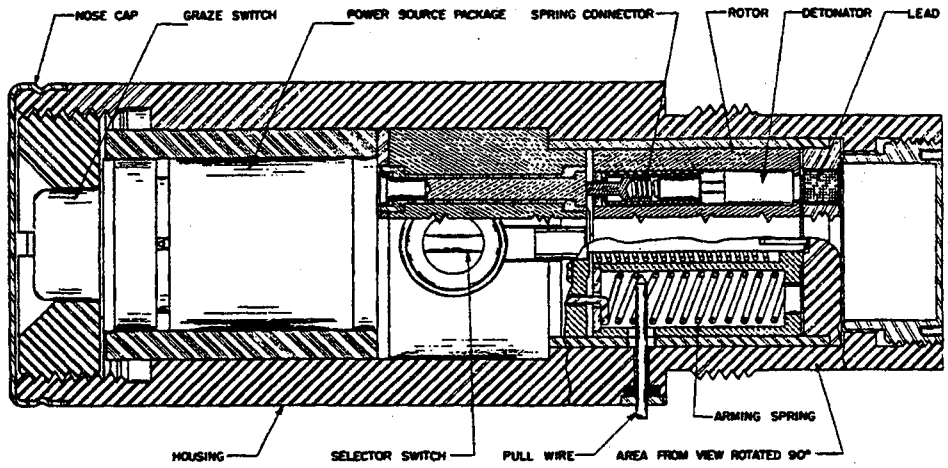

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash
Status	AV 880-2017 Terminated
Ass'y Dwg. No.	XD19Y2338 (Magnavox)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	90, 105 mm
Location	Nose
Use	Chemical, WP
MIL-STD's	331, Tests 101-105, 107, 108, 115
Max Values	
Rotat. (rps)	50
Setback (g)	25,000
Velocity (fps)	M2500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T339, FUZE, PD

ARMING DATA

Method	Setback
Delay	25 - 100 ft
Rotation (rps)	No
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	4000 / 8000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	1.5-12UNF-2A

FUNCTIONING DATA

Action	PD, SQ, delay, select, graze
Type	Electric
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target	Ground-marking
Sensitivity	
Material	
Thickness (in.)	1/8
Max Obliq. (°)	
Velocity (fps)	M2500
Carrier	90 mm

POWER SUPPLY

Piezoelectric

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T65
Booster	None
	Chipboard

REMARKS

T339 Fuze is identical to Fuze T338 except is has no booster.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 349 Mod 1 MT Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-367 and 1-368 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T355, FUZE, PD, MT

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	F 8593008
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	8 in.
Location	Internal
Use	Special
MIL-STD's	331, Tests 101-104
Max Values	
Rotat. (rps)	167
Setback (g)	10,000
Velocity (fps)	20,000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T355, FUZE, PD, MT

ARMING DATA

Method	Spin, Setback, Mech. time
Delay	8 sec
Rotation (rps)	
Non-arm	16 Arm 33
Setback (g)	
Non-arm	300 Arm 900
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	4.9 lb
Total Length (in.)	9.1
Body Diam. (in.)	2.8
Intrusion	
Thread Size	2.91-10NA-4C (LH)

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Two center tuned
Time Setting (sec)	10-100
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	No explosives
Detonator	
Booster	

REMARKS

Similar to Fuzes T316E1 and T342

Any one of three (3) independent mechanisms will close a switch and complete the circuit to an external electric primer

Suitable for circuits at potentials to 2000 volts at altitudes of 20,000 ft

SERIES: A CHAPTER: 1
DESIGNATION: T355
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

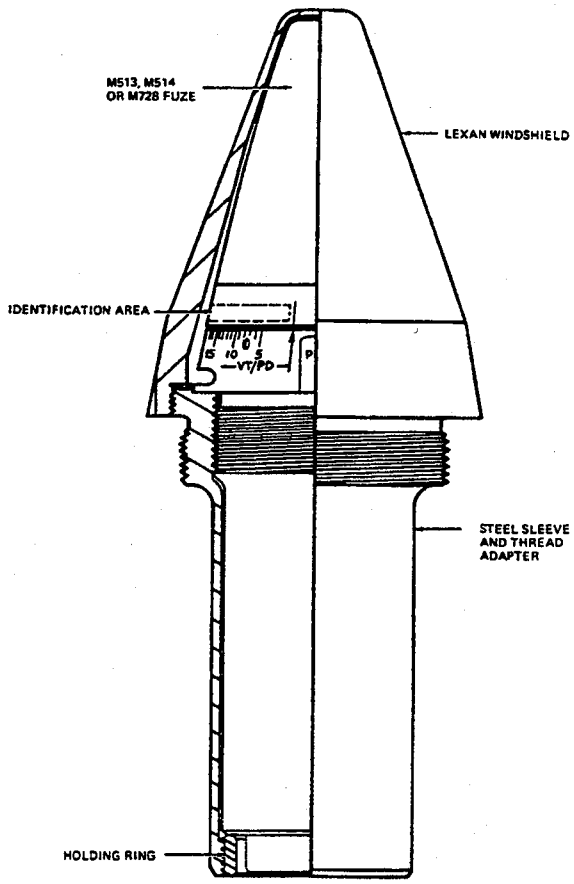

- OVERALL SIZE -	- INTRUSION -	
LG: 8.88 in (225 mm)	DP: 4.7 in (119.4 mm)	WT: 3.6 lb (1633 g)
XSECT: 3.3 in (83.8 mm)	DIA: 2.0 in (50.8 mm)	THD: 2.65-10UNS-2A
		THD DP: 0.687 in (17.4 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 5 177 421
- PARTS LIST: PL 5177421
- SPEC: OD 28654
- PUB: SW030-AA-MMO-010, SW300-BO-ORD-020
- NATIONAL STOCK NO: 1390-00-839-1312 (Mod 0)
- DODIC: N356 (Mod 1), N350 (Mod 0)
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 360 Mod 0
- REPLACES:
- REPLACED BY: Mk 357 Mod 1

GENERAL
- WEAPON: 5-in/38 Mk 12 Gun
- AMMUNITION: Fuze for HE-CVT Mk 35, 47, 49, 51, 56, 66 standard and rocket-assisted projectiles
- LOCATION: Nose
- BALLISTIC LEVELS:
- ROTATION: 208 rps
- SETBACK: 16,200 g
- VELOCITY: 2497 ft/s (761 m/s)
- CREEP: NA
- FLIGHT TIME: 100 s
- SAFETY STD: Waiver for MIL-STD-1316B
- SETTERS: None

Supersedes page 1-371 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 800 g no arm;
1385 g, all arm

SECOND SAFETY:
Spin: 27 rps no arm;
38 rps all arm

OTHER SAFETY:
RC delay of firing capacitor voltage buildup

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
1.9 to 3.6 s

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 15 RFSD & Mk 52 AFD or Proj Bstr Assy 11713497
PRIMER: Mk 124 Electric

DETONATOR: Mk 37 Flash

LEAD: 150 mg Tetryl

BOOSTER: 25 g tetryl booster

OTHER: None

FUNCTIONING DATA

MODES: Proximity, PD
TYPE: Electrical - CVT-RF
CHARACTERISTICS:
Settable turn-on time from 5 to 100 s. Max useful Reserve Energizer life is 50 s after turn-on.
TARGET: Ground Targets, Personnel
SENSITIVITY:
Height: 7 to 66 ft (2 to 20 m), 3 to 33 ft (1 to 10 m) w/desensitivity cap
FUNCTION TEMP:
-7 to +54 deg C
MODE ON DELIVERY:
Std (28 s); RAP (35 s)

POWER SUPPLY:

Mk 16-0 Reserve Energizer (Mod 0);
PS 116 Reserve Energizer
Dwg 11 707 601 (Mod 1)

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0408
US HCSDS:
UN CL/DIV SCG: 1.1 D
US DOT SHIP CL: A
NET EXPL WT: 25.364 g
NET PROP WT: None
STORAGE TEMP: -54 to +60 deg C

REMARKS/DESCRIPTION:
Mk 15-type RFSD and booster combination ensure fuze safety. Time normally set at depot. Certain tactical situations requiring other settings must be made manually. On firing, setback and spin forces break ampule & distribute electrolyte between reserve energizer plates. Simultaneously, clock in RFSD begins to run. Since ground or common return to RE is not complete, variable time circuit is not actuated. After about 2.75 s, S&A removes short from across primer activating impact firing circuit. 5.0 s before set time, S&A completes ground circuit to RE, activating VT circuits. 3.0 s before set time, S&A removes short allowing VT capacitor to charge. VT function fully activated 2.6 s before set time. From this time through end of flight, device functions as a VT fuze to detonate projectile above target. If VT circuit fails, impact device in nose detonates projectile by discharging 2nd independently-charged capacitor through primer. OD 28654 & 41548 specify Fuze & Adapter Assy. (FAA) for M728 or M514 CVT Fuze. Booster assy replaced Mk 52 ADF in Mod 1 & has a setback pin locking one of the upper spin detents. Mk 357-0 (M514) and Mk 365-367 (M513) are for 5"/38 gun; Mk 369-371 (M514) are for 8"/55 gun.

Supersedes page 1-372 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

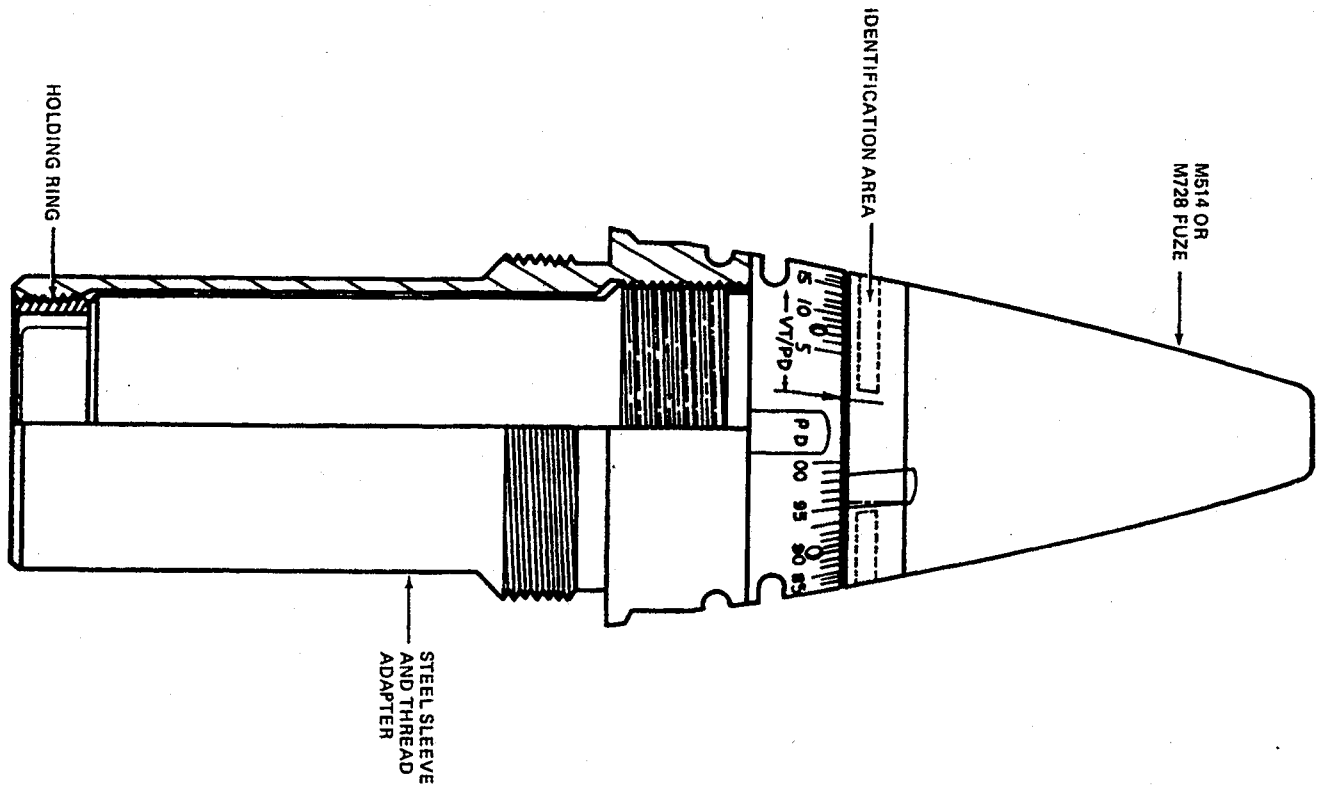

- OVERALL SIZE -	- INTRUSION -	WT: 3.8 lb (1725 g)
LG: 8.77 in (223 mm)	DP: 4.01 in (101.6 mm)	THD: 2.35-10UNS-2A
XSECT: 2.73 in (69.3 mm)	DIA: 2.00 in (50.8 mm)	THD DP: 0.790 in (20.1 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 2 429 024(0) & 5177422(1)
- PARTS LIST: 550013(0) & 5177422(1)
- SPEC: OD 28655 (Assy Proc)
- PUB: SW030-AA-MMO-010, SW300-BO-ORD-020
- NATIONAL STOCK NO: 1390-01-060-8582
- DODIC: N352
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 357 Mod 0
- REPLACES:
- REPLACED BY: Mk 360 Mod 1

GENERAL
- WEAPON: 5-in/54 Mk 18 and 19 Guns
- AMMUNITION: HE-CVT Mk 41, 55, 64, 65, 81 & 127 standard and rocket-assisted projectiles
- LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 254 rps
- SETBACK: 13,700 g
- VELOCITY: 2650 ft/s (808 m/s)
- CREEP: NA
- FLIGHT TIME: 100 s

SAFETY STD: Waiver for MIL-STD-1316B
SETTERS: None

Supersedes page 1-372A of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 800 g no arm;
1385 g, all arm

SECOND SAFETY:
Spin: 27 rps no arm;
38 rps, all arm

OTHER SAFETY:
RC delay of firing capacitor voltage buildup

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
1.9 to 3.6 s

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 15 RFSD & Mk 52 AFD or Proj Bstr Assy 11713497
PRIMER: Mk 124 Electric

DETONATOR: Mk 37 Flash

LEAD: 150 mg Tetryl

BOOSTER: 25 g tetryl booster

OTHER: None

FUNCTIONING DATA

MODES: Proximity, PD
TYPE: Electrical - CVT-RF
CHARACTERISTICS:
Setable turn-on time 5 to 100 s. Max useful Reserve Energizer life is 50 s after turn-on.
TARGET: Ground Targets, personnel
SENSITIVITY:
Height: 7 to 66 ft (2 to 20 m), 3 to 33 ft (1 to 10 m) w/desensitivity cap
FUNCTION TEMP:
-7 to +54 deg C
MODE ON DELIVERY:
Std (21 s); RAP (35 s)

POWER SUPPLY:

Mk 16-0 Reserve Energizer (Mod 0);
PS 116 Reserve Energizer
Dwg 11 707 601 (Mod 1)

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0409
US HCSDS:
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: A
NET EXPL WT: 25.364 g
NET PROP WT: None
STORAGE TEMP: -54 to +60 deg C

REMARKS/DESCRIPTION:
Mk 15-type RFSD and booster combination ensure fuze safety. Time normally set at depot. Certain tactical situations requiring other settings must be made manually. On firing, setback and spin forces break ampule & distribute electrolyte between reserve energizer plates. Simultaneously, clock in RFSD begins to run. Since ground or common return to RE is not complete, variable time circuit is not actuated. After about 2.75 s, S&A removes short from across primer activating impact firing circuit. 5.0 s before set time, S&A completes ground circuit to RE, activating VT circuits. 3.0 s before set time, S&A removes short allowing VT capacitor to charge. VT function fully activated 2.6 s before set time. From this time through end of flight, device functions as a VT fuze to detonate projectile above target. If VT circuit fails, impact device in nose detonates projectile by discharging 2nd independently-charged capacitor through primer. OD 28655 specifies Fuze & Adapter Assy. (FAA) as M728 or M514 CVT Fuze, adapter, holding ring, and windshield. Booster assy replaced Mk 52 ADF of M514 (Mk 360-0 FAA) & has a setback pin locking one of the spin detents which in turn locks the upper rotor. Mod 0 is obsolescent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

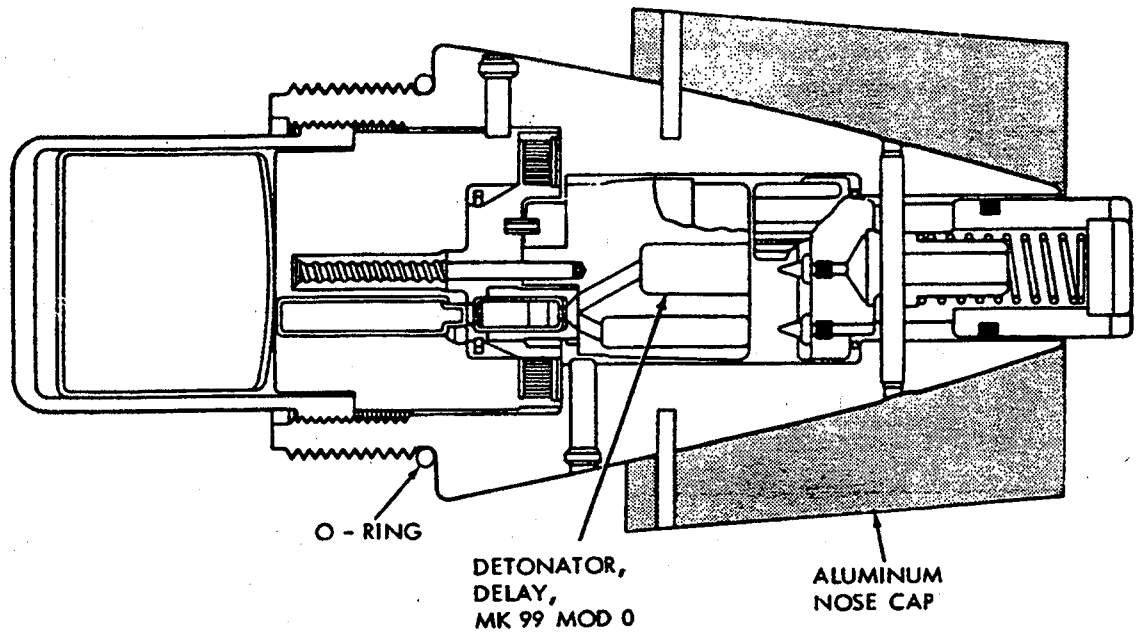

- OVERALL SIZE -	- INTRUSION -	WT: 1.27 lb (576 g)
LG: 6.01 in (152.7 mm)	DP: 2.21 in (56.1 mm)	THD: 2-12UNS-1A
XSECT: 2.125 in (54 mm)	DIA: 1.70 in (43.2 mm)	THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-1970
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 2 421 712
- PARTS LIST:
- SPEC:
- PUB: NAVORD OP 3588

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: M524A6 NAVY MOD 0
- SIMILAR TO: M524A5

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: 81mm Mortar Mk 2 Mod 0

- AMMUNITION:
  - HE, M362 & M374 Series

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 32 rps
- SETBACK: 10,000 g
- VELOCITY: 180 to 876 ft/s (55 to 267 m/s)

- CREEP: NA
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 1-373 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Pull wire

SECOND SAFETY:
Setback: 240 g no arm,
390 g all arm
Acc - time boost

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
0.3 to 0.6 s
15 m (50 ft) minimum

FUNCTIONING DATA

MODES: PD
TYPE: Mechanical
CHARACTERISTICS:
1.5 s Delay allows round to submerge before detonation.

TARGET: Anti-swimmer operations
SENSITIVITY:

FUNCTION TEMP:
-40 to +52 deg C
MODE ON DELIVERY:
SQ

EXPLOSIVE COMPONENTS

S&A DEVICE: Sequential leaf

PRIMER: in M2 delay element

DETONATOR: Mk 99-0 Delay Detonator & M80 Detonator

LEAD: 538 mg RDX
24 mg RDX

BOOSTER: 35.9 g comp A-5

OTHER: Delay Element M2 (M54 Stab Primer, Boron-Barium Chromate. Delay and M7 Relay)

POWER SUPPLY:

Wound rotor spring

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0408
US HCSDS: 667
UN CL/DIV SCG: 1.1 D
US DOT SHIP CL: A
NET EXPL WT: 37.158 g
NET PROP WT: None
STORAGE TEMP: -62 deg C 3 days max
+71 deg C 4 hr/day

REMARKS/DESCRIPTION:

Fuze safety is obtained by restraining the rotor by means of a sequential leaf setback device which is locked in turn by a pull pin. The pull pin is removed freeing the setback device and the graze plunger. On firing, the multiple-leaf sequential setback device senses a proper acceleration-time relationship and releases the spring-driven rotor which rotates to the armed position driving a runaway escapement to obtain 0.3 to 0.6 s delay arming. On impact, the striker firing pins function the delay detonators. If graze impact occurs, the plunger moves forward so that the detonators strike the firing pins. Should impact occur at an angle in which the striker assembly is not driven rearward, inertial forces will drive the plunger forward and force the delay element against the firing pins of the striker and set off the explosive train.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T370E1, FUZE, PIBD

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T A. Nash AV 880-2017
Status	Terminated
Ass'y Dwg. No.	DXP 95985
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	120 mm
Location	Base
Use	HE, HEP
MIL-STD's	
Max Values	420
Rotat. (rps)	30,000
Setback (g)	3000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-28T13:37Z
Check the source to verify that this is the current version before use.

T370E1, FUZE, PIBD

ARMING DATA

Method	Spin
Delay	25 - 100 ft
Rotation (rps)	
Non-arm 25	Arm 34
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	1.5-12NS-1 (LH)

FUNCTIONING DATA

Action	PI, BD, SQ, delay, select, graze
Type	Electric
Delay	0.05
Time Type	
Time Setting (sec)	
Target	Hard-soft surfaces
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T74
Booster	Tetryl

REMARKS

The 90 mm T142E3 HEP shell was used as a test vehicle for development of the fuze. The crush up distance required to produce optimum HEP action determines fuze length.

SERIES: A CHAPTER: 1
DESIGNATION: T370E1
PI BD Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 384 Mod 0 AD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-377 and 1-378 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

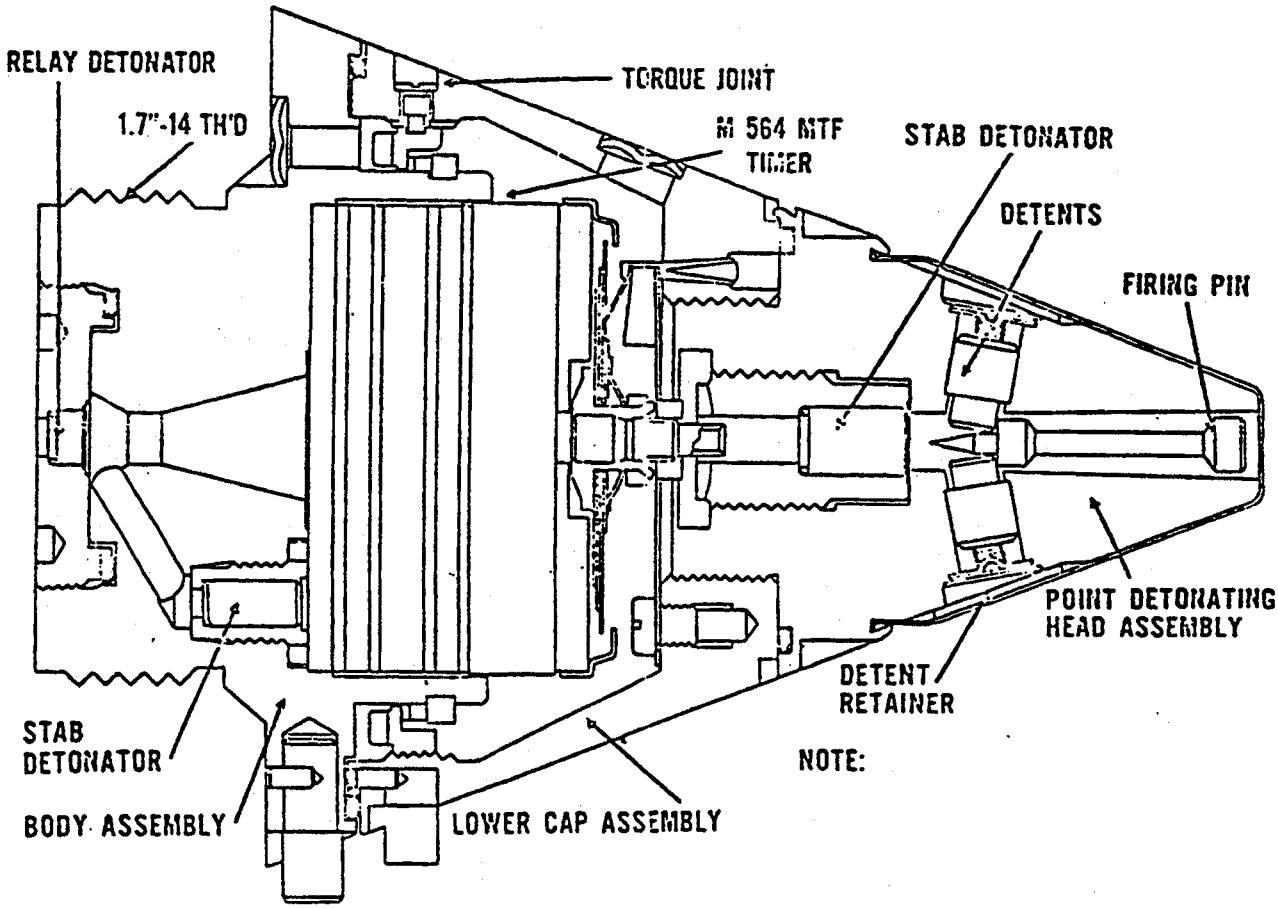

- OVERALL SIZE -	- INTRUSION -	WT: 1.25 lb (567 g)
LG: 4.5 in (114.3 mm)	DP:	THD: 1.7-14
XSECT: 3.0 in (76.2 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G41
- CONTACT: Pomeroy, S
- PHONE: DSN 290-1995
- STATUS: Terminated
- USER: Navy
- ASSY DWG: 2 512 330
- PARTS LIST: DL 2512330
- SPEC: WS 13927
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 5 in/38 gun

- AMMUNITION:
  - Projectile FCL (VT)
  - HE and Illumination

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 208 rps
- SETBACK: 12,800 g
- VELOCITY: 2600 ft/s (792 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 1-379 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback

SECOND SAFETY:
Spin: 33 rps, no arm;
100 rps, all arm

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:
37.5 to 52.5 turns to arm

EXPLOSIVE COMPONENTS

S&A DEVICE: In Aux. Det. Fuze

PRIMER:

DETONATOR: WOX 87A, Mk 44-1,
WOX 80-A

LEAD:

BOOSTER: Black Powder for Illum.

OTHER:

FUNCTIONING DATA

MODES: Time, Settable
TYPE: Mechanical
CHARACTERISTICS:
Settable from 5 to 95 s

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 396 Mod 0 AD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-381 and 1-382 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

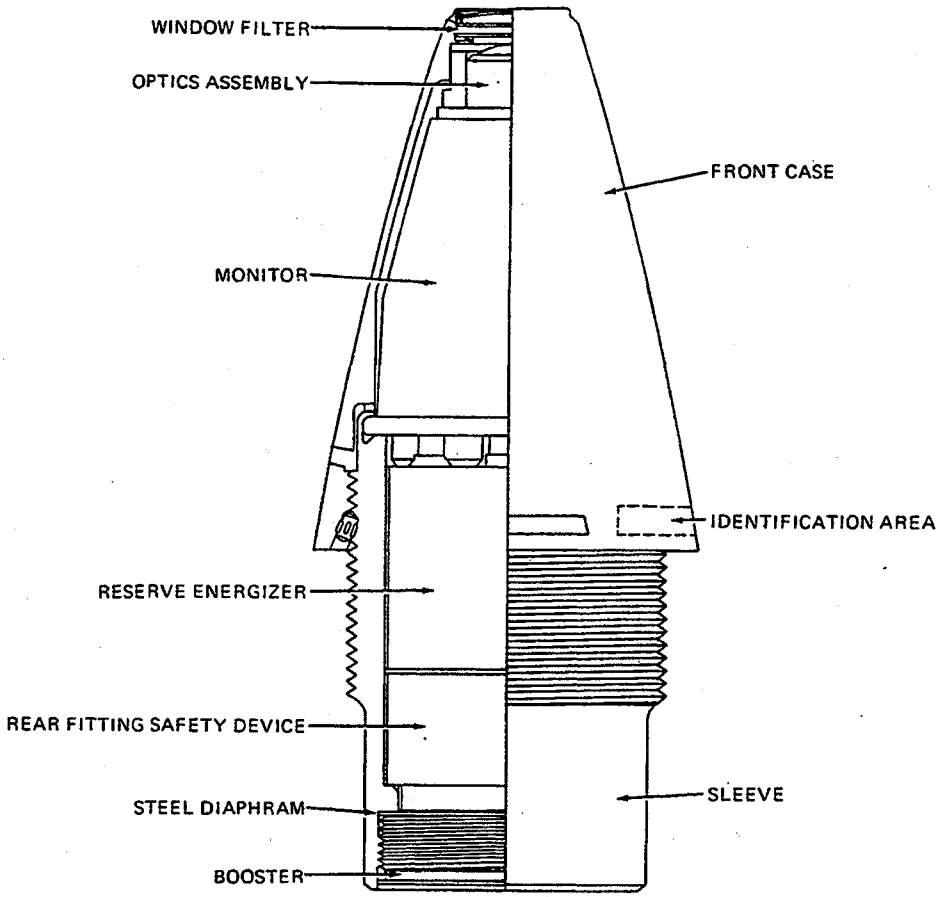

- OVERALL SIZE -	- INTRUSION -	
LG: 5.7 in (144.8 mm)	DP: 2.2 in (55.9 mm)	WT: 2.1 lb (953 g)
XSECT: 2.4 in (61.0 mm)	DIA:	THD: 2-12UN-2A
		THD DP:

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G43
CONTACT: Paige, L
PHONE: DSN 290-2227
STATUS: Terminated
USER: Navy
ASSY DWG: 2 512 165
PARTS LIST: DL 2512165
SPEC: WS 14374
PUB:

NATIONAL STOCK NO:
None
DODIC:
PRIOR MODEL NO: EX-400
SIMILAR TO:

REPLACES:
REPLACED BY: Mk 404

GENERAL
WEAPON: 5 in/54 Gun

AMMUNITION:
HE

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: 254 rps
SETBACK: 14,500 g
VELOCITY: 2650 ft/s (808 m/s)

CREEP:
FLIGHT TIME:
SAFETY STD:
SETTERS:

Supersedes page 1-383 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback

SECOND SAFETY:
Spin: 40 rps, no arm;
254 rps, all arm

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:
780 to 1330 ft

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 42-1

PRIMER:

DETONATOR: Mk 71 Elec

LEAD: Tetryl

BOOSTER: 11 g CH-6

OTHER: Mk 64 Relay

FUNCTIONING DATA
MODES: Proximity, PD
TYPE: Passive Infrared
CHARACTERISTICS:

TARGET: Air Targets
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Mk 39-0 Reserve Energizer

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

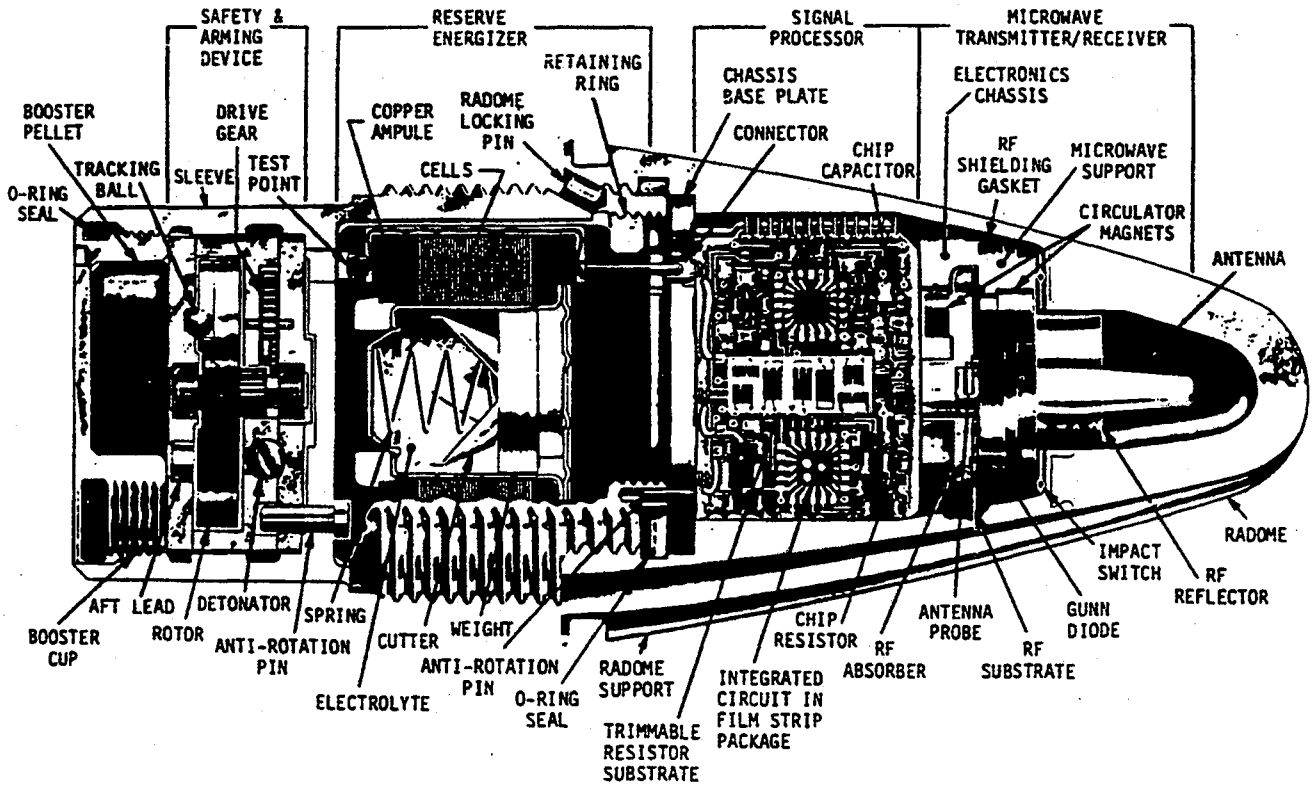

- OVERALL SIZE -	- INTRUSION -	WT: 2.0 lb (907 g)
LG: 5.7 in (144.8 mm)	DP: 2.21 in (56.1 mm)	THD: 2-12UNS-1A
XSECT: 2.42 in (61.5 mm)	DIA:	THD DP:

IDENTIFICATION

AGENCY: NSWC, White Oak, Code G402
CONTACT: Bagnall, J
PHONE: DSN 290-2791
STATUS: Terminated
USER: Navy
ASSY DWG: 2 500 153
PARTS LIST: DL 2500153
SPEC: WS 14157
PUB:

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY:

GENERAL

WEAPON: 76mm, 3 in/50, 5 in/54 guns

AMMUNITION:
HE

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: 408 rps
SETBACK: 20,900 g
VELOCITY: 3034 ft/s (925 m/s)

CREEP:
FLIGHT TIME:
SAFETY STD:
SETTERS:

Supersedes page 1-385 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback

SECOND SAFETY:
Spin: 130 rps, all arm

OTHER SAFETY:
S&A cannot be installed armed

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: DWG 3226320

PRIMER:

DETONATOR: Mk 70-0 Electric

LEAD: PBXN5 (DWG 3226025)

BOOSTER: CH-6

OTHER:

FUNCTIONING DATA

MODES: Proximity, PD
TYPE: Electronic, RF
CHARACTERISTICS:
Automatically adjusts burst position for engagement velocity

TARGET: Air, Surface Targets
SENSITIVITY:
Classified

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

EX-41 Reserve Energizer, 12 W, copper ampule

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 2.1 lb (953 g)
LG:	DP: ABCA	THD: 2-12 NS
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Canceled
- USER: Navy
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 5

- AMMUNITION:
  - Cargo and HE

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback

SECOND SAFETY:
Spin

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 42

PRIMER:

DETONATOR: Mk 71 Mod 0 (elec)
Mk 64 Mod 0 (flash)

LEAD: 100 mg PBXN-5; 166 mg PBXN-5

BOOSTER: 17 g CH-6

OTHER:

FUNCTIONING DATA
MODES: Precision Time, Settable
TYPE: Electronic
CHARACTERISTICS:
Settable from 3 to 200 s via
Remote Inductive Link

TARGET: Surface and Illum.
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Modified Mk 38 RE or Mk 40 Mod 1

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G402
CONTACT: Bagnall, J
PHONE: DSN 290-2791
STATUS: Terminated
USER: Navy
ASSY DWG:
PARTS LIST:
SPEC:
PUB:

NATIONAL STOCK NO:
None
DODIC: None
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY:

GENERAL
WEAPON: Mortar

AMMUNITION:

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION:
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: Meets MIL-STD-1316
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

FUNCTIONING DATA
MODES:
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M500A1 MT Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-387 and 1-388 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M501A1 MT Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-389 and 1-390 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

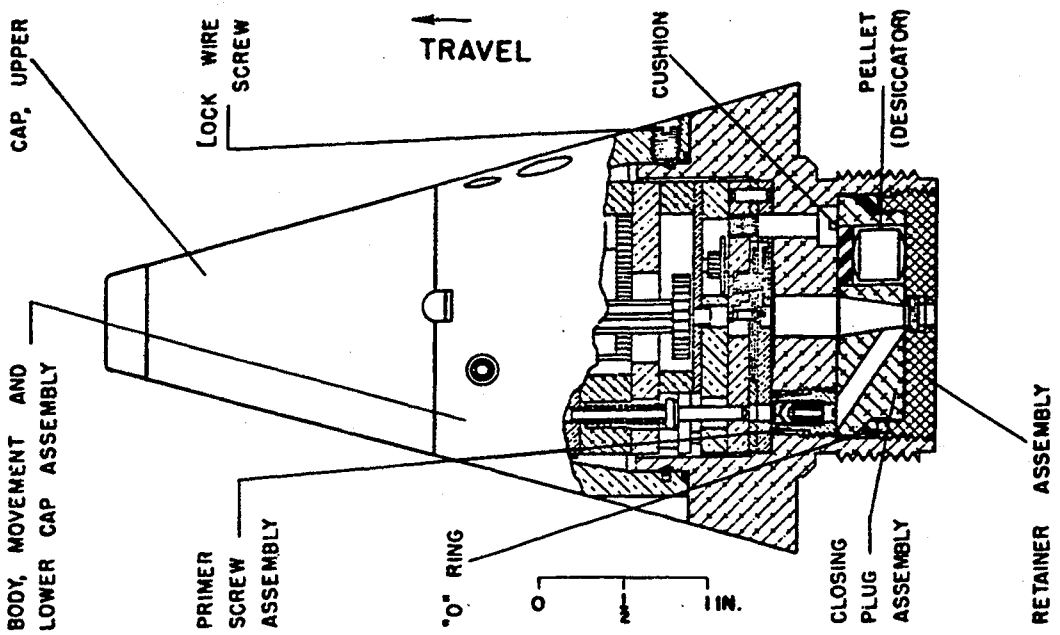

- OVERALL SIZE -	- INTRUSION -	WT: 2.14 lb (971 g)
LG: 5.95 in (151 mm)	DP: 2.21 in (56 mm)	THD: 2-12NS-1
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-7-146
- PARTS LIST: FF4193 (M502)
- SPEC:
- PUB:

NATIONAL STOCK NO:

- DODIC: N277
- PRIOR MODEL NO: T37
- SIMILAR TO: M43A4, M518

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 76- and 90-mm guns

- AMMUNITION:
  - GP

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 475 rps
- SETBACK: 30,000 g
- VELOCITY: 2,700 ft/s (823 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: M20 rammer, M13, M13A1

Supersedes page 1-391 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 33 rps, no arm
250 rps, all arm

SECOND SAFETY:
Setback: 1,400 g, no arm
7,500 g, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: M29A1

DETONATOR: M23

LEAD:

BOOSTER: M21A4

OTHER: M7 Relay

FUNCTIONING DATA

MODES: PD, time, selectable
TYPE: Mechanical
CHARACTERISTICS:
Mechanical, Junghans escapement
0.8 to 30 seconds

TARGET: Aircraft
SENSITIVITY:
0.38 in (9.7 mm) chipboart at 70 deg obliquity, 2,700 fps (823 mps)
Sensitive to firing in heavy rain.
FUNCTION TEMP:

MODE ON DELIVERY:
Safe

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0107
US HCSDS:
UN CL/DIV SCG: 1.2 B
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Centrifugal force causes half-blocks holding the firing pin in the unarmed position to move outward. The firing pin is left in a floating position with unobstructed passage to the detonator. Action of the detonator is augmented by the lead charge and is transmitted through the uninterrupted flash tube to the relay in the closing plug and thence to the booster which explodes and sets off the cartridge charge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M503A2 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-393 and 1-394 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 3.84 lb (1742 g) **
LG: 12.5 in (318 mm)	DP: 4.8 in (122 mm)	THD: 2.0-12NS-2
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 779 523
- PARTS LIST: LD 267 044
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: T75E6, E7, T172 *
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 120-mm anti-aircraft gun

- AMMUNITION:
  - HE, M73

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 265 rps
- SETBACK: 10,600 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 1-395 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:
780-1300 ft (238-396 m)

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 44 ADF

PRIMER: Mk 121 Mod 0

DETONATOR: Mk 54 Mod 0

LEAD:

BOOSTER:

OTHER: Mk 12 RFSD

FUNCTIONING DATA
MODES: Prox, SQ, SD
TYPE: Electric
CHARACTERISTICS:

TARGET: Aircraft
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Long-contour, deep intrusion proximity fuzes. Bore safety provided by an arming switch which delays arming. The A3 mod was not produced. Four versions of A1 and A2 differed in doppler frequency.
* M504 was T75E6; A1 and A2 were T75E7; T172 was improved T75.
** A1 weight indicated. A2 weight: 3.79 lb (1719 g); A3 weight: 9.95-0.1 lb (1338 g).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

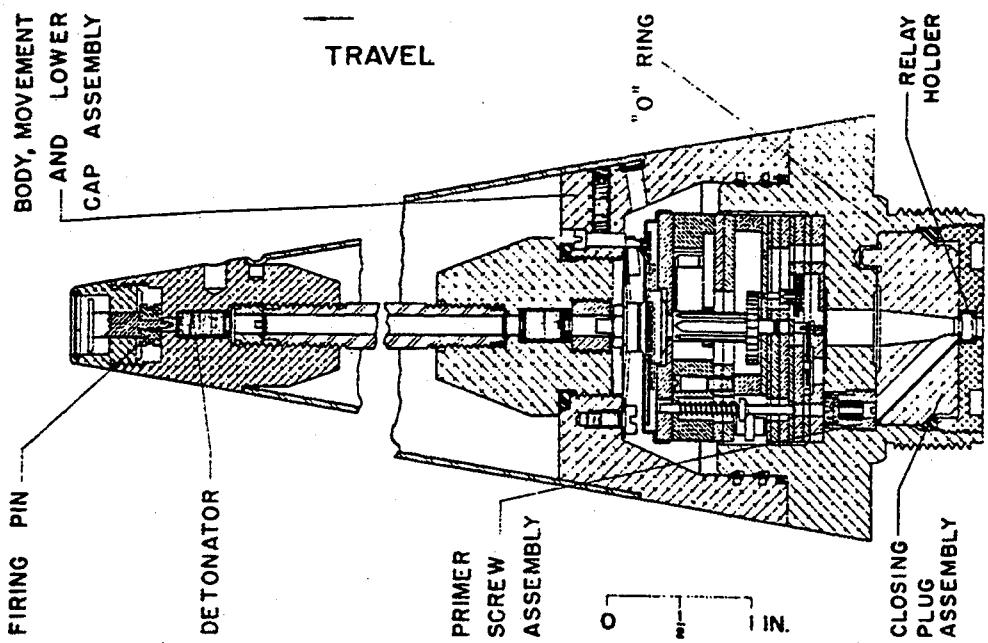

Booster M21A4 not shown

- OVERALL SIZE -	- INTRUSION -	
LG: 9.52 in (242 mm)	DP: 2.21 in (56 mm)	WT: 2.61 lb (1184 g)
XSECT:	DIA:	THD: 2-12NS-1
		THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-7-237, -238
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: T176E3
- SIMILAR TO:

- REPLACES: M61A2 w/M21A4 Booster
- REPLACED BY:

GENERAL
- WEAPON: 120-mm anti-aricraft gun

- AMMUNITION:
  - HE, M73

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 400 rps
- SETBACK: 25,000 g
- VELOCITY: 3,100 fps (945 mps)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Deosen't meet MIL-STD-1316
SETTERS:

Supersedes page 1-397 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 33 rps, none arm;
200 rps, all arm

SECOND SAFETY:
Setback: 1,400 g, none arm;
7,500 g, all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
4 ft (1.2 m)

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: M29A1 percussion (time mode)

DETONATOR: M23 (PD mode)

LEAD:

BOOSTER: M124

OTHER: M7 Relay

FUNCTIONING DATA

MODES: Time, PD, SQ select
TYPE: Mechanical
CHARACTERISTICS:
0.000025 s delay

TARGET: Aircraft
SENSITIVITY:
0.032 in (1 mm) Dural at 70 deg obliquity, 3,100 fps (945 mps)

FUNCTION TEMP:

MODE ON DELIVERY:
Safe

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Rotation of the lower cap turns the timing disk. On firing, setback causes a hammer spring to strike the upraised lug on the time disk, flattening the lug and releasing the disk from the setting pin. The setback pin moves toward the base of the fuze, leaving the firing arm free to turn when the notch in the timing disk comes opposite the upright on the firing arm. Centrifugal force moves the safety lever outward releasing the escapement. Centrifugal force and backlash actuate the weighted gear segments, which, in mesh with the main drive pinion, drive the movement. Rate of movement is governed by the escapement. When the notch in the timing disk reaches the upright of the firing arm, the firing arm turns, permitting the firing pin safety plate to swing out from under the firing pin flange. The firing pin then strikes the primer under action of its spring, initiating the firing train. The PD element is armed when half-blocks holding a separate firing pin move outward under centrifugal force. Impact drives the firing pin into the detonator which flashed down the unobstructed flash tube initiating the M7 relay and M21A4 booster.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

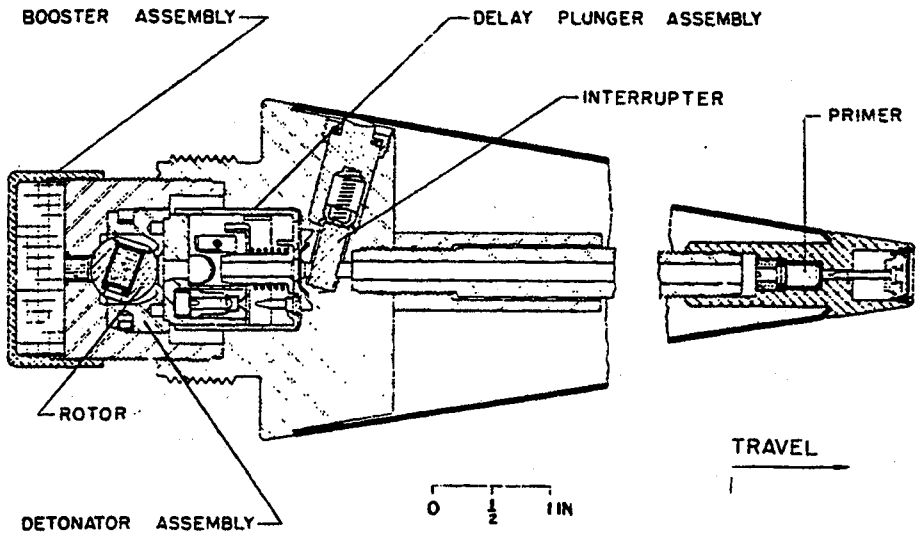

- OVERALL SIZE -	- INTRUSION -	WT: 2.85 lb (1293 g)
LG: 9.59 in (244 mm)	DP: 2.21 in (56 mm)	THD: 2-12NS-1A
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-2-345
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: T63E5
- SIMILAR TO: M48A3, M51A5

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 120-mm anti-aricraft gun

- AMMUNITION:
  - HE, M73

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 260 rps
- SETBACK: 15,000 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

Supersedes page 1-399 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: 25 rps, none arm
45 rps, all arm

SECOND SAFETY:

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
40-100 ft (12.2-30.5 m)

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: M18

LEAD: None

BOOSTER: M124

OTHER: M1 with M2 delay element

FUNCTIONING DATA
MODES: Select graze, PD, delay
TYPE: Mechanical
CHARACTERISTICS:
0.05 s delay

TARGET: Ground
SENSITIVITY:
1 in (25.4 mm) wood at 50 degrees obliquity

FUNCTION TEMP:

MODE ON DELIVERY:
Safe

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Fuze safety is obtained by restraining a rotor in the booster with a spin lever detented by a setback pin, restraining the M1 Delay Plunger with two spin detents and blocking the flash tube with a centrifugal interrupter. The fuze is set SQ or Delay by rotating the interrupter. On firing, acceleration moves the setback pin in the booster rearward releasing the rotor spin lock. Centrifugal force (CF) rotates this lock releasing the unbalanced rotor which rotates to the armed position. CF also moves two radial detents in the M1 Plunger outward and locks them with a spin latch. Finally, CF moves the interrupter outward, if the fuze is set SQ, to open the flash tube. On direct impact, the firing pin crushes the support cup functioning the M18 Det which initiates the M19 Det in the booster and the lead. If the fuze is set delay, the SQ tube is blocked, and the M1 Plunger moves forward striking the fixed firing pin and functioning the M2 Delay which initiates the M19A2 Det.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M508A1 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-401 and 1-402 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

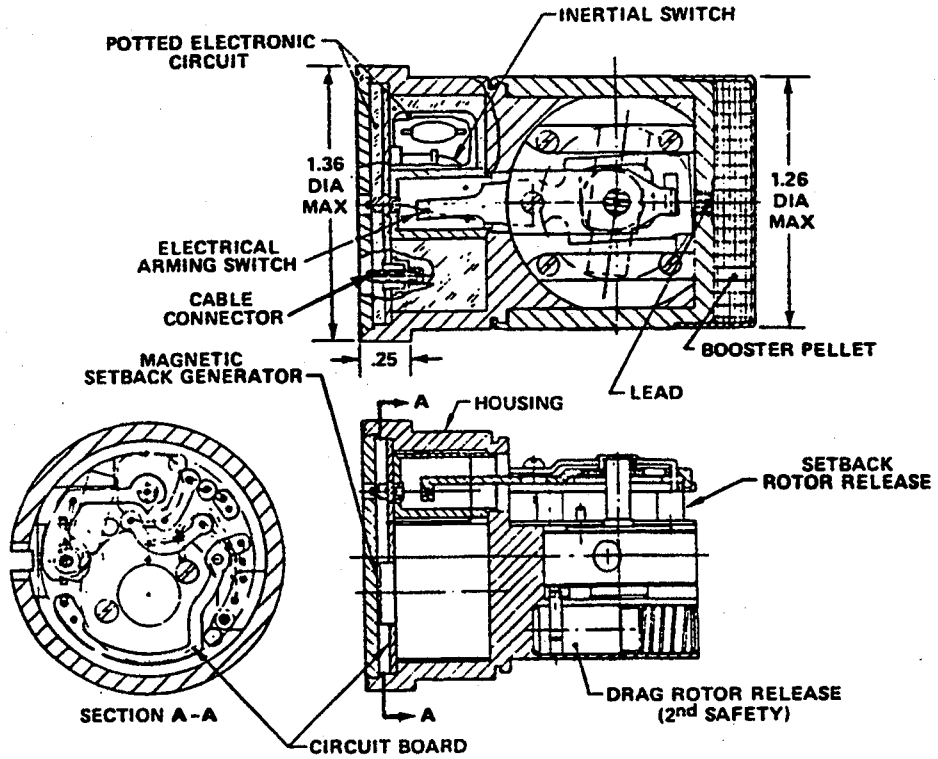

- OVERALL SIZE -	- INTRUSION -	WT: 0.4 lb (180 g) approx
LG: 1.96 in (49.8 mm)	DP: 1.96 in (49.8 mm)	THD: None
XSECT: 1.35 in (34.3 mm)	DIA: 1.26 in (32.0 mm)	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-CCH-V
- CONTACT: Mandala, C
- PHONE: DSN 880-6717
- STATUS: Terminated
- USER: Army, Marines
- ASSY DWG: Not available
- PARTS LIST:
- SPEC: Not available
- PUB: TM 43-0001-28

- NATIONAL STOCK NO:
  Not assigned
- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO:

- REPLACES: M509A1, M509A2
- REPLACED BY:

GENERAL
- WEAPON: 105mm Tank Guns, M68

- AMMUNITION:
  105mm HEAT-MP-T, M456 Series

LOCATION: Front and Base
BALLISTIC LEVELS:
- ROTATION: Negligible
- SETBACK: 60,000 g
- VELOCITY: 3850 ft/s (1173 m/s)

- CREEP: 32 g
- FLIGHT TIME: NA

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
setback 2500 g no arm,
4300 g all arm

SECOND SAFETY:
Creep est. 4 g no arm,
8 g all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No
Meets MIL-STD-1316B
ARMING TIME OR DISTANCE:
5 to 21 ms delay

EXPLOSIVE COMPONENTS

S&A DEVICE: Sequential Leaf Setback & Creep Mechanism
PRIMER: None

DETONATOR:

LEAD: Unknown mg PBXN-5

BOOSTER: Unknown g comp A-5

OTHER: NA

FUNCTIONING DATA
MODES: PIBD, graze
TYPE: Electric, Mechanical
CHARACTERISTICS:
SQ, graze

TARGET: Ground-Tank
SENSITIVITY:
NA

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Magnetic Setback Power Supply

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Fuze safety is ensured by a three-leaf setback device. Upon firing, the three leaves of the sequential leaf setback device rotate in series, releasing the rotor and the third leaf is locked. The rotor spring rotates the rotor 90 degrees to the armed position, removing the detonator electric short and closing the firing circuit to the piezo-electric nose crystal. On impact, a charge is generated in the crystal and functions the M69 Det. The M509A1 is the same except that it has a leaf instead of a button contact on the rotor, and M48 Det and tetryl lead and booster. The M509A2 is used with a setback piezo-electric power supply in the spike of the Full Frontal Area Impact Switch (FFAIS) in the 105 mm M456A2 instead of the nose impact crystal. The M530A1 is similar to the M509A2 except that it has 270 degrees of rotation of the rotor, a runaway escapement delaying the rotor, and a mechanical graze element. The M509A1E1, XM754, XM763, and XM764 are similar to the M509A2 except a drag sensor is added and the rotor rotates 270 degrees.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M510, FUZE, MT, PD

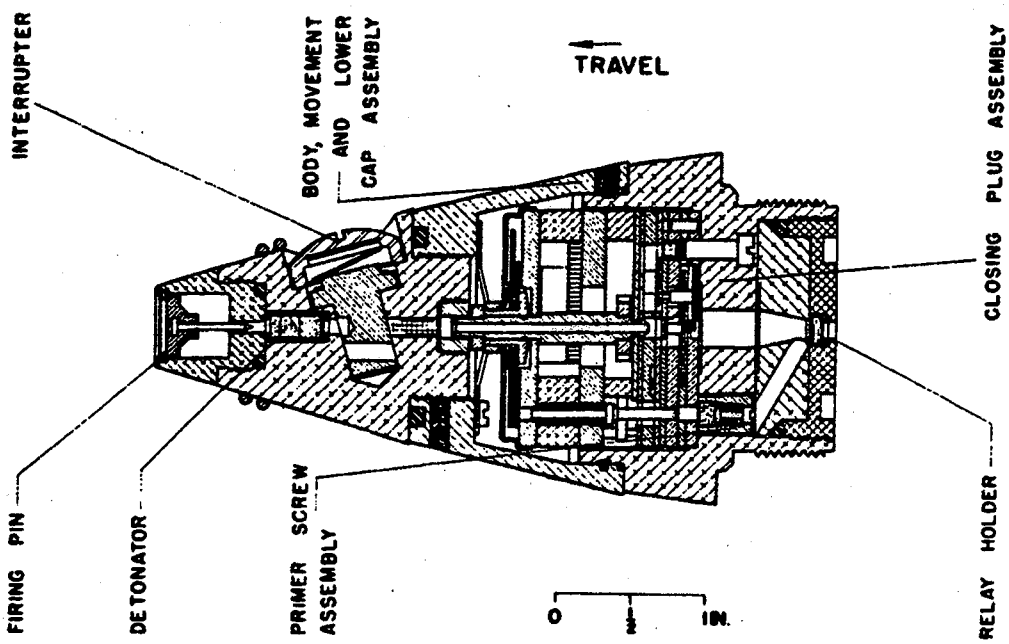

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T S. Honickman AV 880-3174
Status	Obsolete
Ass'y Dwg. No.	FF 4307 FA
Parts List	
Specification	
Previous Number	T220

GENERAL

Carriers	Projectile
Cal. — Size	280 mm - spotting
Location	Nose
Use	GP, spotting
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	
Setback (g)	6000
Velocity (fps)	2500

KEY FEATURES

SERIES: A CHAPTER: 1
DESIGNATION: M510
MT SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M510, FUZE, MT, PD

ARMING DATA

Method	Spin, Setback
Delay	10 - 100 sec
Rotation (rps)	
Non-arm 24	Arm 33
Setback (g)	
Non-arm	Arm 900
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	2.27*
Total Length (in.)	6.12*
Body Diam. (in.)	
Intrusion	2.21 in.*
Thread Size	2-12NS-1

*includes booster

FUNCTIONING DATA

Action	Time, PD
Type	Mechanical
Delay	0.000025 sec.
Time Type	Mechanical, two center tuned
Time Setting (sec)	10 - 100 x 0.1 sec
Target	
Sensitivity	
Material	Wood bursting screen
Thickness (in.)	1
Max Obliq. (°)	70
Velocity (fps)	2500
Carrier	280 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M29A1
Detonator	M22
Booster	T23
Relay	M7

REMARKS

Counterclockwise vernier for time setting.

SERIES: A CHAPTER: 1
DESIGNATION: M510
MT SQ Fuze

Source: https://assist.dla.mil Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M511, FUZE, MT

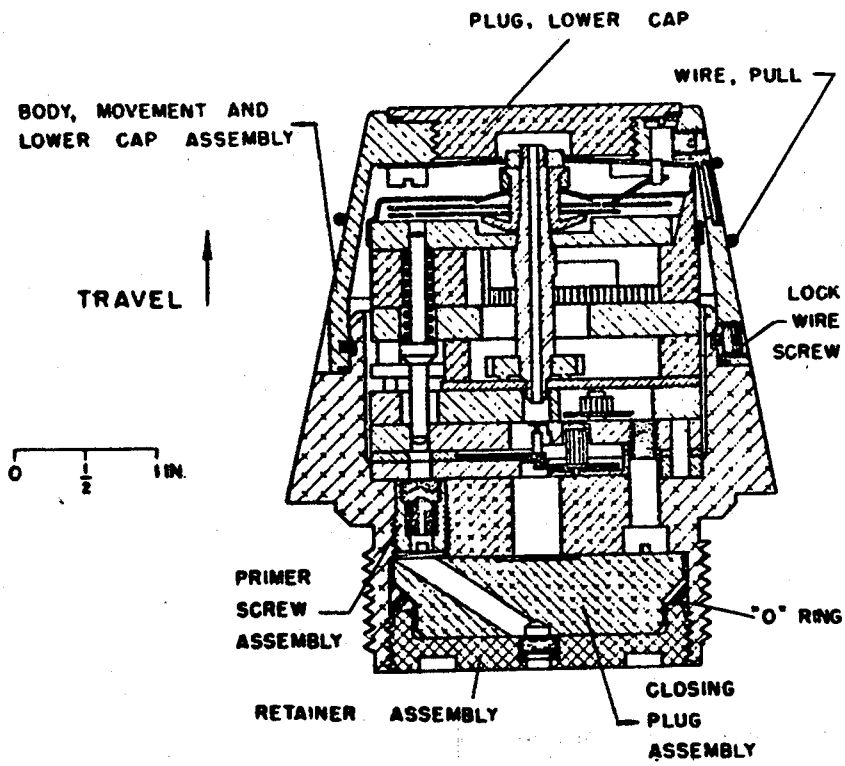

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T S. Honcikman AV 880-3174
Status	Obsolete
Ass'y Dwg. No.	FD 15651
Parts List	
Specification	RP-PD-61
Previous Number	T215

GENERAL

Carriers	Projectile
Cal. — Size	280 mm
Location	Internal
Use	GP, special
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	475
Setback (g)	30,000
Velocity (fps)	2500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-01-26T13:37Z
Check the source to verify that this is the current version before use.

M511, FUZE, MT

ARMING DATA

Method	Spin, setback
Delay	
Rotation (rps)	
Non-arm / Arm	10
Setback (g)	
Non-arm / Arm	900
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	3.53
Body Diam. (in.)	
Intrusion	1.63
Thread Size	2-12NS-1 1.7-14NS-1 (without safety adapter)

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mechanical, two center tuned
Time Setting (sec)	10 - 100 sec x 0.1
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M29A1
Detonator	
Booster	Safety adapter T40
Relay	M7

REMARKS

Counterclockwise vernier for time setting.

SERIES: A
CHAPTER: 1
DESIGNATION: M511
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

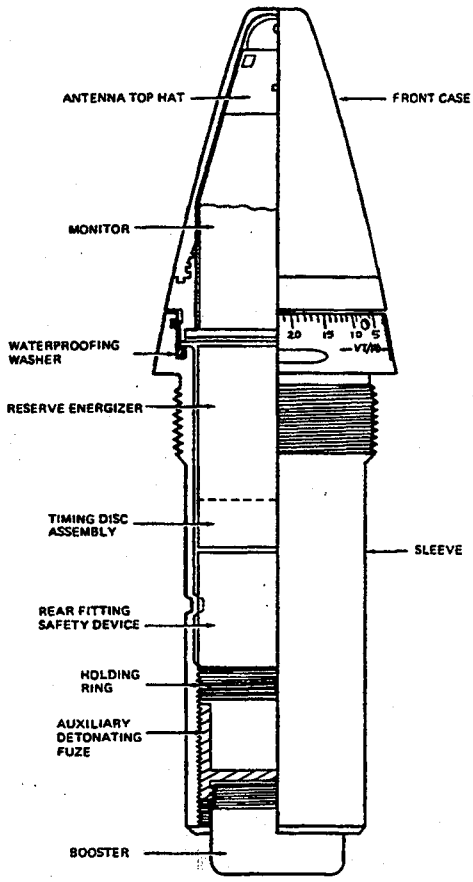

- OVERALL SIZE -	- INTRUSION -	WT: 2.35 lb (1066 g)
LG: 8.60 in (218.4 mm)	DP: 4.91 in (124.7 mm)	THD: 2-12UNS-1
XSECT: 2.40 in (61.0 mm)	DIA: 1.78 in (45.2 mm)	THD DP: 0.90 in (22.9 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 795 240
- PARTS LIST: LD 291 818
- SPEC: RTP 11 706 697
- PUB: TM 43-0001-28

- NATIONAL STOCK NO:
  1390-00-301-1093, -1094, -309-4965
- DODIC: N412
- PRIOR MODEL NO: T226, T226B1 (B1)
- SIMILAR TO: M514

- REPLACES: T226E3, M513
- REPLACED BY:

GENERAL
- WEAPON: 105 mm Howitzers (all models); 4.2-in Mortar M2 & M30
- AMMUNITION:

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 286 rps
- SETBACK: 16,300 g
- VELOCITY: 2700 ft/s (823 m/s)

- CREEP:
- FLIGHT TIME: 100 s

SAFETY STD: Waiver for MIL-STD-1316B
SETTERS: M28 (M14 & M27 w/cap)

Supersedes page 1-407 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 800 g no arm,
1300 g all arm

SECOND SAFETY:
Spin: 28 rps no arm,
32 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
1.5 m min Mechanical
1.9 s min Electrical

FUNCTIONING DATA

MODES: Prox imp backup or imp
TYPE: Electronic, Mechanical
CHARACTERISTICS:
Can be set between 5 & 100 s in 1.0 s incr. Res energizer on 5 s before set time & oscillator on 2.6 s before set time
TARGET: Ground - personnel
SENSITIVITY:
Height: 7 to 66 ft (2 to 20 m), 3 to 33 ft (1 to 10 m) w/desensitivity cap
FUNCTION TEMP:
-18 to +49 deg C
MODE ON DELIVERY:
Safe (Shipping line)

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 15-0 RFSD & Mk 52 Booster (Aux Det)
PRIMER: Mk 124-0 Elec in Mk 15

DETONATOR: Mk 37-0 Flash in Mk 52

LEAD: 150 mg Tetryl (80 & 70 mg Tetryl pellets in Mk 52

BOOSTER: 25 g Tetryl in Mk 52

OTHER: None

POWER SUPPLY:

Mk 16 Reserve Energizer

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0409
US HCSDS: Unknown
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: A
NET EXPL WT: 25.364 g
NET PROP WT: None
STORAGE TEMP: -51 to +71 deg C

REMARKS/DESCRIPTION:

Fuze safety is obtained by restraining two rotors each with two spin detents. On firing, setback removes a pin from one spin detent of the Mk 15 RFSD & breaks the glass ampoule containing the electrolyte. Centrifugal force (CF) opens two spin detents on the escapement of the timer in the Mk 15, distributes the electrolyte to the battery plates, and removes the four detents from the rotors of the Mk 52 Aux Det or Booster. CF rotates these rotors to the armed position and aided by kick-off springs, drives sector gears of the Mk 15 timer. At 2.75 s, the timer removes the short from the Mk 124 Primer and at 5 and 3 s before set time releases two pellets which CF moves into the switch ring in sequence completing the circuit and initiating radio transmission. When the doppler signal between the transmitted and reflected wave reach the proper amplitude, the firing circuit functions the Mk 124 Primer, and, in turn, the Mk 37 Det, leads and booster. Set fuze at 90 s for PD. Do not fire fuze at charge 7 in 105 mm Howitzer, except under combat emergency. The M513A2 is the same as the M514A1 except for oscillator required in small dia projectiles. M513A2 has wider temperature range than M513 and M513A1.

Supersedes page 1-408 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

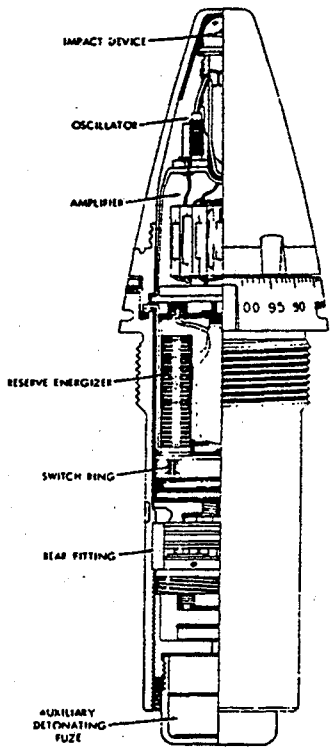

- OVERALL SIZE -	- INTRUSION -	
LG: 8.60 in (218.4 mm)	DP: 4.91 in (124.7 mm)	WT: 2.35 lb (1066 g)
XSECT: 2.40 in (61.0 mm)	DIA: 1.78 in (45.2 mm)	THD: 2-12UNS-1
		THD DP: 0.90 in (22.9 mm)

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G402
CONTACT: Bagnall, J
PHONE: DSN 290-2791
STATUS: Obsolete
USER: Army
ASSY DWG: 795 245
PARTS LIST:
SPEC: RTP 1 170 700
PUB: TM 9-1300-203

NATIONAL STOCK NO:
1390-00-309-4966
DODIC: N411
PRIOR MODEL NO: T227, T227B1
SIMILAR TO: M513

REPLACES:
REPLACED BY:

GENERAL
WEAPON: 120-mm & 155-mm & gun;
155-mm, 240-mm & 8-in How.

AMMUNITION:
HE

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: 264 rps
SETBACK: 10600 g
VELOCITY: 2700 ft/s (823 m/s)

CREEP:
FLIGHT TIME:
SAFETY STD: Waiver for MIL-STD-1316B
SETTERS: M28, wrench

Supersedes page 1-409 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 800 g no arm,
1300 yes all arm

SECOND SAFETY:
Spin: 27 rps no arm,
38 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
1.5 m min, mechanical;
1.9 s min, electrical

FUNCTIONING DATA
MODES: Proximity, PD backup
TYPE: Electronic, Mechanical
CHARACTERISTICS:
HOB

TARGET: Gnd-pers, light target
SENSITIVITY:
Height: 7 to 66 ft (2 to 20 m),
3 to 33 ft (1 to 10 m)
w/desensitivity cap
FUNCTION TEMP:
-18 to +49 deg C
MODE ON DELIVERY:
Safe (shipping line)

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 15-0 RFSD &
Mk 52 Booster (Aux Det)
PRIMER: Mk 124-0 Elec in Mk 15

DETONATOR: Mk 37-0 Flash in Mk 52

LEAD: 150 mg Tetryl (80 & 70 mg
Tetryl pellets in Mk 52

BOOSTER: 25 g Tetryl in Mk 52

OTHER: None

POWER SUPPLY:

Mk 16 Reserve Energizer

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0409
US HCSDS:
UN CL/DIV SCG: 1.1 B
US DOT SHIP CL: A
NET EXPL WT: 25.364 g
NET PROP WT: None
STORAGE TEMP: -29 to +54 deg C

REMARKS/DESCRIPTION:
Fuze safety is obtained by restraining two rotors each with two spin detents. On firing, setback removes a pin from one spin detent of the Mk 15 RFSD & breaks the glass ampoule containing the electrolyte. Centrifugal force (CF) opens two spin detents on the escapement of the timer in the Mk 15, distributes the electrolyte to the battery plates, and removes the four detents from the rotors of the Mk 52 Aux Det or Booster. CF rotates these rotors to the armed position and aided by kick-off springs, drives sector gears of the Mk 15 timer. At 2.75 s, the timer removes the short from the Mk 124 Primer and at 5 and 3 s before set time releases two pellets which CF moves into the switch ring in sequence completing the circuit and initiating radio transmission. When the doppler signal between the transmitted and reflected wave reach the proper amplitude, the firing circuit functions the Mk 124 Primer, and, in turn, the Mk 37 Det, leads and booster in the Mk 52. The M514 does not have a PD setting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

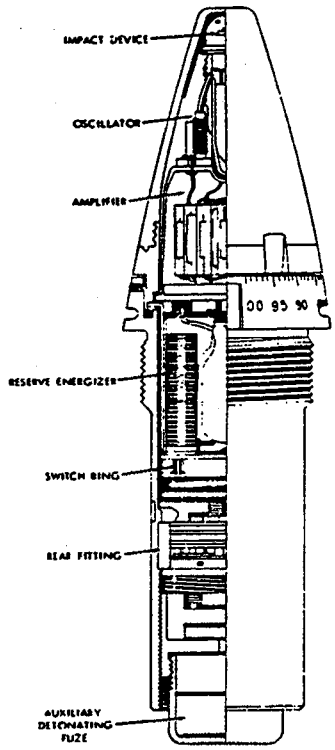

- OVERALL SIZE -	- INTRUSION -	
LG: 8.64 in (219 mm)	DP: 4.907 in (125 mm)	WT: 2.19 lb (933 g)
XSECT: 2.40 in (61.0 mm)	DIA: 1.78 in (45.2 mm)	THD: 2-12UNS-1A
		THD DP: 0.90 in (22.9 mm)

IDENTIFICATION
AGENCY: NSWC, White Oak, Code G402
CONTACT: Bagnall, J
PHONE: DSN 290-2791
STATUS: Obsolete
USER: Army
ASSY DWG: 11 707 153
PARTS LIST: PL 11 707 153
SPEC: MIL-F-60959
PUB: TM 9-1300-203, TM 43-0001-28

NATIONAL STOCK NO:
1390-00-935-9246
DODIC: N462
PRIOR MODEL NO: M514A1E1
SIMILAR TO: M728

REPLACES: M514, T227
REPLACED BY:

GENERAL
WEAPON: 105-mm, 155-mm, 175-mm, 8-in guns; 4.2 in mortar

AMMUNITION:
HE

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: 275 rps
SETBACK: 16000 g
VELOCITY: 2700 ft/s (823 m/s)

CREEP:
FLIGHT TIME:
SAFETY STD: Waiver for MIL-STD-1316B
SETTERS: M28, wrench

Supersedes page 1-411 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 800 g no arm,
1300 yes all arm

SECOND SAFETY:
Spin: 27 rps no arm,
38 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
1.5 m min, mechanical;
1.9 s min, electrical

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 15-0 RFSD &
Mk 52 Booster (Aux Det)
PRIMER: Mk 124-0 Elec in Mk 15

DETONATOR: Dwg 11 713 610

LEAD: 150 mg Tetryl (80 & 70 mg
Tetryl pellets in Mk 52

BOOSTER: 25 g Tetryl in Mk 52

OTHER: None

FUNCTIONING DATA
MODES: Proximity, PD backup
TYPE: Electronic, Mechanical
CHARACTERISTICS:
5 to 100 s

TARGET: Gnd-pers, light target
SENSITIVITY:
Height: 7 to 66 ft (2 to 20 m),
3 to 33 ft (1 to 10 m)
w/desensitivity cap
FUNCTION TEMP:
-18 to +49 deg C
MODE ON DELIVERY:
Safe (shipping line)

POWER SUPPLY:

Mk 16 Reserve Energizer

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0409
US HCSDS:
UN CL/DIV SCG: 1.1 B
US DOT SHIP CL: A
NET EXPL WT: 25.364 g
NET PROP WT: None
STORAGE TEMP: -29 to +54 deg C

REMARKS/DESCRIPTION:
Fuze safety is obtained by restraining two rotors each with two spin detents. On firing, setback removes a pin from one spin detent of the Mk 15 RFSD & breaks the glass ampoule containing the electrolyte. Centrifugal force (CF) opens two spin detents on the escapement of the timer in the Mk 15, distributes the electrolyte to the battery plates, and removes the four detents from the rotors of the Mk 52 Aux Det or Booster. CF rotates these rotors to the armed position and aided by kick-off springs, drives sector gears of the Mk 15 timer. At 2.75 s, the timer removes the short from the Mk 124 Primer and at 5 and 3 s before set time releases two pellets which CF moves into the switch ring in sequence completing the circuit and initiating radio transmission. When the doppler signal between the transmitted and reflected wave reach the proper amplitude, the firing circuit functions the Mk 124 Primer, and, in turn, the Mk 37 Det, leads and booster in the Mk 52. Fuze electronics are solid state. They have been remarked M728.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 2.35 lb
LG:	DP: 4.85 in (123 mm)	THD: 2.0-12NS-2
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 795 368
- PARTS LIST: LD 367 309
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: T225
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 90-mm gun

- AMMUNITION:
  - HE

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 286 rps
- SETBACK: 16,300 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS: M13, M13A1

Supersedes page 1-413 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin

SECOND SAFETY:
Setback

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
500 ft for PD element
0.3 s for proximity element

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 16 RFSD

PRIMER: Mk 124 Mod 0

DETONATOR: None

LEAD: None

BOOSTER: None

OTHER: None

POWER SUPPLY:

FUNCTIONING DATA

MODES: Proximity, PD, SD
TYPE: Electric
CHARACTERISTICS:
3-27 s delay

TARGET: Aircraft, ground
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:
Safe

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Proximity funtion time is set with the time ring. In addition to the time graduations, settings of SD-14, SD-17 and MAX appear on the ring. For SD-14, proximity arming occurs at 0.3 s and SD at 14 s. For SD-17, proximity arming occurs at 0.3 s and SD at 17 s. When set to MAX, the fuze is activated at 26 s, proximity arming occurs at 27 s, and SD occurs at 45 s. On firing, the impact element arms at about 500 ft. The fuze will function if impact occurs between arming of the impact element and arming of the proximity element. At proximity settings of 3 s or greater, the proximity element arms 2 s before the set time and the fuze will detonate on target proximity. If no air target is encountered, SD will occur 2 s after set time. The fuze will detonate on impact if no proximity target is encountered and the SD element fails.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 2.5 lb (1134 g)
LG: 8.5 in (216 mm)	DP: 4.8 in (122 mm)	THD: 2.0-12NS-2
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 795 169
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: T73E10,12,13,14
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 75-mm gun

- AMMUNITION:
  - HE

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 445 rps
- SETBACK: 23,000 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 1-415 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
400-750 ft (PD element in M516A1);
0.8 s for proximity element

EXPLOSIVE COMPONENTS

S&A DEVICE: Mk 13 Mod 7 RFSD

PRIMER: Mk 121 Mod 0

DETONATOR: Mk 54 Mod 0

LEAD:

BOOSTER: Mk 44 ADF

OTHER: None

POWER SUPPLY:

FUNCTIONING DATA
MODES: Proximity, SD
TYPE: Electric
CHARACTERISTICS:
18 s delay at 18 degree elevation

TARGET: Aircraft
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
There is no time setting for this fuze. Bore safety is provided by an arming switch which delays arming for a preset time. The SD switch causes the armed fuze to detonate when the spin of the projectile drops to a preset level. The A1 (T73E10) has an impact element which arms in 400-750 ft (122-229 m).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

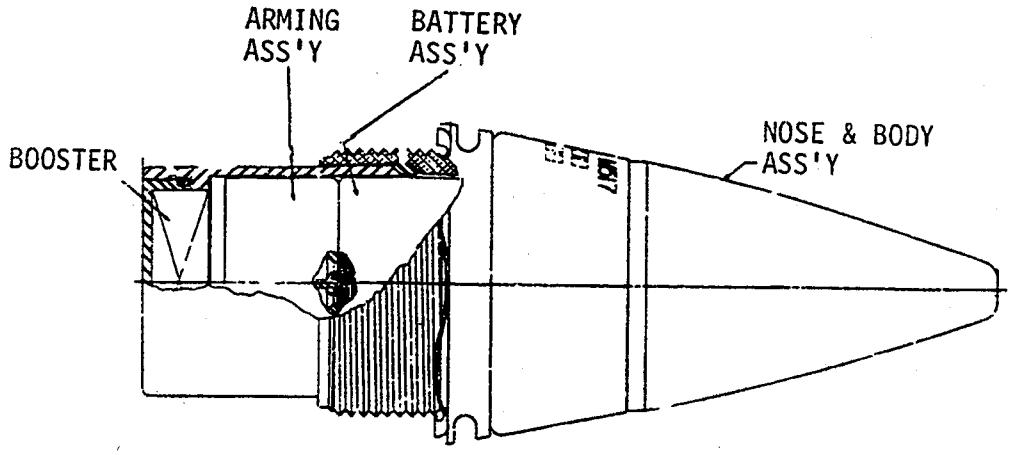

- OVERALL SIZE -	- INTRUSION -	WT: 1.28 lb (580 g)
LG: 6.19 in (157 mm)	DP: 2.21 in (56.1 mm)	THD: 2.00-12NS-1
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARL
- CONTACT:
- PHONE: DSN 290-
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 7 542 838
- PARTS LIST:
- SPEC: TL-PD-81
- PUB: TM 43-0001-28

- NATIONAL STOCK NO: 1390-00-324-1420
- DODIC: N417
- PRIOR MODEL NO: T178E3
- SIMILAR TO:

- REPLACES:
- REPLACED BY: M532

GENERAL
- WEAPON: 81-mm mortar

- AMMUNITION: HE, M362

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: None
- SETBACK: 8,000 g
- VELOCITY: 831 ft/s (253 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 1-417 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 385 g no arm;
385 to 670 g all arm

SECOND SAFETY:

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
1.5 s PD; 4 s proximity

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: None

DETONATOR: M36A1

LEAD:

BOOSTER: Tetryl

OTHER:

POWER SUPPLY:

FUNCTIONING DATA
MODES: Proximity, PD backup
TYPE: Electronic, mechanical
CHARACTERISTICS:

TARGET: Personnel, light equipment
SENSITIVITY:

FUNCTION TEMP:
-40 to +52 deg C
MODE ON DELIVERY:
Proximity

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0107
US HCSDS:
UN CL/DIV SCG: 1.2 B
US DOT SHIP CL: A
NET EXPL WT: 26.3764 g
NET PROP WT:
STORAGE TEMP: -51 to +71 deg C

REMARKS/DESCRIPTION:
On firing, setback force initiates both electrical and mechanical arming. Electrical arming occurs by a required degree of setback to activate power generation in the power supply. Mechanical arming occurs through the sequential setback to the rear of three setback leaves to release the rotor in the base. The rotor is then turned by centrifugal force to align the detonator. Minimum times for arming are 1.5 s for PD action and 4 s for proximity action. When the power supply has generated suffiecient energy, the tranceiver is activated. Reflection of any part of the wave pulse back to the fuze results in a ripple or beat interference with the transmitted wave to close an electrical circuit and initiate the explosive train to the projectile. In event the proximity mode does not function, the PD mode will detonate the projectile. Clearance of at least 100 feet over obstacles is required for maximum reliability. Heavy precipitation or temperature extremes may result in premature functioning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

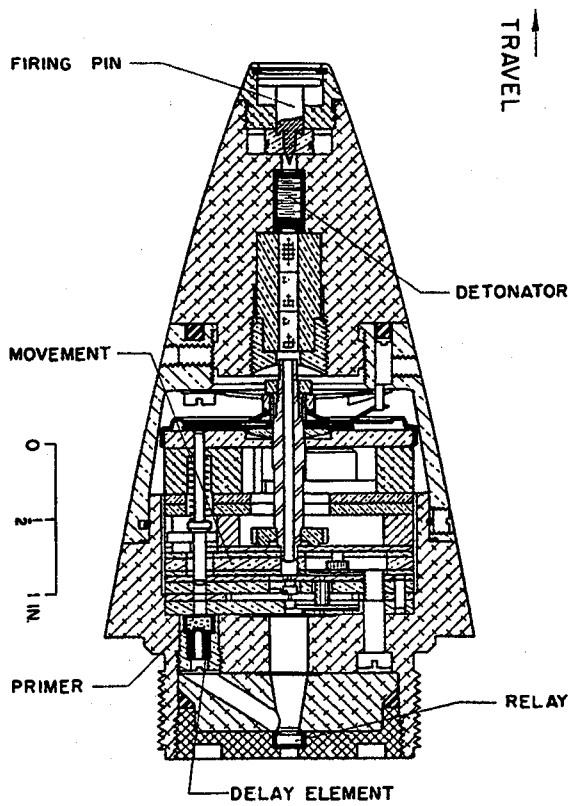

- OVERALL SIZE -	- INTRUSION -	WT: 2.06 lb (934 g)
LG: 5.95 in (151.1 mm)	DP: 2.21 in (56.1 mm)	THD: 2-12NS-1
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT: Chesky, E
- PHONE: DSN 880-2908
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 8 594 043 (Rev A for A1)
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:
  1390-00-344-2318
- DODIC: N279
- PRIOR MODEL NO: T286E1
- SIMILAR TO: M501A1

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 75-mm & 90-mm guns

- AMMUNITION:
  GP

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 475 rps
- SETBACK: 30,000 g
- VELOCITY: 2800 ft/s (854 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 1-419 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: 33 rps no arm;
250 rps all arm

SECOND SAFETY:
Setback: 1,400 g no arm
7,500 g all arm

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: M29A1

DETONATOR: M23

LEAD: Tetryl

BOOSTER: M125
(T23 in early models)

OTHER: M7 Relay

FUNCTIONING DATA
MODES: PD, SQ, time, select
TYPE: Mechanical
CHARACTERISTICS:
0.000025 s delay
Mech. Junghans Esc.
0.8-30 s

TARGET:
SENSITIVITY:
0.38 in (9.65 mm) chipboard
2800 ft/s (854 m/s); 75 mm

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Centrifugal weights

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0107
US HCSDS:
UN CL/DIV SCG: 1.2 B
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Fuze safety is obtained by restraining the time firing pin by means of a setback pin and a spin safety plate and placing a crush cup under the SQ firing pin and spin interrupter in the SQ flash tube. Time is set by rotating lower cap and setting pin which rotates the timing disc. Upon firing, setback of a hammer spring releases the timing disc and setback of a pin releases the firing shaft. Centrifugal force releases detents on the escapement lever and with the kick-off springs help rotate the gear segments which drive the main pinion. When timing disc has rotated to set time, the firing shaft rotates into a notch releasing the safety plate which releases the spring-loaded firing pin to function the M29A1 Primer. If impact occurs before the set time, the firing pin deforms the crush cup and functions the M22 Detonator which flashes down the central flash tube from which the interrupter was removed by centrifugal force. Early models had T23 Booster.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

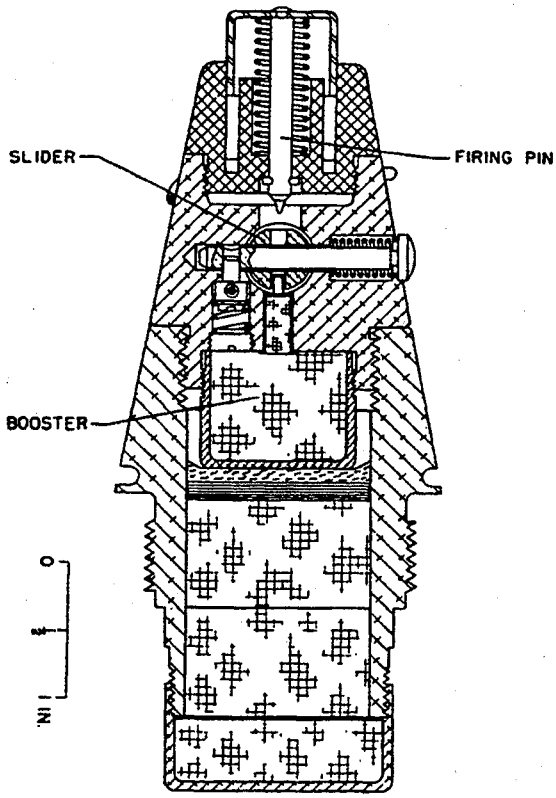

- OVERALL SIZE -	- INTRUSION -	WT: 1.25 lb (567 g)
LG: 5.88 in (149.9 mm)	DP: 2.21 in (56.1 mm)	THD: 2-12UNS-1A
XSECT: 2.403 in (61.0 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT: Zacharin, A
- PHONE: DSN 880-5652
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-2-393
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO: 1390-00-978-7764
- DODIC: N329
- PRIOR MODEL NO: T319
- SIMILAR TO: M52A2, XM719

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: 81 mm mortar, M29A1, and M252

- AMMUNITION: HE, M362

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION:
- SETBACK: 8000 g
- VELOCITY: 1000 ft/s (305 m/s)

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: Doesn't meet MIL-STD-1316

SETTERS: None

Supersedes page 1-421 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Safety wire in setback pin

SECOND SAFETY:
Setback: 600 g all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Yes

ARMING TIME OR DISTANCE:
0.6 to 1.52 m

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: M44

LEAD: Tetryl

BOOSTER: 16.8 g Tetryl

OTHER: 101.3 g Tetrly adapter booster (4 pellets)

FUNCTIONING DATA

MODES: PD, SQ
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Personnel
SENSITIVITY:

FUNCTION TEMP:
-40 to +52 deg C
MODE ON DELIVERY:
PD

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG: 1.1 D
US DOT SHIP CL: A
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Safety is maintained by a bore-riding pin which holds a slider and its detonator out of line. On firing, the setback pin is forced back against its spring and free of the bore-riding pin. The bore-riding pin is ejected by its spring after the fuze has passed the muzzle. This allows the slider spring to move the slider and align the detonator with the firing pin and lead. On impact, the striker drives the firing pin against its spring and into the detonator, initiating the explosive train. The M525A1 and M526A1 are similar except they have a three-second delay arming mechanism and the firing pin provides an additional interlock on the slider. The M52A2 is an M519 without an adapter-booster. All remaining M519 Fuzes are installed in the mortar rounds and reserved for combat only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M520A1 MT SQ Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-423 and 1-424 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M521 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-425 and 1-426 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M522, FUZE, MT

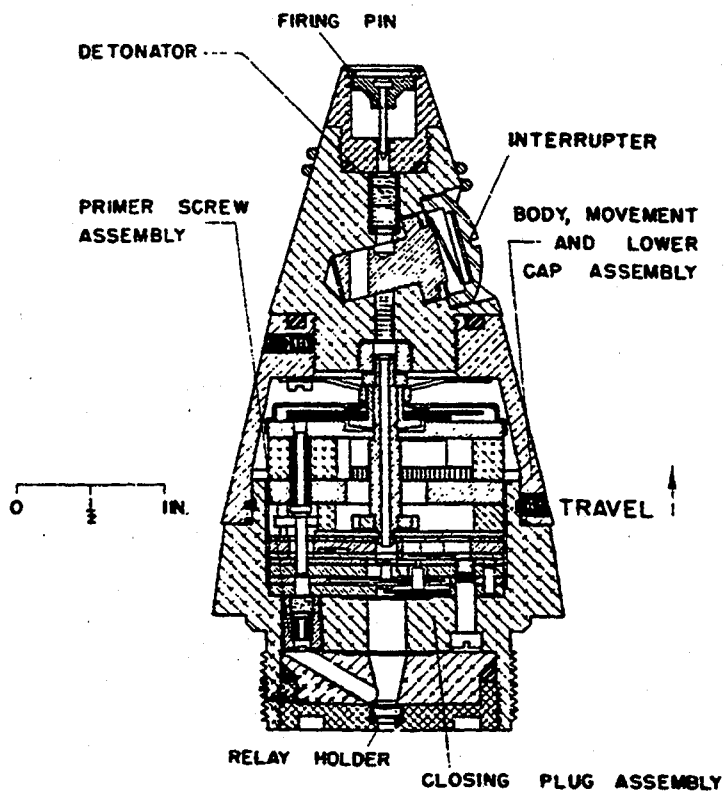

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T S. Honickman AV 880-3174
Status	Obsolete
Ass'y Dwg. No.	FF7053
Parts List	F8592981
Specification	
Previous Number	T309

GENERAL

Carriers	Projectile
Cal. — Size	280 mm
Location	Nose
Use	Special
MIL-STD's	331, Tests 101-104
Max Values	
Rotat. (rps)	167
Setback (g)	10,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:3?Z
Check the source to verify that this is the current version before use.

M522, FUZE, MT

ARMING DATA

Method	Spin, setback
Delay	
Rotation (rps)	
Non-arm 16	Arm 33
Setback (g)	
Non-arm 500	Arm 900
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	1.92 lb
Total Length (in.)	5.38
Body Diam. (in.)	
Intrusion	1.64 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	Time, select, PD, SQ
Type	Mechanical
Delay	0.000025 sec
Time Type	Mechanical, two center tuned
Time Setting (sec)	10 - 100 sec x 0.1
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M29A1
Detonator	
Booster	Safety adapter T40E1
Lead	Tetryl
Relay	M7

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M524A6 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-429 and 1-430 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M525A1 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-431 and 1-432 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M526A1 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-433 and 1-434 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M527B1 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-435 and 1-436 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M532 Proximity Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-437 and 1-438 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M534A1 BD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-439 and 1-440 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M535, FUZE, PD

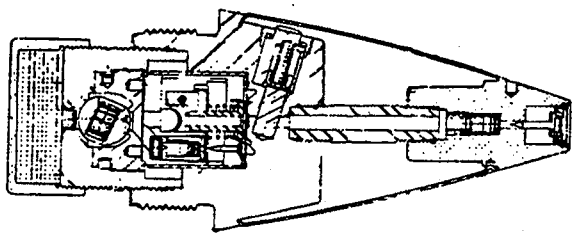

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T
Status G. ECKSTEIN AV 880-5468
Obsolete
Ass'y Dwg. No. F8866760
Parts List
Specification
Previous Number T177E3

GENERAL

Carriers Projectile
Cal. — Size 75 to 280 mm
Location Nose
Use HE
MIL-STD's 331, Tests 101 & 102
Max Values
Rotat. (rps) 550
Setback (g) 21,000
Velocity (fps)

KEY FEATURES

Waterproof

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M535, FUZE, PD

ARMING DATA

Method	Spin
Delay	35 ft (min.)
Rotation (rps)	
Non-arm 25	Arm 66.6
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.15 lb
Total Length (in.)	5.95
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, SQ, delay
Type	Mechanical
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Wood
Thickness (in.)	1
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M18
Booster	M124 (T35E7)
Delay Plunger	M1 (0.05 sec)

REMARKS

Intended as a replacement for Fuze M51A5.

SERIES: A CHAPTER: 1
DESIGNATION: M535
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M539A1 PIBD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-443 and 1-444 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M543, FUZE, MT

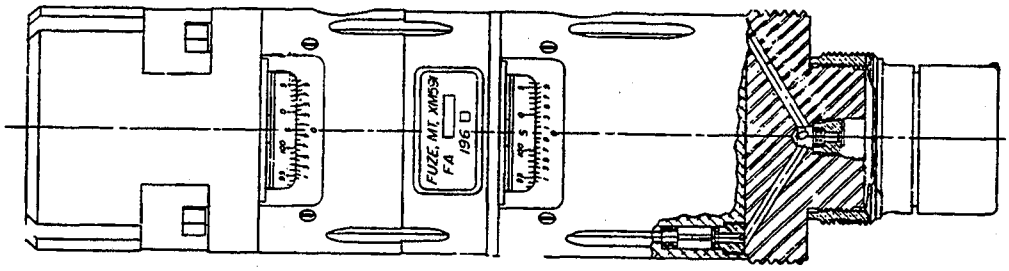

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T
S. Honickman AV 880-3174

Status Terminated

Ass'y Dwg. No. F 8594379

Parts List

Specification

Previous Number T316E1, T342E1

GENERAL

Carriers Projectile

Cal. — Size 8 in. Howitzers

Location Internal

Use GP, special

MIL-STD's 331, Tests 101-104

Max Values

Rotat. (rps) 167

Setback (g) 12,000

Velocity (fps)

KEY FEATURES

Three separate timers aligned in stack.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M543, FUZE, MT

ARMING DATA

Method	Spin, setback, mechanical timer
Delay	8 ft
Rotation (rps)	
Non-arm 16	Arm 33
Setback (g)	
Non-arm 500	Arm 900
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	4.92 lb
Total Length (in.)	8.6
Body Diam. (in.)	2.9
Intrusion	Internal
Thread Size	2.91-10NA-40

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mechanical, two center tuned
Time Setting (sec)	10 - 100
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	T103 (3)
Detonator	M17
Booster	M21A4 (2)
Black Powder Pellet	800 gm
Relay	M7
Lead	Tetryl

REMARKS

Replaced by Fuze XM591.

M543 fuze is identical to Fuze T316E1 except that breach block was modified to accept Booster M21A4 and explosives are different.

SERIES: A CHAPTER: 1
DESIGNATION: XM543
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M548 MTSQ Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-447 and 1-448 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M557 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-449 and 1-450 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

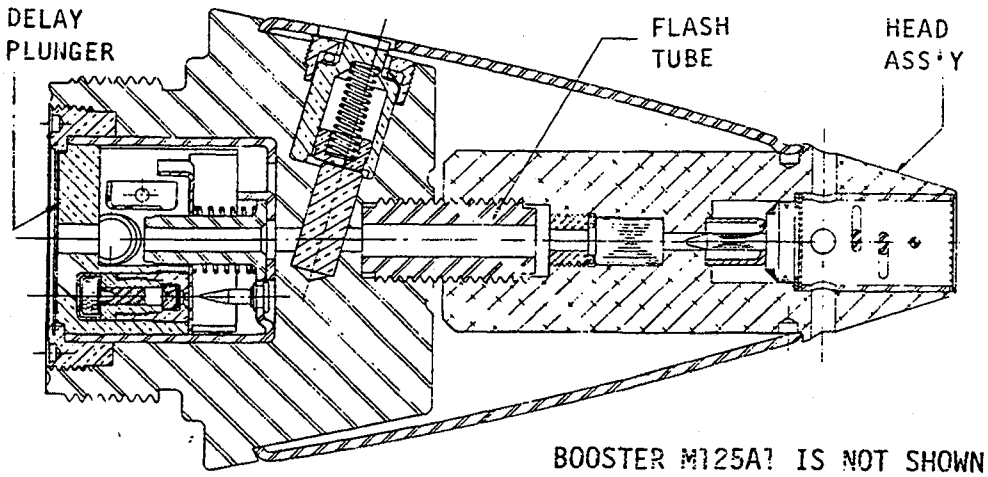

BOOSTER M125A1 IS NOT SHOWN

IDENTIFICATION

AGENCY: ARRADCOM, DRDAR-LCN-T

CONTACT: W. Erck
AV 880-5468

STATUS: Terminated

USER: Army, Marines

ASSY DWG: DP-9217452

PARTS LIST:

SPEC: X-PA-PD-3084

NSN: None

PRIOR NOMENCLATURE: M557

REPLACES: M51A5

GENERAL

MUNITION: Proj for all field artillery 75mm to 8in.

USE: HE, H, WP, HD
GB and VX

LOCATION: Nose

BALLISTIC LEVELS:

ROTATION: 550 rps

SETBACK: 30,000 g

VELOCITY: 1,000 m/s

CREEP:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Setback, 32 g nominal

SECOND SAFETY:

Spin, 16 rps nonarm, 33 arm

OTHER SAFETY:

None

DELAY:

200 ft

SAFE/ARM CONDITION:

No

FUNCTIONING DATA

MODE(S): SQ or Delay

TYPE: Mechanical

CHARACTERISTICS:

SQ - 170 microsec
Delay - 0.05 sec

TARGET: Ground - personnel, vehicles

SENSITIVITY:

Chro-
1 in wood

PHYSICAL DATA

WEIGHT: 2.15 lb (975.2 gm)

TOTAL LENGTH: 5.93 in (15.06 cm)

CROSS SECTION: 2.41 in (6.13 cm)

INTRUSION: 2.21 in (5.61 cm)
1.73 (4.40 cm)

THREAD SIZE: 2-12UNS-1A

OTHER:

POWER SUPPLY:

None

EXPLOSIVE TRAIN

S&A DEVICE:

PRIMER: In M2 Delay Element

DETONATORS: M24 Stab, M17 Flash

LEAD: 244 mg CH-6

BOOSTER: 340 gr Comp A-5

OTHER: M2 Delay Element (contains M54 Stab Primer, Boron-Barium

mate Delay, and M17 Relay)

REMARKS

Has density integrating device in head assy for rain insensitivity and improved foliage penetration. Fuze consists of M48E1 and M125A1E1 Booster. Fuze is similar to XM712E2. Replaced by M739.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM558, FUZE, MT

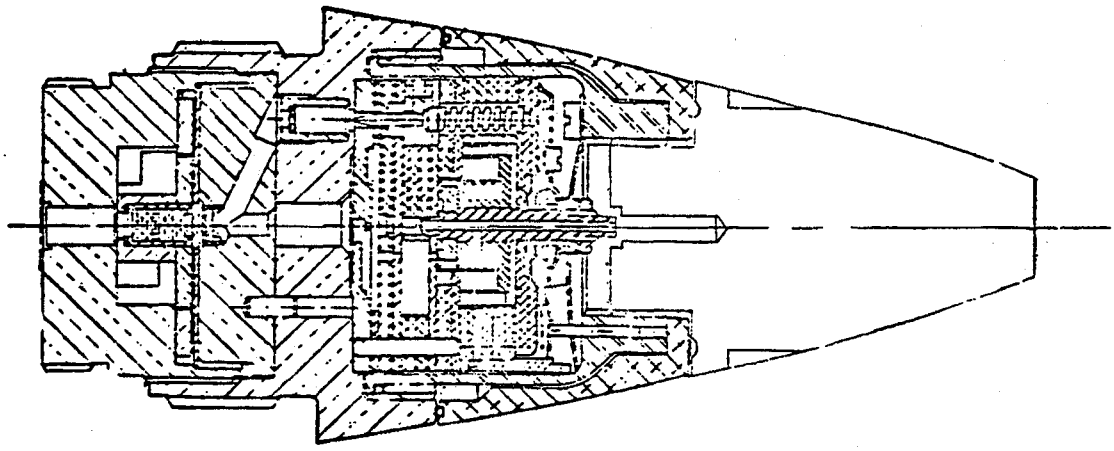

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T
J. Mora

Status Terminated

Ass'y Dwg. No. 8882234

Parts List

Specification

Previous Number

GENERAL

Carriers	Projectile (XM403)
Cal. — Size	175 mm Gun
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Uses Popovitch modified Junghans escapement to reduce spin sensitivity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM558, FUZE, MT

ARMING DATA

Method	Spin, setback
Delay	200 ft (min.)
Rotation (rps)	
Non-arm 25 **Arm** 33	
Setback (g)	
Non-arm **Arm** 900	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.02 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	2 in.

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech., Popovitch esc.
Time Setting (sec)	3 to 115
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M49
Booster	
Relay	M7

REMARKS

Similar to Fuzes XM560 and M565, except extended time range.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM559E1, FUZE, PIBD

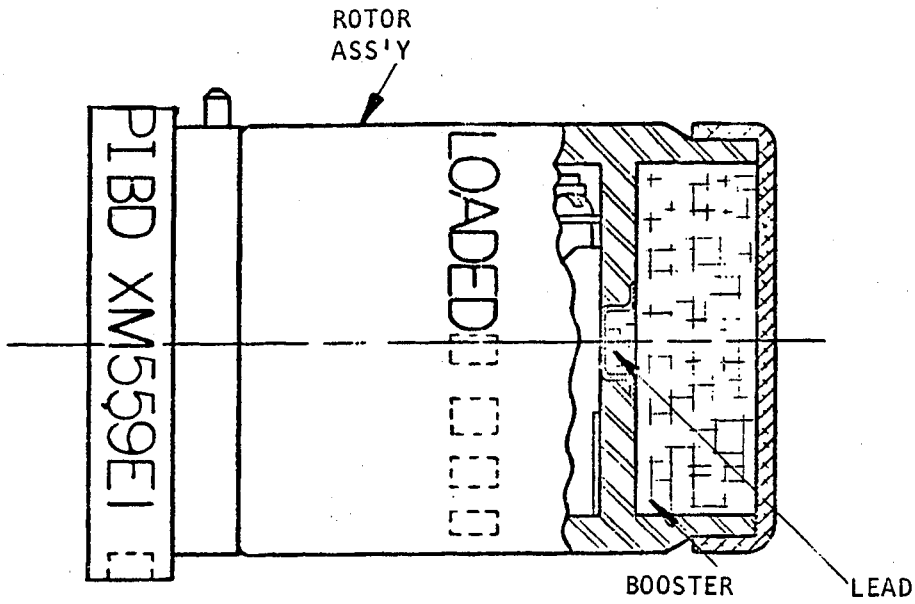

IDENTIFICATION

Agency ARRADCOM, Post

Status Terminated

Ass'y Dwg. No. P-132446

Parts List

Specification

Previous Number

GENERAL

Carriers Projectile

Cal. — Size 76 - 120 mm

Location Base

Use HEAT

MIL-STD's

Max Values

Rotat. (rps)

Setback (g) 43,000

Velocity (fps) 4100

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM559E1, FUZE, PIBD

ARMING DATA

Method	Setback
Delay	*
Rotation (rps)	
Non-arm	**Arm**
Setback (g)	
Non-arm	**Arm** 2500 - 3400 g for 1.6 - 2.4 millisec
Arming Wire	No
External Indicat.	No

*22-37' (76 mm); 24-41' (90 mm); 24-40' (105 mm); 23-39' (120 mm).

PHYSICAL DATA

Weight	0.230 lb
Total Length (in.)	1.963
Body Diam. (in.)	1.250 (1.350 diam. flanged base)
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PI, BD, SQ
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Armor plate

Sensitivity	Non-Funct	Funct	Funct
Material	Plywood	Plyw.	Armor
Thickness (in.)	1/8	1.0	
Max Obliq. (°)	-	-	
Velocity (fps)	4100		
Carrier	All		

POWER SUPPLY

Piezoelectric

EXPLOSIVE TRAIN

S&A Device	
Primer	T92
Detonator	T74
Booster	Tetryl, 7.42 grain

REMARKS

Same as Fuze M530 except 90° rotor travel instread of 270° and higher g creep spring on graze plunger.

The XM559 fuze had a graze-creep spring too weak to resist functioning on impact with 1/8" plywood targets. This spring was redesigned to withstand 170 g and the fuze was designated XM559E1.

SERIES: A CHAPTER: 1
DESIGNATION: XM559E1
PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM560, FUZE, MT

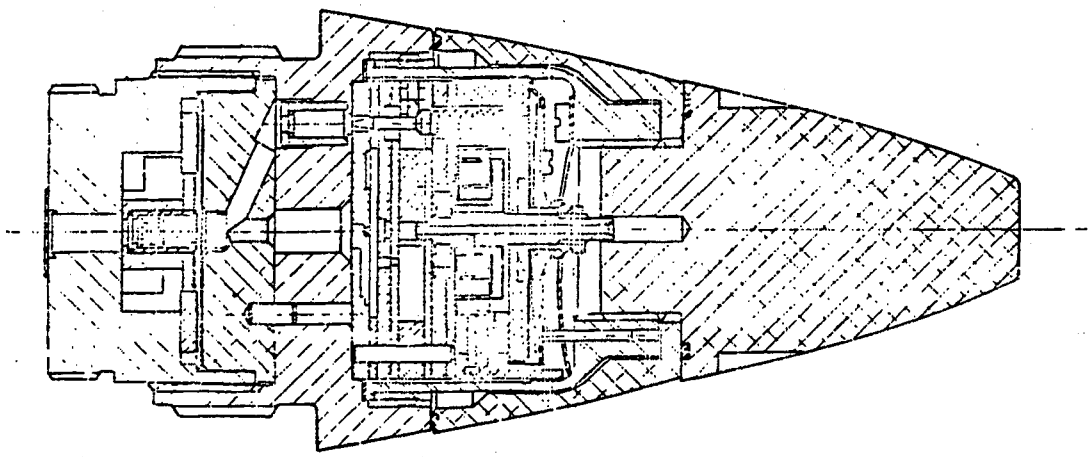

IDENTIFICATION

Agency ARRADCOM-DRDAR-LCN-T
J. Mora

Status Terminated

Ass'y Dwg. No. 8875942

Parts List

Specification

Previous Number

GENERAL

Carriers Projectile (XM400)

Cal. — Size 105 mm

Location Nose

Use HE

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Uses Popovitch modified Junghans escapement to reduce spin sensitivity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM560, FUZE, MT

ARMING DATA

Method	Spin, setback
Delay	200 ft (min.)
Rotation (rps)	
Non-arm 25 **Arm** 33	
Setback (g)	
Non-arm **Arm** 900	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.02 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	2 in.

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech., Popovitch esc.
Time Setting (sec)	2.7 - 100
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M49
Booster	
Relay	M7

REMARKS

Similar to Fuze M565 except different escapement.

SERIES: A CHAPTER: 1
DESIGNATION: XM560
MTSQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM561, FUZE, TIME

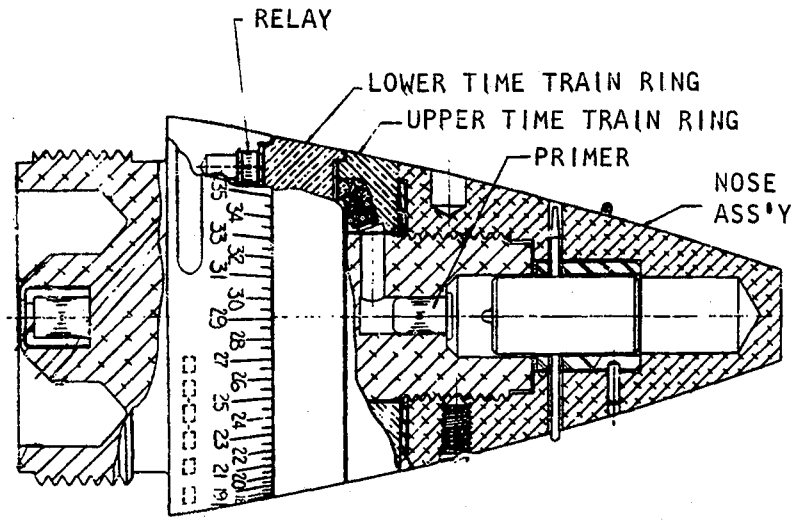

IDENTIFICATION

Agency ARRADCOM DRDAR-LCN-T, S.Honickman AV 880-3174
Status Terminated
Ass'y Dwg. No. P-118797
Parts List
Specification
Previous Number

GENERAL

Carriers	Mortar projectile
Cal. — Size	81 mm
Location	Nose
Use	Illuminating
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	10,000
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 1
DESIGNATION: XM561
Time & SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM561, FUZE, TIME

ARMING DATA

Method	Setback
Delay	None
Rotation (rps)	
Non-arm	**Arm**
Setback (g)	
Non-arm	**Arm** 570
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.35 lb
Total Length (in.)	4.615
Body Diam. (in.)	
Intrusion	0.885 in.
Thread Size	2-12NS

FUNCTIONING DATA

Action	Time
Type	Pyrotechnic
Delay	2 sec
Time Type	Pyrotechnic
Time Setting (sec)	2 - 39.5
Target	Illuminating
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	None
Primer	M29A1
Detonator	M17
Booster	None

REMARKS

Replaces Fuze M84.

SERIES: A CHAPTER: 1
DESIGNATION: XM561
Time & SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M562 MTSQ Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-461 and 1-462 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M563 MT Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-463 and 1-464 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM566, FUZE, PD

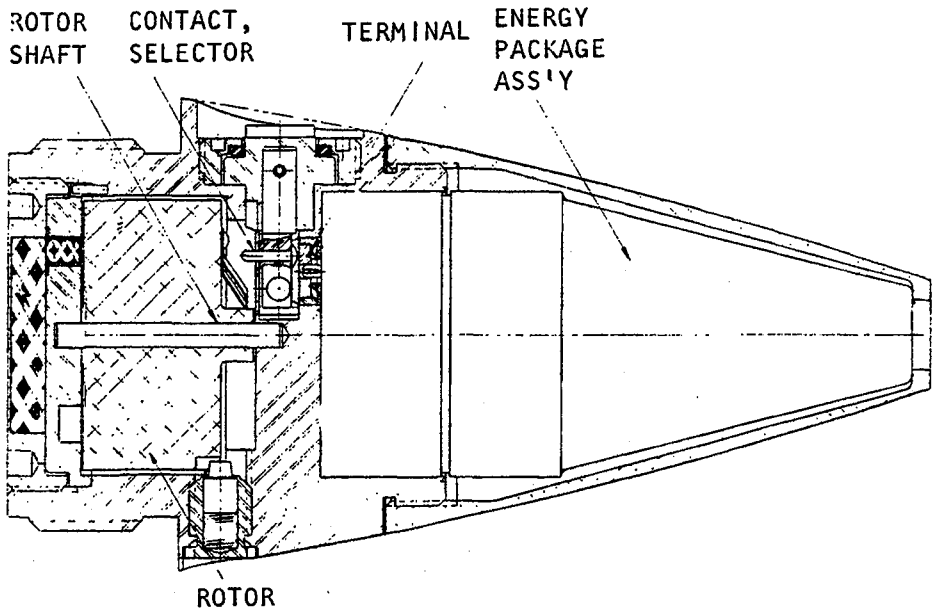

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T, G. Eckstein, AV 880-5468

Status Terminated

Ass'y Dwg. No. 965120, 963502 (Magnavox)

Parts List

Specification

Previous Number

GENERAL

Carriers Projectile

Cal. — Size 75 - 240 mm

Location Nose

Use Chemical

MIL-STD's

Max Values

Rotat. (rps) 580

Setback (g) 30,000

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM566, FUZE, PD

ARMING DATA

Method	Spin, setback
Delay	75 - 150 ft
Rotation (rps)	
Non-arm	25
Arm	33
Setback (g)	
Non-arm	
Arm	100
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.05 lb
Total Length (in.)	5.97
Body Diam. (in.)	
Intrusion	0.90-0.03 in.
Thread Size	2-12-NS

FUNCTIONING DATA

Action	PD, SQ, delay, graze
Type	Mechanical
Delay	0.05 sec.
Time Type	
Time Setting (sec)	
Target	Marking, spotting
Sensitivity	
Material	Chipboard
Thickness (in.)	0.125
Max Obliq. (°)	60
Velocity (fps)	
Carrier	

POWER SUPPLY

Lucky - piezoelectric

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	XM65 (SQ) XM88 (delay)
Booster	None

REMARKS

Similar to Fuze T212 except shorter intrusion and no booster.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM568, FUZE, MT

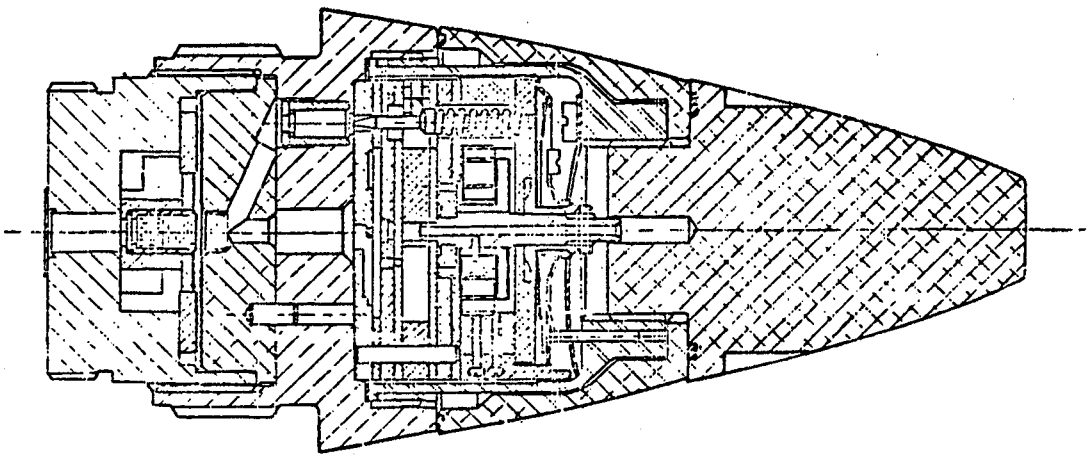

IDENTIFICATION

Agency ARRADCOM-DRDAR-LCN-T
J. Mora

Status Terminated

Ass'y Dwg. No. Similar to 8875942

Parts List

Specification

Previous Number

GENERAL

Carriers Projectile (M442)

Cal. — Size 105 mm

Location Nose

Use HE

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Uses Popovitch modified Junghans escapement to reduce spin sensitivity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM568, FUZE, MT

ARMING DATA

Method	Spin, setback
Delay	200 ft (min.)
Rotation (rps)	
Non-arm	25 Arm 33
Setback (g)	
Non-arm	Arm 900
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.02 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	2 in.

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech., Popovitch esc.
Time Setting (sec)	2.7 - 100
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M17
Booster	Tetryl
Relay	M7

REMARKS

Similar to Fuze XM560 except different explosive train.

Similar to Fuze M565 except different escapement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM569, FUZE, PIBD

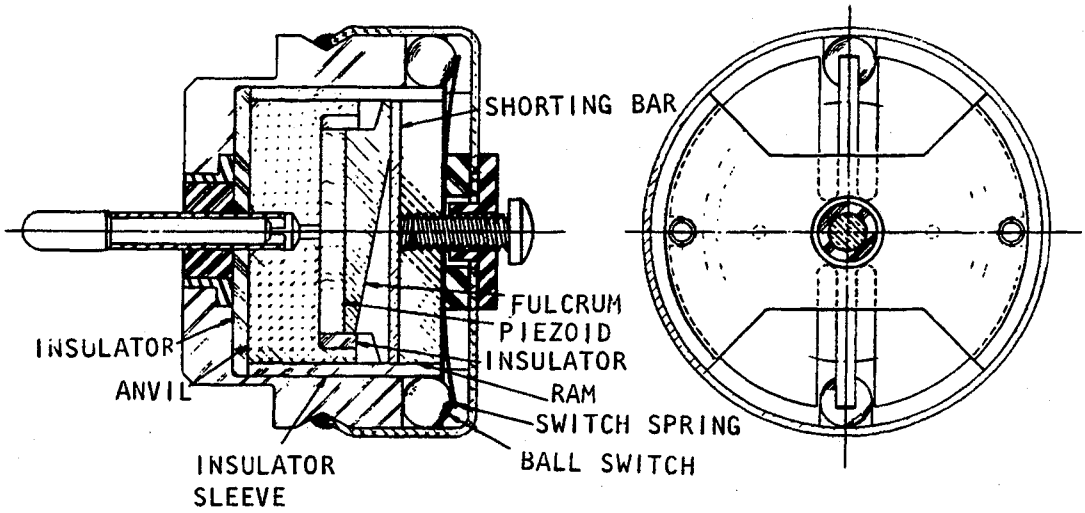

IDENTIFICATION

Agency ARRADCOM, Juliano

Status Terminated

Ass'y Dwg. No. 970961, 966767 (Magnavox)

Parts List

Specification

Previous Number

GENERAL

Carriers	Projectile
Cal. — Size	75 - 120 mm
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	50
Setback (g)	40,000
Velocity (fps)	

KEY FEATURES

Provides increased effectiveness against nonconventional armor.

Source: https://assist.dla.mil - Downloaded: 2026-01-26 03:37:
Check the source to verify that this is the current version before use.

XM569, FUZE, PIBD

ARMING DATA

Method	Setback
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	2500 / 4300
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.33 lb
Total Length (in.)	1.963
Body Diam. (in.)	1.257
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PI, BD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Nonconventional armor
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Piezoelectric

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M48
Booster	

REMARKS

Fuze consists of XM23 power supply in the nose and M509A1 fuze in the base.

SERIES: A CHAPTER: 1
DESIGNATION: XM569
PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM570, FUZE, MT

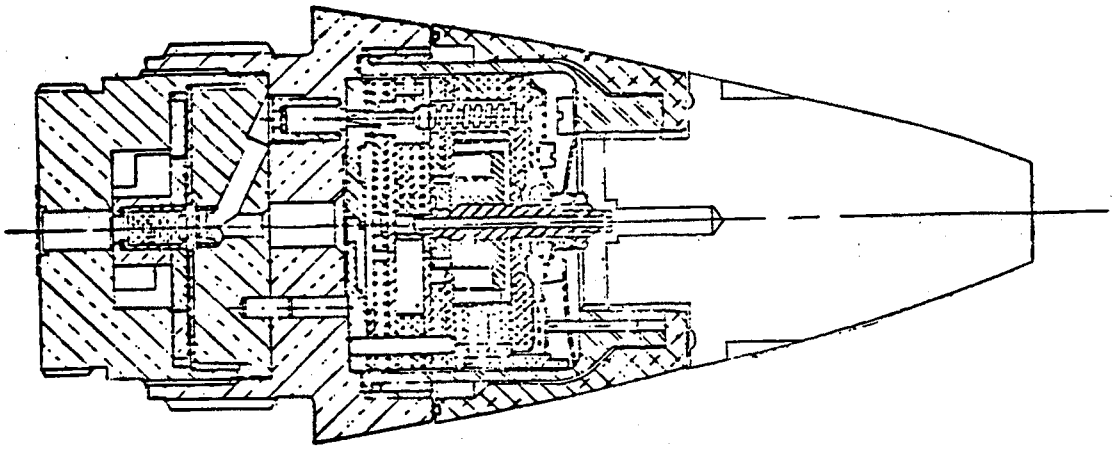

IDENTIFICATION

Agency ARRADCOM-DRDAR-LCN-T
J. Mora

Status Terminated

Ass'y Dwg. No. Similar to 8882234

Parts List

Specification

Previous Number

GENERAL

Carriers Projectile

Cal. — Size 175 mm Gun

Location Nose

Use HE

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Uses Popovitch modified Junghans escapement to reduce spin sensitivity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM570, FUZE, MT

ARMING DATA

Method	Spin, setback
Delay	200 ft (min.)
Rotation (rps)	
Non-arm	25
Arm	33
Setback (g)	
Non-arm	
Arm	900
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech., Popovitch esc.
Time Setting (sec)	3 - 115
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M17
Booster	Tetryl
Relay	M7

REMARKS

Similar to Fuze XM558, except different explosive train.

Similar to Fuzes XM560 and M565 except extended time range.

SERIES: A CHAPTER: 1
DESIGNATION: XM570
MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M571 MT Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-473 and 1-474 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M572 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-475 and 1-476 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M572E1, FUZE, PD

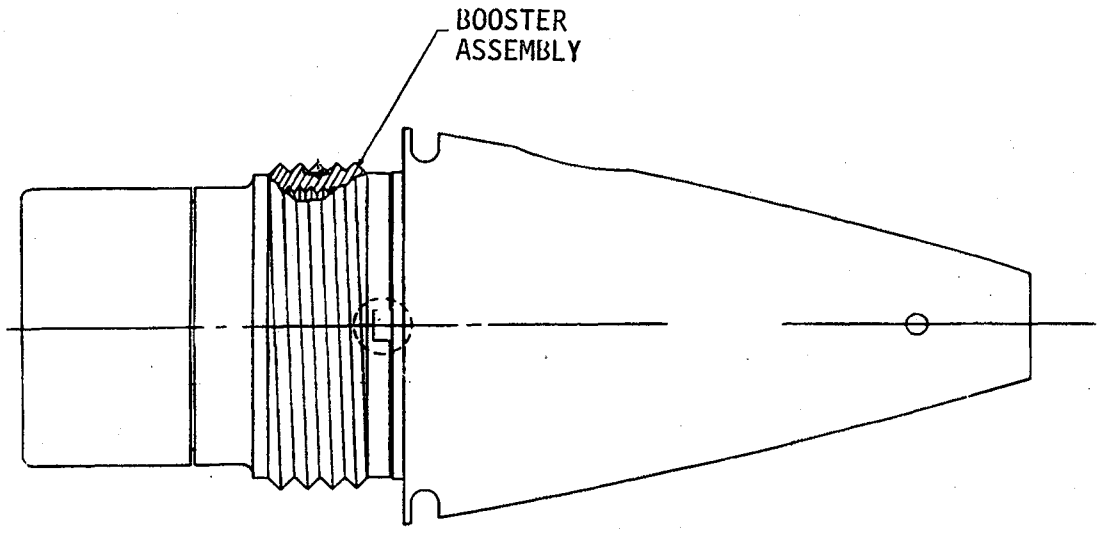

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-T, G. Eckstein, AV 880-5468
Status	Terminated
Ass'y Dwg. No.	9231838
Parts List	9231838
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	175 mm
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	550
Setback (g)	21,000
Velocity (fps)	3,000

KEY FEATURES

Includes rain insensitive head.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M572E1, FUZE, PD

ARMING DATA

Method	Spin
Delay	200 ft
Rotation (rps)	
Non-arm 16	Arm 33
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.73 lb
Total Length (in.)	5.99
Body Diam. (in.)	2.412
Intrusion	2.21 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, SQ & delay
Type	Mechanical
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Wood
Thickness (in.)	1
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M24
Booster	M125A1
Delay Plunger	M1 (0.05 sec)

REMARKS

Single piece, all aluminum fuze body, to increase structural integrity of the fuze.

M48A3E2 with M125A1 booster is called M572E1 fuze. Now replaced by M739 PD fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM574, FUZE, ET

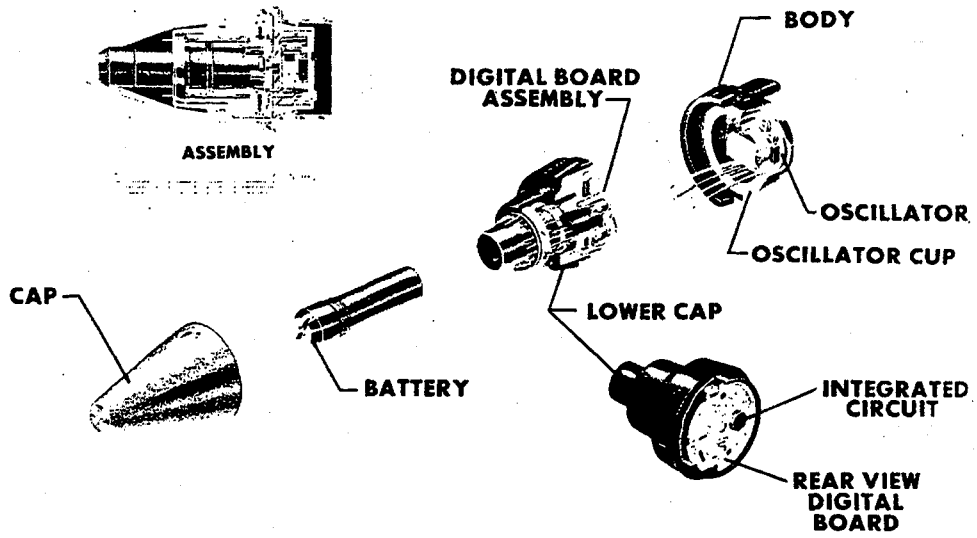

IDENTIFICATION

Agency ARRADCOM, Shaw
Status Terminated
Ass'y Dwg. No.
Parts List
Specification
Previous Number

GENERAL

Carriers	Projectile
Cal. — Size	Artillery range
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	565
Setback (g)	30,000
Velocity (fps)	

KEY FEATURES

Uses a single MOS integrated circuit for all digital functions. Time base is a 20,480 HZ LC oscillator using transistors contained in the integrated circuit. Setting is accomplished by use of an external setting device.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM574, FUZE, ET

ARMING DATA

Method	Spin & setback
Delay	Mechanical
Rotation (rps)	
Non-arm 20 Arm 28	
Setback (g)	
Non-arm Arm 100	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.2 lb
Total Length (in.)	5.93
Body Diam. (in.)	2.412
Intrusion	2.21 in.
Thread Size	2.12NS-1

FUNCTIONING DATA

Action	Time (spin initiated)
Type	Electronic
Delay	
Time Type	Integrated circuit, electronic
Time Setting (sec)	2.0 - 199.9 x 0.1 sec
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY - Silver oxide primary battery. Liquid ammonia reserve battery.

EXPLOSIVE TRAIN

S&A Device	M125A1E4
Primer	
Detonator	T77
Booster	

REMARKS

Arms at 1700 rpm, with CG of S&A off 0.075 in. from axial center, in minimum torque condition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

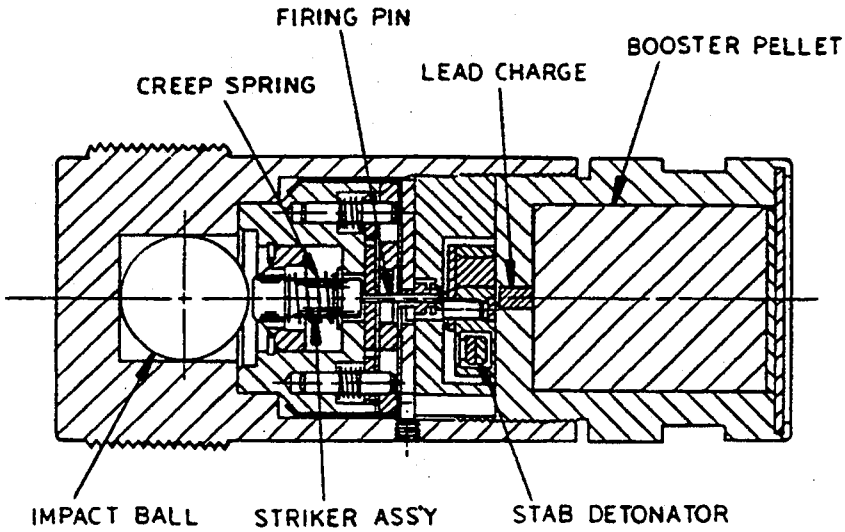

- OVERALL SIZE -	- INTRUSION -	WT: 1.876 lb (851 g)
LG: 4.50 in (114.2 mm)	DP: 4.08 in (103.6 mm)	THD: 1.8-12UNS-2A (LH)
XSECT: 1.68 in (42.7 mm)	DIA: 1.68 in (42.7 mm)	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT: Nash, A
- PHONE: DSN 880-2017
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 9 323 961
- PARTS LIST: 9323961
- SPEC: MIL-F-60041, 60042
- PUB:

- NATIONAL STOCK NO:
  1390-00-182-3132
- DODIC:
- PRIOR MODEL NO: M578
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 105mm Tank Gun, M68

- AMMUNITION:
  Cartridge, HEP-T, M393A2

LOCATION: Base
BALLISTIC LEVELS:
- ROTATION: 400 rps
- SETBACK: 12,800 g
- VELOCITY: 2400 ft/s (732 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: 100 rps no arm,
150 rps all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
6 m Delay Arming

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: None

DETONATOR: M61 Stab

LEAD: 70 mg Comp A5

BOOSTER: 36 g RDX,
1.10 dia x 1.44 in

OTHER:

FUNCTIONING DATA
MODES: BD
TYPE: Mechanical, Inertial
CHARACTERISTICS:
Non Delay, 400 micro s

TARGET: Ground-Tank, Personnel
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM583, FUZE, PROXIMITY

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi
Status	AV 290-2400 terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	4.2 in. & 107mm mortar 105, 155, 175mm, & 8 in. artillery
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Short intrusion, solid state, universal proximity fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM583, FUZE, PROXIMITY

ARMING DATA

Method: Spin & setback
Delay:
Rotation (rps):
Non-arm: Arm:
Setback (g):
Non-arm: Arm:
Arming Wire: No
External Indicat.: No

PHYSICAL DATA

Weight:
Total Length (in.):
Body Diam. (in.):
Intrusion:
Thread Size:

ABC std. short intrusion.

FUNCTIONING DATA

Action: Proximity
Type: Electronic
Delay:
Time Type:
Time Setting (sec): 0 - 150
Target: Antipersonnel
Sensitivity:
Material:
Thickness (in.):
Max Obliq. (°):
Velocity (fps):
Carrier:

POWER SUPPLY

Battery

EXPLOSIVE TRAIN

S&A Device:
Primer:
Detonator:
Booster:

REMARKS

Also known as LoCost fuze.

SERIES: A CHAPTER: 1
DESIGNATION: XM583
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM584, FUZE, REMOTE CONTROL (COMMAND)

IDENTIFICATION

Agency ERADCOM, DELHD-DE-OE
L. Tozzi, AV 290-2400

Status Terminated

Ass'y Dwg. No.

Parts List

Specification

Previous Number

GENERAL

Carriers	Projectile
Cal. — Size	105 & 152mm (tank)
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM584, FUZE, REMOATE CONTROL (COMMAND)

ARMING DATA

Method: Spin & setback
Delay:
Rotation (rps):
Non-arm: Arm:
Setback (g):
Non-arm: Arm:
Arming Wire: No
External Indicat.: No

PHYSICAL DATA

Weight:
Total Length (in.):
Body Diam. (in.):
Intrusion:
Thread Size:

FUNCTIONING DATA

Action: Electronic time
Type: Electronic
Delay:
Time Type:
Time Setting (sec):
Target Sensitivity: Antipersonnel, helicopters, & lt. aircraft
Material:
Thickness (in.):
Max Obliq. (°):
Velocity (fps):
Carrier:

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device:
Primer:
Detonator:
Booster:

REMARKS

Fuze is automatically & remotely set in tank and automatically commanded to function at proper distance.

SERIES: A CHAPTER: 1
DESIGNATION: XM584
ET Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM585E4, FUZE, PD

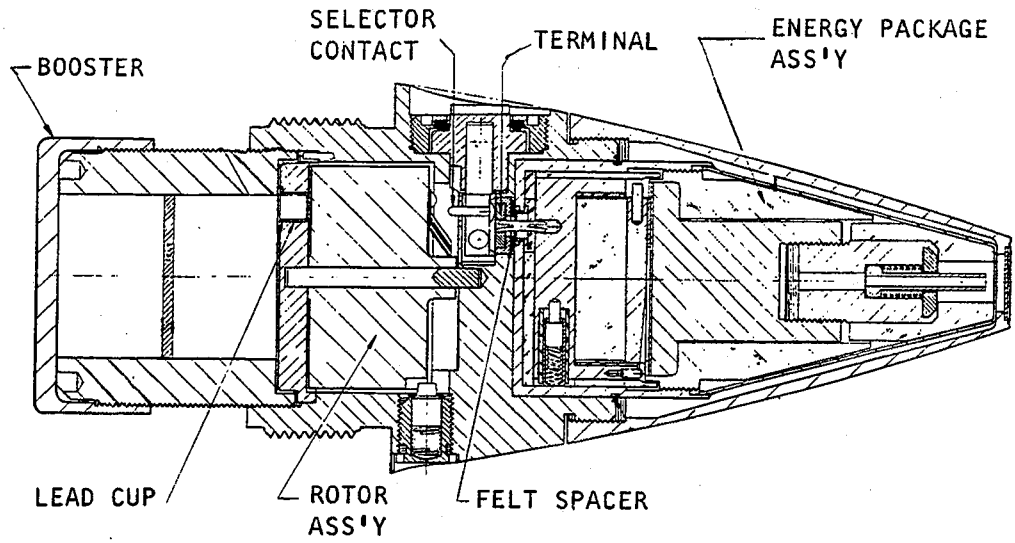

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T, G. Eckstein, AV 880-5468
Status Terminated
Ass'y Dwg. No. F9219672 (PA)
Parts List
Specification
Previous Number

GENERAL

Carriers	Projectile
Cal. — Size	90 - 152 mm
Location	Nose
Use	HE, Chemical (WP)
MIL-STD's	
Max Values	
Rotat. (rps)	500
Setback (g)	33,000
Velocity (fps)	3000

KEY FEATURES

Electro-mechanical piezoid charged on setback.

Excellent graze functioning sensitivity and reliability.

SD or delay graze functioning option available.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM585E4, FUZE, PD

ARMING DATA

Method	Setback and spin
Delay	32 - 84 ft*
Rotation (rps)	
Non-arm	25
Arm	30
Setback (g)	
Non-arm	90
Arm	100
Arming Wire	No
External Indicat.	No

*118-198 ft in 152 mm gun.

PHYSICAL DATA

Weight	2.10 lb
Total Length (in.)	5.97
Body Diam. (in.)	2.415
Intrusion	2.21 in.
Thread Size	2.0-12UNS-1A

FUNCTIONING DATA

Action	PD, SQ, delay, graze, select.
Type	Electric
Delay	0.050 sec
Time Type	
Time Setting (sec)	
Target	Antipersonnel & antimateriel, marking, screening
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Piezo electric

EXPLOSIVE TRAIN

S&A Device	
Primer	XM88
Detonator	XM65
Booster	RDX

REMARKS

Fuze identical to Fuze T212 series except stainless steel arming balls used in lieu of aluminum.

Replaces Fuze M557 in 152 mm XP410 WP cartridge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

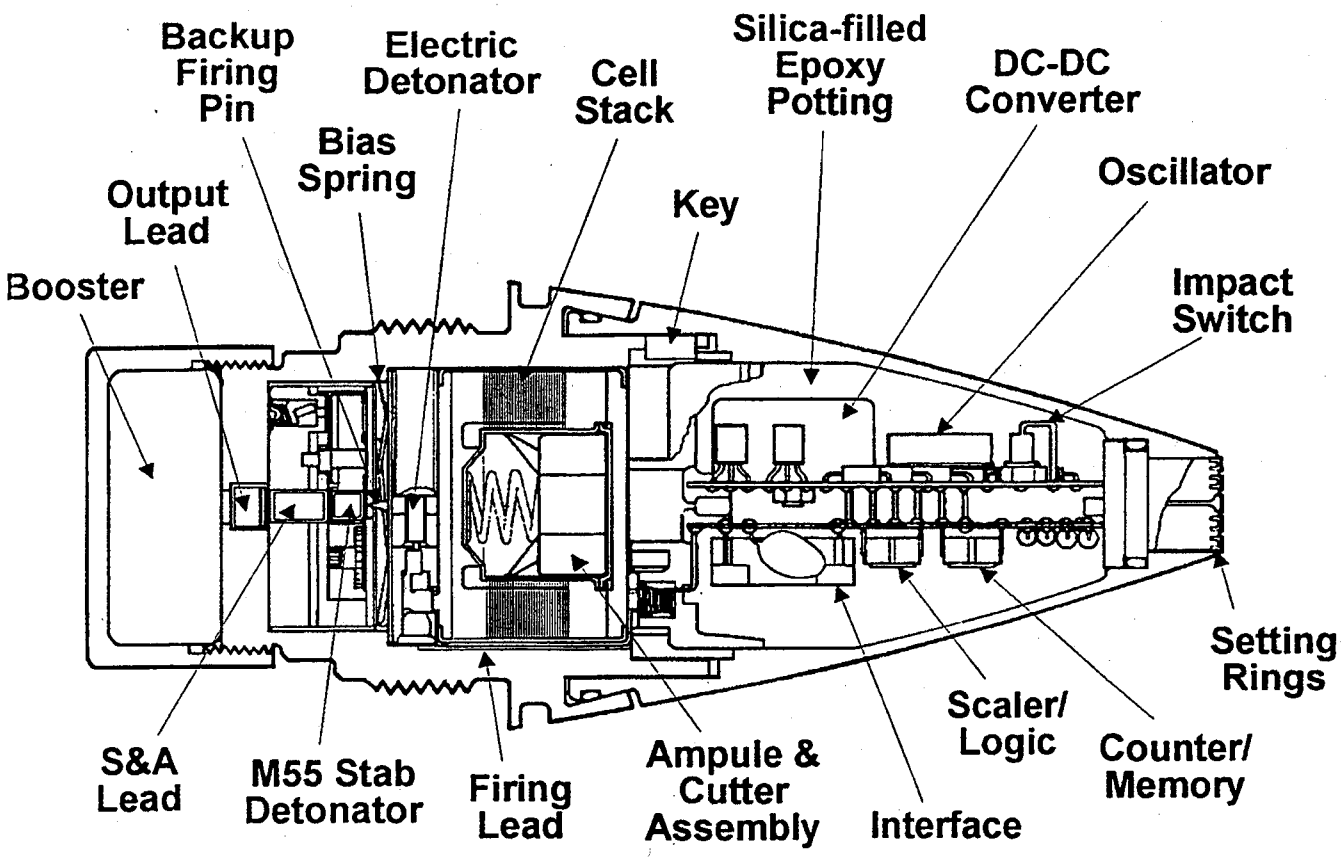

- OVERALL SIZE -	- INTRUSION -	
LG: 5.97 in (151.6 mm)	DP: 2.21 in (56.1 mm)	WT: 1.81 lb (821.0 g)
XSECT: 2.41 in (61.3 mm)	DIA: 1.71 in (43.4 mm)	THD: 2.0-12UNS-1A
		THD DP: 0.880 in (22.4 mm)

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-A
- CONTACT: Harrison, E
- PHONE: DSN 290-3710
- STATUS: Terminated
- USER: Army
- ASSY DWG: 11 711 435
- PARTS LIST: 11711435
- SPEC: MIL-F-48700
- PUB: TM 43-0001-28

- NATIONAL STOCK NO: 1390-01-062-4574
- DODIC: N600
- PRIOR MODEL NO: XM587E2
- SIMILAR TO: M724, Mk 423

- REPLACES: M548, M564
- REPLACED BY:

GENERAL
- WEAPON: 105 mm, 155 mm & 8 in Howitzers

- AMMUNITION: 105mm HE M1, & HE RA M548,155mm HE M107,HE RA M549, Agent GB VX, M121A1&WP M110, 8-in HE M106

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 500 rps
- SETBACK: 30,000 g
- VELOCITY: 3300 ft/s (1006 m/s)

- CREEP: 7 g
- FLIGHT TIME: 200 s (max settable)

SAFETY STD: MIL-STD-1316

SETTERS: M36 Setter/M744 Trng Fuze

Supersedes page 1-486A of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 800 g no arm,
1200 g all arm

SECOND SAFETY:
Spin: 18 rps no arm,
28.4 rps all arm

OTHER SAFETY:
Elec arming 3 to 4 s
before set time

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
42 to 124 m
400 to 800 calibers

EXPLOSIVE COMPONENTS

S&A DEVICE: M724 type, 11 720 300

PRIMER: None

DETONATOR: Mod M100 Elec. 11722405
M55 Stab

LEAD: 182 mg PBXN-5, 11720258
134 mg PBXN-5, 11720310

BOOSTER: 27 g comp A5, 11720213

OTHER: None

FUNCTIONING DATA
MODES: Time and Impact, Settable
TYPE: Electronic, mechanical
CHARACTERISTICS:
0.2 to 199.9 s by 0.1 incr.
mechanical impact backup

TARGET: Ground-Personnel, Materiel
SENSITIVITY:
8 in (203 mm) plywood, 0 degree
obliquity, 400 ft/s (122 m/s)

FUNCTION TEMP:
-40 to +63 deg C
MODE ON DELIVERY:
PD

POWER SUPPLY:

PS-127, Liquid Reserve, 11720216

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0408
US HCSDS: 1482, 1483 w/o booster
UN CL/DIV SCG: 1.1 D
US DOT SHIP CL: A
NET EXPL WT: 27.432 g
NET PROP WT: None
STORAGE TEMP: -54 deg C 3 days max
+71 deg C 4 hr/day max

REMARKS/DESCRIPTION:
The M36 Fuze Setter is used to program the M587 fuze to function at a set time or on impact. On firing, the setback pin moves rearward, partially freeing the rotor. Centrifugal force (CF) rotates the spin detents allowing the rotor to turn to the armed position delayed by a runaway escapement. Setback also ruptures the copper electrolyte ampule and CF forces the electrolyte into the battery plates. Electronic timing is accomplished with an oscillator, a binary divider, and a counter. A short on the firing capacitor is removed 3.4 s before the set time or, in the case of impact setting, 0.1 s after power supply activation. At set time, the counter circuit triggers the firing capacitor functioning the modified M100 Electric Detonator which initiates the M55 Stab Detonator in the rotor and, in turn, the leads and booster. Impact switch closure will fire the electric detonator if the fuze is set to impact or as a backup for timer failure. If the fuze fails electronically, inertia moves the safety device forward and the M55 Detonator strikes a firing pin. The M724 and Mk 423 are similar, but do not have a backup mechanical firing pin. The M724 does not have a booster.

Supersedes page 1-486B of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM588, FUZE, MORTAR, PROXIMITY

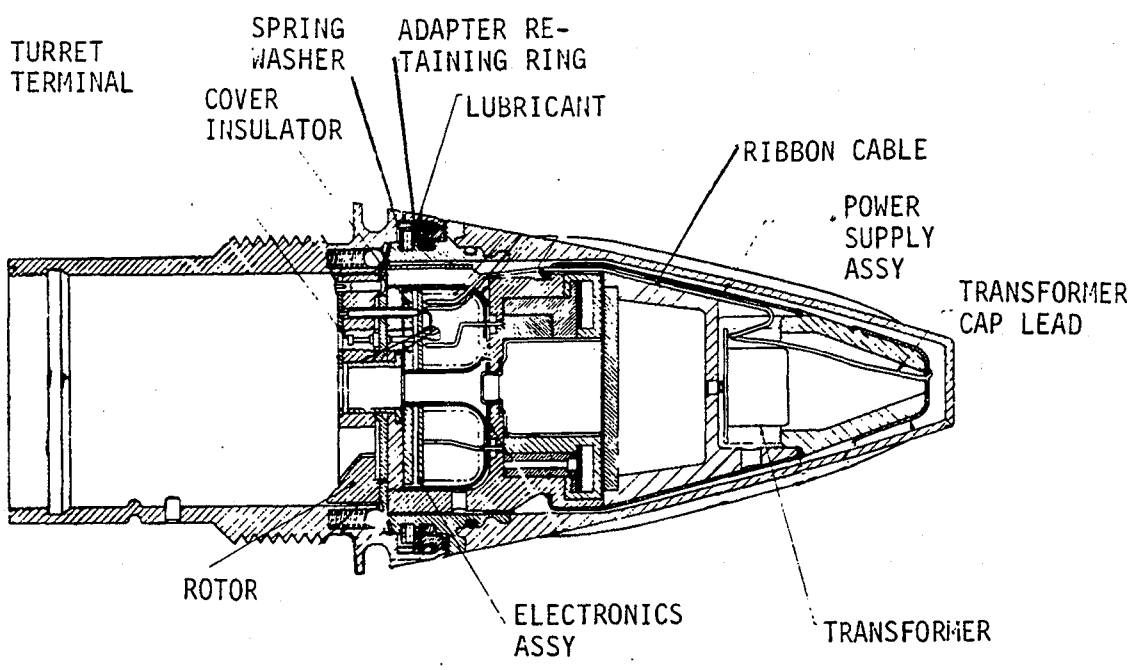

IDENTIFICATION

Agency	ERADCOM. DELHD-IT
	J. Cullinane
Status	AV 290-2677
	Terminated
Ass'y Dwg. No.	10989680
Parts List	EPI 10989689
Specification	MIL-F-60968
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	81 mm Mortar
Location	
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	50
Setback (g)	8000
Velocity (fps)	650

KEY FEATURES

Near surface detonation over all targets without target penetration and consequent smothering of projectile fragments

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM588, FUZE, MORTAR, PROXIMITY

ARMING DATA

Method	Setback (falling leaf mech.)
Delay	2-6 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 250 / Arm 450	
Arming Wire	Internal pull pin
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Proximity (NSB) or 50 ms delay
Type	Electronic
Delay	0.25 sec
Time Type	
Time Setting (sec)	
Target	Near surface burst
Sensitivity	*
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

PS114 Liquid reserve

EXPLOSIVE TRAIN

S&A Device	MIL-D-60970
Primer	None
Detonator	M84, also stab delay detonator for PD backup
Booster	RDX

REMARKS

Standard artillery contour

*Does not require impact deceleration, proximity (1-2 in.) with target initiator detonation

SERIES: A CHAPTER: 1
DESIGNATION: XM588
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM589, FUZE, NEAR SURFACE BURST

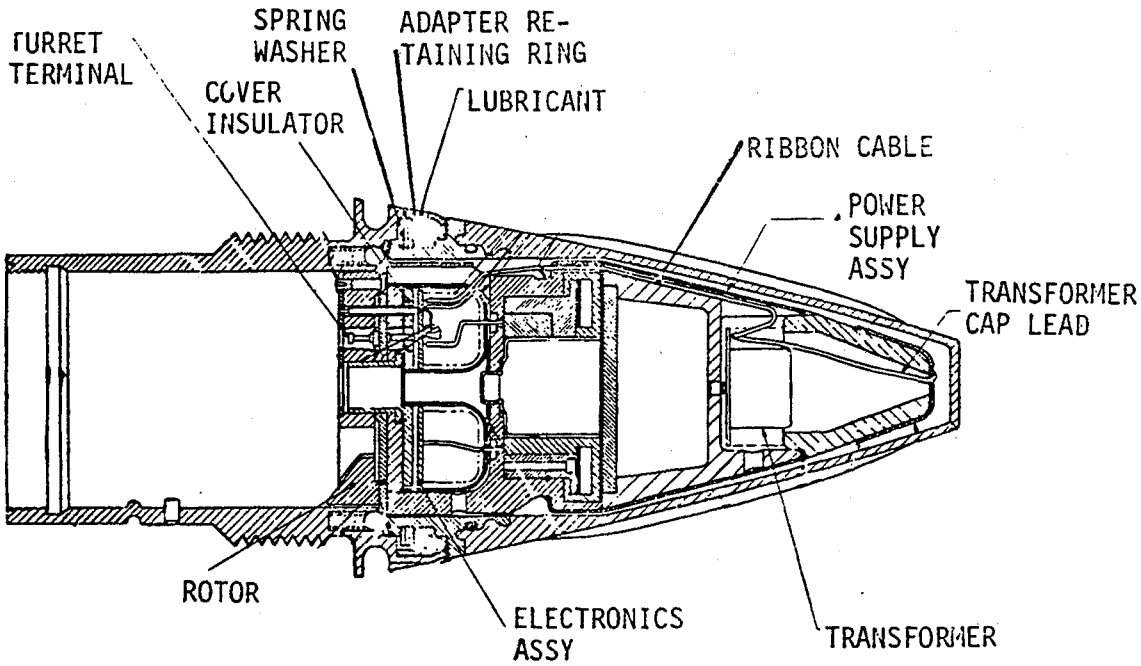

IDENTIFICATION

Agency	ERADCOM, DELHD-IT J. Cullinane
Status	AV 290-2408 Terminated
Ass'y Dwg. No.	Similar to dwg. 10989680
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	Artillery
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	50
Setback (g)	8000
Velocity (fps)	650

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM589, FUZE, NEAR SURFACE BURST

ARMING DATA

Method	Setback & spin
Delay	2-6 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	250 / 450
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.1 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Capacitance of earth
Type	Electrical
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Battery

EXPLOSIVE TRAIN

S&A Device	M125
Primer	
Detonator	M84
Booster	RDX

REMARKS

Same as Fuze XM588, except different S&A (longer time).

Standard artillery contour.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FUZE, MT, M591

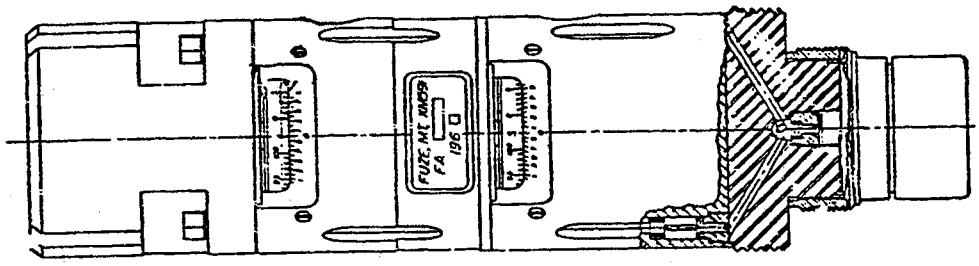

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T
Status S. Honickman AV 880-3174 Obsolete
Ass'y Dwg. No. F10535728
Parts List 10535728
Specification MIL-F-60890
Previous Number M543A1

GENERAL

Carriers Projectile
Cal. – Size 8 in. Howitzer

Location Internal
Use Practice, Training
MIL-STD's 331, Tests 101-104
Max Values
Rotat. (rps) 171
Setback (g) 12,000
Velocity (fps)

KEY FEATURES

Two seperate timers aligned in stack.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FUZE, MT, M591

ARMING DATA

Method: Spin, setback, mechanical timer
Delay: 8 secs.
Rotation (rps)
Non-arm: 16 Arm: 33
Setback (g)
Non-arm: 500 Arm: 900
Arming Wire: No
External Indicat.: No

PHYSICAL DATA

Weight: 4.92 lb.
Total Length (in.): 10.127
Body Diam. (in.): 2.8
Intrusion: Internal
Thread Size: 2.91-10NA-4C

FUNCTIONING DATA

Action: Time
Type: Mechanical
Delay
Time Type: Mechanical, two center tuned
Time Setting (sec): 10 - 100, .1 increments (Vernier)
Target: Ground
Sensitivity
Material
Thickness (in.)
Max Obliq. (°)
Velocity (fps)
Carrier

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device
Primer: T103E1(3)
Detonator: M17
Booster: M125A1
Pellet: 807gm Black powder (2)
Relay: M7
Lead: Tetryl

REMARKS

Replaces Fuze M543A1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M592A1 MT Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-493 and 1-494 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

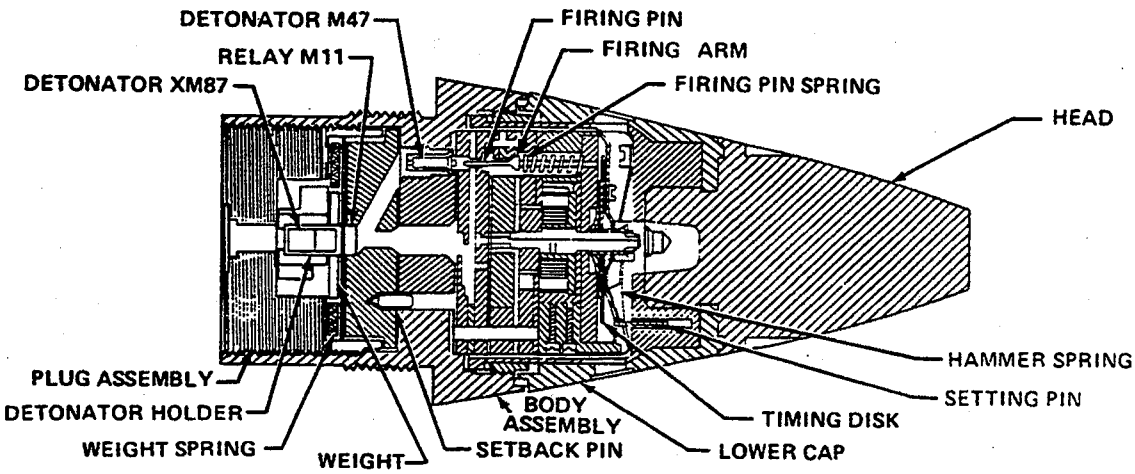

- OVERALL SIZE -	- INTRUSION -	WT: 1.5 lb (680 g)
LG: 5.287 in (134.3 mm)	DP: 1.5 in (38.1 mm)	THD: 1.9-16UNS-1A (non std)
XSECT: 2.4 in (61.0 mm)	DIA:	THD DP: 0.870 in (22.1 mm)

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT: Chesky, E
- PHONE: DSN 880-2908
- STATUS: Obsolete
- USER:
- ASSY DWG: 10 542 850
- PARTS LIST: PL10542850
- SPEC: FA PD M12723
- PUB: TM 43-0001-28

- NATIONAL STOCK NO:
  1390-00-425-6265
- DODIC: N385
- PRIOR MODEL NO: None
- SIMILAR TO: M563, M571, M711

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 106 mm Recoilless Rifle, M40A4 and M40A6

- AMMUNITION:
  Cartridge, APERS-T, M581

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 210 rps
- SETBACK: 5810 g
- VELOCITY: 1450 ft/s (442 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 1-495 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 1000 g no arm,
1700 g all arm

SECOND SAFETY:
Spin: 33 rps no arm,
75 rps all arm
Complete fuze
OTHER SAFETY:

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
10 ms after setback ceases

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: M47, M87

LEAD:

BOOSTER:

OTHER: Relay M11

FUNCTIONING DATA
MODES: Muzzle or time action
TYPE: Mechanical
CHARACTERISTICS:
Mechanical, Popovitch escapement
200-3300m, 100m increments

TARGET: Antipersonnel
SENSITIVITY:

FUNCTION TEMP:
-40 to +52 deg C
MODE ON DELIVERY:

POWER SUPPLY:

Mainspring

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL: C
NET EXPL WT:
NET PROP WT:
STORAGE TEMP: -62 to +71 deg C

REMARKS/DESCRIPTION:
The fuze is not detonator safe since there is no interruption of the explosive train after the last sensitive component, the M87 Det. The fuze is not used to initiate a bursting charge, but only to open a beehive flechette projectile. For Muzzle action, acceleration moves four pins rearward freeing the centrifugal weights above timer which uncover firing notch in timing disc. Firing arm rotates into notch freeing spring-loaded firing pin which functions M47 Detonator. In the meantime, overlapping weights between the M11 Relay and the M87 Detonator in base are moved aside by centrifugal force. For time action, lower cap is rotated which rotates the timing disc through the setting pin. On acceleration, the hammer weight frees the timing disc from the pin. Centrifugal force frees the spring-driven timing movement which rotates until the firing arm can rotate into the notch freeing the firing pin as described above. The M592A1 is generally the same as the M563, M571, and M711 except for differences in acceleration and spin arming characteristics. The M592 differs from the M592A1 in that it has alpha weights instead of four setback weights.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 1.27 lb (576 g)
LG: 5.96 in (151 mm)	DP: 2.21 in (56 mm)	THD: 2-12UNS-1A
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-
- CONTACT:
- PHONE:
- STATUS: Terminated
- USER: Army
- ASSY DWG: 8 797 514
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO: M524A1 (M524E2)

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 90-mm gun

- AMMUNITION:
  - HE, XM591 Cartridge

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 25 rps
- SETBACK: 7,400 g
- VELOCITY: 140 fps (43 m)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

Supersedes page 1-497 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 70 g, none arm;
165, all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
0.20 to 0.33 s

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: M63 Stab (SQ)
M80 Flash (SQ & delay)

LEAD: Plunger lead (SQ)
Booster lead (SQ & delay)

BOOSTER: Tetryl (SQ & delay)

OTHER: M2 Delay Element (delay)

FUNCTIONING DATA
MODES: PD
TYPE: Mechanical
CHARACTERISTICS:
0.05 s delay, SQ

TARGET: Personnel, river boats
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, the setback assembly rotates 130 deg clockwise turning the segment shaft to the armed position where it is locked. In the armed position, a flat section of the segment shaft permits the lever of the setback device and its shaft to rotate clockwise when acceleration of the projectile ceases. While in the rifle tube, friction between the rotor and body of the arming mechanism prevents rotor movement. After acceleration, force by the rotor stop pin on the lever shaft of the setback device turns the lever and shaft clockwise until the rotor stop pin is disengaged from the setback device. The rotor is driven by its drive spring to the armed position. The plunger, keyed to the rotor, turns in a counter clockwise direction to the armed position. When set SQ, the striker drives firing pins into both the M63 detonator and M2 delay. If the SQ detonator fails, the fuze will still function on delay. When set delay, the striker drives one firing pin into the M2 delay causing initiation of the remaining firing train after 0.05 s. The remaining firing pin is driven into a hole instead of the M63 detonator. The XM594E1 has an improved striker detent system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM597, FUZE, PD

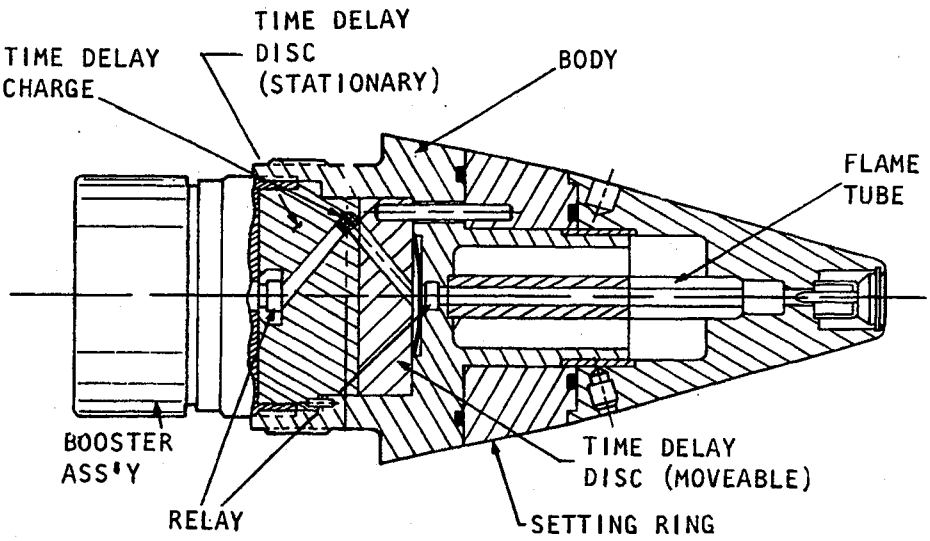

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T, G. Eckstein, AV 880-5468

Status Terminated

Ass'y Dwg. No. E320-68-07 (Thiokol)

Parts List

Specification

Previous Number

GENERAL

Carriers	Projectile
Cal. — Size	105 mm, 8 in.
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	416
Setback (g)	30,000
Velocity (fps)	

KEY FEATURES

Settable delay after impact to allow penetration of jungle canopy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM597, FUZE, PD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm 16	Arm 33
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.10 lb
Total Length (in.)	5.97
Body Diam. (in.)	
Intrusion	2.21 in.
Thread Size	2.00-12UNS

FUNCTIONING DATA

Action	PD, delay
Type	Pyrotechnic, mechanical
Delay	0.05 - 0.20 sec
Time Type	Pyrotechnic
Time Setting (sec)	0.050 sec incr.
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	M564
Relay	XM10

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: XM597
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM599, FUZE, MT

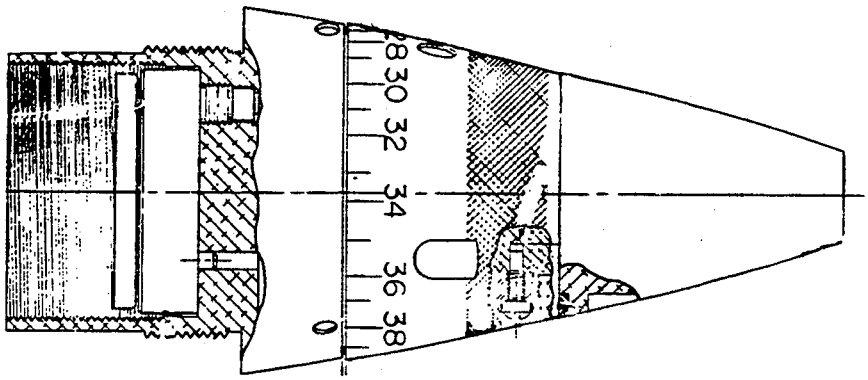

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T S. Honickman AV 880-3174
Status	cancelled
Ass'y Dwg. No.	X10551600
Parts List	PLX10551600
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	152 mm APER-T XM618
Location	Nose
Use	Beehive
MIL-STD's	331, Tests 101-105, 108
Max Values	
Rotat. (rps)	108
Setback (g)	25,000
Velocity (fps)	2240

KEY FEATURES

Hand settable, muzzle action (beehive).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM599, FUZE, MT

ARMING DATA

Method	Spin, setback
Delay	
Rotation (rps)	
Non-arm	17
Arm	83.3
Setback (g)	
Non-arm	1000
Arm	5000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.5 lb
Total Length (in.)	5.278
Body Diam. (in.)	2.4
Intrusion	1.50 in.
Thread Size	1.9-16UNS1A

FUNCTIONING DATA

Action	PD, time
Type	Mechanical
Delay	
Time Type	Mech., two center tuned (round hairspg.)
Time Setting (sec)	200 - 3900 m
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M47, XM87
Booster	
Relay	M11

REMARKS

When set for muzzle action, this fuze will function before 50 ft.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

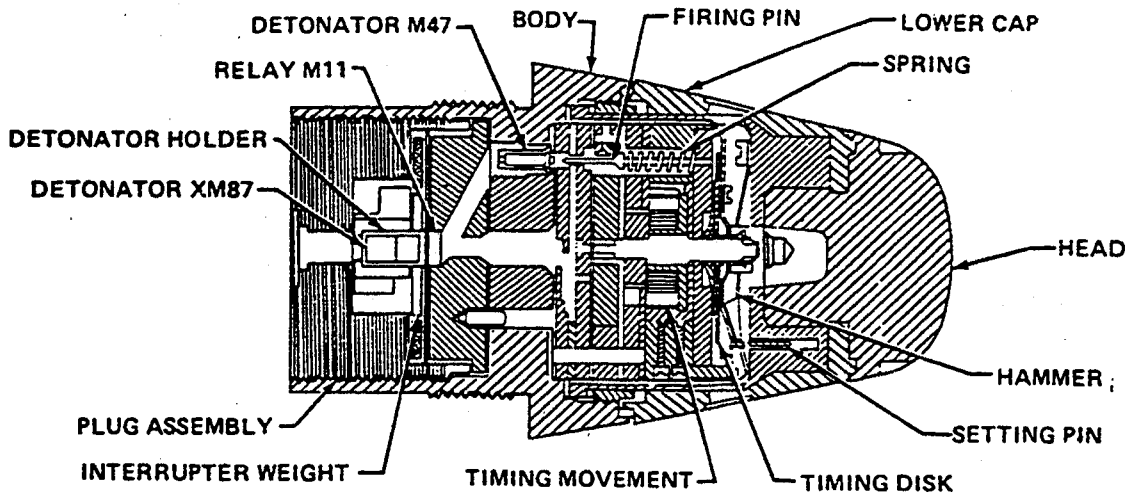

- OVERALL SIZE -	- INTRUSION -	WT: 1.32 lb (599 g)
LG: 4.166 in (105.8 mm)	DP: 1.5 in (38.1 mm)	THD: 1.9-16UNS-1A (non std)
XSECT: 2.4 in (61.0 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 10 542 845
- PARTS LIST: PL10542845
- SPEC: MIL-F-60589
- PUB: TM 43-0001-28

- NATIONAL STOCK NO:
  1315-00-143-8235; 1315-00-926-9328
- DODIC: C275
- PRIOR MODEL NO: XM711
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 90 mm recoilless rifle

- AMMUNITION:
  Flechette-loaded, M580
  Beehive (muzzle action)

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 19,050 rps
- SETBACK: 20,660 g
- VELOCITY: 3000 ft/s (914 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: Hand

Supersedes page 1-503 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 1000 g no arm
5600 g all arm

SECOND SAFETY:
Spin: 100 rps no arm
333 rps all arm

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
10 ms after setback

EXPLOSIVE COMPONENTS

S&A DEVICE: Dwg. 10 533 945

PRIMER: None

DETONATOR: M47 stab, M11 relay, XM87 percussion

LEAD: None

BOOSTER: None

OTHER:

POWER SUPPLY:

None

FUNCTIONING DATA

MODES: Muzzle or time action
TYPE: Mechanical
CHARACTERISTICS:
Popovitch escapement 200-400 m
100 m increments

TARGET: Anitpersonnel
SENSITIVITY:
NA

FUNCTION TEMP:
-40°C to +52°C
MODE ON DELIVERY:

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP: +71°C < 4 hr/day
-62°C less than 3 days

REMARKS/DESCRIPTION:

The fuze provides selectable muzzle action (MA) or set time. When MA is selected, setback causes the setback pins to move down and allow centrifugal force to move the weight above the timer, uncovering a notch in the timing disk. At the same time, centrifugal force moves aside the weights between the M11 Relay and XM87 Detonator in the base. With the notch in the timing disk uncovered, the firing arm slides in and turns, permitting the spring-loaded firing pin to strike the M47 Detonator and initiate the explosive train as the projectile leaves the muzzle. If the fuze is set for time, rotation of the lower cap turns the timing disk by means of a setting pin lodged in an upraised lug on the disk. Setback permits a hammer spring to strike the upraised lug, thus releasing the timing disk from the setting pin. Centrifugal force releases the timing movement. When the disk has turned the preset time, the disk notch engages the firing arm. The firing arm turns to allow the firing pin to strike the detonator. The fuze functions for optimum payload dispersion for the range set (100 m short for 200-500 m; 75 m short for 600-4400 m).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM712E2, FUZE, PD

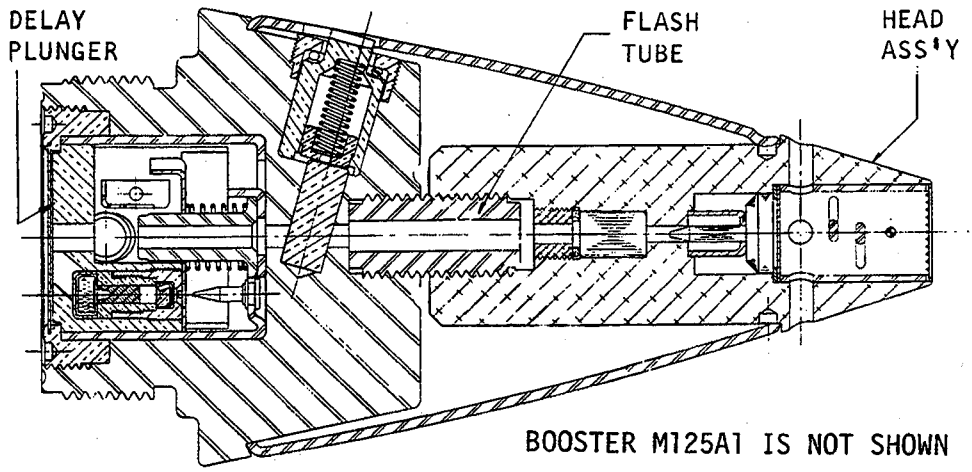

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T, G. Eckstein, AV 880-5468
Status Terminated
Ass'y Dwg. No. P9217452
Parts List
Specification
Previous Number

GENERAL

Carriers	Mortar projectile
Cal. — Size	75 - 280 mm & 4.2 in.
Location	Nose
Use	HE
MIL-STD's	331, Tests 101, 102, 104, 115
Max Values	
Rotat. (rps)	550
Setback (g)	32,000
Velocity (fps)	2800

KEY FEATURES

Rain insensitive PD element, and improved foliage (jungle) penetration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM712E2, FUZE, PD

ARMING DATA

Method	Spin
Delay	200 ft
Rotation (rps)	
Non-arm	16
Arm	33
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

Setback arming capability provided by booster

PHYSICAL DATA

Weight	2.15 lb
Total Length (in.)	5.93
Body Diam. (in.)	2.412
Intrusion	2.21 in.
Thread Size	2.12NS-1

FUNCTIONING DATA

Action	PD, SQ, delay
Type	Mechanical
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M24
Booster	M125A1E series
Delay plunger	M1

REMARKS

This development was terminated when it was found that the M557A1E1 would lead to the same result.

M557A1E1 also terminated, now replaced by M739 PD fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M716 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-507 and 1-508 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M717 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-509 and 1-510 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM718 FUZE, PROXIMITY, ARTILLERY

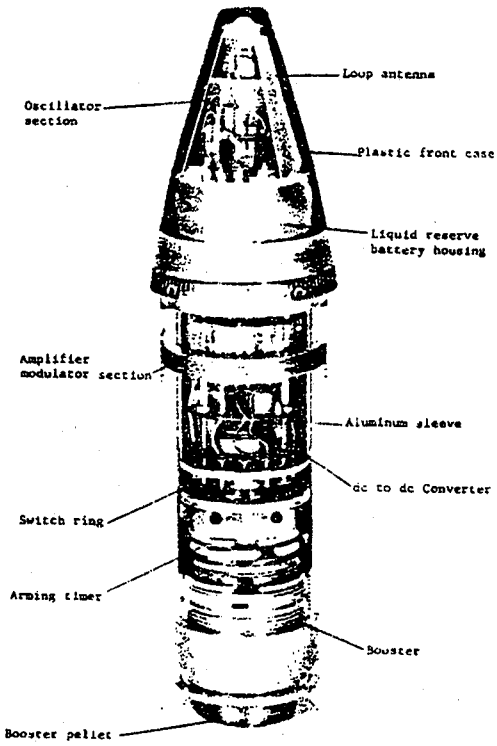

IDENTIFICATION

Agency ERADCOM, DELHD-DE-OE
L. Tozzi
Status AV 290-2400
Terminated
Ass'y Dwg. No. D10980200
Parts List EPL 10980200
Specification XTL-PD-166, Rev. 1
Previous Number T368E2

GENERAL (U)

Carriers Projectile
Cal. – Size 4.2 mortar - 175m

Location
Use HE
MIL-STD's
Max Values
Rotat. (rps) 400
Setback (g) 23,000
Velocity (fps) 3,000

Group 3

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM718, FUZE, PROXIMITY, ARTILLERY

ARMING DATA (U)

Method	Spin & setback
Delay	1.9 - 3.6 sec
Rotation (rps)	
Non-arm	21 Arm 38
Setback (g)	
Non-arm	780 Arm 1200
Arming Wire	None
External Indicat.	No

PHYSICAL DATA (U)

Weight	2.43 lb
Total Length (in.)	8.6
Body Diam. (in.)	1.785
Intrusion	4.912 in.
Thread Size	2-12UNS-1A

FUNCTIONING DATA (U)

Action	Proximity, PD pickup
Type	Electrical
Delay	
Time Type	
Time Setting (sec)	8 - 98 x 1 sec
Target	Ground, water Antipersonnel
Sensitivity	
Material	Plywood
Thickness (in.)	1
Max Obliq. (°)	
Velocity (fps)	Zone 1, 105 mm H.
Carrier	All

POWER SUPPLY (U)

PS-107, silver/zinc

EXPLOSIVE TRAIN (U)

S&A Device	XM139 proj. booster
Primer	MK 124
Detonator	
Booster	

REMARKS

SERIES: A CHAPTER: 1
DESIGNATION: XM718
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

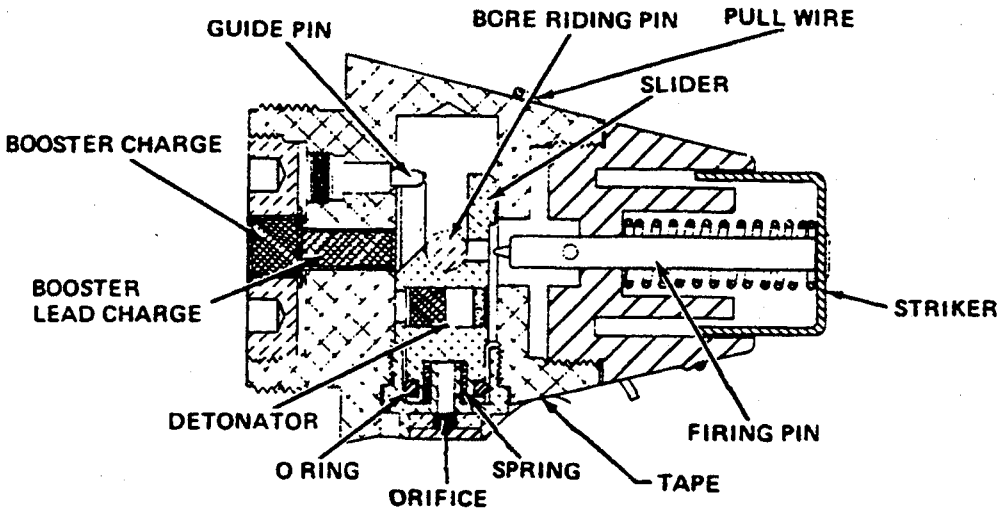

- OVERALL SIZE -	- INTRUSION -	WT: 0.25 lb (113.4 g)
LG: 2.95 in (74.9 mm)	DP: 0.5 in (12.7 mm)	THD: 1.5-12NF-(non-std)
XSECT: 1.93 in (49.0 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 9 220 850; 73-1-161
- PARTS LIST: PL 9 220 850
- SPEC: PA-PD-2961
- PUB: TM 43-0001-28

- NATIONAL STOCK NO: 1390-00-143-7035
- DODIC: N332
- PRIOR MODEL NO:
- SIMILAR TO: M52A2, M519E1, M527, M716, M717
- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 60 and 81 mm mortars
- AMMUNITION:

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION:
- SETBACK: 8000 g
- VELOCITY: 1000 ft/s (304 m/s)
- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Arming wire

SECOND SAFETY:
Setback: 600 to 1200 g all arm (estimated)

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Yes

ARMING TIME OR DISTANCE:
1.5 to 6.0 s

EXPLOSIVE COMPONENTS

S&A DEVICE: Out-of-line explosive train
PRIMER: None

DETONATOR: M44E1

LEAD: Tetryl

BOOSTER: Tetryl

OTHER: None

FUNCTIONING DATA
MODES: PD SQ
TYPE: Mechanical
CHARACTERISTICS:
Dashpot

TARGET: Personnel
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:
SQ

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Setback from weapon firing forces the setback pin rearward against the pin spring and releases the bore-riding pin. The bore-riding pin then contacts the bore of the mortar and is ejected when the cartridge leaves the muzzle. Ejection of the bore-riding pin unlocks the slider. The slider is moved by a compression spring. A vacuum is created behind the slider due to an o-ring seal. The vacuum is relieved gradually by the bleed air orfice. The metered pressure relief through the orfice provides 1.5 to 6 s delay before the slider completes the movement necessary to align the detonator with the firing pin and arm the fuze. On impact, the striker and firing pin are depressed, and inertia throws the slider with detonator forward into the firing pin. Detonation is on superquick action through the booster lead charge and tetryl booster charge. The M717 is the same except it has a much larger tetryl booster.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M720E1 PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-515 and 1-516 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM723E1, FUZE PD

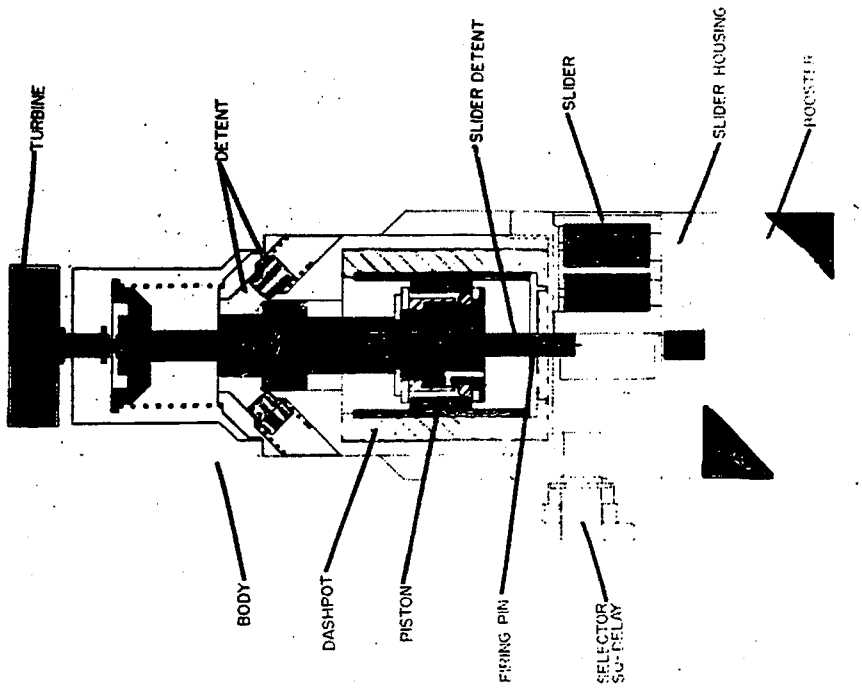

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T, S. Israels
Status Terminated
Ass'y Dwg. No. P923-6133
Parts List
Specification
Previous Number

GENERAL

Carriers	Projectile
Cal. — Size	60 and 81 mm
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	30,000
Velocity (fps)	

KEY FEATURES

Independent dual safeties: (1) air sensing turbine, (2) glass dashpot (PAOD) timer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM723E1, FUZE, PD

ARMING DATA

Method	Setback, turbine
Delay	2 - 6 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm 400	Arm 600
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	7 oz
Total Length (in.)	3 3/4
Body Diam. (in.)	1 3/4
Intrusion	1 in.
Thread Size	1 1/2 - 12

FUNCTIONING DATA

Action	PI, select
Type	Mechanical
Delay	SQ, 0.050 sec delay
Time Type	Mech.,non-escapement
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	Pneumatic annular orifice dashpot (PAOD)
Primer	
Detonator	M63, XM76
Booster	

REMARKS

Fuze utilizes PAOD timer as originally designed and tested in XM723. Addition of independent second safety and safety interlocks constitute E1 model.

SERIES: A CHAPTER: 1
DESIGNATION: XM723E1
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M728 CVT Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 1-519 and 1-520 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

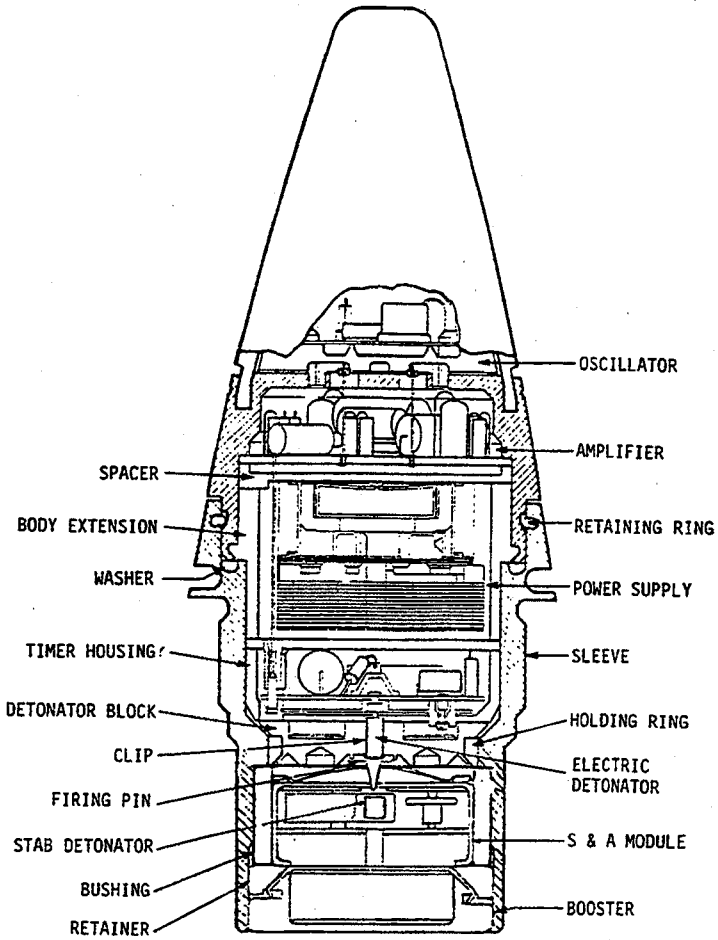

- OVERALL SIZE -	- INTRUSION -	
LG: 5.97 in (151.6 mm)	DP: 2.21 in (56.1 mm)	WT: 1.76 lb (798.3 g)
XSECT: 2.42 in (61.4 mm)	DIA: 1.79 in (45.5 mm)	THD: 2.0-12UNS-1A
		THD DP: 0.75 in (19.1 mm)

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-T
- CONTACT: Beard, J
- PHONE: DSN 290-2420
- STATUS: Terminated
- USER: Army, Marines
- ASSY DWG: 11 741 889
- PARTS LIST: 11 741 889
- SPEC: MIL-F-48712, -48713
- PUB:

- NATIONAL STOCK NO:
  1390-01-020-0096, 1390-01-137-5444
- DODIC: N464
- PRIOR MODEL NO: M732
- SIMILAR TO: M514A1, M728, M732

- REPLACES: M728, M514A1, M732
- REPLACED BY:

GENERAL
- WEAPON: 4.2-in Mortar, 105mm, 155mm & 8-in Howitzers & 175mm Gun
- AMMUNITION:
  4.2in HE M329A2,105mm HE M1, 155 mm HE M107&GB UX M121A1,8in HE M106 & GBM UX M426,175mm HE M437

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 50 rps to 360 rps
- SETBACK: 1600 g to 20,000 g
- VELOCITY: 328 to 3280 ft/s (100 m/s to 1000 m/s)

- CREEP: 6 g max
- FLIGHT TIME: 140 s (approx)

SAFETY STD: Waiver for MIL-STD-1316B

SETTERS: M27

Supersedes page 1-520A of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 800 g no arm,
1200 g all arm

SECOND SAFETY:
Spin: 17 rps no arm,
28 rps all arm

OTHER SAFETY:
Electric arming 5 s before
expected functioning

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
37 to 111 m, mechanical
5 s before function, electric

FUNCTIONING DATA
MODES: Proximity or PD
TYPE: Electronic, RF CW
CHARACTERISTICS:
Mechanical impact back-up
5 to 150 s setting for
prox mode

TARGET: Ground-Personnel, Materiel
SENSITIVITY:
2.3 ft (0.7 m) plywood, 0 degree
obliquity, 640 ft/s (195 m/s),
105 mm Howitzer
FUNCTION TEMP:
-37 to +63 deg C
MODE ON DELIVERY:
PD

EXPLOSIVE COMPONENTS

S&A DEVICE: M724 type,
Dwg 11 720 300
PRIMER: None

DETONATOR: Mod 100 Elec, 11 722 405
M55 Stab

LEAD: 134 mg PBXN-5

BOOSTER: 11.0 g CH-6

OTHER: None

POWER SUPPLY:

PS-115,
Liquid Reserve, 11007046
NSN 1390-01-054-5139

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0409
US HCSDS: 846, 984 w/o booster
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: A
NET EXPL WT: 11.250 g
NET PROP WT: None
STORAGE TEMP: -46 to +71 deg C

REMARKS/DESCRIPTION:
Fuze safety is obtained by a setback detent and two spin detents on the safety device rotor and setback and spin requirements for the power supply. On firing, acceleration moves the setback pin rearward, partially releasing the safety rotor and breaks the copper ampoule, releasing the electrolyte in the power supply. Centrifugal force (CF) rotates the spin detents completely releasing the unbalanced rotor and rotates it to the armed position, delayed by a runaway escapement. CF also forces the electrolyte between the plates of the battery which powers the electronic timer, arms the proximity circuitry 5 s before the set time, and transmits the CW RF. When the doppler signal between the transmitted and reflected waves reaches the proper value, the firing circuit functions the Mod M100 Det which initiates the M55 Det in the safety rotor and the lead and booster. The M732A1 differs from the M732 in that it has an M724 type S&A device instead of an M125A1 type, a sliding S&A type impact backup system, and a large booster pellet which can initiate cast TNT bursting charges. This type impact backup system provides proper function on rocket-assisted projectiles.

Supersedes page 1-520B of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

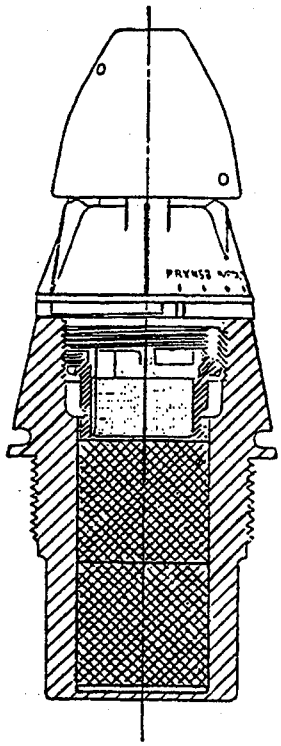

- OVERALL SIZE -	- INTRUSION -	WT: 1.10 lb (499.0 g)
LG: 6.083 in (154.5 mm)	DP: 2.20 in (55.9 mm)	THD: 2-12UNS-1A
XSECT: 2.41 in (61.2 mm)	DIA: 17.4 in (44.2 mm)	THD DP: 0.78 in (19.8 mm)

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-T
- CONTACT: Beard, J
- PHONE: DSN 290-2420
- STATUS: Terminated
- USER: Army, Marines
- ASSY DWG: 11 723 140
- PARTS LIST: 11723140
- SPEC: MIL-F-50828
- PUB:

- NATIONAL STOCK NO:
  Not yet assigned
- DODIC: Not yet assigned
- PRIOR MODEL NO: None
- SIMILAR TO: M734

- REPLACES: M524A6,M526,M532,M567
- REPLACED BY:

GENERAL
- WEAPON: 81mm Mortar, M1 & M29A1 & 4.2-in Mortar M2 & M30
- AMMUNITION:
  81mm Cart, HE, M374 Series & Smoke, M375 Series; 4.2-in Cartridge M329 Series

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 0 to 130 rps
- SETBACK: 1000 to 12000 g
- VELOCITY: 217 to 1100 ft/s (66 to 335 m/s)

- CREEP:
- FLIGHT TIME: 8.5 to 55 s

SAFETY STD: MIL-STD-1316B

SETTERS: Manual

Supersedes page 1-520C of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 225 g no arm,
375 g all arm
Boost: 8 ms at 375 g
SECOND SAFETY:
Sustained air flow
25 m/s minimum velocity

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
100 m mech, 2 to 3 s
more elec

EXPLOSIVE COMPONENTS

S&A DEVICE: Zig-zag & airflow type

PRIMER: In delay

DETONATOR: Mod M100 micro elec,
11722405, M61 Stab

LEAD: 413 mg PBXN-5, 11722542

BOOSTER: 8 g Comp A-5 (in 734)
65.4 g Comp A-5
(in adapter)
OTHER: Delay for M734 .05 to .15 s,
11730630 (11722790 alt)

FUNCTIONING DATA
MODES: Prox, near burst, SQ or DEL
TYPE: Electronic, Mechanical
CHARACTERISTICS:
Prox: 1 to 4 m HOB
Near burst: 0 to 1 m HOB
SQ: 200 to 700 microsec
Delay: 100 ms
TARGET: Gnd-Personnel and Material
SENSITIVITY:
0.4 ft (0.12 m) plywood, 0 degree
obliquity, 630 ft/s (192 m/s),
105 mm Howitzer
FUNCTION TEMP:
-46 to +63 deg C
MODE ON DELIVERY:
Proximity

POWER SUPPLY:

Turbine Alternator, 11722760

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL: A
NET EXPL WT: 74.0978 g
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
The fuze is made safe by restraining the rotor by an acceleration-time sensing device and an air flow operated jackscrew detent. The fuze is set by rotating the head for proximity, near burst, impact, or delay functioning. On firing, a setback weight moves rearward oscillating in a zig-zag track to sense a proper acceleration-time propulsion. This partially releases the rotor and frees a turbine alternator. Sustained air flow into the turbine in flight slowly unscrews the jackscrew, completely releasing the rotor. The rotor is spring-driven to the armed position unshorting the detonator and completing the electrical circuits. The alternator powers the transceiver and a timing circuit which delays the firing circuit for 2 to 3 s after rotor arming. When the CW RF doppler signal reaches the proper value, the firing circuit functions the Mod M100 Det which initiates the lead and booster. When set SQ, an elect switch closes at impact and functions the Mod M100. When set delay, an inertia firing pin functions the stab delay which initiates the M61 Detonator. The XM741 is the same as the M734 but has a 1.5 to 2-in adapter booster.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

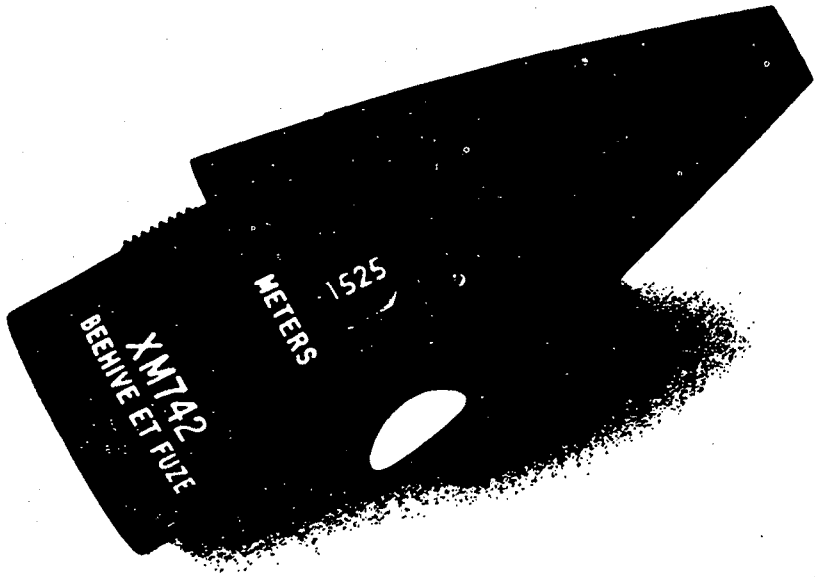

IDENTIFICATION

AGENCY: ARRADCOM, DRDAR-LCN-T

CONTACT: P. Weldon
AV 880-2155

STATUS: Terminated

USER: Army

ASSY DWG: None Government

PARTS LIST:

SPEC: None

NSN: None

PRIOR NOMENCLATURE: None

REPLACES: M571

GENERAL

MUNITION: Projectile for 105mm Tank Gun, M68

USE: Cartridge APERS-T M494 "Beehive"

LOCATION: Nose

BALLISTIC LEVELS:

ROTATION: 500 rps

SETBACK: 30,000 g

VELOCITY: 823 m/s

CREEP:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26 13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Setback 3000 g non arm, 6060 arm

SECOND SAFETY:

Spin 50 rps non arm, 209 arm

OTHER SAFETY:

None

DELAY:

400 calibers

SAFE/ARM CONDITION:

No
Meets MIL-STD-1316B

FUNCTIONING DATA

MODE(S): Time, Settable

TYPE: Electronic

CHARACTERISTICS:

Muzzle action to 4400 m x 25 m incr

TARGET: Ground-Personnel

SENSITIVITY:

Not applicable

PHYSICAL DATA

WEIGHT: 1.28 lb (580.6 gm)

TOTAL LENGTH: 5.26 in (12.23 cm)

CROSS SECTION: 2.115 in (5.37 cm)

INTRUSION: 1.50 in (3.81 cm)

THREAD SIZE: 1.9-16UNS-1A

OTHER:

POWER SUPPLY:

Setback Generator

EXPLOSIVE TRAIN

S&A DEVICE:

PRIMER: None

DETONATORS: XM100 Elec.,
M87 Flash

LEAD: None

BOOSTER: None

OTHER: Expelling Chg: In shell
Relay: M7

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

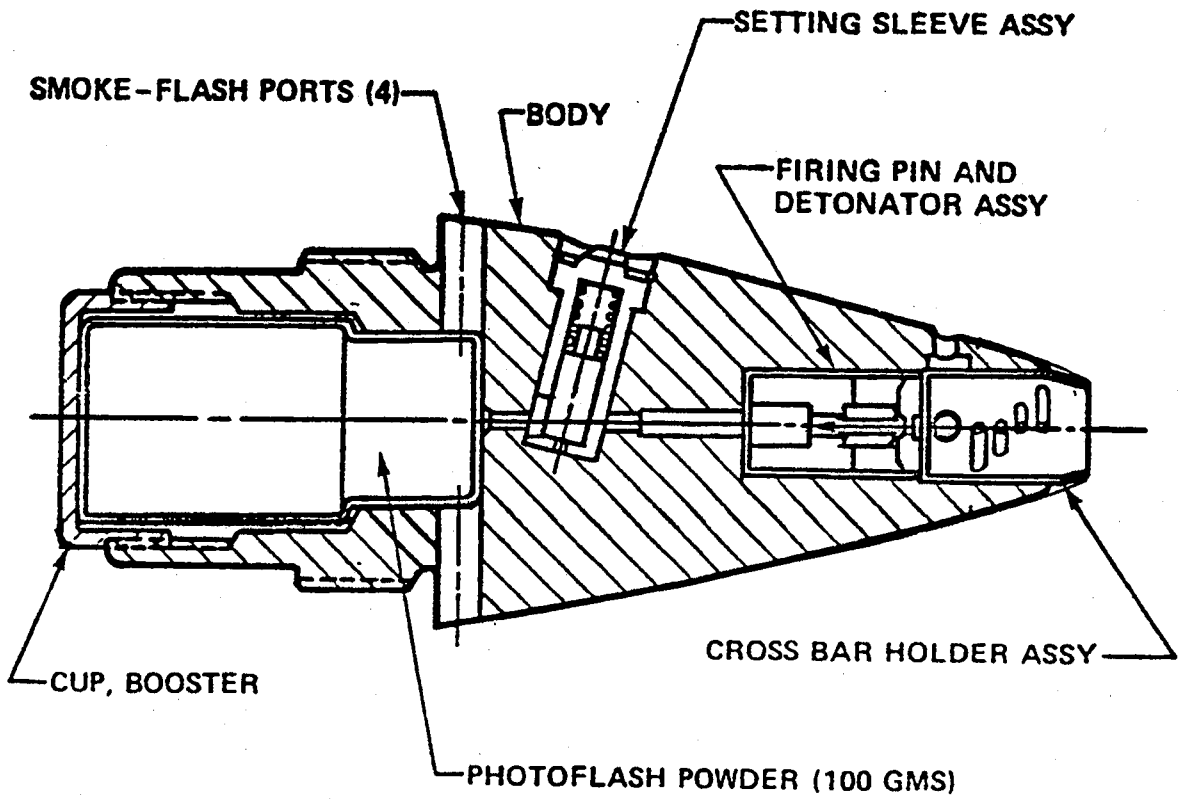

- OVERALL SIZE -	- INTRUSION -	WT: 1.50 lb (680.4 g)
LG: 5.97 in (151.6 mm)	DP: 2.21 in (56.1 mm)	THD: 2-12UNS-1A
XSECT: 2.41 in (61.0 mm)	DIA: 17.3 in (44.0 mm)	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Terminated
- USER: Army
- ASSY DWG: 9 331 823
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO:

- REPLACES: M739 practice use
- REPLACED BY:

GENERAL
- WEAPON: 105mm, 155mm, & 8 How & 4.2 in Mortar

- AMMUNITION:
  - Training Proj. 155mm XM804

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 500 rps
- SETBACK: 25,000 g
- VELOCITY: 3000 ft/s (914 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 18.3 rps no arm,
28.3 rps all arm,
Interrupter

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Yes

ARMING TIME OR DISTANCE:
None - bore safe only

EXPLOSIVE COMPONENTS

S&A DEVICE: None except interrupter

PRIMER: None

DETONATOR: M99 Stab

LEAD: None

BOOSTER: None

OTHER: Spotting chg: 52 g ZnKCLO(3), KNO(3), & AL

FUNCTIONING DATA

MODES: PD
TYPE: Mechanical
CHARACTERISTICS:
SQ action only

TARGET: None - Indirect Fire Practice
SENSITIVITY:
1 in (25.4 mm) plywood, 70 degree obliquity, 1000 ft/s (305 m/s), 155 mm Howitzer
FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 1.50 lb (680.4 g)
LG: 5.97 in (151.6 mm)	DP: 2.21 in (56.1 mm)	THD: 2-12UNS-1A
XSECT: 2.41 in (61.0 mm)	DIA: 17.3 in (44.0 mm)	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Terminated
- USER: Army
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO:

- REPLACES: M739 practice use
- REPLACED BY:

GENERAL
- WEAPON: 1/10 range 4.2 inch practice mortar

- AMMUNITION:
  - Training projectile

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 100 rps
- SETBACK: 5,000 g
- VELOCITY: 279 ft/s (85 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
To be determined

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:
None - bore safe only

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: To be determined

LEAD: None

BOOSTER: None

OTHER: Spotting chg:
To be determined

FUNCTIONING DATA

MODES: PD
TYPE: Mechanical
CHARACTERISTICS:
SQ action only

TARGET: None - Indirect Fire Practice
SENSITIVITY:
Ground impact at 279 ft/s (85 m/s)

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

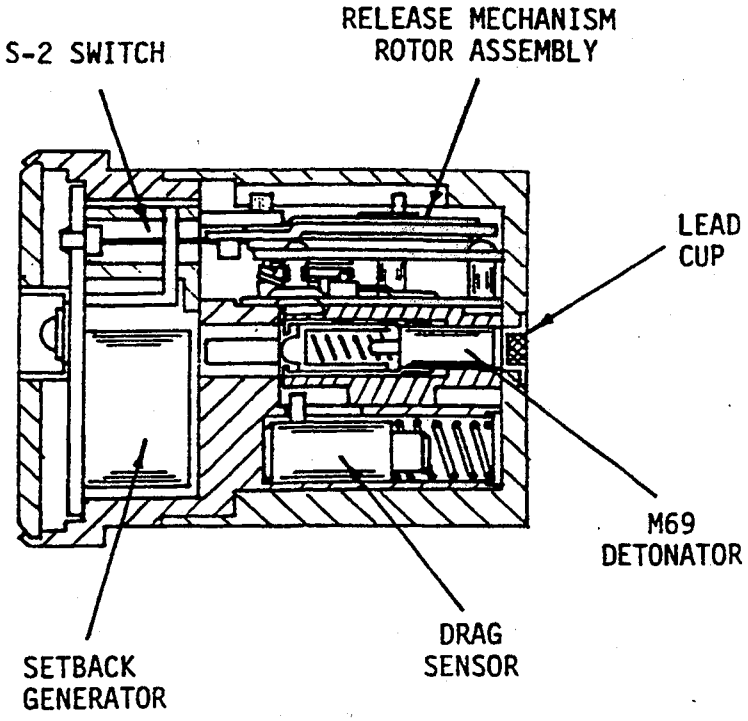

- OVERALL SIZE -	- INTRUSION -	WT: 0.27 lb (122 g)
LG: 1.76 in (44.7 mm)	DP: 1.35 in (34.2 mm)	THD: None
XSECT: 1.35 in (34.5 mm)	DIA: 1.26 in (32.0 mm)	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-C
- CONTACT: Bisson, E
- PHONE: DSN 880-5591
- STATUS: Terminated
- USER: Army, Marines
- ASSY DWG: 9 362 000
- PARTS LIST:
- SPEC: In preparation
- PUB:

- NATIONAL STOCK NO:
  Not assigned
- DODIC: Not assigned
- PRIOR MODEL NO: None
- SIMILAR TO: M509A2, M530A1, XM754, M764
- REPLACES: None
- REPLACED BY:

GENERAL
- WEAPON: 105mm Tank Cannon, M68

- AMMUNITION:
  Projectile, HEAT-MP-T, XM815

LOCATION: Nose and base
BALLISTIC LEVELS:
- ROTATION: Negligible
- SETBACK: 42,000 g
- VELOCITY: 3850 ft/s (1173 m/s)

- CREEP: 15 g
- FLIGHT TIME: 8 s max

SAFETY STD: Meets MIL-STD-1316B
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 2500 g no arm, 4500 g all arm (sequential leaves); 10000 g no arm, 15000 g all arm (generator)

SECOND SAFETY:
Creep: 2 g no arm, 4 g all arm estimated

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
11 to 26 m

EXPLOSIVE COMPONENTS

S&A DEVICE: Sequential leaf and creep

PRIMER: None

DETONATOR: M69 Elec

LEAD: 30 mg PBXN-5

BOOSTER: None

OTHER: Precision Initiating Coupler (PIC) in projectile

FUNCTIONING DATA

MODES: SQ and Graze
TYPE: Electric
CHARACTERISTICS:
SQ, 50 microsec (graze)
Graze, 600 microsec

TARGET: Gnk-Tank, lt armor, bunkers
SENSITIVITY:
1 in (25.4 mm) plywood

FUNCTION TEMP:
-37 to +52 deg C
MODE ON DELIVERY:
SQ

POWER SUPPLY:

Magnetic setback power supply, 78 V min on 0.56 mfd. Wound rotor spring.

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL: C
NET EXPL WT: 0.226 g
NET PROP WT: None
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:
The rotor is prevented from arming by a detent in the sequential setback device, & a detent from a drag sensor. On firing, acceleration holds the unbalanced rotor in the unarmed position, but rotates the three leaves of the setback device in sequence to release the rotor. Setback also causes a magnet to shear a disc and move rearward through the armature coil generating a charge for the firing capacitor. The spring driven rotor turns 270 deg toward the armed position, but can only arm if a drag sensor has removed a second detent before 220 deg rotation. Arming of the rotor unshorts the detonator and puts it in the firing circuit with the capacitor. On impact, the frontal area crush switch (FACS) closes the firing circuit and functions the M69 Det. On graze, a trembler switch closes the circuit. If either switch is closed during the arming cycle, the det will fire at 180 degrees out of line, its safest position. The XM763 is similar to the M764. Graze (trembler switch) 300 g sensitivity in the forward hemisphere. Stocked as part of XM815 Projectile.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

IDENTIFICATION

AGENCY: ARRADCOM, DRDAR-LCN-T

CONTACT: E. Bisson
AV 880-6375

STATUS: Terminated

USER: Army

ASSY DWG: 12526354 (Hnywl)

PARTS LIST:

SPEC:

NSN: Not assigned

PRIOR NOMENCLATURE: DM781

REPLACES: DM 781

GENERAL

MUNITION: Projectile for 120mm tank gun

USE: Projectile, HEAT-T-MP
X570 DMR and XM830

LOCATION: Nose and base

BALLISTIC LEVELS:

ROTATION: Negligible

SETBACK: 50,000 g

VELOCITY: mps

CREEP: 32 g

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Setback, 12,000 g non arm, 18,000 arm shear pins and sequential pins

SECOND SAFETY:

Runaway delay escapement

OTHER SAFETY:

None

DELAY:

30 to 100m (25-45 ms)

SAFE/ARM CONDITION:

No
Will meet MIL-STD-1316B

FUNCTIONING DATA

MODE(S): PI BD, Graze

TYPE: Electric, Mechanical

CHARACTERISTICS:

SQ, 10 microsec

TARGET: Ground-tank

SENSITIVITY:

1mm Dural

PHYSICAL DATA

WEIGHT: 0.32 lb (144 gm)

TOTAL LENGTH: 1.98 in (5.03 cm)

CROSS SECTION: 1.57 in (4.0 cm)

INTRUSION: 1.98 in (5.03 cm) depth
1.57 in (4.0 cm) dia

THREAD SIZE: None

OTHER:

POWER SUPPLY:

Magnetic setback generator

EXPLOSIVE TRAIN

S&A DEVICE: Runawayand creep

PRIMER: None

DETONATORS: M-DN 7 Elec

LEAD: M-DN 1002, 275 mg

BOOSTER:

OTHER:

REMARKS

This is an Americanized DM781 with the addition of a second safety, creep. Functioning initiated by Frontal Area Crush Switch (FACS) on projectile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

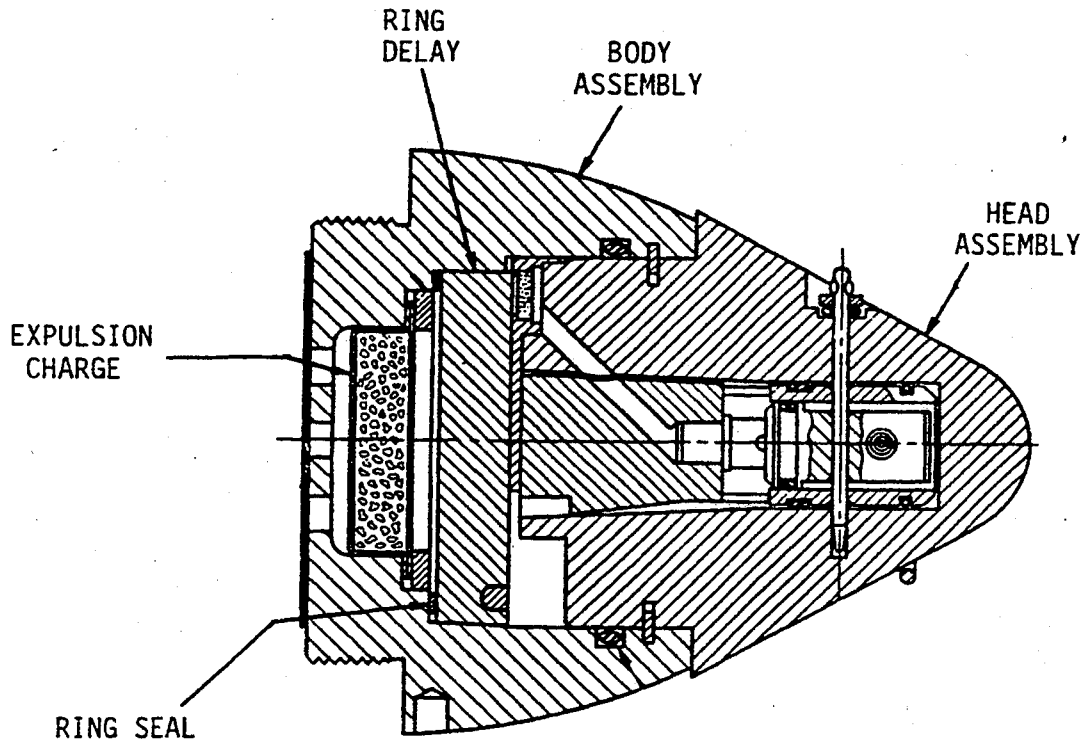

- OVERALL SIZE -	- INTRUSION -	WT: 1.93 lb (875.4 g)
LG: 3.85 in (97.8 mm)	DP: 0.60 in (15.2 mm)	THD: 2.4-18UNS-1A
XSECT: 3.00 in (76.2 mm)	DIA: Thread	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-C
- CONTACT: Cohen, S
- PHONE: DSN 880-5584
- STATUS: Terminated
- USER: Army, Marines
- ASSY DWG: 9 349 500
- PARTS LIST:
- SPEC: MIL-F-63089
- PUB:

- NATIONAL STOCK NO: 1315-01-199-8689
- DODIC: C871
- PRIOR MODEL NO: M84A1E1
- SIMILAR TO: M84A1, M84A1E1, XM769

- REPLACES: M84A1
- REPLACED BY:

GENERAL
- WEAPON: 81mm Mortar, M1, M29A1, M252 and L16/A2

- AMMUNITION: Cartridge, Illuminating, M301A3 & XM853, & Smoke, XM819

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 32 rps
- SETBACK: Not determined
- VELOCITY: 961 ft/s (293 m/s)

- CREEP: NA
- FLIGHT TIME: 45 s

SAFETY STD: Waiver for MIL-STD-1316B
SETTERS: Hand or wrench, 9 349 539

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Pull wire

SECOND SAFETY:
Setting

OTHER SAFETY:
Setback: 500 g non-fire,
1000 g fire
Shear wire on firing pin
SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
3 s

EXPLOSIVE COMPONENTS

S&A DEVICE: Shear wire

PRIMER: M39A1 Perc

DETONATOR: None

LEAD: None

BOOSTER: Expulsion: 4.8 g Class 5 black powder

OTHER: 141mg A1A Ign Pdr, 7.5mg Tungsten del comp, 227 mg Boron-pot Nitrate

FUNCTIONING DATA
MODES: Time, Settable
TYPE: Pyrotechnic
CHARACTERISTICS:
5 to 62 s x 1 s incr

TARGET: Ground-Illum & screening
SENSITIVITY:
NA

FUNCTION TEMP:
-46 to +63 deg C
MODE ON DELIVERY:
Safe

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL: C
NET EXPL WT: 0.4015 g
NET PROP WT: 4.8 g
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:
Fuze safety is provided by a pull wire and a shear pin in the firing pin and non alignment of the firing train until the fuze is set. It is set by rotating the fuze head relative to the time ring in the body. The pull wire is removed before firing. On firing, acceleration moves the firing pin rearward, shearing the shear wire and functioning the M39A1 Primer. The primer ignites the A1A Ignition Powder which ignites the Tungsten Delay Composition in the time ring. After the set delay, the time train ignites a Boron-Potassium Nitrate pellet which ignites the Black Powder expulsion charge. The XM768 differs from the M84A1 in that it is waterproof, burns for up to 62 s, has only one time ring, uses tungsten delay composition instead of black powder, and has a simpler construction. The XM768 is the same as the M84A1E1. The XM768 is similar to the XM769, except that it is larger.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

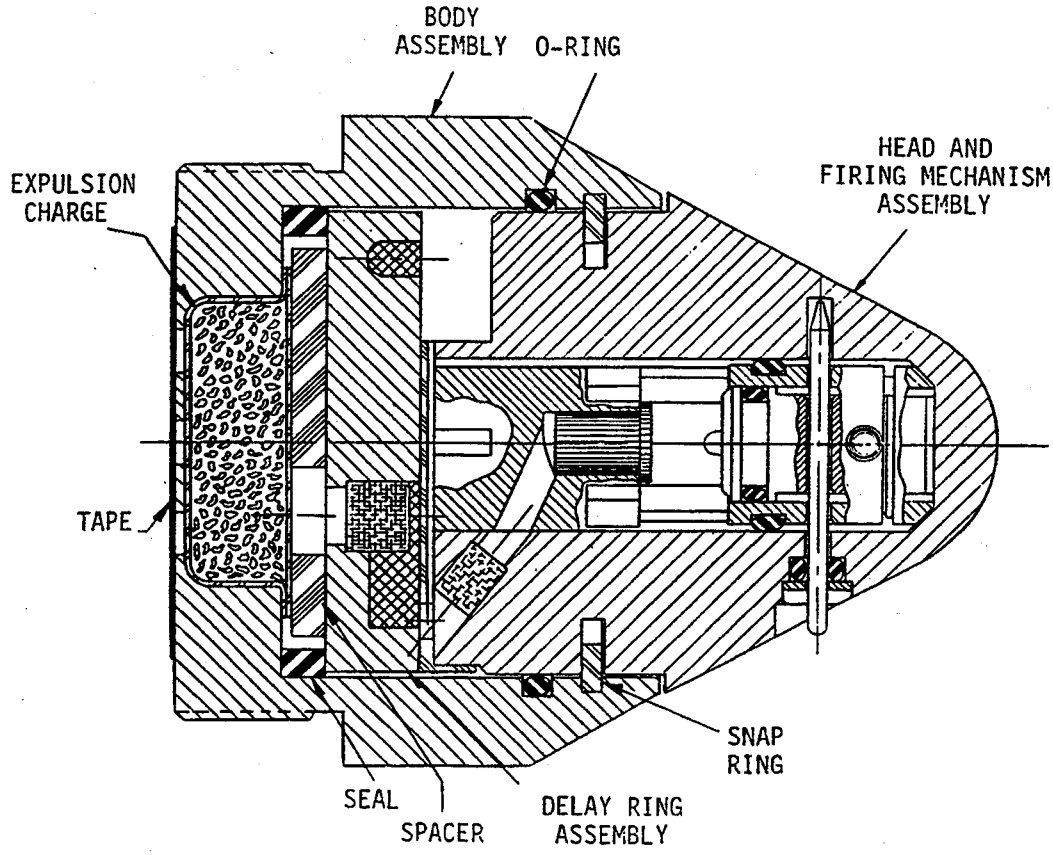

- OVERALL SIZE -	- INTRUSION -	WT: 1.31 lb (593.9 g)
LG: 2.54 in (64.5 mm)	DP: 0.48 in (12.2 mm)	THD: 2-20 UNS-1A
XSECT: 2.28 in (57.9 mm)	DIA: Thread	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT: Ragonese, W
- PHONE: DSN 880-2019
- STATUS: Terminated
- USER: Army, Marines
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO: Not assigned
- DODIC: T007
- PRIOR MODEL NO: Nothing
- SIMILAR TO: M65A1E1, M84A1, M84A1E1, XM768
- REPLACES: M65A1
- REPLACED BY:

GENERAL
- WEAPON: 60mm Mortar, M2, M19 & M224

- AMMUNITION: Cartridge, Illuminating, M83A3, and XM721

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: None
- SETBACK: 1900 to 3300 g
- VELOCITY: 453 ft/s (138 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

Supersedes page 1-524C of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Pull wire

SECOND SAFETY:
Setback: 500 g non-fire,
900 g fire

OTHER SAFETY:

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
No delay arming

EXPLOSIVE COMPONENTS

S&A DEVICE: Shear wire

PRIMER: M39A1 Perc

DETONATOR: None

LEAD: None

BOOSTER: Expulsion: 2.59 g Class 5
Black powder

OTHER: 141 mg A1A Ign Pdr, 7.5 mg
Tungsten Delay Comp, 227 mg
Boron-Potassium Nitrate

FUNCTIONING DATA
MODES: Time, settable
TYPE: Pyrotechnic
CHARACTERISTICS:
3 to 45 s
in 1 s increments

TARGET: Ground - Illum
SENSITIVITY:
NA

FUNCTION TEMP:
-46 to +63 deg C
MODE ON DELIVERY:
Safe

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG: 1.4 S
US DOT SHIP CL: C
NET EXPL WT: 0.4015 g
NET PROP WT: 2.59 g + delay
STORAGE TEMP: -46 to +63 deg C

REMARKS/DESCRIPTION:
Fuze safety is achieved by restraining the firing plunger with a pull wire and two shear pins and by having the pyrotechnic train out of line until set time. Time is set by rotating the nose of the fuze with respect to the fixed time rings and withdrawing the pull wire. On firing, acceleration moves the firing plunger rearward cutting the shear wires and functioning the M39A1 Primer which ignites the A1A ignition powder, and, in turn, the tungsten delay composition time ring. The delay burns the length of time set in the ring and ignites the Boron-Barium Nitrate pellet which ignites the black powder expelling charge in the base of the fuze. This ignites and ejects the parachute flare. The XM769 is the same as the M65A1E1 Fuze. It is similar to the M65A1 except that it has a simpler design, has tungsten delay rings instead of black powder, is settable from 3 to 45 s instead of a fixed 15 s, and is waterproof. It is similar in design to the XM768 except that it is smaller.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG: 6.0 in (152 mm)	DP: 2.2 in (56 mm)	THD: 2.0-12UNS-1A
XSECT: 2.4 in (61 mm)	DIA: 1.8 in (46 mm)	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-M
- CONTACT: Goodman, R
- PHONE: DSN 290-3710
- STATUS: Terminated
- USER: Army
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:
  None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Nothing

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: 155 mm & 8-in howitzers

- AMMUNITION:
  155 mm GB M687
  8-in GB XM836

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 500 rps
- SETBACK: 30,000 g
- VELOCITY:

- CREEP:
- FLIGHT TIME: 200 s

SAFETY STD: MIL-STD-1316
SETTERS: Auto-inductive

Supersedes page 1-524E of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback

SECOND SAFETY:
Spin

OTHER SAFETY:
Overhead safety of prox and time modes

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

POWER SUPPLY:

FUNCTIONING DATA
MODES: Prox, time
TYPE: Electronic
CHARACTERISTICS:
Prox: Selectable HOB to 75 in
Time: 0.5 to 200 s in 0.1 s increments

TARGET: Ground
SENSITIVITY:

FUNCTION TEMP:
-32 to +44 deg C
MODE ON DELIVERY:

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP: -51 to +69 deg C

REMARKS/DESCRIPTION:
The XM770 is no longer being developed. The functional capabilities planned for the XM770 will be provided by the XM773, now in development.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

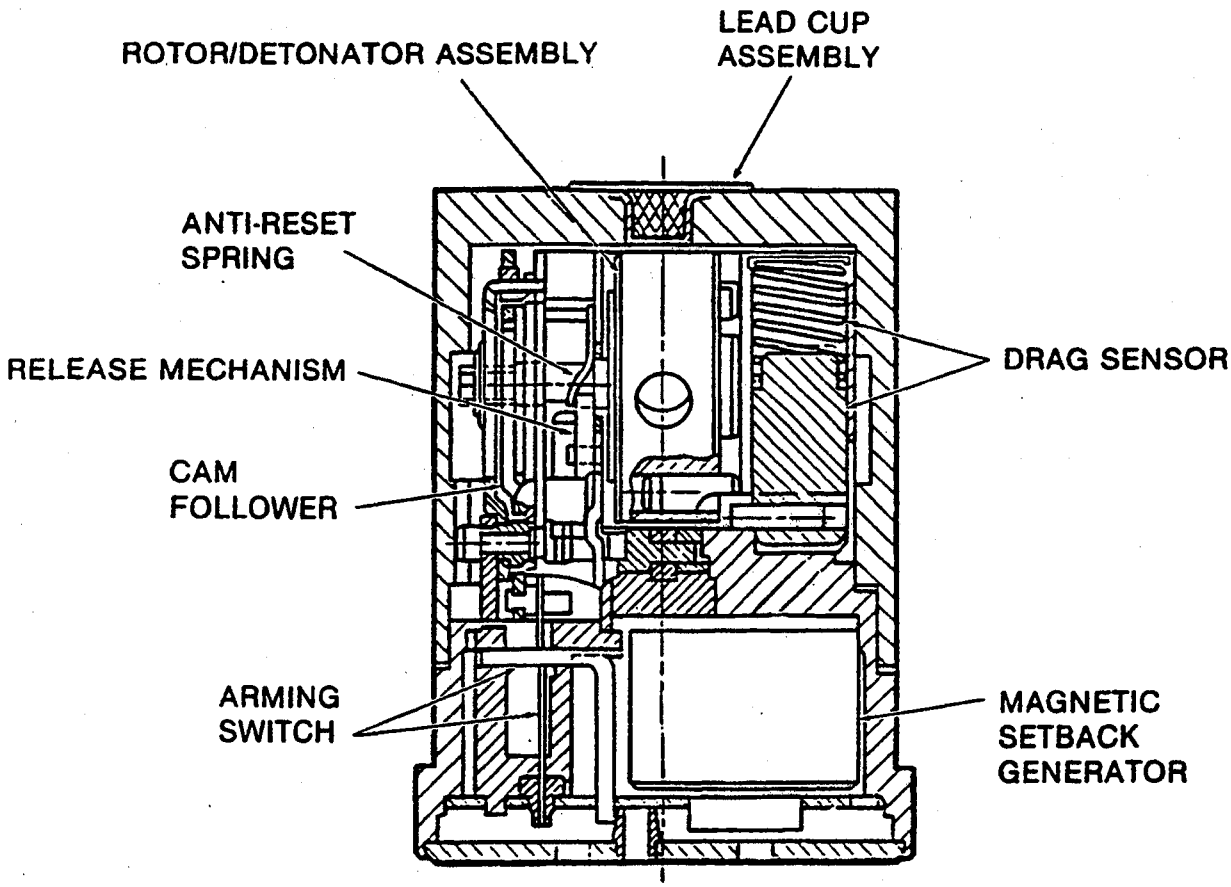

- OVERALL SIZE -	- INTRUSION -	WT: 0.27 lb (122 g)
LG: 1.77 in (44.9 mm)	DP: 1.52 in (38.6 mm)	THD: None
XSECT: 1.25 in (34.3 mm)	DIA: 1.25 in (31.8 mm)	THD DP: None

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-C
- CONTACT: Hubal, R
- PHONE: DSN 880-5589
- STATUS: Terminated
- USER: NATO
- ASSY DWG: 12 575 000
- PARTS LIST: PL 12 575 000
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO: XM763, XM764

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: 106 mm Reciolless Rifle

- AMMUNITION:
  - HEAT, M344A1E1

LOCATION: Base
BALLISTIC LEVELS:
- ROTATION: 15 rps
- SETBACK: 8000 to 12000 g
- VELOCITY: 2200 ft/s (671 m/s)

- CREEP: 10 g
- FLIGHT TIME: 8 s

SAFETY STD: MIL-STD-1316
SETTERS: None

NEW PAGE..

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 2000 g no arm
4000 g all arm
(sequential leaves)
SECOND SAFETY:
Drag sensor - rotor will lock up at 220 deg rotation unless drag sensor has moved to armed position
OTHER SAFETY:
Generator not in firing circuit when armed. Duds if graze or frontal impact sw shorted before arming.
SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
10 to 20 m

EXPLOSIVE COMPONENTS

S&A DEVICE: Sequential leaf drag sensor
PRIMER: None

DETONATOR: Mk 96

LEAD: 30 mg PBXN-5

BOOSTER: None

OTHER: Precision-initiating coupler (PIC) in projectile

FUNCTIONING DATA
MODES: SQ and graze
TYPE: Electric
CHARACTERISTICS:
Functions SQ on impact after frontal impact sw closure. Backup graze funcitioning.

TARGET: Armor
SENSITIVITY:
To be determined

FUNCTION TEMP:
-40 to + 51 deg C
MODE ON DELIVERY:
SQ

POWER SUPPLY:

Magnetic setback generator

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL: C
NET EXPL WT: 0.226 g
NET PROP WT: None
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:
The rotor is prevented from arming by a detent in the sequential setback device, and a detent from a drag sensor. On firing, acceleration holds the unbalanced rotor in the unarmed position, but rotates the three leaves of the setback device in sequence to release the rotor. Setback also causes a magnet to shear a disc and move rearward through the armature coil generating a charge for the firing capacitor. The spring-driven rotor turns 270 deg toward the armed position, but can only arm if a drag sensor has removed a second detent before 220 deg rotation. Rotor arming unshorts the detonator and puts it in the firing circuit with the capacitor. On impact, the frontal area crush switch (FACS) closes the firing circuit and functions the Mk 96 Detonator. On graze, a trembler switch closes the circuit. If either switch is closed during the arming cycle, the detonator will fire safe, 180 deg out of line. The XM763 and XM764 generators and drag sensors function at higher setback and drag levels and they have a longer arming time.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

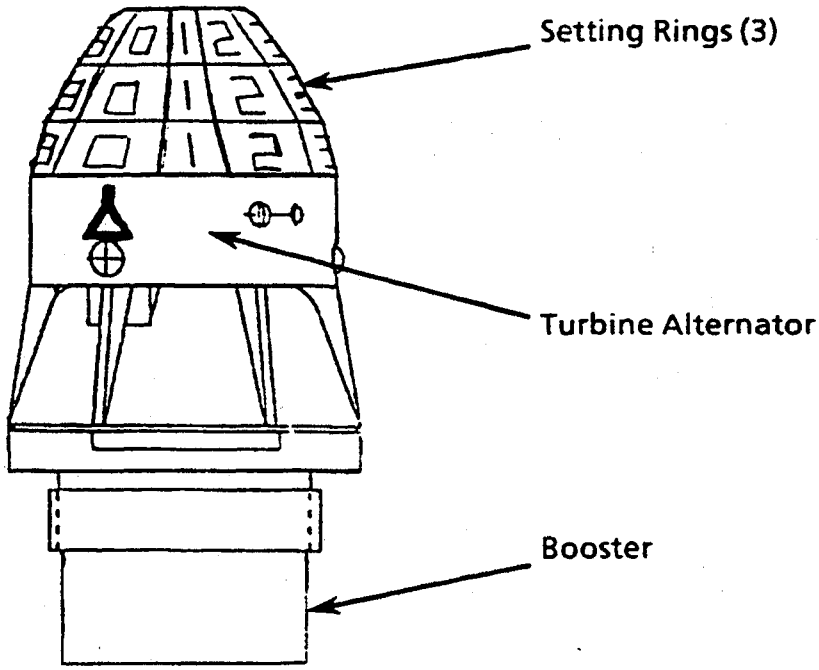

- OVERALL SIZE -	- INTRUSION -	WT:
LG: 3.800 in (96.5 mm)	DP: 1.145 in (29.1 mm)	THD: 1.5-12UNF-2A
XSECT: 1.9330 in (49.1 mm)	DIA: 1.375 in (34.9 mm)	THD DP: 0.50 in (12.7 mm)

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-C
- CONTACT: McKimm, T
- PHONE: DSN 880-3060
- STATUS: Terminated
- USER: Army, Marines
- ASSY DWG: 12 926 500
- PARTS LIST: 12 926 500
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: NA
- SIMILAR TO:

- REPLACES: M772, M776
- REPLACED BY:

GENERAL
- WEAPON: 81 mm Mortar, M252
  60 mm Mortar, M224

- AMMUNITION:
  - 81 mm, RP smoke, M819
  - 81 mm, illum, M853A1
  - 60 mm, illum, M721

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK: 15,000 g
- VELOCITY: 320 m/s (1050 ft/s)
  charge 1-4 only

- CREEP:
- FLIGHT TIME:

SAFETY STD: Meets MIL-STD-1316C

SETTERS: Hand

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: all arm pulse duration must be equal to or greater than 1 millisecond.

SECOND SAFETY:
Piston actuator lock - controlled by analog timer, turbine alternator > 39 m/s and setting = or > 3.0 s.

OTHER SAFETY:

SAFE/ARM INDICATION:
Green dot visible thru lead hole prior to boostering.

ARMING TIME OR DISTANCE:
Greater than 100 m
2.0 s

EXPLOSIVE COMPONENTS

S&A DEVICE: Out-of-line explosive train

PRIMER: None

DETONATOR: M100

LEAD: M55 Stab Detonator used as transfer lead

BOOSTER: 2.99 or 4.85 g black powder

OTHER: Auxiliary lead 0.164 g PBXN-5 and booster, 5.56 g CH-6, used to initiate HE test projectile

FUNCTIONING DATA

MODES: Time (air burst); PD backup

TYPE: Electronic

CHARACTERISTICS:
Time set with three rings: 3.0 to 99.8 s in 0.1 s increments.
Fuze functions PD only when set to 99.9 s.

TARGET:

SENSITIVITY:

FUNCTION TEMP:
-45 to +63 deg C

MODE ON DELIVERY:
Time, with PD backup

POWER SUPPLY:

Turbine alternator

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT: 3.13 to 5.0 g
NET PROP WT:
STORAGE TEMP: -45 to +71 deg C

REMARKS/DESCRIPTION:

The XM778 Electronic Precision Time Fuze is hand-settable from 3 s to 99.8 s. The fuze has dual independent locks on the rotor. A zig-zag setback device is the primary lock; the secondary lock is controlled by a piston actuator to provide a safe arming distance in excess of 100 m. This is obtained with a 2-s arming delay. The delay is a combination of 0.4 s when the setting rings are checked for valid time equal to or greater than 3.0 s, followed by a 1.6 +/- 15% s analog timer which is started if the first condition is true. The digital board is in the upper half of the fuze. The lower board, containing the analog timer and power circuits, is just above the S&A.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M1117, FUZE, IMPACT

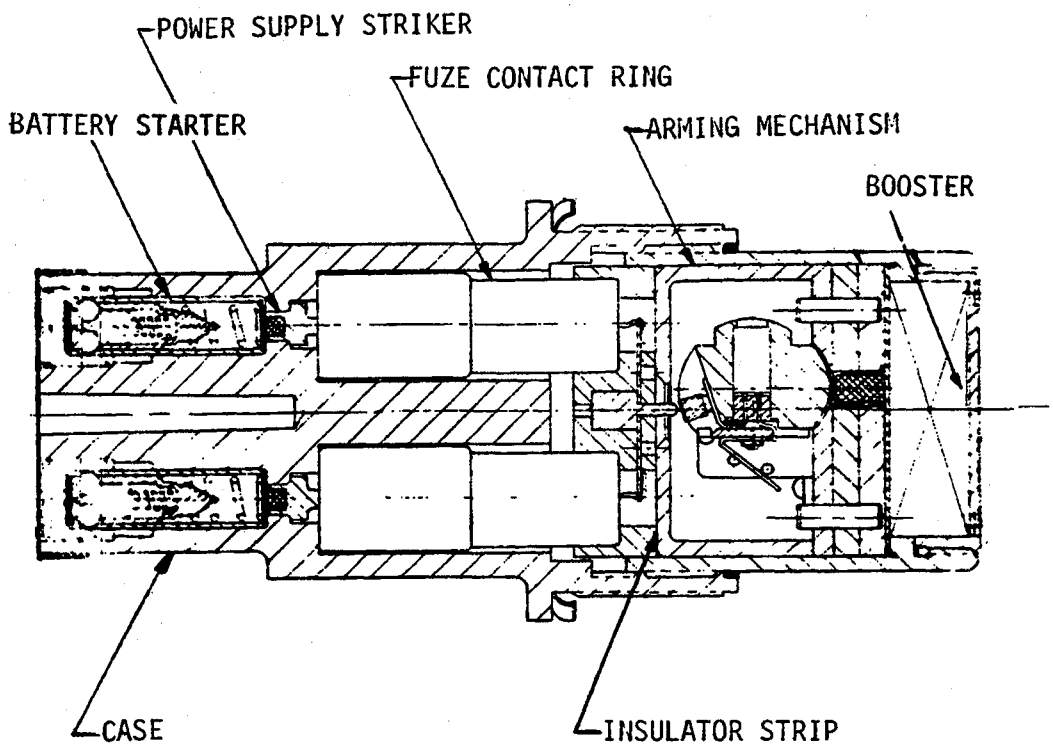

IDENTIFICATION

Agency	ERADCOM, DELHD-IT-OE R. Wyckoff AV 290-2677 Obsolete
Status	
Ass'y Dwg. No.	D10979953
Parts List	EP1 10979953
Specification	TL-PD-97
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	2 in.
Location	Base
Use	Practice
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M1117, FUZE, IMPACT

ARMING DATA

Method	Setback and Electrical
Delay	0.70-2.40 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	300 / 385-670
Arming Wire	Safety wire
External Indicat.	None

PHYSICAL DATA

Weight	
Total Length (in.)	5.02
Body Diam. (in.)	
Intrusion	1.27 in.
Thread Size	2.0-12UN-1A

FUNCTIONING DATA

Action	Base detonating
Type	Electrical
Delay	
Time Type	
Time Setting (sec)	
Target	General
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

M1117

EXPLOSIVE TRAIN

S&A Device	
Primer	M84
Detonator	T24E1
Booster	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M1907M, FUZE, COMBINATION, TIME AND IMPACT

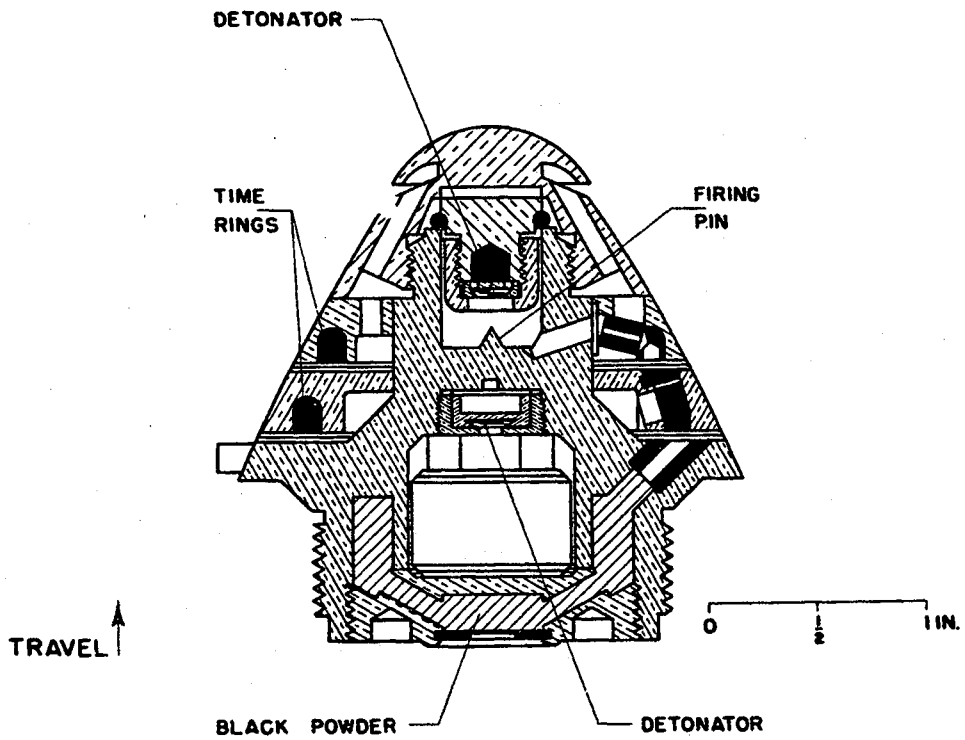

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-T
A. Nash, AV 880-2017

Status Obsolete

Ass'y Dwg. No. 73-3-114

Parts List

Specification

Previous Number

GENERAL

Carriers Projectile

Cal. — Size 75 mm - 155 mm

Location Nose

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M1907M, FUZE,COMBINATION, TIME AND IMPACT

ARMING DATA

Method	Setback, spin
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.25 lb
Total Length (in.)	2.57
Body Diam. (in.)	
Intrusion	0.82 in.
Thread Size	1.7-14NS-1A

FUNCTIONING DATA

Action	Time
Type	Pyrotechnic
Delay	21 sec
Time Type	Pyrotechnic
Time Setting (sec)	
Target	Antipersonnel, anti-material
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	
Delay	Black powder

REMARKS

Explosive train is not interrupted.

Dummy fuze is the M42A1 (Dwg. 72-5-1).

SERIES: A CHAPTER: 1
DESIGNATION: M1907M
Time Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CHAPTER 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M2, FUZE, BOMB, IMPACT

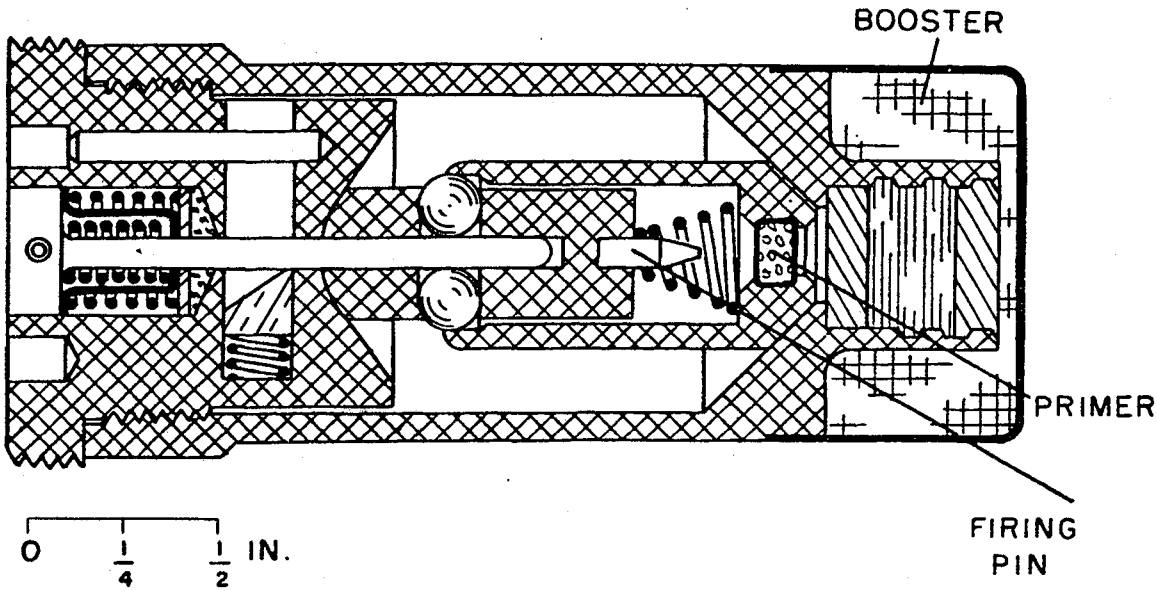

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts, AV 584-4298
Status	Cancelled
Ass'y Dwg. No.	B14-15-298
Parts List	
Specification	MIL-F-10098A, 10099
Previous Number	E 18R1

GENERAL

Carriers	Bomb
Cal. — Size	M69, 6 lb
Location	Side fuzing
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M2, FUZE, BOMB, IMPACT

ARMING DATA

Method	Release from cluster
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.25 lb
Total Length (in.)	2.693
Body Diam. (in.)	
Intrusion	2.693 in.
Thread Size	1.125-24

FUNCTIONING DATA

Action	PI; delay; all ways
Type	Mechanical
Delay	1-3 sec
Time Type	
Time Setting (sec)	
Target	Incendiary
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	
Booster	Black powder and magnesium, 2.5 gm

Explosive train is not interrupted

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

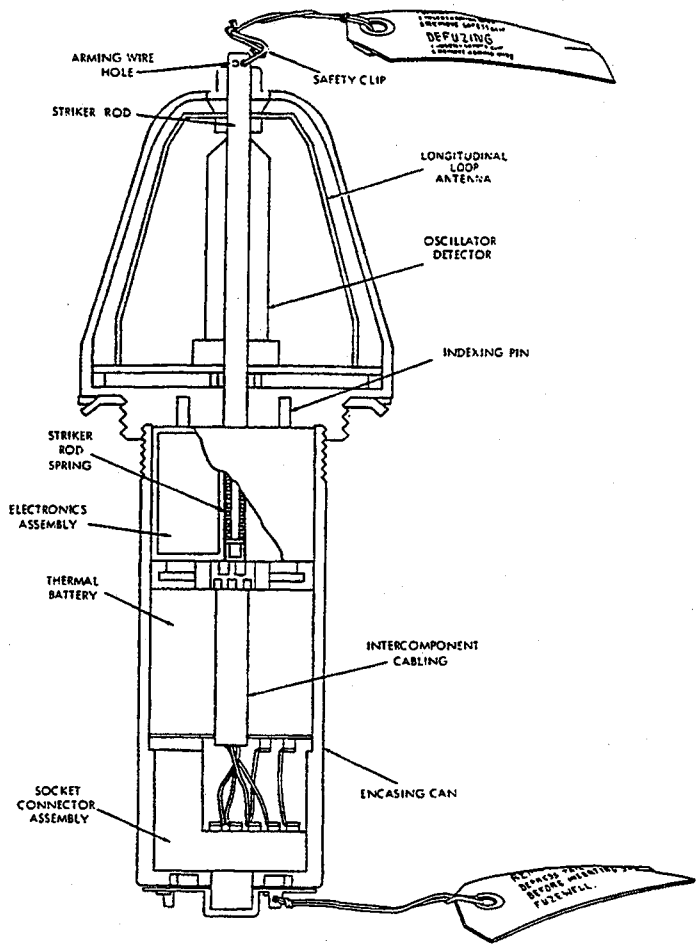

- OVERALL SIZE -	- INTRUSION -	WT: 4.3 lb (1950 g)
LG: 11.75 in (298 mm)	DP: 6.75 in (171.5 mm)	THD: 3.5-12UN-2A
XSECT: 4.6 in (116.4 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NAWC, Point Mugu
- CONTACT: Morgan, D
- PHONE: DSN 351-6416
- STATUS: Obsolete
- USER: Navy, Marines
- ASSY DWG: 10 403 068
- PARTS LIST:
- SPEC:
- PUB: NAVAIR 11-1F-2

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO: M20A1 Bomb Prox Sensor

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: GP bomb

- AMMUNITION:
  - Mk 80 Series GP Bombs

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP: Free fall
- FLIGHT TIME: Greater than 60 s

SAFETY STD: No explosive
SETTERS: Screwdriver; HOB range sw

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Impact fuze provides system safety

SECOND SAFETY:
NA

OTHER SAFETY:
NA

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
3.5 s warm-up time

EXPLOSIVE COMPONENTS

S&A DEVICE: NA

PRIMER: NA

DETONATOR: NA

LEAD: NA

BOOSTER: NA

OTHER: NA

FUNCTIONING DATA

MODES: Proximity
TYPE: Pulse doppler
CHARACTERISTICS:
M20: 45-90 deg approach angle; 100-160 ft high setting; 20-60 ft low setting. M20A1: 20-60 ft.

TARGET: Ground
SENSITIVITY:

FUNCTION TEMP:
-54 to +71 deg C
MODE ON DELIVERY:
Proximity

POWER SUPPLY:

Mk 93-0 Thermal Battery,
1.5 V, A; 170 V, B; -8 V, C

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:
The M20 Proximity Fuze Sensing Element is not classified as a fuze, since it does not contain an explosive train. The M20A1 is activated by withdrawal of an arming wire at weapon release. The arming wire releases a strike rod mechanism which hits a percussion primer activating the battery. At approximately 3.5 s after battery activation, the element can reliably process a target return signal.The oscillator produces a radio frequency signal in the form of pulsed RF energy which is radiated in a lobal pattern. As the weapon approaches ground, interaction between emitted and reflected RF energy causes a doppler signal to appear at the oscillator detector. This signal is applied to the target signal amplifier where it is amplified sufficiently to trigger a thyratron in the firing circuit. Energy in the firing capacitor is made available to the impact tail fuze. The differences between the M20 and M20A1 are in the number of burst height ranges and type of plastic used in the nose cone.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

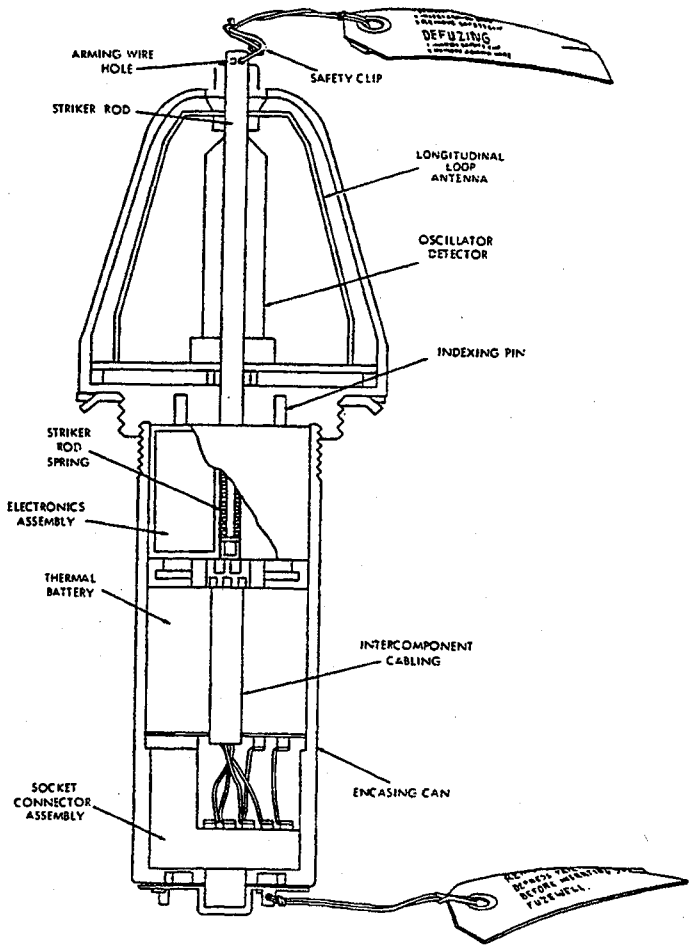

- OVERALL SIZE -	- INTRUSION -	WT: 4.3 lb (1950 g)
LG: 11.75 in (298 mm)	DP: 6.75 in (171.5 mm)	THD: 3.5-12UN-2A
XSECT: 4.6 in (116.4 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NAWC, Point Mugu
- CONTACT: Morgan, D
- PHONE: DSN 351-6416
- STATUS: Obsolete
- USER: Navy, Marines
- ASSY DWG: 10 403 068
- PARTS LIST:
- SPEC:
- PUB: NAVAIR 11-1F-2

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO: M20 Bomb Prox Sensor

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: GP bomb

- AMMUNITION:
  - Mk 80 Series GP Bombs

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP: Free fall
- FLIGHT TIME: Greater than 60 s

SAFETY STD: No explosive
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Impact fuze provides system safety

SECOND SAFETY:
NA

OTHER SAFETY:
NA

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
3.5 s warm-up time

EXPLOSIVE COMPONENTS

S&A DEVICE: NA

PRIMER: NA

DETONATOR: NA

LEAD: NA

BOOSTER: NA

OTHER: NA

FUNCTIONING DATA

MODES: Proximity
TYPE: Pulse doppler
CHARACTERISTICS:
M20: 45-90 deg approach angle; 100-160 ft high setting; 20-60 ft low setting. M20A1: 20-60 ft.

TARGET: Ground
SENSITIVITY:

FUNCTION TEMP:
-54 to +71 deg C
MODE ON DELIVERY:
Proximity

POWER SUPPLY:

Mk 93-0 Thermal Battery,
1.5 V, A; 170 V, B; -8 V, C

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:
The M20A1 Proximity Fuze Sensing Element is not classified as a fuze, since it does not contain an explosive train. The M20A1 is activated by withdrawal of an arming wire at weapon release. The arming wire releases a strike rod mechanism which hits a percussion primer activating the battery. At approximately 3.5 s after battery activation, the element can reliably process a target return signal.The oscillator produces a radio frequency signal in the form of pulsed RF energy which is radiated in a lobal pattern. As the weapon approaches ground, interaction between emitted and reflected RF energy causes a doppler signal to appear at the oscillator detector. This signal is applied to the target signal amplifier where it is amplified sufficiently to trigger a thyratron in the firing circuit. Energy in the firing capacitor is made available to the impact tail fuze. The differences between the M20 and M20A1 are in the number of burst height ranges and type of plastic used in the nose cone.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NWC, Code 333
- CONTACT:
- PHONE: DSN 437-3283
- STATUS: Terminated
- USER: Navy
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Fuel-air explosive (FAE) bomb

- AMMUNITION:
  - BLU-95/B Bomb

LOCATION:
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 2-5 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Pull wire for batter firing device

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: NA

PRIMER: NA

DETONATOR: NA

LEAD: NA

BOOSTER: NA

OTHER: NA

FUNCTIONING DATA

MODES: Proximity
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTIQN TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Thermal battery, + & - 16 Vdc

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the FMU-26/B, A/B, B/B Bomb Impact/Airburst Fuzes may be found in MIL-HDBK-145B.

Supersedes pages 2-7 and 2-8 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E28, FUZE, DELAY

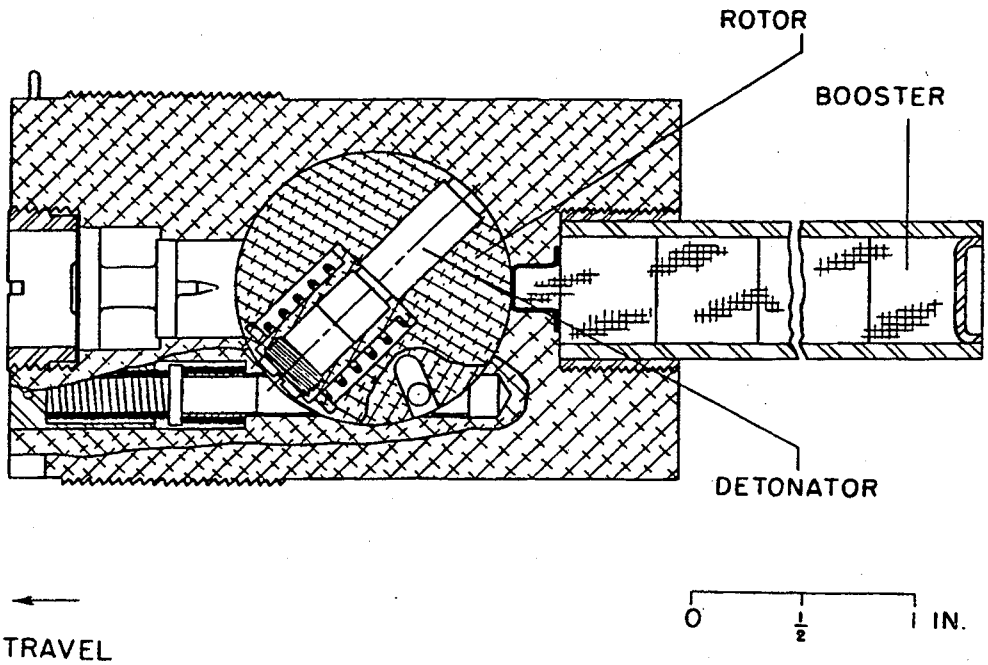

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts, AV 584-4298
Status	Terminated
Ass'y Dwg. No.	D314-15-559
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	E71, 35 lb
Location	Nose
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E28, FUZE, DELAY

ARMING DATA

Method	Release from cluster
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1.4 lb
Total Length (in.)	3.045
Body Diam. (in.)	
Intrusion	3.045 in
Thread Size	1.8125-16

FUNCTIONING DATA

Action	Delay
Type	Mechanical
Delay	0.025 sec
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M31
Booster	Tetryl, 78 gm
Delay	M2

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E29, FUZE, DELAY

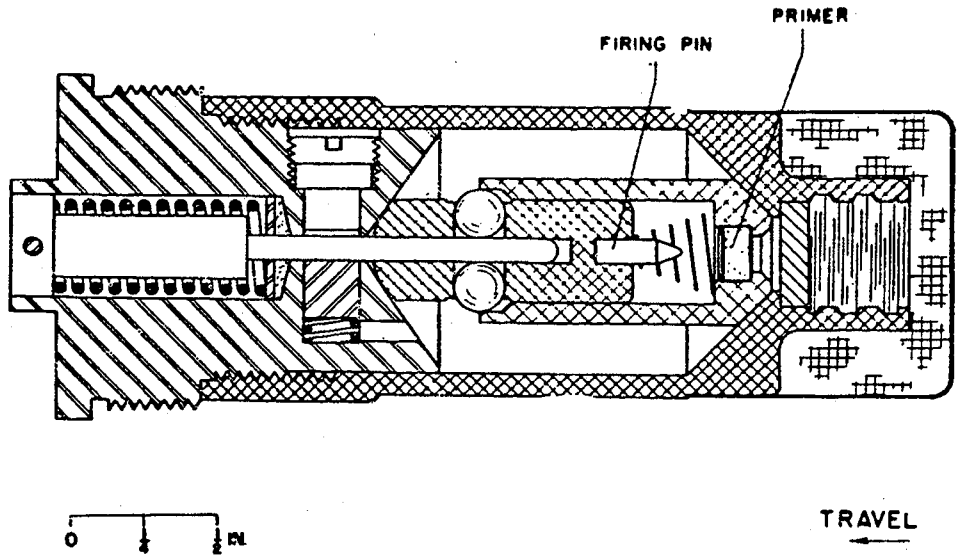

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts, AV 584-4298
Status	Terminated
Ass'y Dwg. No.	C14-15-569
Parts List	
Specification	196-131-611, 612
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	M74A1, 10 lb
Location	Nose
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E29, FUZE, DELAY

ARMING DATA

Method	Release from cluster
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.33 lb
Total Length (in.)	3.125
Body Diam. (in.)	
Intrusion	3.125 in.
Thread Size	1.125-24

FUNCTIONING DATA

Action	Delay, all ways
Type	Mechanical
Delay	1-3 sec
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	
Booster	Black powder, 4 gm

Explosive train is not interrupted

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
AGENCY: NWC, Code 333
CONTACT:
PHONE: DSN 437-3283
STATUS: Terminated
USER: Navy
ASSY DWG:
PARTS LIST:
SPEC:
PUB:

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY:

GENERAL
WEAPON: Fuel-air explosive (FAE) bombs

AMMUNITION:
BLU-96/B, FAE II Weapon

LOCATION:
BALLISTIC LEVELS:
ROTATION:
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: MIL-STD-1316 is NA
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Pull wire for battery firing device

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
None

EXPLOSIVE COMPONENTS

S&A DEVICE: NA

PRIMER: NA

DETONATOR: NA

LEAD: NA

BOOSTER: NA

OTHER: NA

FUNCTIONING DATA

MODES: Proximity
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Thermal battery + and - 16 Vdc

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E30, FUZE, PI

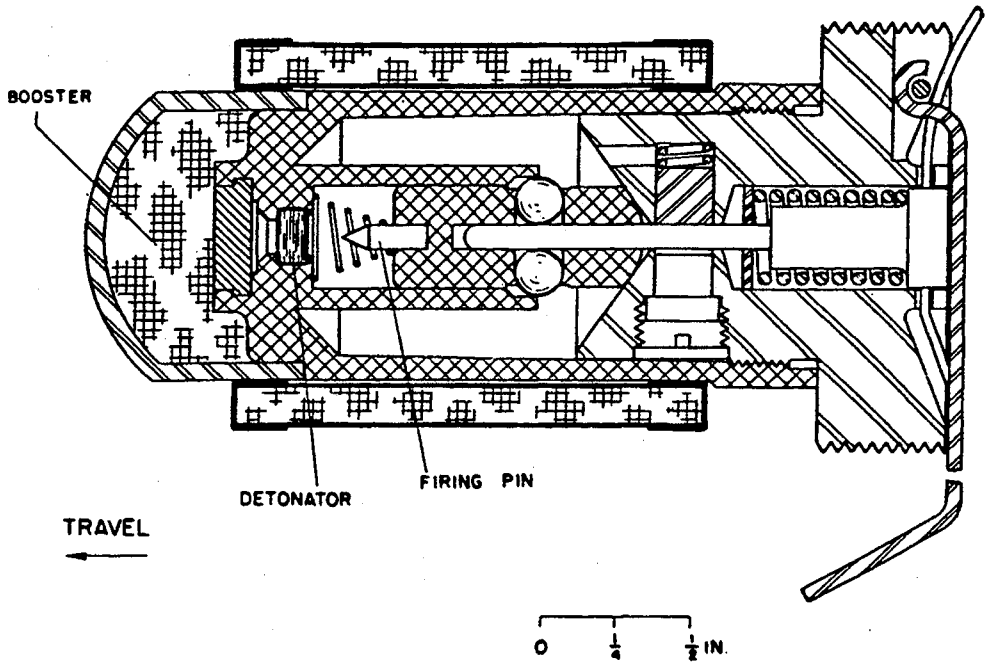

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts, AV 584-4298
Status	Terminated
Ass'y Dwg. No.	C314-15-2043
Parts List	
Specification	CRL-116, 117
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	E49, 10 lb E76, 7 lb
Location	Nose
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E30, FUZE, PI

ARMING DATA

Method	Release from cluster
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.42 lb
Total Length (in.)	3.0
Body Diam. (in.)	
Intrusion	3.0 in.
Thread Size	1.50-16

FUNCTIONING DATA

Action	PI, all ways
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	
Booster	Black powder, 12 gm

Explosive train is not interrupted

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
AGENCY: NWC, Code 333
CONTACT:
PHONE: DSN 437-3283
STATUS: Terminated
USER: Navy
ASSY DWG:
PARTS LIST:
SPEC:
PUB:

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO:
SIMILAR TO:

REPLACES: M20, M20A1, Mk 43
REPLACED BY:

GENERAL
WEAPON: GP Bombs

AMMUNITION:
Mk 80 Series Bombs

LOCATION:
BALLISTIC LEVELS:
ROTATION:
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: MIL-STD-1316 is NA
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
NA

SECOND SAFETY:
NA

OTHER SAFETY:
NA

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: NA

DETONATOR: NA

LEAD: NA

BOOSTER: NA

OTHER: NA

POWER SUPPLY:

FUNCTIONING DATA

MODES: Proximity
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E34R4, FUZE, PI

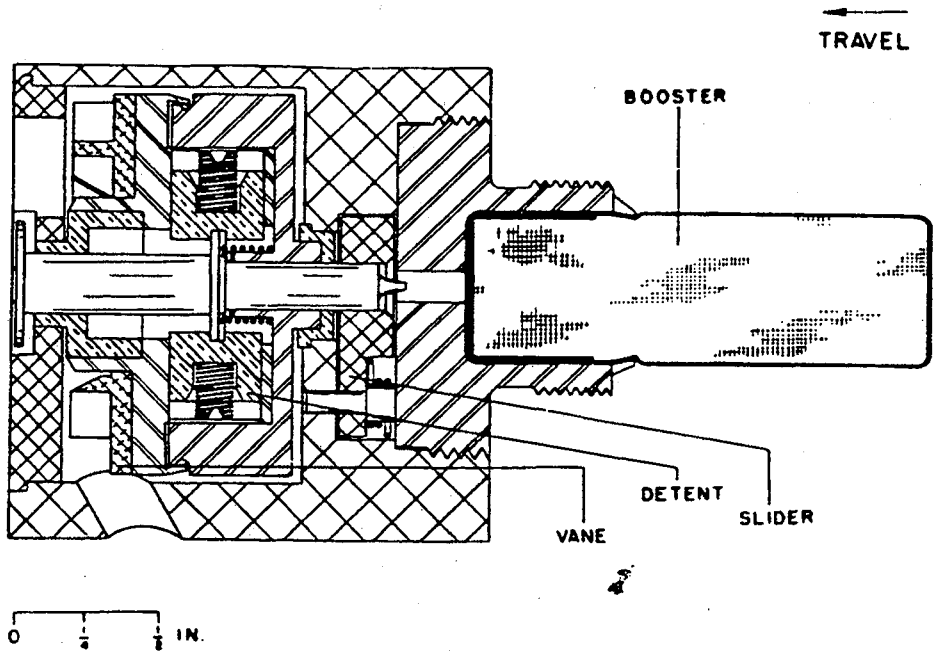

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts AV584-4298
Status	Terminated
Ass'y Dwg. No.	D14-15-573
Parts List	
Specification	196-131-611
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	E61R4, 1/2 lb
Location	Nose
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E34R4, FUZE, PI

ARMING DATA

Method	Release from cluster, vane
Delay	
Rotation (rps)	
Non-arm	65 Arm 68
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.66 lb
Total Length (in.)	3.123
Body Diam. (in.)	
Intrusion	1.498 in.
Thread Size	0.75-16

FUNCTIONING DATA

Action	PI
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	
Booster	Black Powder

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-35/B, FUZE, BOMB, LONG DELAY

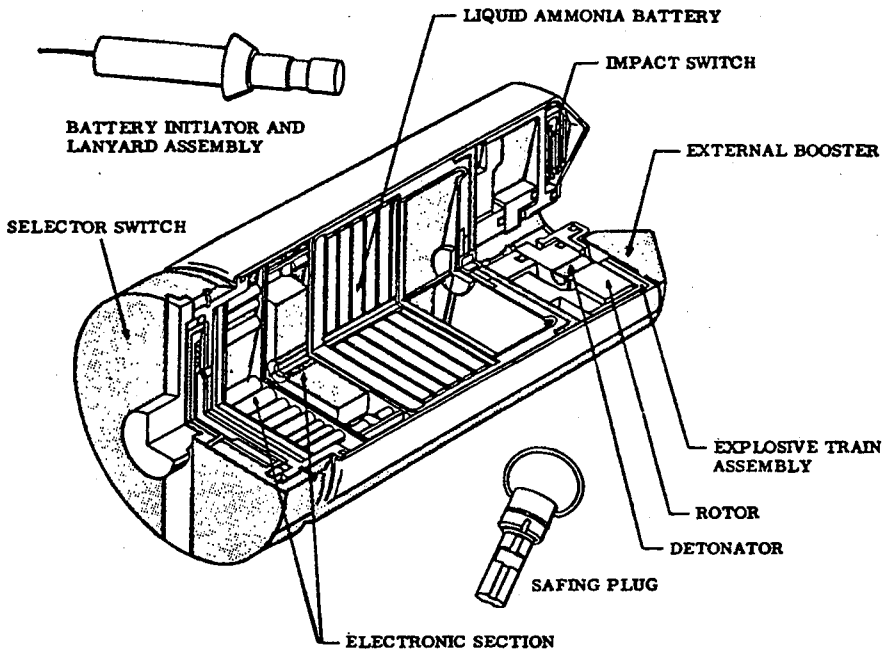

IDENTIFICATION

Agency	Eglin AFB, Arm Div, 5D-3 E. Smith, AV 872-8186
Status	Terminated
Ass'y Dwg. No.	65D56422
Parts List	DL63D56422
Specification	CP 56422
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	250-3000 lb
Location	Nose or tail
Use	HE, GP
MIL-STD's	331 Tests 101-115, 201, 205-206; 810
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-35/B, FUZE, BOMB, LONG DELAY

ARMING DATA

Method	Elect. init. actuators
Delay	1.5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Arming lanyard initiates battery firing device
External Indicat.	Yes

PHYSICAL DATA

Weight	3.5 lb approx
Total Length (in.)	6.7
Body Diam. (in.)	2.87
Intrusion	8 1/2 in. approx
Thread Size	

FUNCTIONING DATA

Action	Timed delayed after impact
Type	Electronic
Delay	
Time Type	Electrical
Time Setting (sec)	20 min. to 36 hr
Target	
Sensitivity	250-500 g's min. in any direction
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Ammo-battery

EXPLOSIVE TRAIN

S&A Device	
Primer	Percussion cap
Detonator	M36A1 (modified bridgewire)
Booster	FZU-2/B

REMARKS

Replaced by Fuze FMU-72/B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E38, FUZE, PD, BOMB,

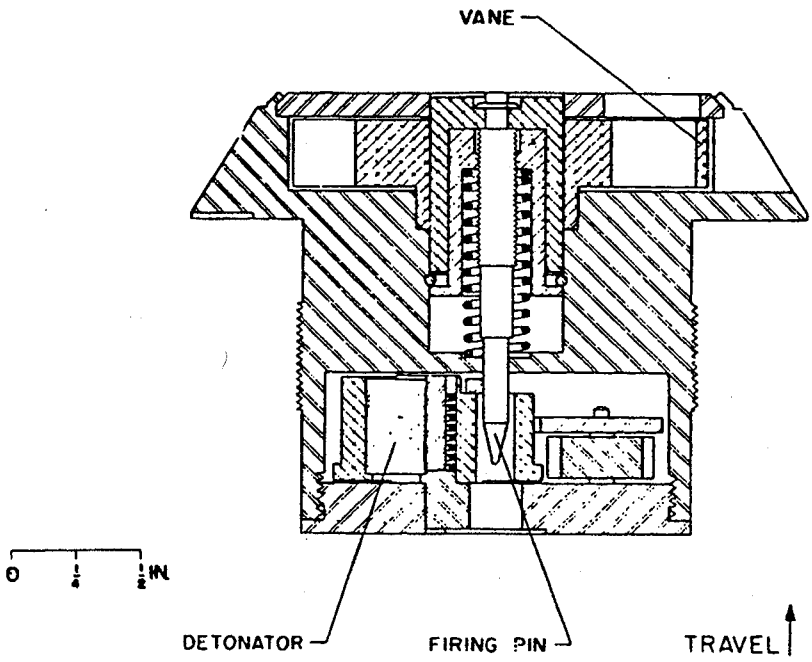

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts, AV 584-4298
Status	Terminated
Ass'y Dwg. No.	D314-15-2072
Parts List	
Specification	CRL-189, 190
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	E91R1, 3 lb
Location	Nose
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E38, FUZE, PD, BOMB

ARMING DATA

Method	Release from cluster, vane
Delay	5 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.7 lb
Total Length (in.)	1.75
Body Diam. (in.)	
Intrusion	1.25 in.
Thread Size	1.54-32

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M47
Booster	Tetryl
Burster	Comp. B, 0.24 lb

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E40, FUZE, PD, BOMB,

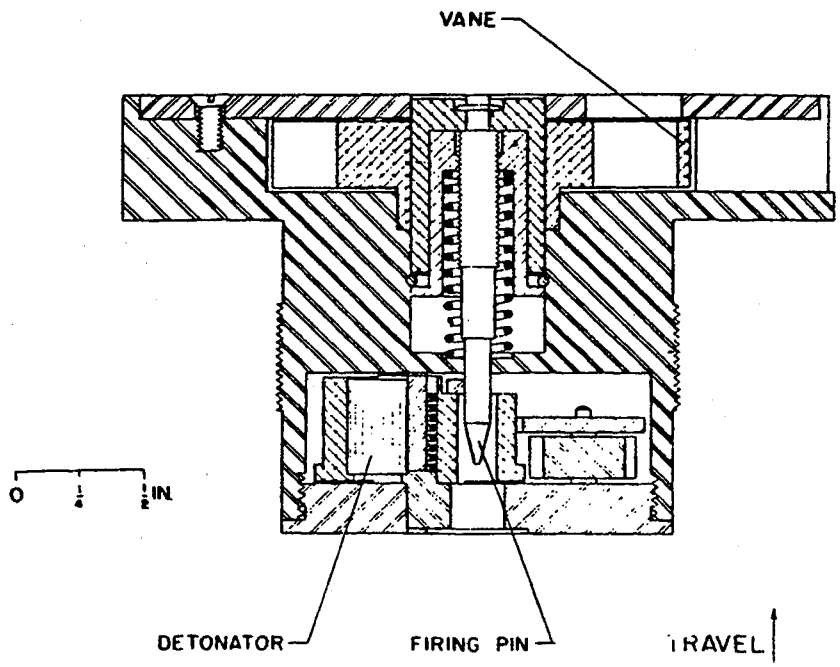

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts, AV 584-4298
Status	Terminated
Ass'y Dwg. No.	D314-15-2088
Parts List	
Specification	CRL-218, 219
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	E104R1, 6 lb
Location	Nose
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E40, FUZE, PD, BOMB

ARMING DATA

Method	Vane, release from cluster
Delay	5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.8 lb
Total Length (in.)	1.75
Body Diam. (in.)	
Intrusion	1.25 in.
Thread Size	1.603-16

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M47
Booster	
Burster	Tetryl 0.33 lb

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E41, FUZE, PD, BOMB,

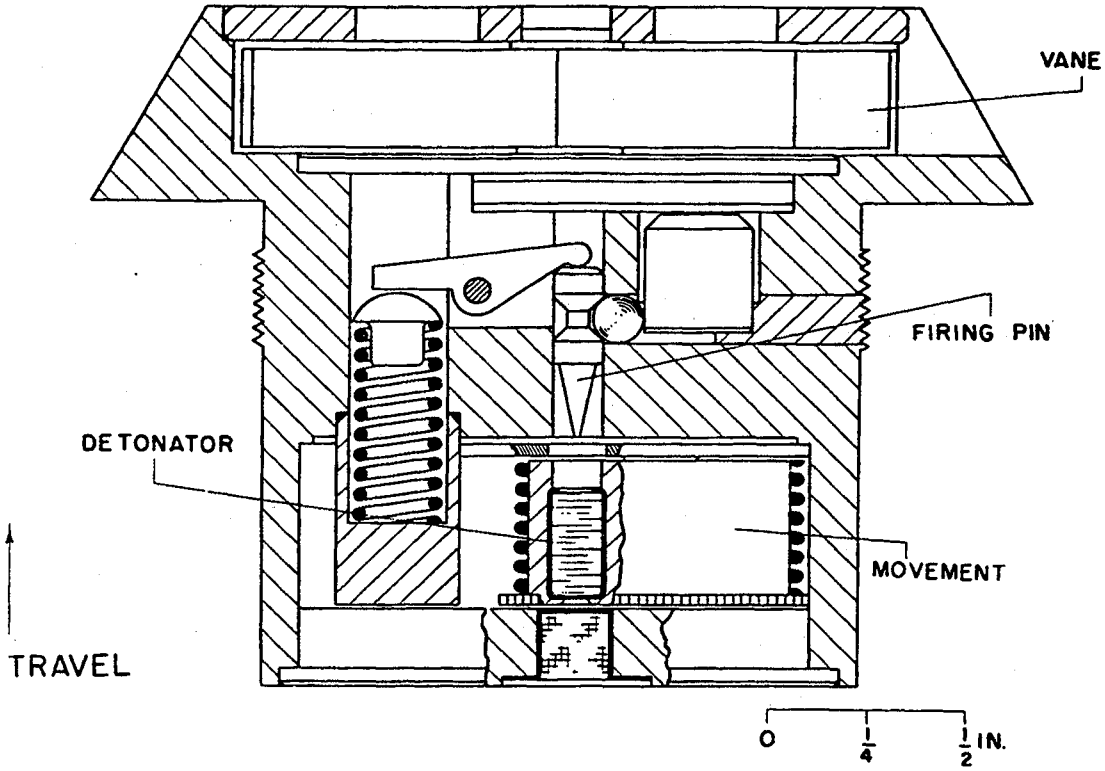

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts, AV 584-4298
Status	Terminated
Ass'y Dwg. No.	D2800
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	E91R1
Location	Nose
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E41, FUZE, PD, BOMB

ARMING DATA

Method	Vane, release from cluster
Delay	5 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.7 lb
Total Length (in.)	1.75
Body Diam. (in.)	
Intrusion	1.25 in.
Thread Size	1.54-32

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M47
Booster	
Burster	Comp. B, 0.24 lb

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E43, FUZE, PD, BOMB,

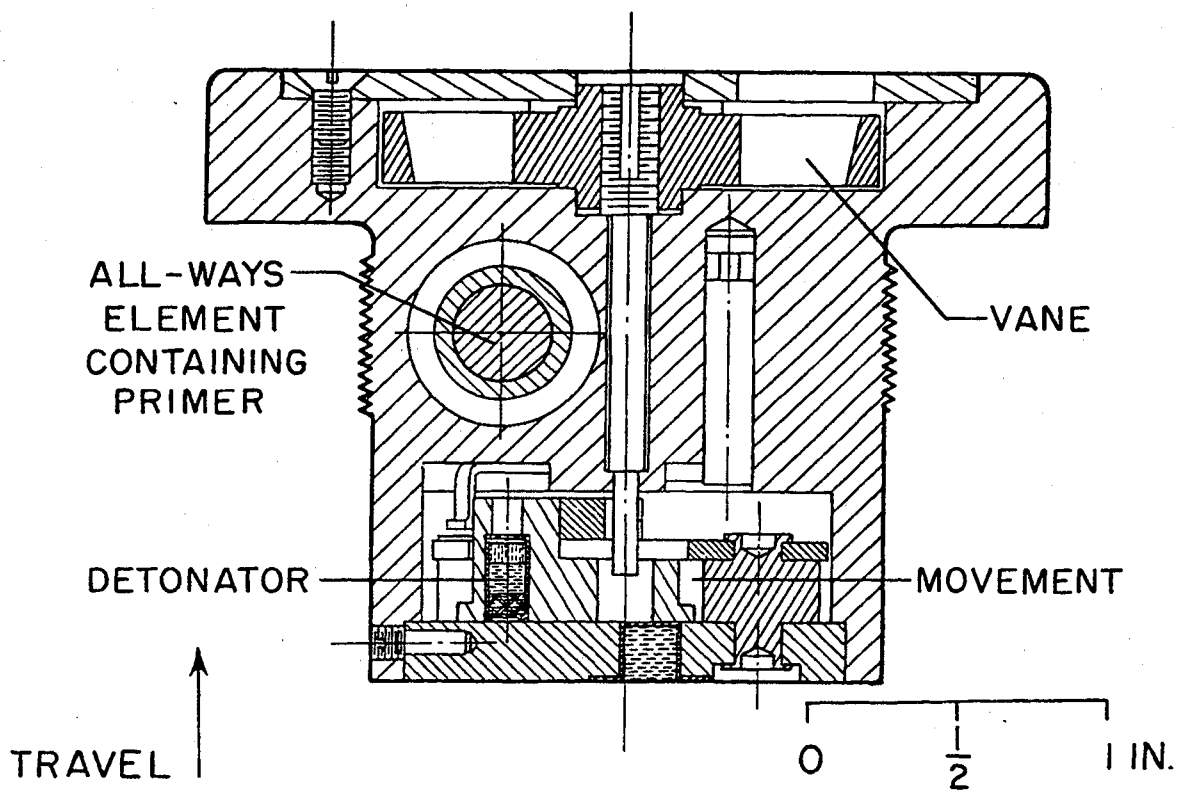

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts, AV 584-4298
Status	Terminated
Ass'y Dwg. No.	E314-15-2162
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	10 lb, E104 type
Location	Nose
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E43, FUZE, PD, BOMB,

ARMING DATA

Method	Vane, release from cluster
Delay	5 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.7 lb
Total Length (in.)	1.75
Body Diam. (in.)	
Intrusion	1.25 in.
Thread Size	1.54-32

FUNCTIONING DATA

Action	PD, all ways
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M47
Booster	
Burster	Comp. B, 0.24 lb

REMARKS

Similar to E41, except it has an "all-ways" functioning element.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the FMU-56B/B, A-D/B Bomb Proximity Fuzes may be found in MIL-HDBK-145B.

Supersedes pages 2-27 and 2-28 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-57A/B, FUZE, PROXIMITY

IDENTIFICATION

Agency	Eglin AFB, Arm. Div. R. Erhart
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	250-3000 lb
Location	Nose
Use	GP
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

All solid state pulse doppler radar proximity fuze, HOB 30 feet. Self contained in-line-out-of-line S&A and battery power supply. Compatible with GP bombs possessing standard HF nose fuze well. Lanyard provided only for MK 81, 82, and M117 bombs and internal plumbing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-57A/B, FUZE, PROXIMITY

ARMING DATA

Method	Electronic timer
Delay	5-18 sec by 9 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Bangee lanyard
External Indicat.	Yes

PHYSICAL DATA

Weight	4.6 lb
Total Length (in.)	13.75
Body Diam. (in.)	3.0 approx
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Proximity
Type	Doppler radar
Delay	
Time Type	Electrical
Time Setting (sec)	5-18 sec
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	
Burst Height	30 ft

POWER SUPPLY

Thermal battery

EXPLOSIVE TRAIN

S&A Device	
Primer	Percussion cap/battery
Detonator	M36A1
Booster	FZU-3/B

REMARKS

Illustration shows FMU-57/B.

Fuze incorporates a dudding feature which functions if an impact of 100 g is experienced before safe separation time. The sensor requires a minimum of 200 KTS velocity for arming.

The FMU-57A/B is a product improved version of the FMU-57/B offering improved safety features, integral BFD, and improved lanyard attachment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-63/B, FUZE, BOMB DELAY

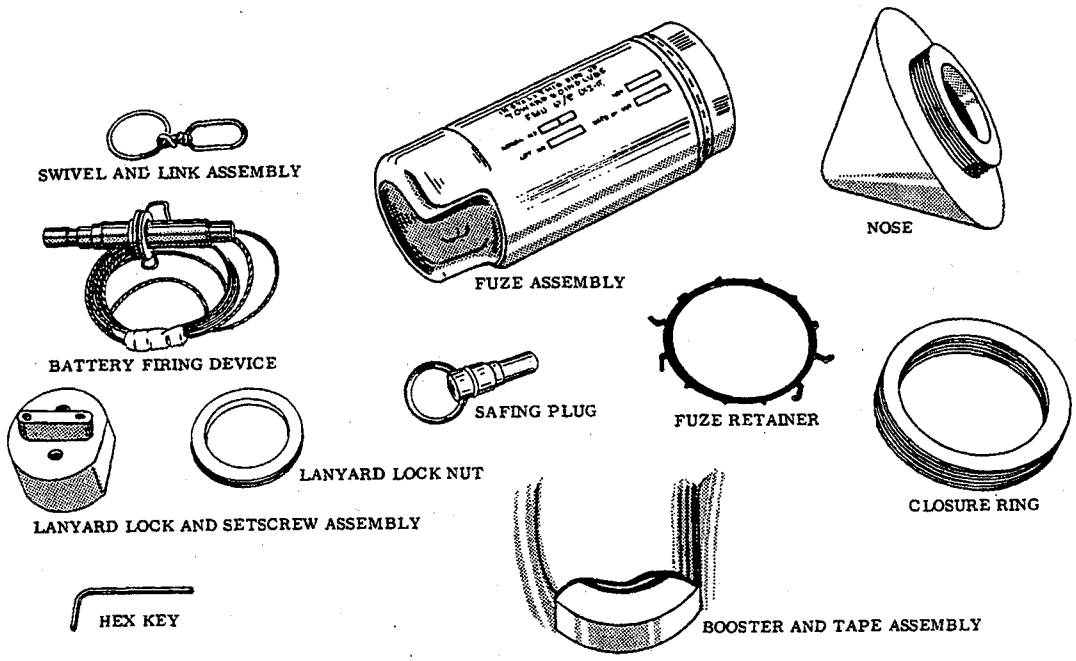

IDENTIFICATION

Agency	Eglin AFB, Arm Div. R. Erhart
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	250-3000 lb
Location	Nose or tail
Use	HE or GP
MIL-STD's	331 Tests 101-115,
Max Values	201, 205-206; 810
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

This is a long delay bomb fuze with antidisturbance feature. It is compatible with retarded bombs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-63/B, FUZE, BOMB DELAY

ARMING DATA

Method	Electrical
Delay	10 min after lanyard pull
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Arming lanyard initiates battery firing device
External Indicat.	Yes

PHYSICAL DATA

Weight	3.5 lb
Total Length (in.)	6.9
Body Diam. (in.)	2.87
Intrusion	8 1/2 in. approx
Thread Size	

FUNCTIONING DATA

Action	Impact, time
Type	Electronic
Delay	
Time Type	Electrical
Time Setting (sec)	*
Target	
Sensitivity	250-500 g min
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Ammonia battery

EXPLOSIVE TRAIN

S&A Device	
Primer	Percussion cap/battery
Detonator	M55
Booster	FZU-2/B

REMARKS

*Delay: 1 hour to 8 days. Backup detonation at 10 ± 2 days. Further backup detonation upon battery degradation to lowest voltage ± 5% of set time. Pre-set prior to bomb assembly.

Replacement for Fuze FMU-72/B.

SERIES: AF CHAPTER: 2
DESIGNATION: FMU- 63/B
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E64, INITIATOR, FUZE, MT

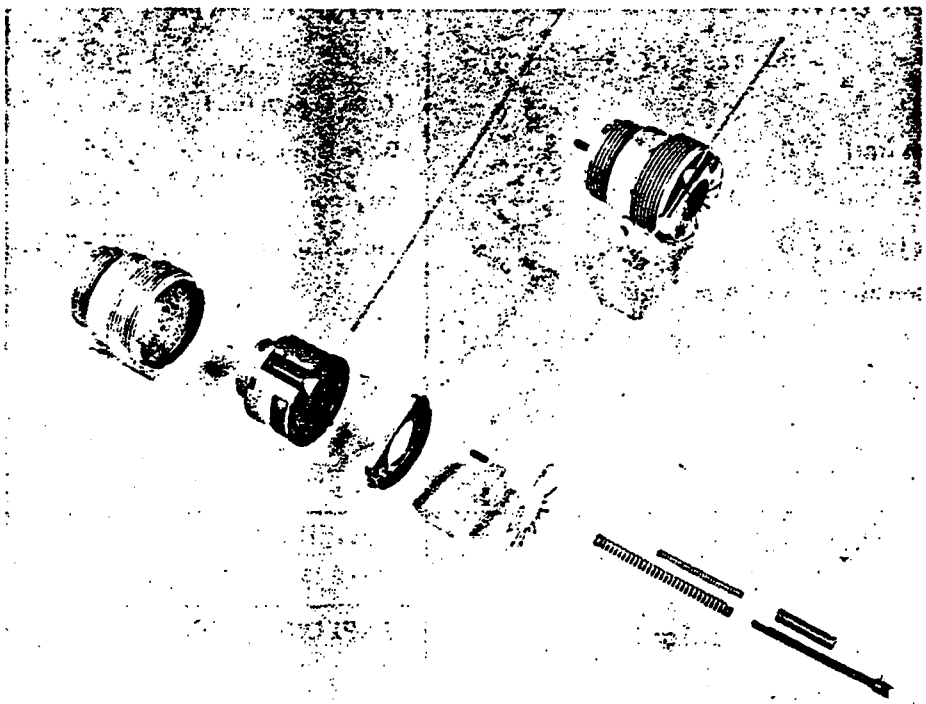

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts, AV 584-4298
Status	Terminated
Ass'y Dwg. No.	11985
Parts List	PL 11985
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	10 lb
Location	Base
Use	Chemical
MIL-STD's	331, Tests 101-105, 107, 108, 201
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

E64, INITIATOR, FUZE, MT

ARMING DATA

Method	Release of arming pin
Delay	
Rotation (rps)	0
Non-arm	Arm
Setback (g)	0
Non-arm	Arm
Arming Wire	Prior to installation
External Indicat.	Yes

PHYSICAL DATA

Weight	1 5/8 oz
Total Length (in.)	1.5
Body Diam. (in.)	1.125
Intrusion	Complete
Thread Size	1.25-24NS

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech. runaway
Time Setting (sec)	2-8
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Main spring

EXPLOSIVE TRAIN

S&A Device	
Primer	Inert
Detonator	
Booster	

REMARKS

Time setting is accomplished with key

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XB-65A, FUZE, BOMB

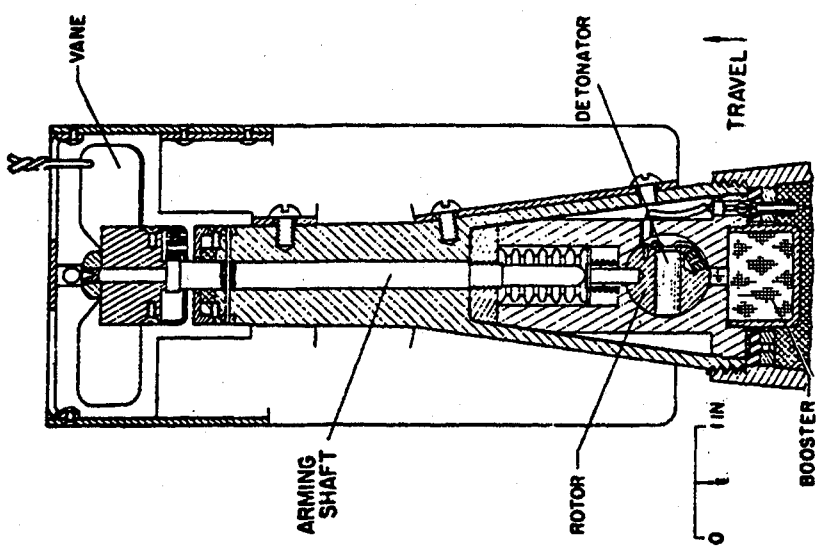

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs
Status	AV 290-1529 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	ATAP bombs in cluster
Location	Tail
Use	Heat
MIL-STD's	331, tests 101-105
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XB-65A, FUZE, BOMB

ARMING DATA

Method	Vane
Delay	150
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	
Total Length (in.)	5
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PI, BD
Type	Electric
Delay	0.0001 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 121 MOD 0
Booster	Tetryl 8 gm

REMARKS

SERIES: N CHAPTER: 2
DESIGNATION: XB- 65A
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
AGENCY: Eglin AFB, ASD/YGP
CONTACT:
PHONE:
STATUS: Terminated
USER: Air Force, Navy
ASSY DWG:
PARTS LIST:
SPEC:
PUB:

NATIONAL STOCK NO:
None
DODIC: None
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY:

GENERAL
WEAPON: GP retarded bombs

AMMUNITION:
M117, M118, Mk 81, Mk 82

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: NA
SETBACK: NA
VELOCITY: NA

CREEP: NA
FLIGHT TIME: NA
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Lanyard

SECOND SAFETY:
Retarding g sensor

OTHER SAFETY:
None

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:
1 to 3 s in 0.25 s intervals

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

FUNCTIONING DATA
MODES: Proximity
TYPE: Electronic
CHARACTERISTICS:
Burst heights settable to 15, 30 or 50 ft (4.6, 9.1 or 15.2 m)

TARGET: Surface
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:
Proximity

POWER SUPPLY:

Thermal reserve battery

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
On launch, removal of the lanyard initiates the thermal reserve battery which powers the fuze. Retardation force, integrated with time, moves a sensor forward releasing a ball lock which allows a g weight to move forward. If the retardation force continues for 0.6 s, the drive block will have moved sufficiently to allow the release pin to unblock the arming timing mechanism. The proximity sensor is activated on thermal battery startup. The proximity sensor output provides the fire signal. The fuze incorporate a dud-on-jam feature.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-68/B, FUZE, MECHANICAL

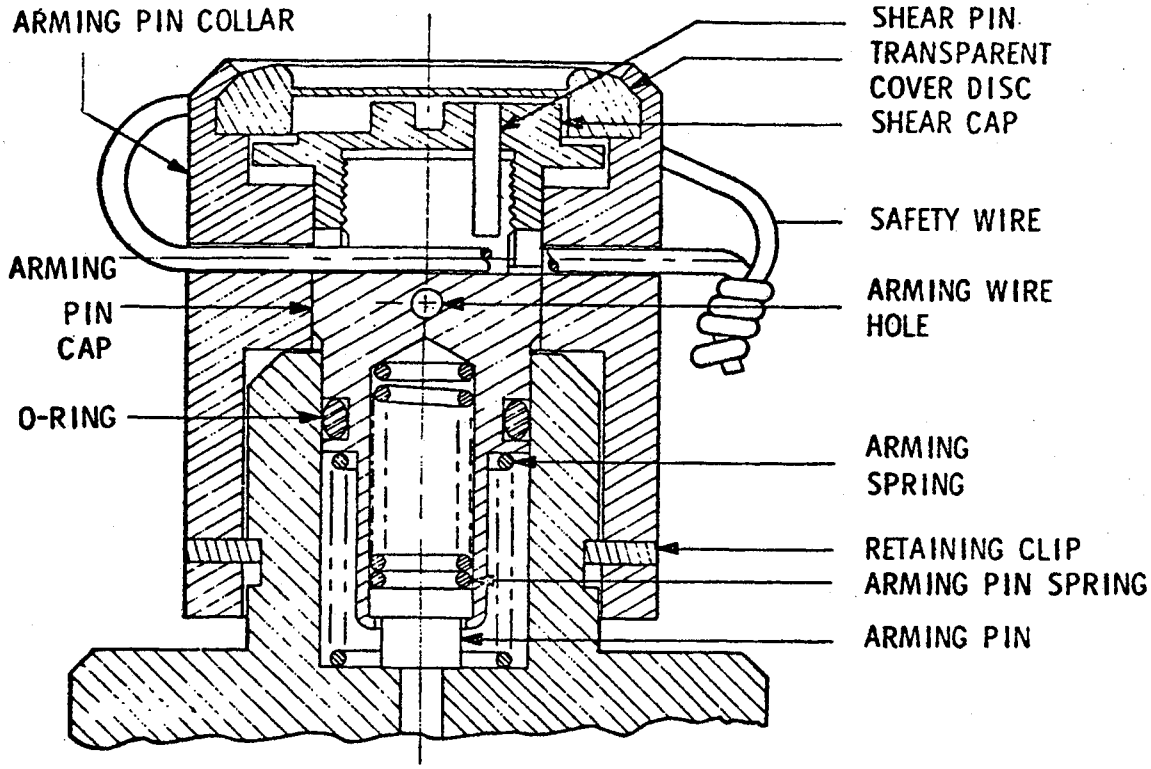

IDENTIFICATION

Agency	Eglin AFB, Arm Div. R. Mabry
Status	Obsolete
Ass'y Dwg. No.	66F11651
Parts List	DL 66F11651
Specification	MIL-F-38643 (USAF)
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	500, 750 lb
Location	Nose and tail
Use	Incendiary
MIL-STD's	331, Tests 101-108, 111; 810
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-68/B, FUZE, MECHANICAL

ARMING DATA

Method	Escapement
Delay	0.3-0.5 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

Safety wire and untouched crown

PHYSICAL DATA

Weight	1 lb
Total Length (in.)	3.4
Body Diam. (in.)	1.5
Intrusion	2 in.
Thread Size	1.5-24NS-2A

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Personnel & lt. mat.
Sensitivity	9 in. drop functions 50% of fuzes
Material	Steel
Thickness (in.)	1/2
Max Obliq. (°)	Random
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M55
Booster	Tetryl, 12 gm

REMARKS

This fuze is a modification of Fuze FMU-60/B. The basic changes include removal of the borerider feature and redesign of the arming pin safety lock utilized in the FMU-60/B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-70/B, FUZE, BOMB, NOSE

IDENTIFICATION

Agency	Eglin AFB, Arm Div.
	R. Erhart
Status	Terminated
Ass'y Dwg. No.	64E11302
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	750, 500, 250 lb
Location	Nose
Use	GP
MIL-STD's	331, Tests 101-115, 201, 206; 810
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

SERIES: AF CHAPTER: 2
DESIGNATION: FMU- 70/B
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-70/B, FUZE, BOMB, NOSE

ARMING DATA

Method	*
Delay	0.6 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Lanyard
External Indicat.	No

*Escapement actuator when senses 3 - 4 g for 0.60 sec.

PHYSICAL DATA

Weight	2.7 lb
Total Length (in.)	0.25
Body Diam. (in.)	2.9
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Impact or delay
Type	Mechanical
Delay	
Time Type	Mechanical
Time Setting (sec)	2.5 - 3.5 x 0.25 sec
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M42
Detonator	
Booster	Tetryl, 154 gm
Lead	Tetryl

REMARKS

FMU-70/B (X1-2) combines the nose function capabilities of the FMU-70/B and tail function of the 54/B. It will also be compatible for low drag delivery.

A nose version of Fuze FMU-54/B.

SERIES: AF CHAPTER: 2
DESIGNATION: FMU- 70/B
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the FMU-72/B Bomb Impact Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 2-41 and 2-42 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XB-74B, FUZE, BOMB

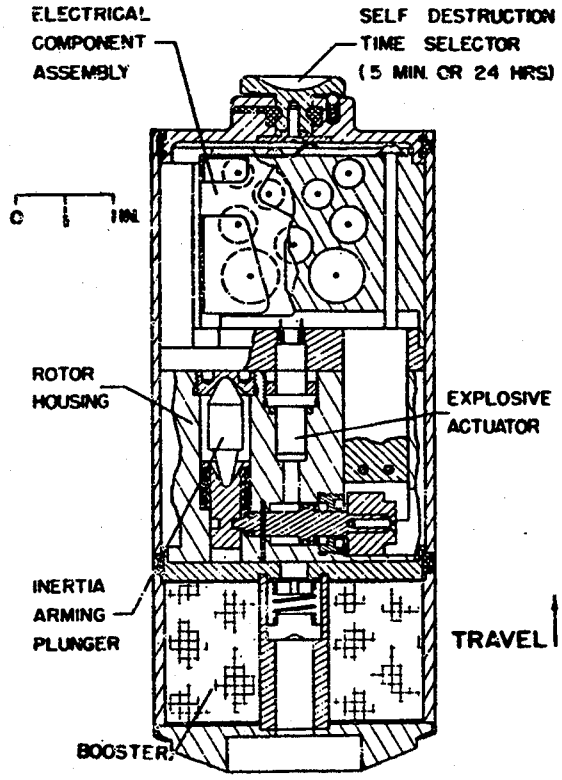

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs
Status	AV 290-1529 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	250, 500, 750, 1000, 2000, 3000 lb
Location	Tail
Use	HE or GP
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Impact before 2 sec sterilizes fuze

Mechanical arming completed at impact

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XB-74B, FUZE, BOMB

ARMING DATA

Method	Deceleration
Delay	15 min after impact
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	SD, disturbance
Type	Electric
Delay	
Time Type	Electric
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	XE-61A
Detonator	MK 62 MOD 0
Booster	Tetryl 166 gm
Lead	Tetryl

REMARKS

Replaced Fuze XB-74A which was for old series bombs but has been discontinued

SERIES: N CHAPTER: 2
DESIGNATION: XB- 74B
Bomb Long Delay Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the FMU-81/B Bomb Impact Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 2-45 and 2-46 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-82/B, FUZE, PROXIMITY

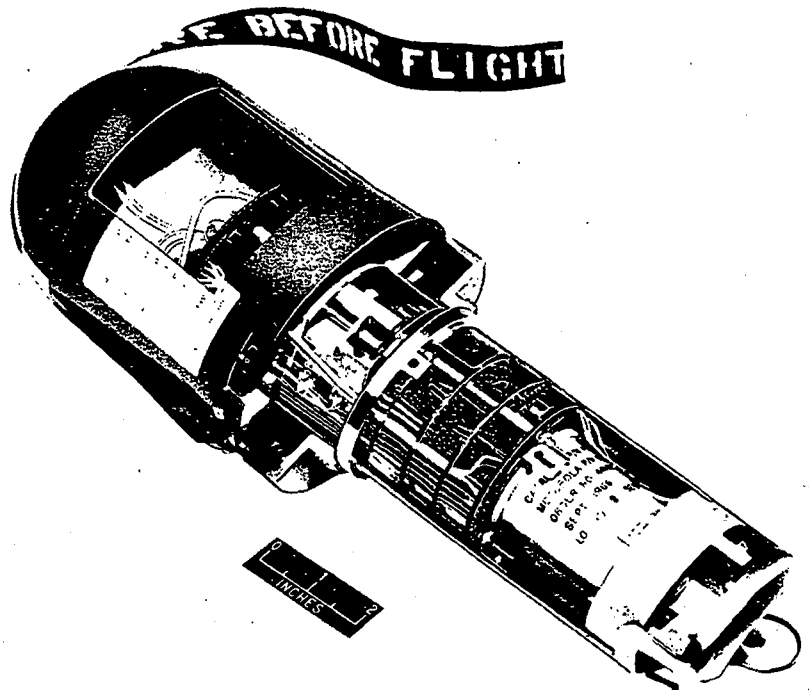

IDENTIFICATION

Agency	Eglin AFB, Arm Div. Erhart
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	250-3000 lb
Location	Nose
Use	HE, GP
MIL-STD's	331 Tests 101-105, 107-109,111,113,201, 206;810
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Low altitude proximity fuze.

Safe separation sensor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-82/B, FUZE, PROXIMITY

ARMING DATA

Method	Electronic timer
Delay	3-18 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Lanyard
External Indicat.	Yes

PHYSICAL DATA

Weight	6.0 lb
Total Length (in.)	15.0 approx
Body Diam. (in.)	3.0 approx
Intrusion	6.0 in. approx
Thread Size	2-12NS-1A

FUNCTIONING DATA

Action	Proximity
Type	Pulse doppler radar
Delay	
Time Type	
Time Setting (sec)	
Target	Area
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

Burst height 30 ft approx

POWER SUPPLY

Thermal battery

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	D74B1
Booster	FZU-2/B

REMARKS

SERIES: AF CHAPTER: 2
DESIGNATION: FMU- 82/B
Bomb Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T93, FUZE, BOMB, NOSE, PROXIMITY

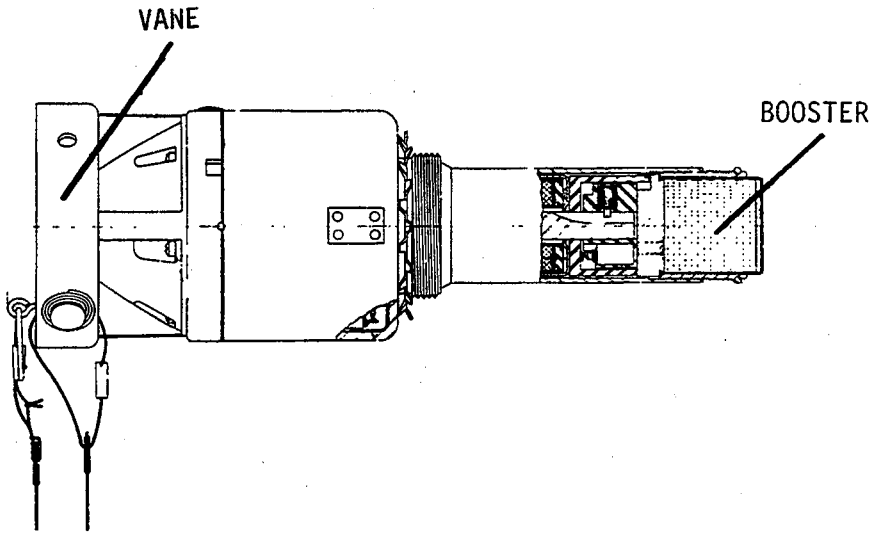

IDENTIFICATION

Agency ERADCOM, DELHD-DE-OE
Status L. Tozzi AV 290-2400
Obsolete
Ass'y Dwg. No. 73-11-300
Parts List
Specification VE-PD-116
Previous Number

GENERAL

Carriers Bomb
Cal. — Size 100, 260, 500, 1000 and 2000 lb
Location Nose
Use GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T93, FUZE, BOMB, NOSE, PROXIMITY

ARMING DATA

Method	Vane
Delay	2000 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	4.5 lb
Total Length (in.)	10.02
Body Diam. (in.)	
Intrusion	
Thread Size	2-12NS-1A

FUNCTIONING DATA

Action	Proximity
Type	Electrical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M36A1
Booster	Tetryl

REMARKS

Optional; air-to-air use with self-destruction

Fuze is same as Fuze M168 with sensitivity switch removed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M100A2, FUZE, BOMB, TAIL

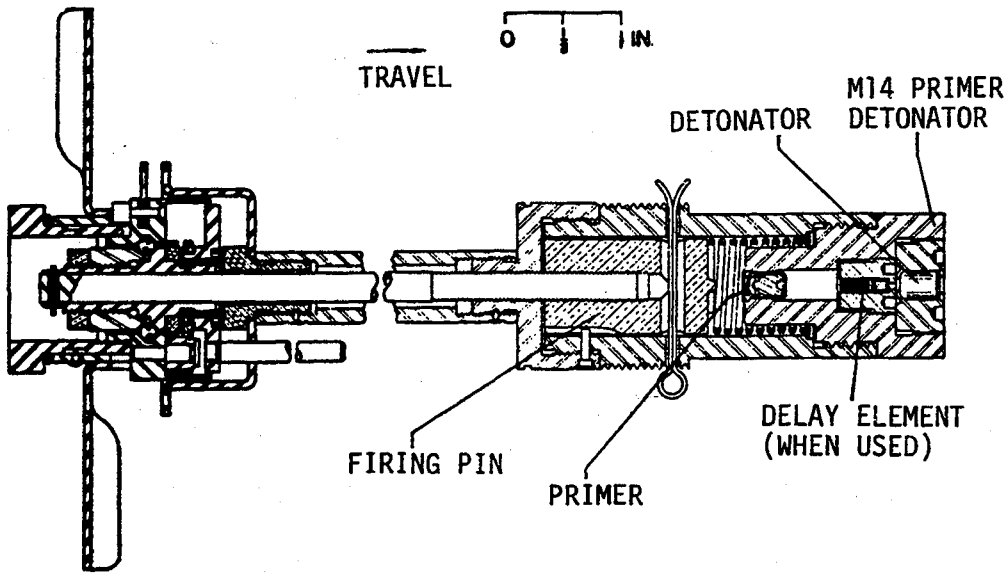

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-3, 73-8-183
Parts List
Specification
Previous Number T4E2

GENERAL

Carriers Bomb with box fins only
Cal. — Size 100, 250, 220, 260 lb
Location Tail
Use HE, GP, fragmentation
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering Cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M100A2, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	500 ft (M4 vane) 1300 ft (M5 vane)
Rotation (rps)	
Non-arm / Arm	150-170 revs.
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes (to replace shipping safety pin)
External Indicat.	Yes

PHYSICAL DATA

Weight	2.7 lb
Total Length (in.)	9.26
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact - inertia
Type	Mechanical
Delay	Instant, or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard target only
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A non-delay or 0.025 sec delay M14 primer-detonator is standard.

A 0.01, 0.1 or 0.24 sec delay M14 primer-detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

M4 vane is standard, M5 vane may be substituted in the field to give longer arming time.

AN-M100A1 is an earlier model having 24 single threads on the arming stem and an eight-bladed vane requiring about 720 revs. to arm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M101A2, FUZE, BOMB, TAIL

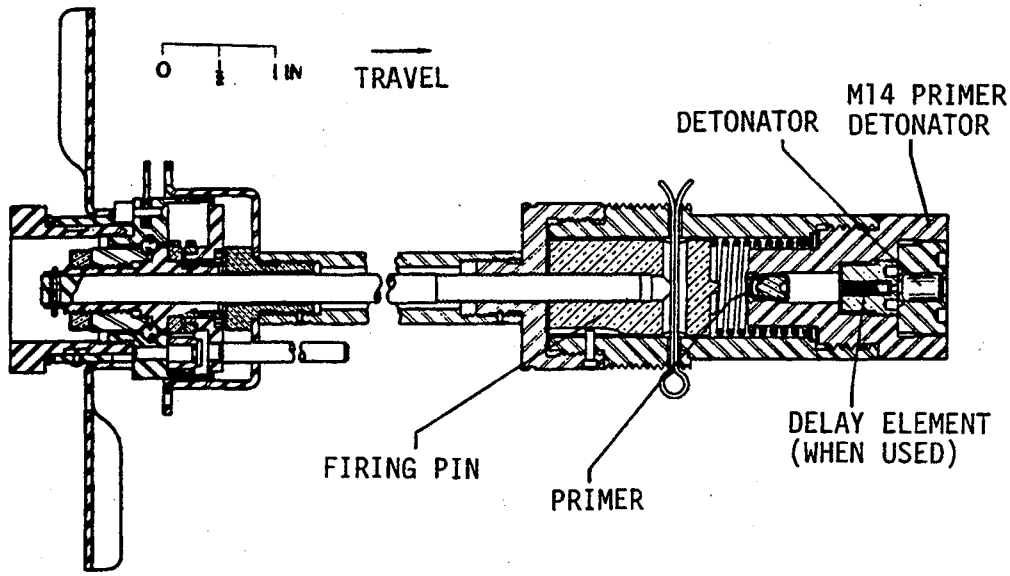

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-7, 73-8-181
Parts List
Specification
Previous Number T4E2

GENERAL

Carriers Bomb with box fins only
Cal. — Size 500 lb
Location Tail
Use HE, GP, SAP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M101A2, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	500 ft (M4 vane) 1300 ft (M5 vane)
Rotation (rps)	
Non-arm	Arm 150-170 revs.
Setback (g)	
Non-arm	Arm
Arming Wire	Yes (to replace shipping safety pin)
External Indicat.	Yes

PHYSICAL DATA

Weight	2.9 lb
Total Length (in.)	12.26
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact - inertia
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard target only
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A non-delay or 0.025 sec delay M14 primer-detonator is standard.

A 0.01, 0.1 or 0.24 sec delay M14 primer-detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

M4 vane is standard, M5 vane may be substituted in the field to give longer arming time.

AN-M101A1 is an earlier model having 24 single threads on the arming stem and an eight-bladed vane requiring about 720 revs. to arm.

SERIES: N CHAPTER: 2
DESIGNATION: AN-M101A2
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M102A2, FUZE, BOMB, TAIL

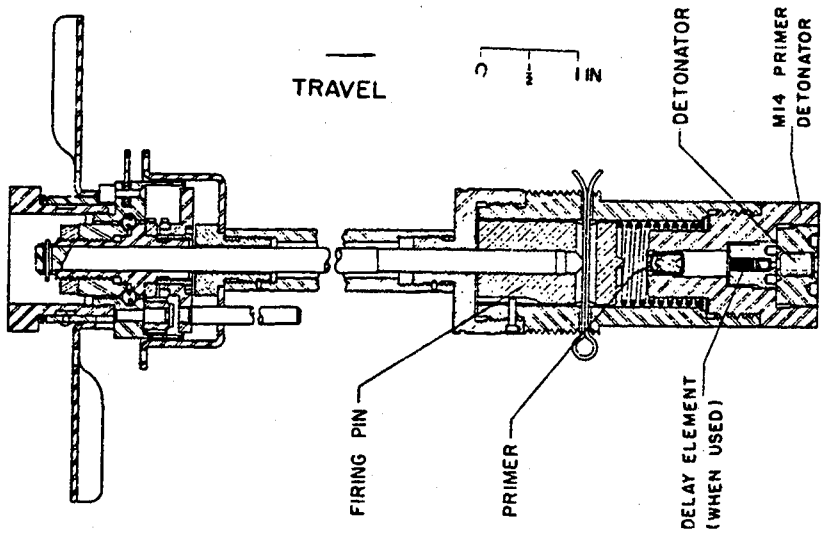

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-8, 73-8-72
Parts List
Specification
Previous Number T4E2

GENERAL

Carriers Bomb with box fins only
Cal. — Size 1000, 2000 lb
Location Tail
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M102A2, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	500 ft (M4 vane) 1300 ft (M5 vane)
Rotation (rps)	
Non-arm / Arm	150-170 revs.
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes (to replace shipping safety pin)
External Indicat.	Yes

PHYSICAL DATA

Weight	3.2 lb
Total Length (in.)	16.26
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact - inertia
Type	Mechanical
Delay	Instant, or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard target only
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A non-delay or 0.025 sec delay M14 primer-detonator is standard.

A 0.01, 0.1 or 0.24 sec delay M14 primer-detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

M4 vane is standard, M5 vane may be substituted in the field to give longer arming time.

AN-M102A1 is an earlier model having 24 single threads on the arming stem and an eight-bladed vane requiring about 720 revs. to arm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M103A1, FUZE, BOMB, NOSE

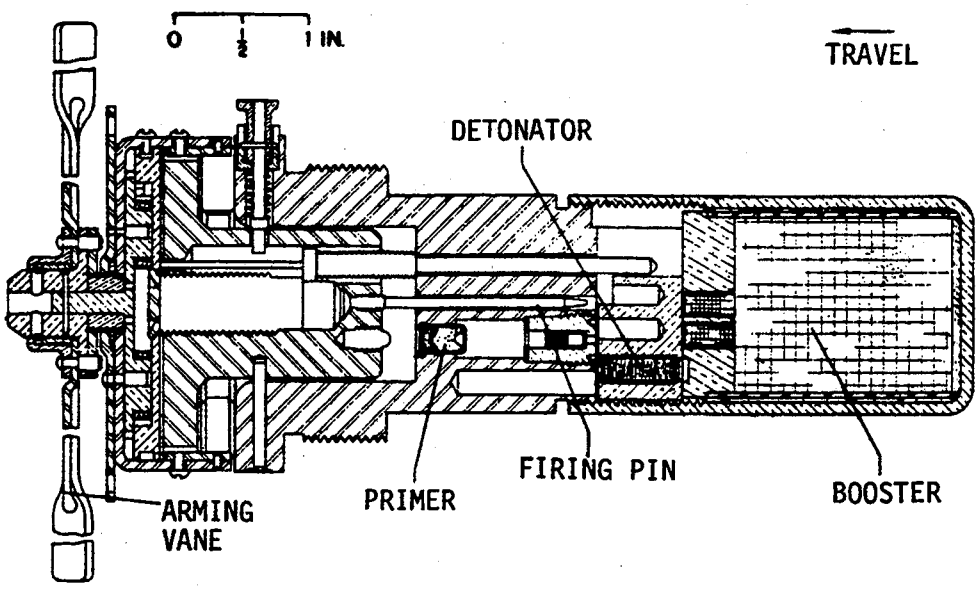

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-14
Parts List
Specification
Previous Number T3E5

GENERAL

Carriers Bomb
Cal. — Size 90, 100, 260, 350, 500, 1000, 2000 lb
Location Nose
Use HE, GP, incend., SAP, depth, fragmentation
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil --, Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M103A1, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	500 - 1000 ft (M1 vane) 3000-5500 ft (M2 vane)
Rotation (rps)	
Non-arm	Arm 175 revs (delay) 308 revs (inst)
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.7 lb
Total Length (in.)	7.23
Body Diam. (in.)	2.48
Intrusion	5.23 in.
Thread Size	2.0-12NS-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	Instant. or 0.1 sec
Time Type	
Time Setting (sec)	
Target	Hard and moderate hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M39A1
Detonator	M20
Booster	Tetryl
Relay	M6

REMARKS

Air travel to arm is dependent on size and weight of bomb. Operation of M2 vane is erratic on some bombs.

SERIES: N CHAPTER: 2
DESIGNATION: AN-M103A2
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M104, FUZE, BOMB, NOSE

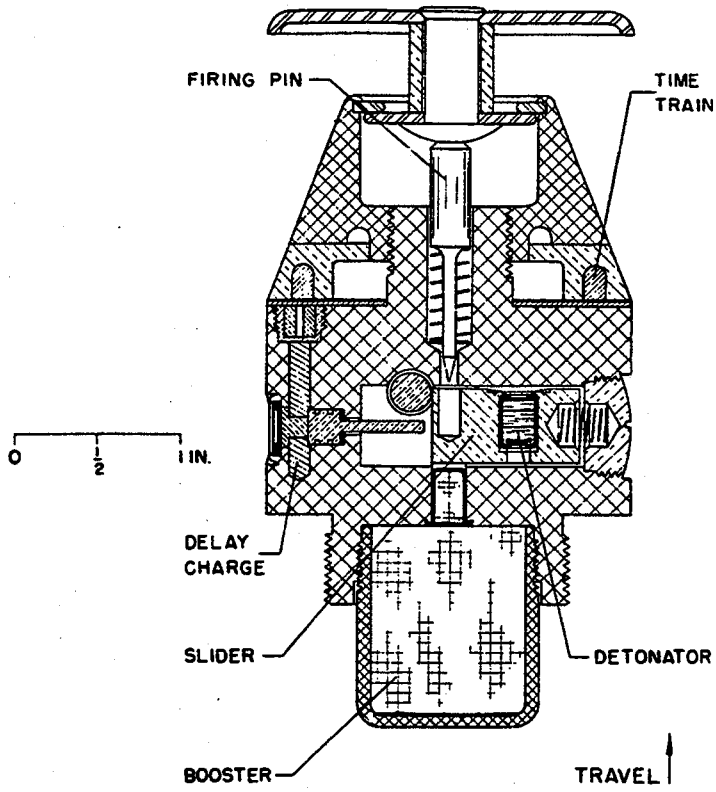

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-28
Parts List	
Specification	
Previous Number	T11

GENERAL

Carriers	Bomb
Cal. — Size	23 lb
Location	Nose
Use	Parachute, fragmentation
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M104, FUZE, BOMB, NOSE

ARMING DATA

Method	*
Delay	2.5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

*Spring loaded arming pin & delay arming charge (pyrotechnic train).

PHYSICAL DATA

Weight	1.2 lb
Total Length (in.)	4.4
Body Diam. (in.)	
Intrusion	1.3 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel, light vehicle
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M29
Booster	Tetryl

REMARKS

Replaced by Fuzes M210 and M170.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M105, FUZE, BOMB, NOSE

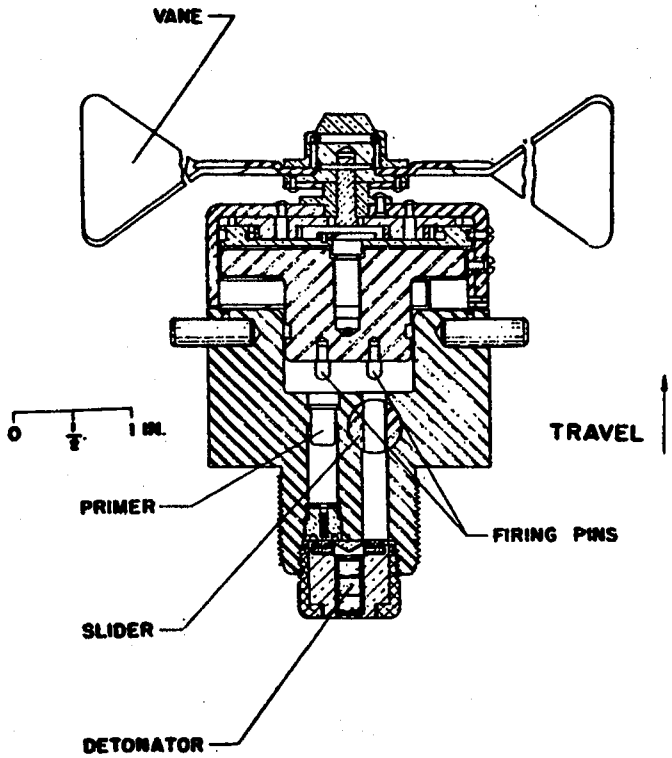

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-80
Parts List	
Specification	
Previous Number	T18

GENERAL

Carriers	Bomb
Cal. — Size	100, 300, 600, 1100, 2000 lb
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M105, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	500 to 1000 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.3 lb
Total Length (in.)	4.6
Body Diam. (in.)	
Intrusion	1.4 in.
Thread Size	1.25-16NS-1

FUNCTIONING DATA

Action	PD, delay, select
Type	Mechanical
Delay	0.1 to 0.15 sec
Time Type	
Time Setting (sec)	
Target	Hard or mod. hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M106A2, FUZE, BOMB, TAIL

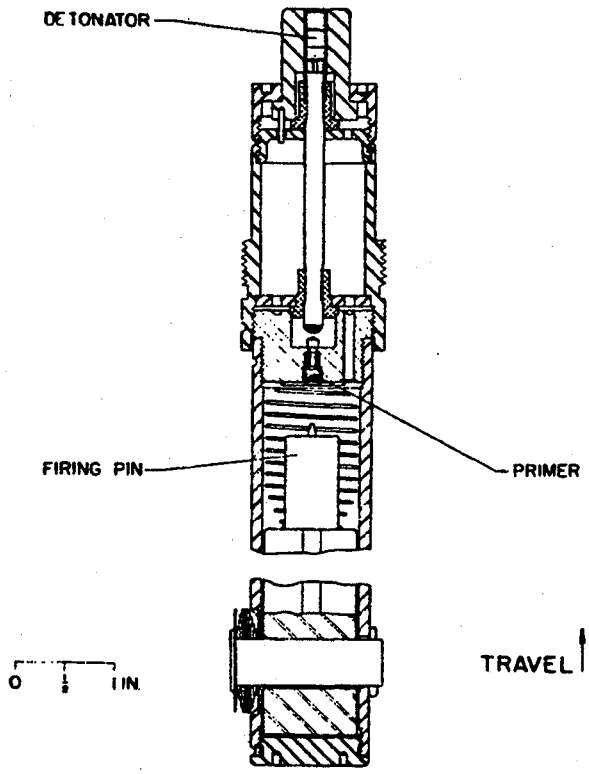

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	73-8-96
Parts List	
Specification	
Previous Number	T17

GENERAL

Carriers	Bomb
Cal. — Size	
Location	Tail
Use	HE or GP, AP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M106A2, FUZE, BOMB, TAIL

ARMING DATA

Method	Spring loaded arming pin
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2.4 lb
Total Length (in.)	9.4
Body Diam. (in.)	
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Delay
Type	Mechanical
Delay	3.5 to 4.5 sec
Time Type	
Time Setting (sec)	
Target	Hard and soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	
Booster	

REMARKS

Replaced by the M112 and M115 series Bomb tail fuzes.

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M107, FUZE, BOMB, NOSE, MECHANICAL TIME

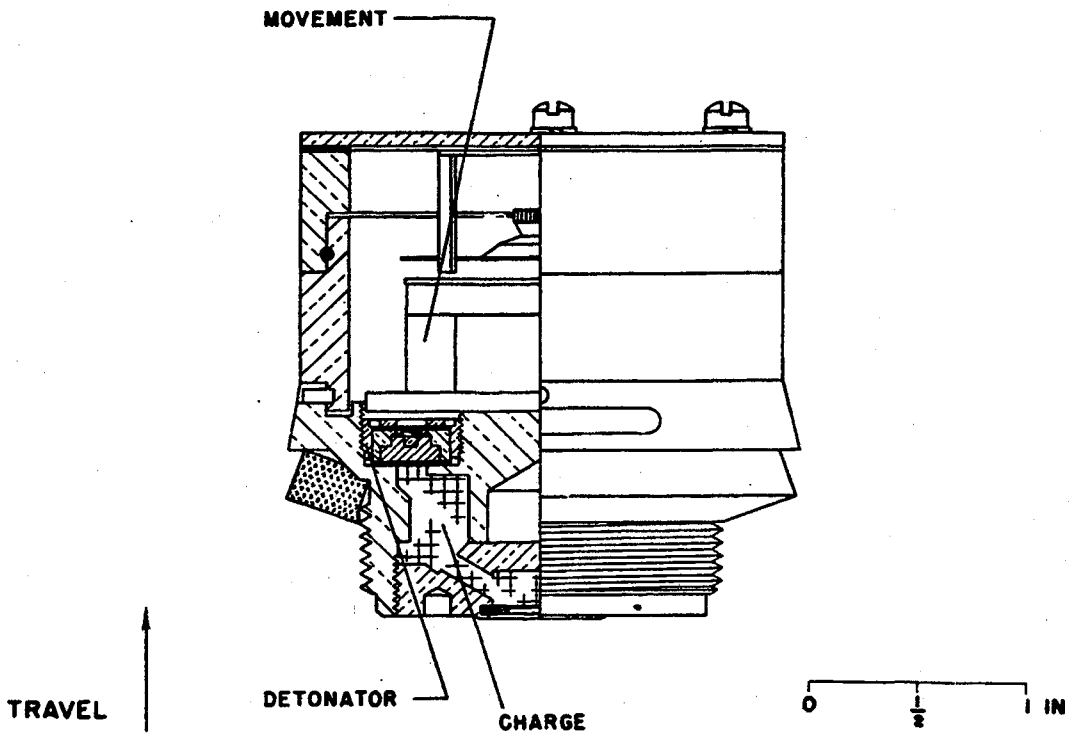

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-41
Parts List	
Specification	
Previous Number	T10

GENERAL

Carriers	Bomb
Cal. — Size	
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M107, FUZE, BOMB, NOSE, MECHANICAL TIME

ARMING DATA

Method	Spring loaded arming pin
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.5 lb
Total Length (in.)	2.0
Body Diam. (in.)	
Intrusion	0.5 in.
Thread Size	1.7-14NS-1

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	5 - 30
Target	Aerial burst
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Replaced by Fuze M111. This was an artillery time fuze adapted for use in bombs as a temporary measure.

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M108, FUZE, BOMB, NOSE

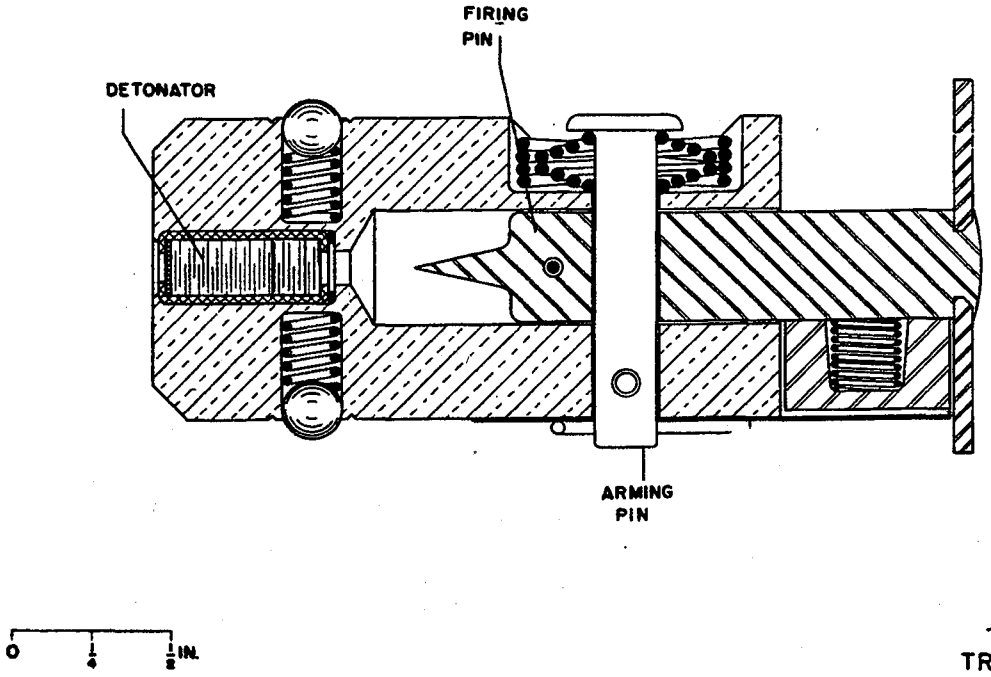

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-44
Parts List	
Specification	
Previous Number	T21

GENERAL

Carriers	Bomb
Cal. — Size	100 lb
Location	Nose
Use	Practice
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M108, FUZE, BOMB, NOSE

ARMING DATA

Method	Spring loaded arming pin
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	0.5 lb
Total Length (in.)	2.66
Body Diam. (in.)	
Intrusion	
Thread Size	(2 ball latch)

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Target practice
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M13
Booster	

REMARKS

Explosive train is not interrupted.

Used with Bomb, TP, 100 lb, M75A1.

SERIES: A CHAPTER: 2
DESIGNATION: M108
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M109, FUZE, BOMB, NOSE

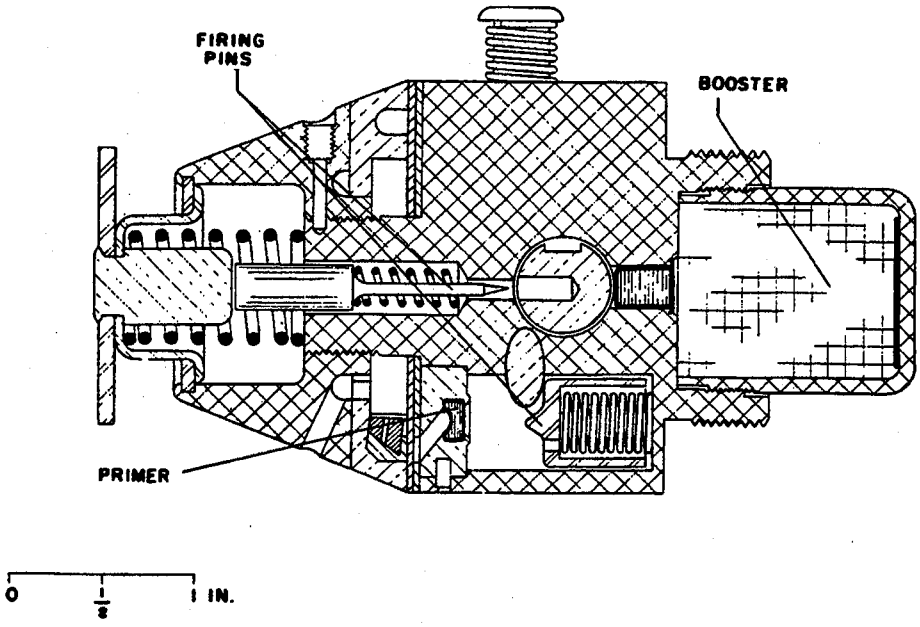

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-46
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	23 lb
Location	Nose
Use	Parachute, fragmentation
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M109, FUZE, BOMB, NOSE

ARMING DATA

Method	Spring loaded arming pin & delayed arming charge
Delay	2.5 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.2 lb
Total Length (in.)	4.36
Body Diam. (in.)	
Intrusion	1.3 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target Sensitivity	Antipersonnel, light vehicles
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M29
Booster	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM109, INITIATOR, FUZE, MT

IDENTIFICATION

Agency ARRADCOM-DRDAR, Nabreski
Status Terminated
Ass'y Dwg. No. FD 203771
Parts List PL 203771
Specification
Previous Number

GENERAL

Carriers Bomb
Cal. — Size Canister cluster
Location Top external
Use Chemical
MIL-STD's 331, Tests 101-105, 201, 108, 109
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM109, INITIATOR, FUZE, MT

ARMING DATA

Method	Pull wire releases arming pin
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2 oz
Total Length (in.)	1.15
Body Diam. (in.)	1.1
Intrusion	Interrupter pin intrudes approx. 0.4 in.
Thread Size	

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech. runaway
Time Setting (sec)	2-10
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Main spring

EXPLOSIVE TRAIN

S&A Device	
Primer	Inert
Detonator	
Booster	

REMARKS

Setting is accomplished with key

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M110A1, FUZE, BOMB, NOSE

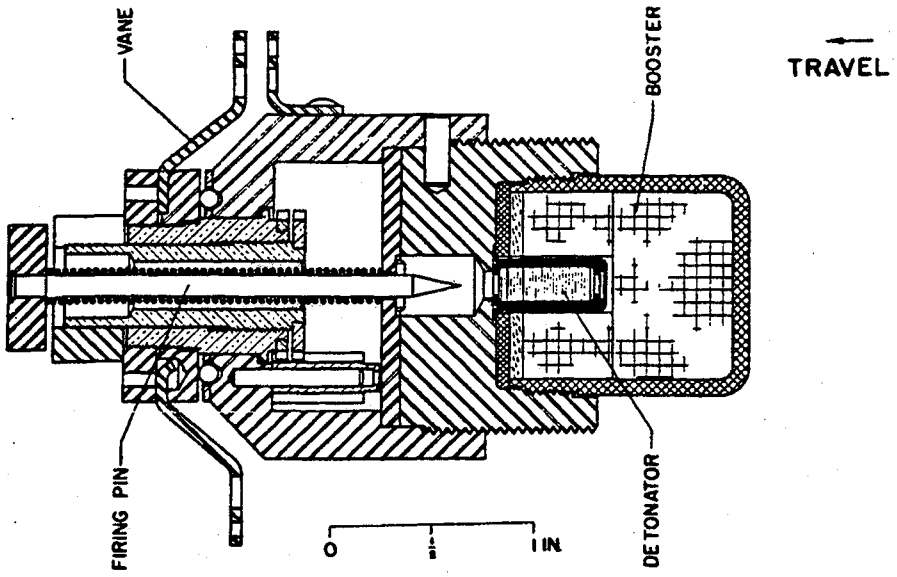

IDENTIFICATION

Agency ARRADCOM-DRDAR, Harris

Status Terminated

Ass'y Dwg. No. 73-8-77

Parts List

Specification

Previous Number T24

GENERAL

Carriers	Bomb - fin stabilized
Cal. — Size	20 lb frag, 115 lb chem.
Location	Nose
Use	HE or GP, chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M110A1, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	725 ft
Rotation (rps)	
Non-arm	Arm 325 revs
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.0 lb
Total Length (in.)	3.7
Body Diam. (in.)	1.75
Intrusion	1.3 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Hard and soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M13
Booster	Tetryl

REMARKS

Explosive train is not interrupted.

Replaced by Fuze AN-M158.

SERIES: N CHAPTER: 2
DESIGNATION: AN-M110A1
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M111A2, FUZE, BOMB, NOSE, MECHANICAL TIME

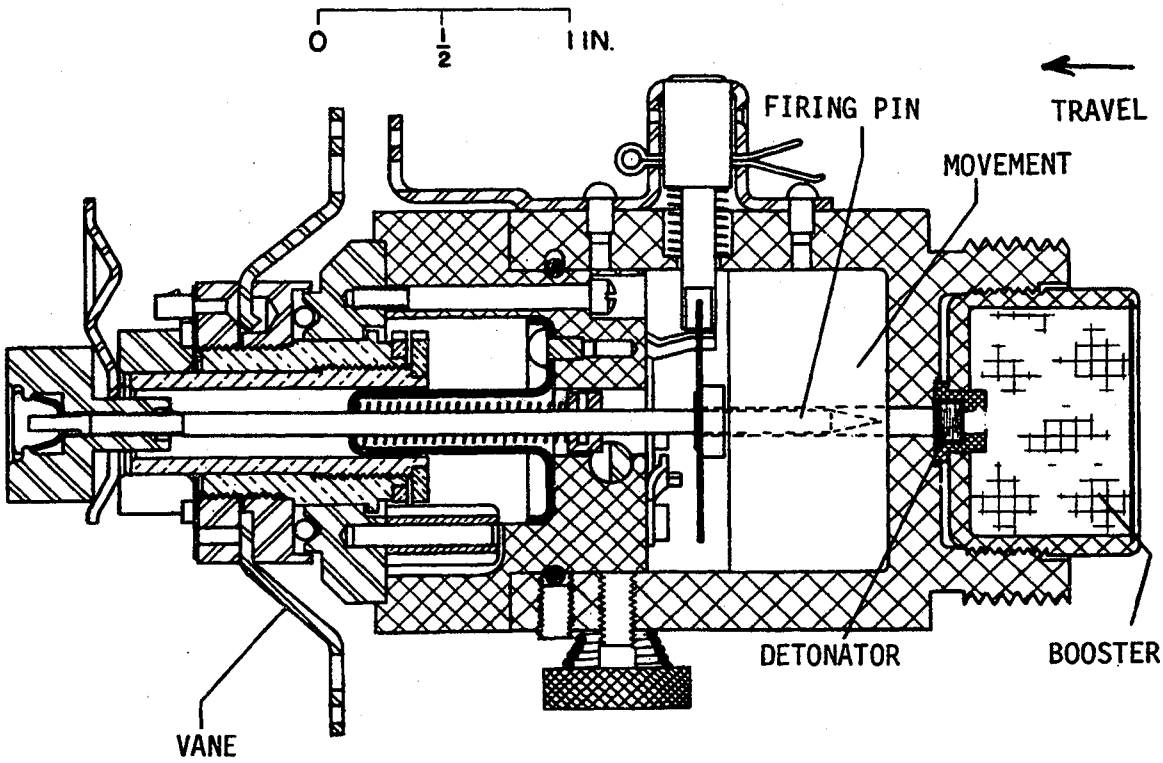

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-121
Parts List	
Specification	
Previous Number	T22

GENERAL

Carriers	Bomb, (parachute, cluster)
Cal. — Size	
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M111A2, FUZE, BOMB, NOSE MECHANICAL TIME

ARMING DATA

Method	Vane
Delay	1300 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.4 lb
Total Length (in.)	4.48
Body Diam. (in.)	
Intrusion	0.8 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	PD, time, select
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	5 - 92
Target	Illumination
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	
Booster	Black powder

REMARKS

Replaced by Fuze M146.

Explosive train is not interrupted.

SERIES: A CHAPTER: 2
DESIGNATION: M111A2
Bomb MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M112A1, FUZE, BOMB, TAIL

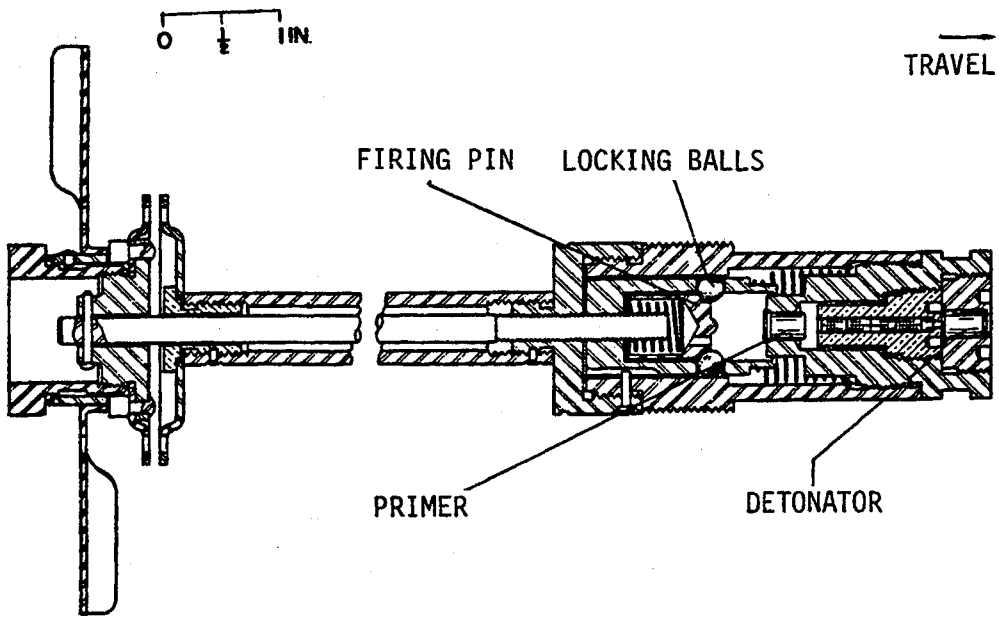

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-112, 73-8-113
Parts List
Specification
Previous Number

GENERAL

Carriers Bomb with box fins
Cal. — Size 100 and 250 lb
Location Tail
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M112A1, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	80 ft
Rotation (rps)	
Non-arm / Arm	18-21 revs
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2.3 lb
Total Length (in.)	9.6
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact - inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	8 - 15 or 4 - 5
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16A1
Booster	

REMARKS

Explosive train is not interrupted.

M4 vane is standard. M5 vane may be substituted in the field to increase the air travel to arm.

The standard delay (8 - 15 sec) may be replaced by a 4 - 5 sec delay, if so, minimum release altitude is 100 ft. This fuze is used for minimum altitude ("masthead") bombing.

SERIES: N CHAPTER: 2
DESIGNATION: M112A1
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

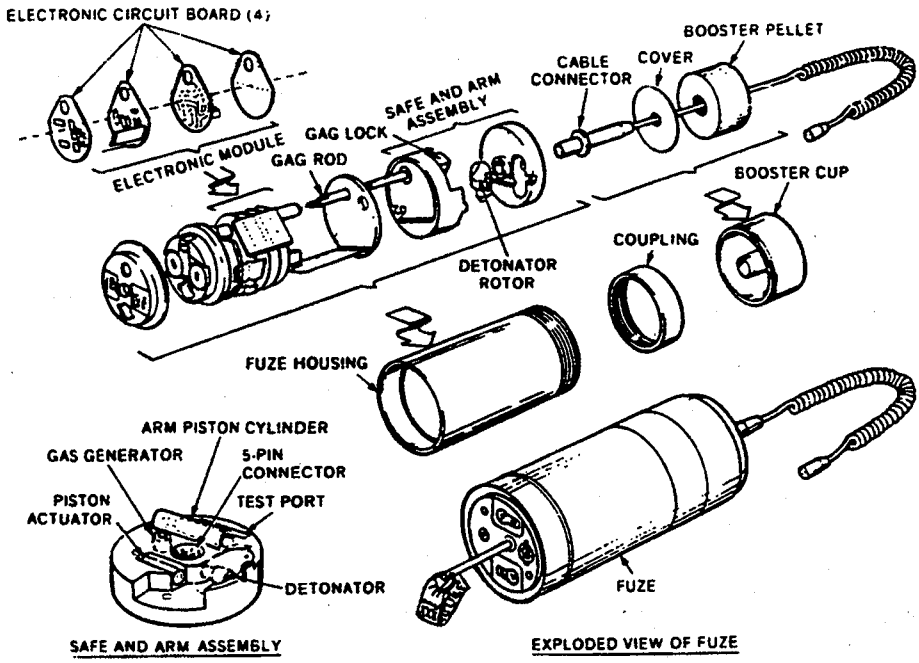

- OVERALL SIZE -	- INTRUSION -	
LG: 7.25 in (184.2 mm)	DP: 7.25 in (184.2 mm)	WT: 4.5 lb (2041 g)
XSECT: 3.0 in (76.2 mm)	DIA:	THD: 3.5-12UNS-2A closure rng
		THD DP:

IDENTIFICATION
- AGENCY: Eglin AFB, AD/YN
- CONTACT: Stewart, D
- PHONE: DSN 872-8371
- STATUS: Terminated
- USER: AF
- ASSY DWG: 728 020
- PARTS LIST:
- SPEC: SP 728 020
- PUB:

- NATIONAL STOCK NO:
  - Not assigned
- DODIC: Not assigned
- PRIOR MODEL NO: None
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: GP and laser guided bombs

- AMMUNITION:
  - HE, Mk 80 Series (LD & HD)
  - HE, M117 (LD & HD)

LOCATION: Nose and tail
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP: High drag
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316
SETTERS: Screwdriver

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Lanyard to FZU-37A/B Initiator;
Initiator output: 100 kts no go;
200 kts all go
SECOND SAFETY:
Turbine release signal

OTHER SAFETY:
Turbine release signal and voltage must be present before 10 s (min) & 2.5 min (max) after lanyard pull
SAFE/ARM INDICATION:
Safe if safing pin in place or safing pin port is not red
ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: Out-of-line explosive train
PRIMER:

DETONATOR: Dwg 728065

LEAD: 200 mg CH-6
Dwg 728054

BOOSTER: 125 g CH-6
Dwg 790AS505

OTHER:

FUNCTIONING DATA
MODES: Impact or delay
TYPE: Electronic
CHARACTERISTICS:
0.000, 0.005, 0.010, 0.025, 0.050, 0.100, 0.200 s delay; preflight selectable

TARGET: Ground
SENSITIVITY:
40 g no go; 80 g all go

FUNCTION TEMP:
-54 to +71 deg C
MODE ON DELIVERY:

POWER SUPPLY:

FZU-37A/B Bomb Fuze Initiator

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Power and turbine release signals are supplied by the FZU-37A/B Bomb Fuze Initiator. The FMU-112/B Fuze starts on receipt of 10 Vdc and turbine release signal. These must occur before 10 s (min) and 2.5 min (max) after lanyard pull or the fuze will dud. Redundant drogue sensors monitor bomb deceleration for 2.45 s after release and will select the retard arm time if the proper g level is sensed for 1.2 s. At 2.25 s (high drag), and 3.63 s (low drag) after timer start, the gag rod is removed from the rotor by a piston actuator unlocking the rotor. At the proper arming (selected LD or HD as determined by the drogue sensors), a gas generator is fired turning the rotor and aligning the detonator with the rest of the explosive train and connecting it to the firing circuit. The fuze will function on receipt of a proximity signal or at impact. Impact and proximity inputs are ignored during the first second after timer start, preventing the fuze from functioning. Proximity inputs after 1 s but before arming cause the fuze to function on impact only.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M113A1, FUZE, BOMB, TAIL

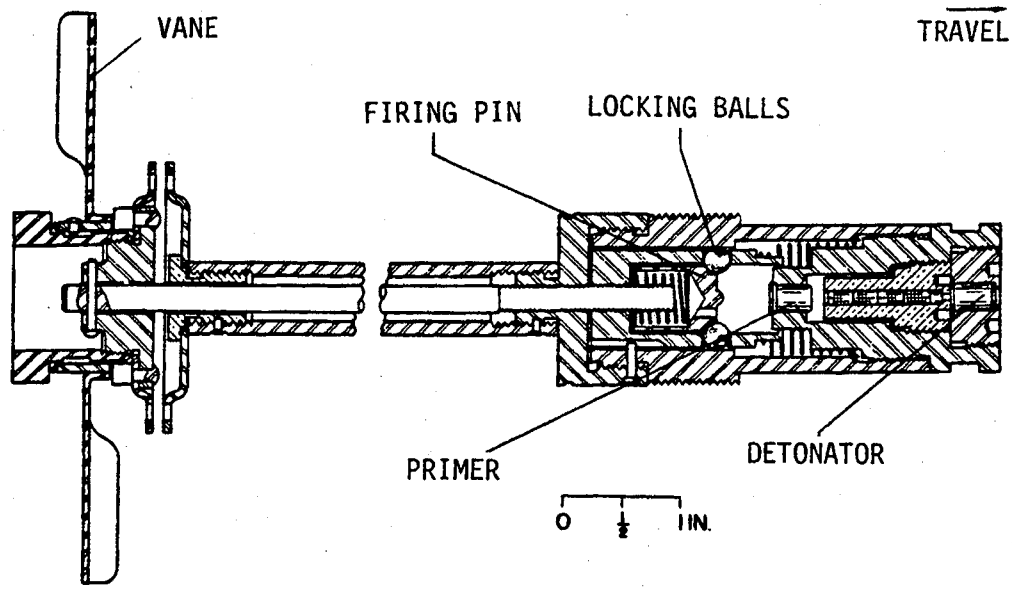

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-114, 73-8-115
Parts List
Specification
Previous Number

GENERAL

Carriers	Bomb with box fins
Cal. — Size	100, 250 lb
Location	Tail
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M113A1, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	90 ft
Rotation (rps)	
Non-arm / Arm	18-21 revs
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2.5 lb
Total Length (in.)	12.6
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	8 - 15 or 4 - 5
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16
Booster	

REMARKS

Explosive train is not interrupted.

M4 vane is standard. M5 vane may be substituted in the field to increase the air travel to arm.

The standard delay (8 - 15 sec) may be replaced by a 4 - 5 sec delay. If so, minimum release altitude is 100 ft. This fuze is used for minimum altitude ("masthead") bombing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M114A1, FUZE, BOMB, TAIL

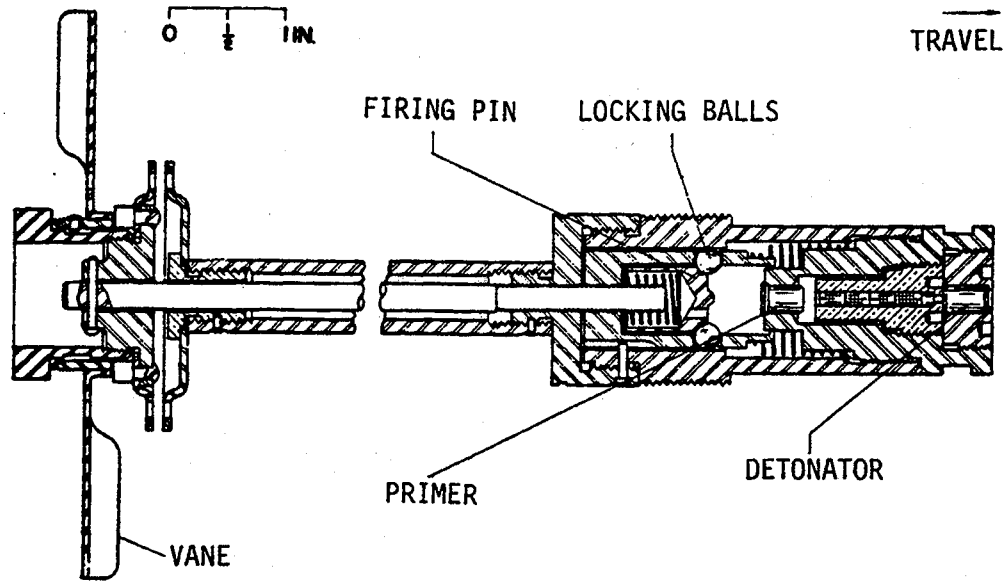

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424

Status Obsolete

Ass'y Dwg. No. 73-8-116, 73-8-117

Parts List

Specification

Previous Number

GENERAL

Carriers Bomb with box fins

Cal. — Size 100, 250 lb

Location Tail

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M114A1, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	90 ft
Rotation (rps)	
Non-arm	Arm 18-21 revs
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2.8 lb
Total Length (in.)	16.6
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact - inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	8 - 15 or 4 - 5
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16
Booster	

REMARKS

Explosive train is not interrupted.

M4 vane is standard. M5 vane may be substituted in the field to increase the air travel to arm.

The standard delay (8-15 sec) may be replaced by a 4-5 sec delay. If so, minimum release altitude is 100 ft. This fuze is used for minimum altitude ("masthead") bombing.

SERIES: N CHAPTER: 2
DESIGNATION: M114A1
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M115, FUZE, BOMB, TAIL

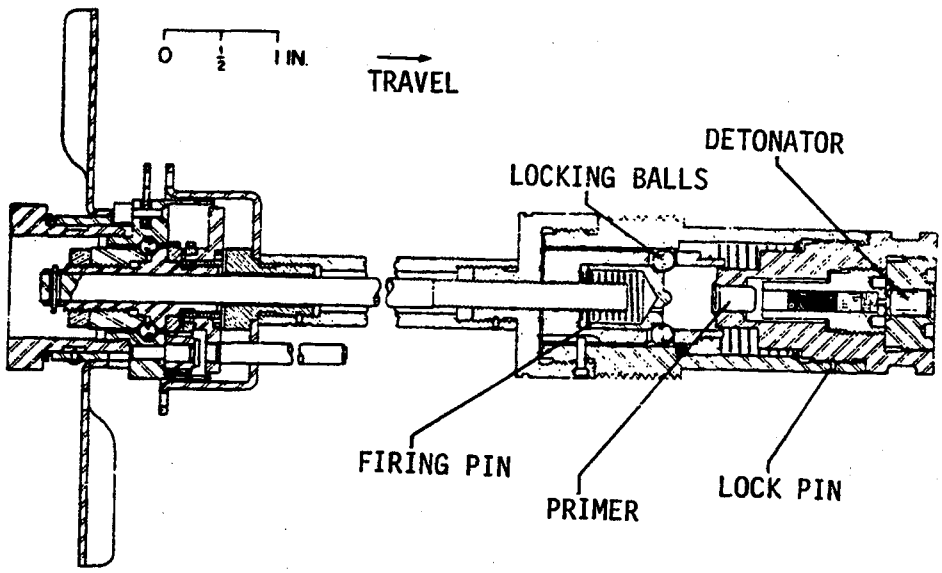

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-158, 73-8-159
Parts List
Specification
Previous Number

GENERAL

Carriers Bomb with box fins
Cal. — Size 100, 250 lb
Location Tail
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M115, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	550 ft (M4 vane) 1325 ft (M5 vane)
Rotation (rps)	
Non-arm	Arm 18-21 revs
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2.7 lb
Total Length (in.)	9.54
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact - inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	8-15 or 4-5
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16
Booster	

REMARKS

Explosive train is not interrupted.

M4 vane is standard. M5 vane may be substituted in the field to increase the air travel to arm.

The standard delay (8-15 sec) may be replaced by a 4-5 sec delay. If so, minimum release altitude is 100 ft. This fuze is used for minimum altitude ("masthead") bombing.

SERIES: N CHAPTER: 2
DESIGNATION: M115
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M116, FUZE, BOMB, TAIL

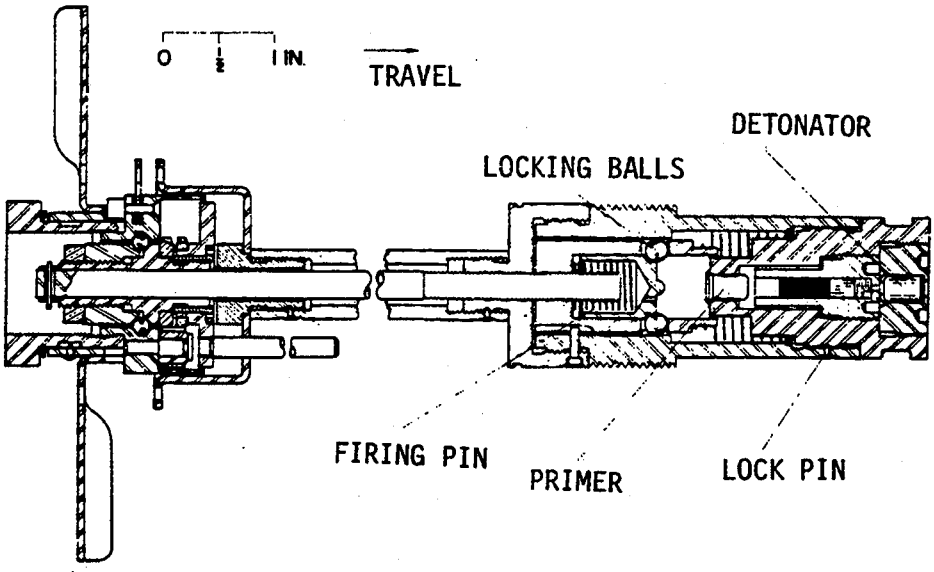

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424

Status Obsolete

Ass'y Dwg. No. 73-8-160, 73-8-161

Parts List

Specification

Previous Number

GENERAL

Carriers Bomb with box fins

Cal. — Size 500 lb

Location Tail

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M116, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	550 ft (M4 vane) 1325 ft (M5 vane)
Rotation (rps)	
Non-arm	Arm 18-21 revs
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2.9 lb
Total Length (in.)	12.54
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	8-15 or 4-5
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16
Booster	

REMARKS

Explosive train is not interrupted.

M4 vane is standard. M5 vane may be substituted in the field to increase the air travel to arm.

The standard delay (8-15 sec) may be replaced by a 4-5 sec delay. If so, minimum release altitude is 100 ft. This fuze is used for minimum altitude ("masthead") bombing.

SERIES: N CHAPTER: 2
DESIGNATION: M116
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M117, FUZE, BOMB, TAIL

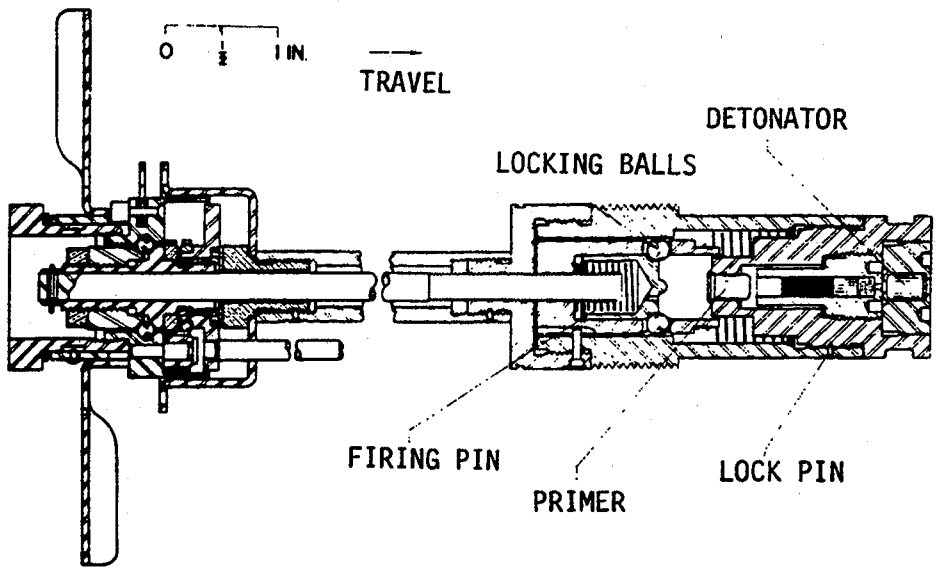

IDENTIFICATION

Agency NMC, Code 2141, R. Villars
AV 351-6424

Status Obsolete

Ass'y Dwg. No. 73-8-162, 73-8-163

Parts List

Specification

Previous Number

GENERAL

Carriers Bomb with box fins

Cal. — Size 1000, 2000 lb

Location Tail

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M117, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	550 ft (M4 vane) 1325 ft (M5 vane)
Rotation (rps)	
Non-arm	Arm 18-21 revs
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.2 lb
Total Length (in.)	16.54
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	8-15 or 4-5
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16
Booster	

REMARKS

Explosive train is not interrupted.

M4 vane is standard. M5 vane may be substituted in the field to increase the air travel to arm.

The standard delay (8-15 sec) may be replaced by a 4-5 sec delay. If so, minimum release altitude is 100 ft. This fuze is used for minimum altitude ("masthead") bombing.

SERIES: N CHAPTER: 2
DESIGNATION: M117
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

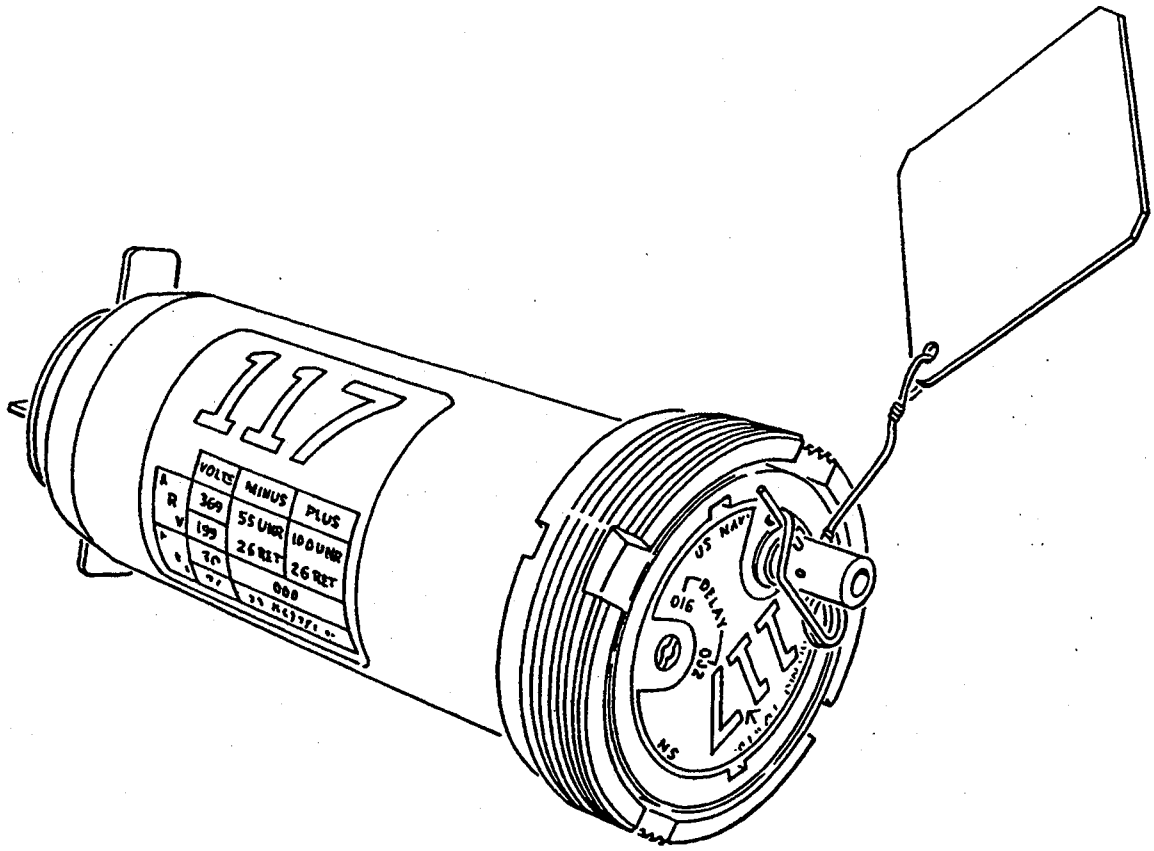

- OVERALL SIZE -	- INTRUSION -	WT: 4.3 lb (1950 g)
LG: 8.5 in (216 mm)	DP: 7.5 in (190.5 mm)	THD: 3.5-12
XSECT: 3.5 in (90.3 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NAWC, Point Mugu
- CONTACT: Morgan, D
- PHONE: DSN 351-6416
- STATUS: Terminated
- USER: Navy
- ASSY DWG: 790-AS-500
- PARTS LIST: PL 790AS500
- SPEC: AS 3290
- PUB: NAVAIR 11-5A-17

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO:
SIMILAR TO:

REPLACES: Mk 344, Mk 376
REPLACED BY:

GENERAL
- WEAPON: GP and laser-guided bombs

AMMUNITION:
- Mk 80 series GP (LD and HD) and Laser Guided Bombs
- HE

LOCATION: Tail
BALLISTIC LEVELS:
- ROTATION: Free Fall
- SETBACK:
- VELOCITY: 550 KIAS

CREEP:
FLIGHT TIME:
SAFETY STD:
SETTERS:

Supersedes page 2-89 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Arming wire

SECOND SAFETY:
Requires high voltage electrical signal from A/C

OTHER SAFETY:
Retardation must be sensed to obtain 2.6 s arm time, HERO safe.

SAFE/ARM INDICATION:
Pop-out pin extended; Black/Red stripes visible

ARMING TIME OR DISTANCE:
5.5 s; 10 s; 2.6 s automatic for high drag bomb

FUNCTIONING DATA
MODES: Impact, Delay
TYPE: Electric
CHARACTERISTICS:
In-flight selection of one of 2 func times; 0 or delay (remarks)

TARGET: Surface
SENSITIVITY:
Functions on water
40 to 80 g

FUNCTION TEMP:

MODE ON DELIVERY:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: Mk 100 Mod 0

LEAD: Tetryl

BOOSTER: CH-6, 4.4 oz (125 g)

OTHER: Expl. Driver Mk 20 Mod 0 (1)

POWER SUPPLY:

None; Energy from A/C transferred during release cycle.

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M120A1, FUZE, BOMB, NOSE

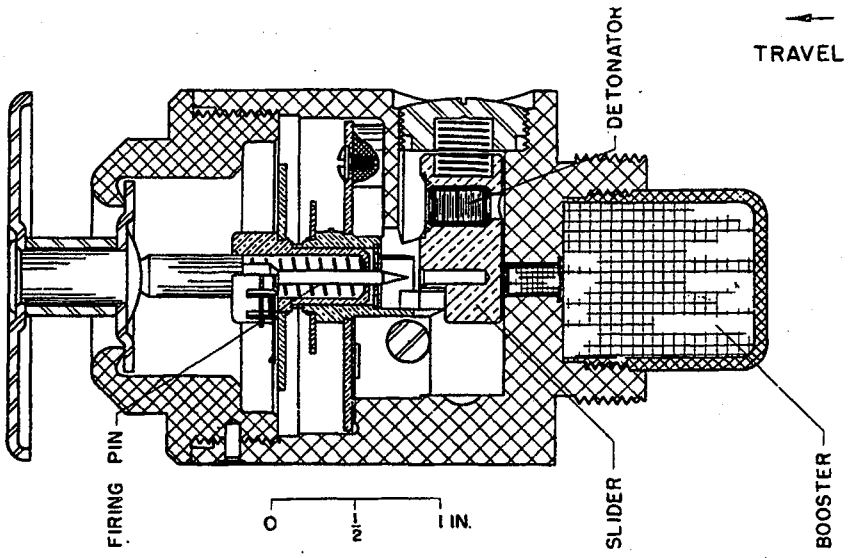

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424

Status Obsolete

Ass'y Dwg. No. 73-8-138, 73-8-139

Parts List

Specification

Previous Number

GENERAL

Carriers Bomb

Cal. — Size 23, 120 lb

Location Nose

Use Parachute, fragmentation

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M120A1, FUZE, BOMB, NOSE

ARMING DATA

Method	Mechanical time
Delay	1.9 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.1 lb
Total Length (in.)	4.6
Body Diam. (in.)	2.3
Intrusion	
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	Structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	Tetryl

REMARKS

When arming pin is even partially ejected, the fuze should be regarded as dangerous.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M121, FUZE, BOMB, TAIL

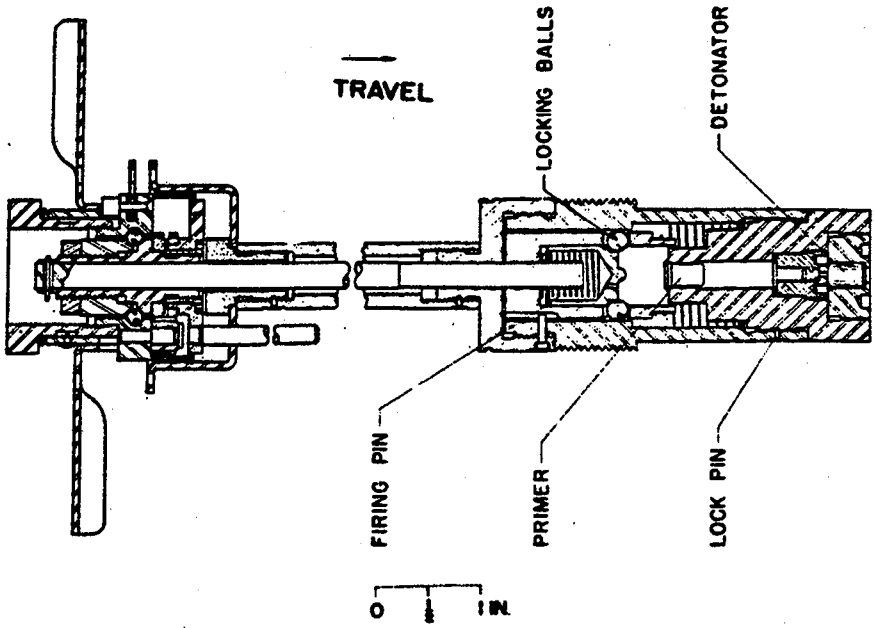

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-153, 73-8-154
Parts List	
Specification	
Previous Number	T35

GENERAL

Carriers	Bomb
Cal. — Size	M4 destructor
Location	Tail
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M121, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	1500 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2.7 lb
Total Length (in.)	9.6
Body Diam. (in.)	
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	BD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	Structures
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M27
Detonator	
Booster	

REMARKS

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-122/B FUZE, BOMB, PROXIMITY

IDENTIFICATION

Agency Eglin AFB, Arm Div.

Status R. Erhart
Terminated

Ass'y Dwg. No.

Parts List

Specification

Previous Number

GENERAL

Carriers SUU-54 Dispenser/GBU-2

Cal. — Size 2000 lbs.

Location ADU-428 Adapter

Use Laser Guided Cluster

MIL-STD's 331, 810, 1316

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Modification of the FMU-110/B for laser guided SUU-54 dispenser (GBU-2).
High altitude proximity function.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-122/B FUZE, BOMB, PROXIMITY

ARMING DATA

Method	Electro-explosive
Delay	3-18 sec.
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Lanyard
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Proximity (300-2200 ft)
Type	Pulse Doppler
Delay	N/A
Time Type	N/A
Time Setting (sec)	N/A
Target	Area (Cluster Bomb)
Sensitivity	
Material	N/A
Thickness (in.)	N/A
Max Obliq. (°)	N/A
Velocity (fps)	N/A
Carrier	GBU-2B/B Laser Guided SUU-54

POWER SUPPLY

Thermal Battery

EXPLOSIVE TRAIN

S&A Device	In-Line/Out-of-Line
Primer	
Detonator	D74B1
Booster	

REMARKS

SERIES: AF CHAPTER: 2
DESIGNATION: FMU-122/B
Bomb Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M123A1, FUZE, BOMB, TAIL

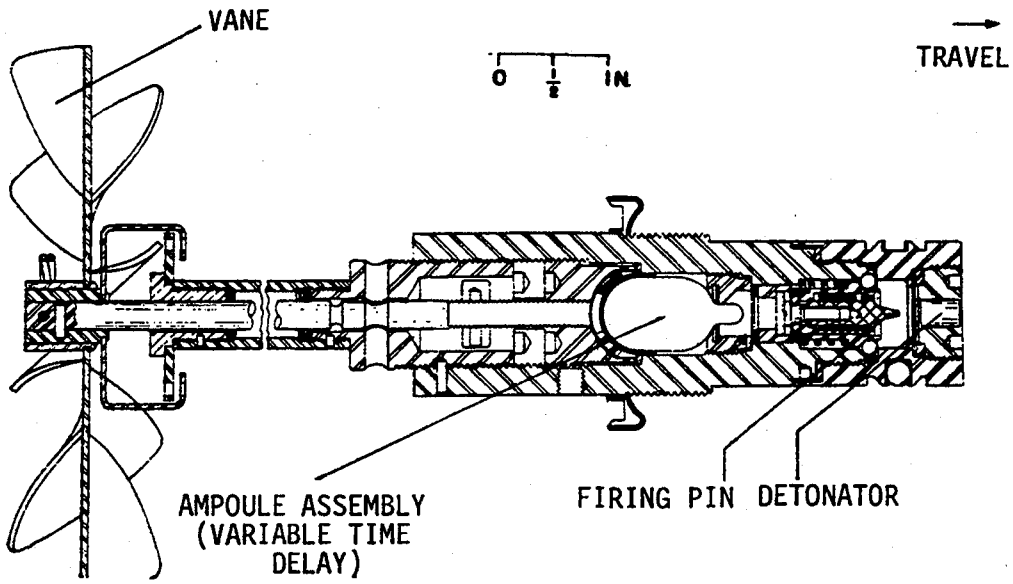

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-169, 170 & 172
Parts List
Specification
Previous Number T38

GENERAL

Carriers Bomb
Cal. — Size 100, 250 lb
Location Tail
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M123A1, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	Less than 100 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	2.9 lb
Total Length (in.)	9.24
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Delay or with drawl
Type	Mechanical
Delay	Delay or instant.
Time Type	Chemical
Time Setting (sec)	1 - 144 hour
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	

REMARKS

Explosive train is not interrupted.

This fuze contains an anti-withdrawal device which will operate if fuze is rotated in the wrong direction on insertion in the bomb. Arming is not required to activate this section.

SERIES: N CHAPTER: 2
DESIGNATION: M123A1
Bomb Long Delay Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	
LG: 18 in (457.2 mm)	DP:	WT: 16 lb (7258 g)
XSECT: 8.0 in (203.2 mm)	DIA:	THD: 3.5-12UNS-2A
		THD DP:

IDENTIFICATION
- AGENCY: Eglin AFB, AD/YN
- CONTACT: Smith, E
- PHONE: DSN 872-5988
- STATUS: Terminated
- USER: AF
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Cluster bomb

- AMMUNITION:
  - SUU-54 Dispenser/GBU-15
  - STANDOFF Guided CBU

LOCATION: Between SUU-54 & guidance

BALLISTIC LEVELS:
- ROTATION: Free Fall
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:

SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Lanyard Safing Pin

SECOND SAFETY:
Electronic Signal from Weapon

OTHER SAFETY:
Arm Times of 3, 4, 5, 6, 7, 8, 9, 10 and 18 s

SAFE/ARM INDICATION:
Yes

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: D74B1

LEAD:

BOOSTER:

OTHER:

FUNCTIONING DATA
MODES: Proximity
TYPE: Electronic, Pulse Doppler Radar
CHARACTERISTICS:
Ground selectable HOB from 300 to 3000 feet

TARGET: Surface
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Thermal Battery

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M124A1, FUZE, BOMB, TAIL

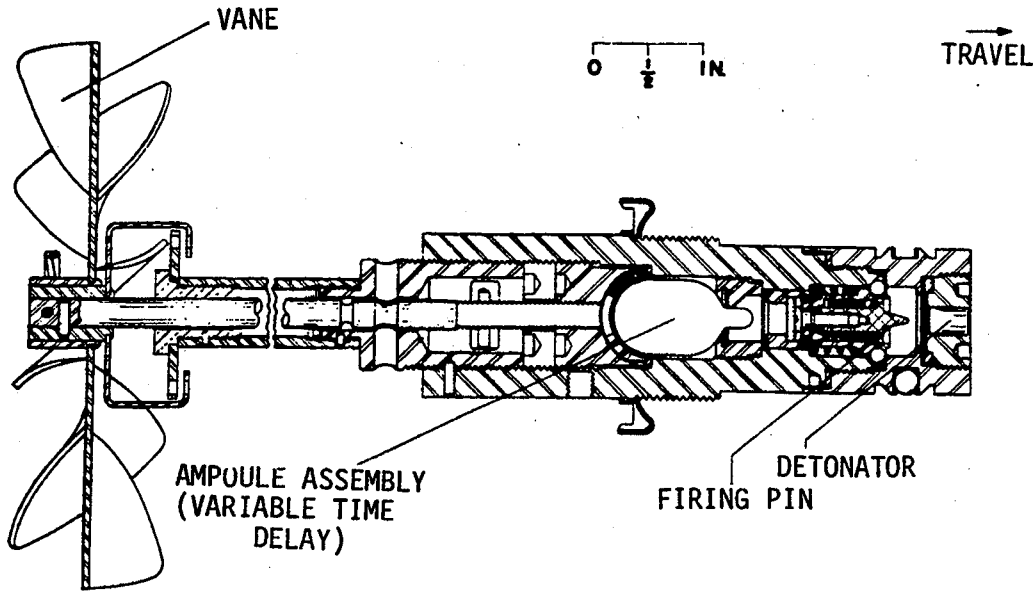

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424

Status Obsolete

Ass'y Dwg. No. 73-8-169, 170 & 172

Parts List

Specification

Previous Number T38

GENERAL

Carriers Bomb

Cal. — Size 500 lb

Location Tail

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M124A1, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	Less than 100 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	3.1 lb
Total Length (in.)	12.24
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Delay or withdrawl
Type	Mechanical
Delay	Delay or instant.
Time Type	Chemical
Time Setting (sec)	1 - 144 hour
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	

REMARKS

Explosive train is not interrupted.

This fuze contains an anti-withdrawal device which will operate if fuze is rotated in the wrong direction on insertion in the bomb. Arming is not required to activate this section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M125A1, FUZE, BOMB, TAIL

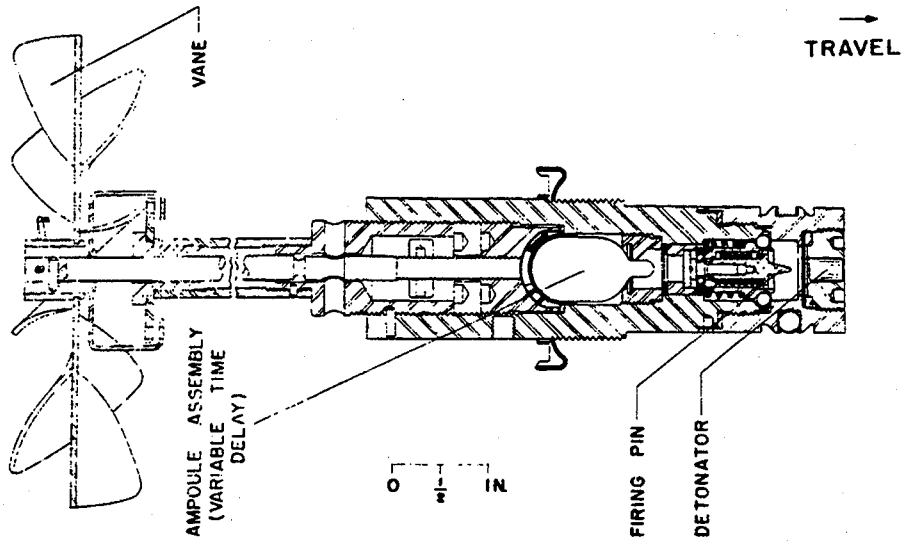

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-169, 170 & 172
Parts List
Specification
Previous Number T38

GENERAL

Carriers Bomb
Cal. — Size 1000, 2000 lb
Location Tail
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M125A1, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	Less than 100 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	3.4 lb
Total Length (in.)	16.24
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Delay or withdrawal
Type	Mechanical
Delay	Delay or instant.
Time Type	Chemical
Time Setting (sec)	1 - 144 hour
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	

REMARKS

Explosive train is not interrupted.

This fuze contains an antiwithdrawal device which will operate if fuze is rotated in the wrong direction on insertion in the bomb. Arming is not required to activate this section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M126A1, FUZE, BOMB, NOSE

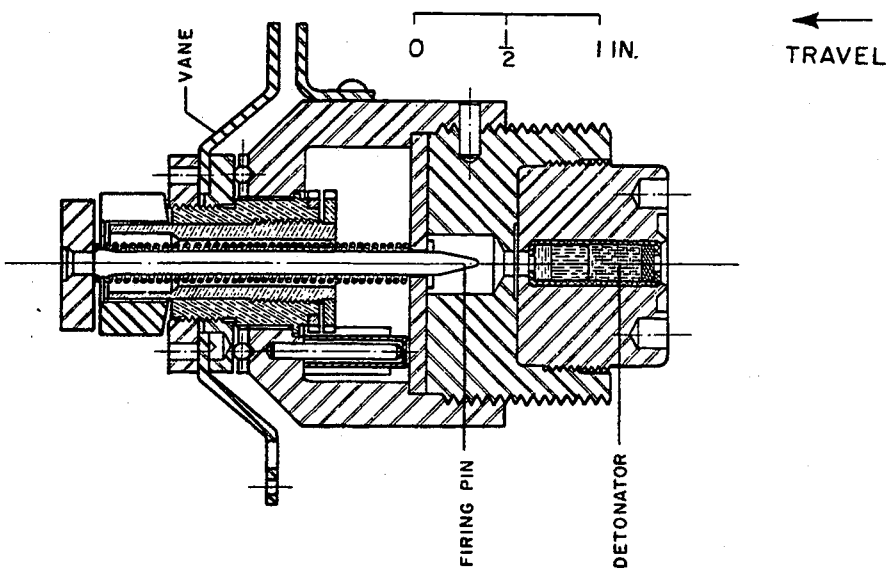

IDENTIFICATION

Agency ARRADCOM-DRDAR, Harris

Status Obsolete

Ass'y Dwg. No. 73-8-167

Parts List

Specification

Previous Number

GENERAL

Carriers Bomb

Cal. — Size 100, 750 lb

Location Nose

Use Chemical, Gas, WP, smoke

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M126A1, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	725 ft
Rotation (rps)	
Non-arm	Arm 325 rev
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.10 lb
Total Length (in.)	3.25
Body Diam. (in.)	1.75
Intrusion	0.84 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	Instantaneous
Time Type	
Time Setting (sec)	Screening, marking, antipersonnel
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M28
Booster	

REMARKS

Explosive train is not interrupted.

Fuze AN-M126 has arming delay of 1200 ft and rev. to arm of 570 rev. due to more teeth on the gears in the earlier model.

Replaced by Fuze M159.

SERIES: A CHAPTER: 2
DESIGNATION: AN-M126A1
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

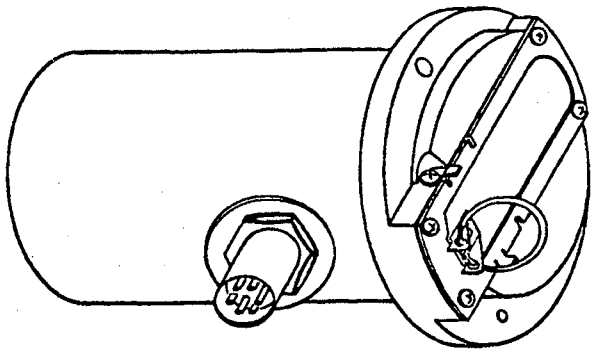

IDENTIFICATION

AGENCY: NWC/CL, Code 3355

CONTACT: L. Brauer

STATUS: Obsolete

USER: Navy/Air Force

ASSY DWG: X1155AS426

PARTS LIST:

SPEC:

NSN:

PRIOR NOMENCLATURE:

REPLACES:

GENERAL

MUNITION: Fuel air explosive BLU-95/B

USE: Fuel air explosive

LOCATION: Aft end of warhead

BALLISTIC LEVELS:

ROTATION:

SETBACK:

VELOCITY:

CREEP:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Arming wire activated during launch

SECOND SAFETY:

Dynamic air pressure

OTHER SAFETY:

Electrical energy required at the beginning at arming sequence also parallel electric timer.

DELAY:

SAFE/ARM CONDITION:

Tear strip and gag rod

FUNCTIONING DATA

MODE(S): Proximity

TYPE: Electric

CHARACTERISTICS:

Two independent isolated explosive outputs one instantaneous and one delay

TARGET: Surface

SENSITIVITY:

PHYSICAL DATA

WEIGHT:

TOTAL LENGTH: 5.4 in

CROSS SECTION:

INTRUSION:

THREAD SIZE:

OTHER:

POWER SUPPLY:

18 Vdc weapon power supply

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line explosive train

PRIMER:

DETONATORS: 2 (Type TBD)

LEAD:

BOOSTER:

OTHER:

REMARKS

The FMU-126/B uses an external TDD to provide a firing signal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M127, FUZE, BOMB, NOSE, MECHANICAL TIME

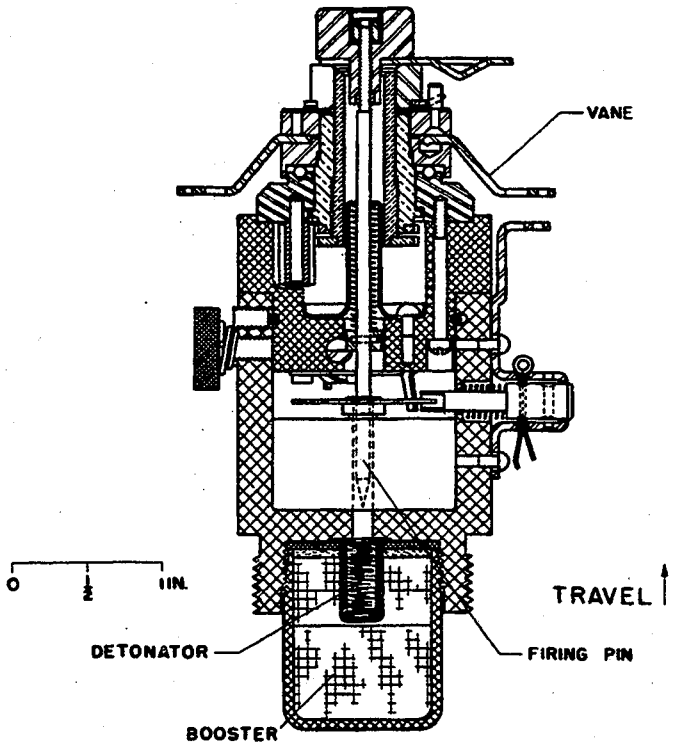

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-179, 73-8-180
Parts List	
Specification	
Previous Number	T39

GENERAL

Carriers	Bomb
Cal. — Size	
Location	Nose
Use	Incendiary cluster
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M127, FUZE, BOMB, NOSE, MECHANICAL TIME

ARMING DATA

Method	Vane
Delay	1300 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.4 lb
Total Length (in.)	4.96
Body Diam. (in.)	
Intrusion	1.3 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	PD, time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	5 - 92
Target	Structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	
Booster	Tetryl

REMARKS

Explosive train is not interrupted.

SERIES: A CHAPTER: 2
DESIGNATION: M127
Bomb MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M128, FUZE, BOMB, NOSE, MECHANICAL TIME

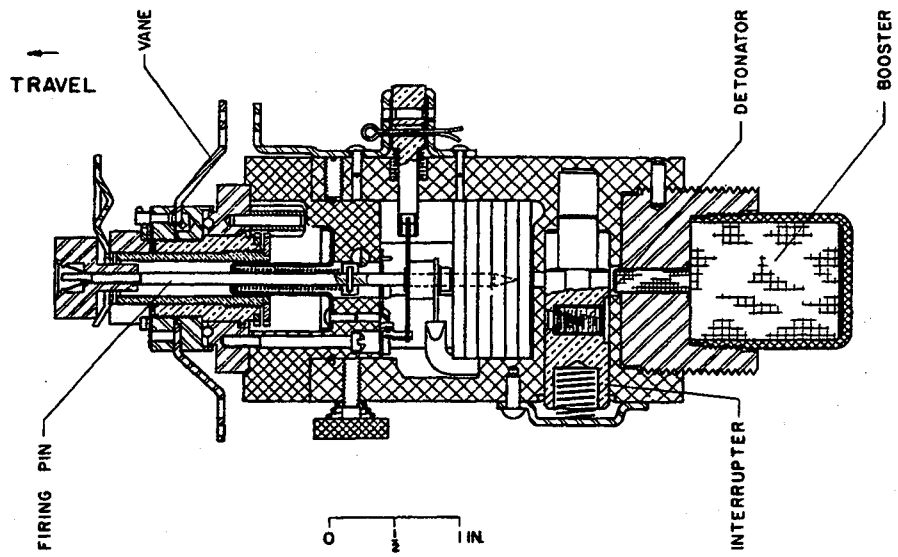

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-184, 73-8-185
Parts List	
Specification	
Previous Number	T55

GENERAL

Carriers	Bomb (cluster)
Cal. — Size	
Location	Nose
Use	Incendiary
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M128, FUZE, BOMB, NOSE, MECHANICAL TIME

ARMING DATA

Method	Vane
Delay	1300 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.6 lb
Total Length (in.)	6.2
Body Diam. (in.)	
Intrusion	1.3 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	PD, time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	5 - 92
Target	Structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl

REMARKS

SERIES: A CHAPTER: 2
DESIGNATION: AN-M128
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M129, FUZE, BOMB

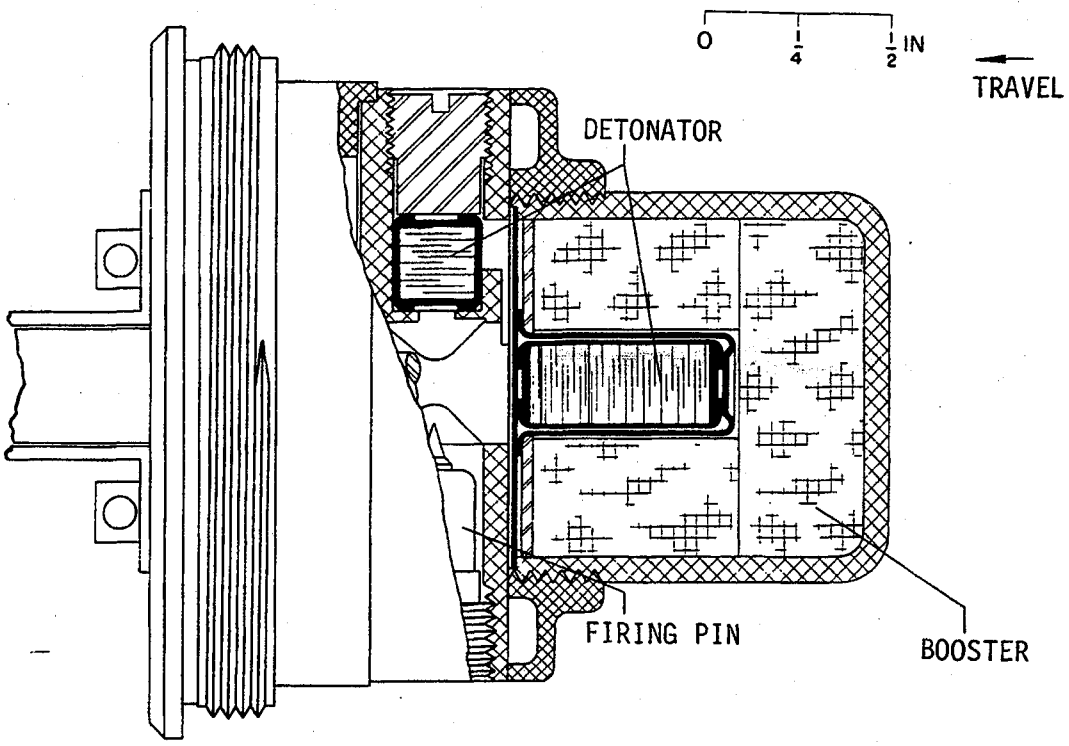

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424

Status Obsolete

Ass'y Dwg. No. 73-8-252

Parts List

Specification

Previous Number T47E1

GENERAL

Carriers Bomb, frag.

Cal. — Size 4 lb

Location Amidships

Use Fragmentation

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M129, FUZE, BOMB

ARMING DATA

Method	Vane
Delay	50 ft
Rotation (rps)	
Non-arm / Arm	3.5 - 5 rev
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	0.4 lb
Total Length (in.)	3.0
Body Diam. (in.)	1.75
Intrusion	1.8 in.
Thread Size	1.75-24NS-1

FUNCTIONING DATA

Action	Impact or time
Type	Mechanical
Delay	Instantaneous or 2.5 sec
Time Type	
Time Setting (sec)	
Target	Hard & moderate hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M41A1
Detonator	M31
Booster	Tetryl

REMARKS

Explosive train is not interrupted.

Fuze is for use in butterfly bombs only.

Fuze is pre-set by the manufacturer for "ground" (impact) or "air" (timer) detonation. Air burst occurs 2.5 sec after arming is complete.

SERIES: N CHAPTER: 2
DESIGNATION: M129
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

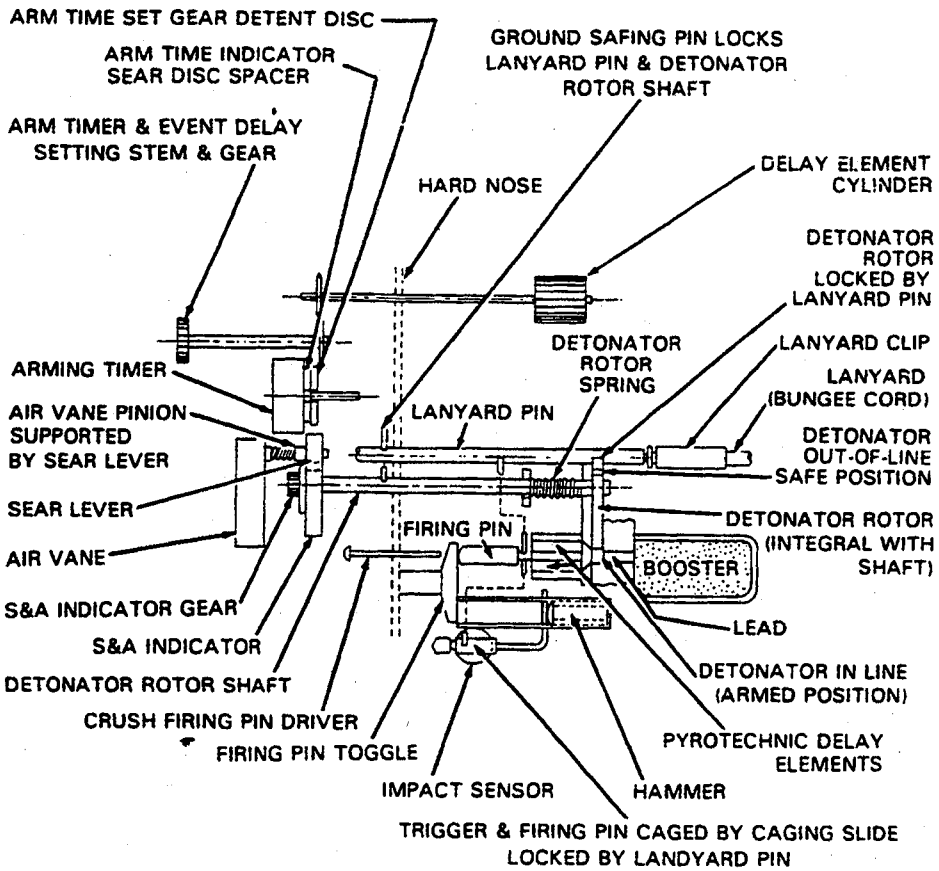

- OVERALL SIZE -	- INTRUSION -	WT: 10 lb (4536 g)
LG: 11.83 in (300.48 mm)	DP: 6.9 in (247.14 mm)	THD: 3.5-12UNS-2A
XSECT: 4.6 in (116.8 mm)	DIA: 2.83 in (71.88 mm)	THD DP:

IDENTIFICATION
- AGENCY: Eglin AFB, AD/YGE
- CONTACT: Folsom, E
- PHONE: DSN 872-4261
- STATUS: Terminated
- USER: AF
- ASSY DWG: IMF-200-605 (Contractor)
- PARTS LIST:
- SPEC: SP 747 878A
- PUB:

- NATIONAL STOCK NO:
  - Not assigned
- DODIC: Not assigned
- PRIOR MODEL NO: None
- SIMILAR TO: Nothing

- REPLACES: M904, M905
- REPLACED BY: FMU-139A/B

GENERAL
- WEAPON: GP bomb

- AMMUNITION:
  - M117 and Mk 80 Series

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP: Free Fall
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Lanyard

SECOND SAFETY:
Vane: no arm 118 KCAS,
all arm 142 KCAS

OTHER SAFETY:
Fuze will dud if impact occurs before arming

SAFE/ARM INDICATION:
Safe if safety interlock pin in place or arm/safe indicator not red

ARMING TIME OR DISTANCE:
4, 6, 8, 10, 12, 14, 16, 18 s; preflight selectable

FUNCTIONING DATA
MODES: Impact or delay
TYPE: Mechanical
CHARACTERISTICS:
0.000, 0.010, 0.025, 0.060 s +/- 20%, preflight selectable

TARGET: Ground
SENSITIVITY:
Crush or graze
40 g - 30 to 85 deg
200 g - 85 to 95 deg
FUNCTION TEMP:
-54 to +71 deg C
MODE ON DELIVERY:

EXPLOSIVE COMPONENTS

S&A DEVICE: Out-of-line explosive train
PRIMER: 5.0 grains total weight

DETONATOR: 2 grains lead azide, 4 grains RDX

LEAD: 8.34 grains - CH6

BOOSTER: 174 g - CH6

OTHER: Multiple delay elements. Two each selected for each impact delay.

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT:
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
On bomb release, the lanyard pulls the lanyard pin aft which opens the nose input port and four exit ports permitting vane rotation, removes a latch from the rotor, starts the arming timer and unlocks the trigger and firing pin. Vane rotation overcomes a bias spring and thus provides the torque to drive the rotor into the in-line position. At the preselected arm time, a latch is removed from the rotor and, if there is sufficient air speed, the rotor will move to the armed position. On nose impact, the firing pin initiates two adjacent pyrotechnic delays (i.e., inst & 0.010 s, 0.010 & 0.025 s, 0.025 s & 0.060 s, or 0.060 & 0.060 s). On graze impact, an inertial sensor and mechanism triggers the firing pin. Each delay initiates output charges which, in turn initiate the detonator, lead and booster.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M131A1, FUZE, BOMB

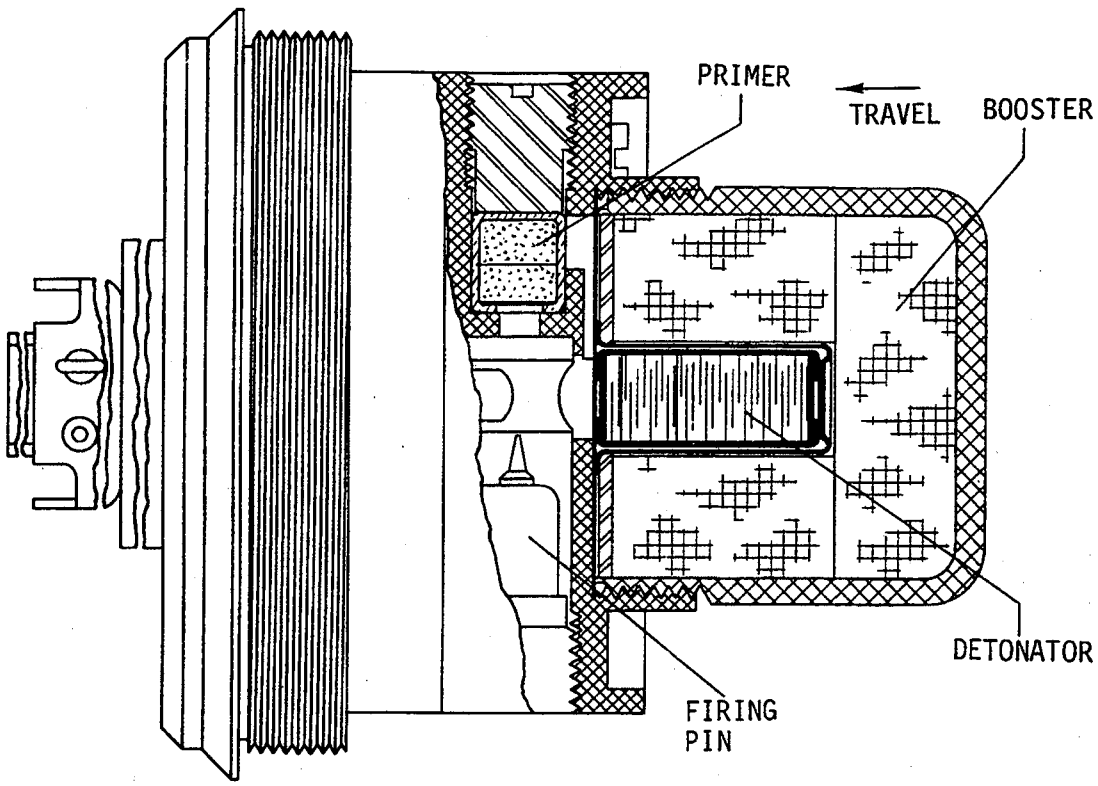

IDENTIFICATION

Agency NMC, Code 2141, R. Villars
AV 351-6424

Status Obsolete

Ass'y Dwg. No. 73-8-282

Parts List

Specification

Previous Number T49E2

GENERAL

Carriers Bomb

Cal. — Size 4 lb

Location Amidships

Use Fragmentation

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M131A1, FUZE, BOMB

ARMING DATA

Method	Vane
Delay	50 ft
Rotation (rps)	
Non-arm	Arm 3.5 - 5 revs
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	0.4 lb
Total Length (in.)	3.1
Body Diam. (in.)	1.75
Intrusion	1.8 in.
Thread Size	1.75-24NS-1

FUNCTIONING DATA

Action	Antidisturbance*
Type	Mechanical
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	Hard & moderate hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

*Detonation occurs only after a shock or disturbance following initial impact.

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M41A1
Detonator	M31
Booster	Tetryl

REMARKS

Explosive train is not interrupted.

Fuze is for use in butterfly bombs only.

SERIES: N CHAPTER: 2
DESIGNATION: M131A1
Bomb AD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M132, FUZE, BOMB, TAIL

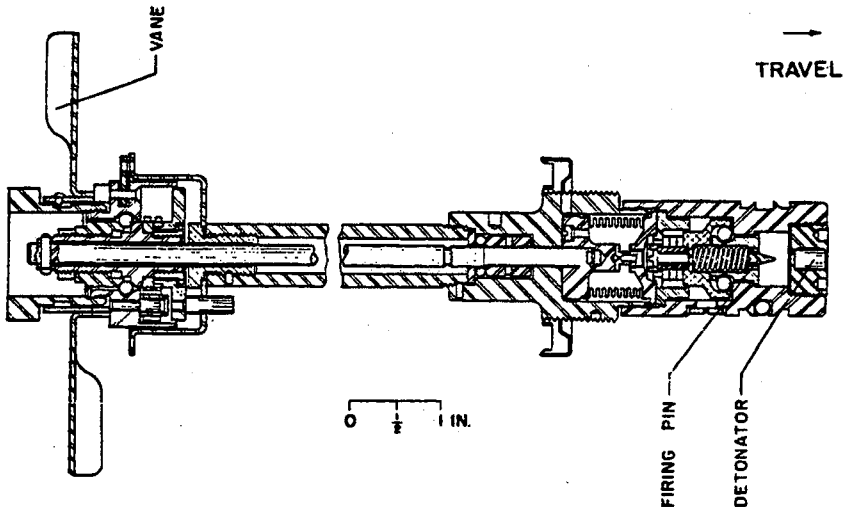

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424

Status Obsolete

Ass'y Dwg. No. 73-8-199

Parts List

Specification

Previous Number T41

GENERAL

Carriers Bomb with box fins

Cal. — Size 100, 250 lb

Location Tail

Use GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M132, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	100 ft (M4 vane)
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	2.1 lb
Total Length (in.)	9.57
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Delay or withdrawal
Type	Mechanical
Delay	Delay or instant.
Time Type	Chemical
Time Setting (sec)	16 min*
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

*Delay time varies with temperature from 6 min at 120°F - 80 min at 10°F

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	

REMARKS

Explosive train is not interrupted.

Air travel to arm may be increased by use of M5 vane.

Fuze contains an antiwithdrawal device which will detonate regardless of arming status.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M133, FUZE, BOMB, TAIL

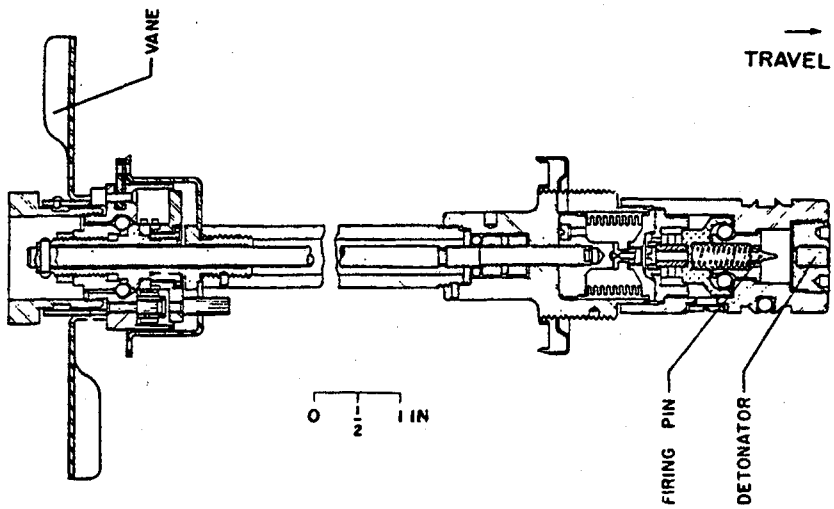

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-199
Parts List
Specification
Previous Number T41

GENERAL

Carriers Bomb with box fins
Cal. — Size 500 lb
Location Tail
Use GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M133, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	100 ft (M4 vane)
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	2.3 lb
Total Length (in.)	12.57
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Delay or withdrawal
Type	Mechanical
Delay	Delay or instant.
Time Type	Chemical
Time Setting (sec)	16 min*
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

*Delay time varies with temperature from 6 min at 120°F - 80 min at 10°F

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	

REMARKS

Explosive train is not interrupted.

Air travel to arm may be increased by use of M5 vane.

This fuze contains an antiwithdrawal device which will detonate regardless of arming status.

SERIES: N CHAPTER: 2
DESIGNATION: M133
Bomb Time Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M134, FUZE, BOMB, TAIL

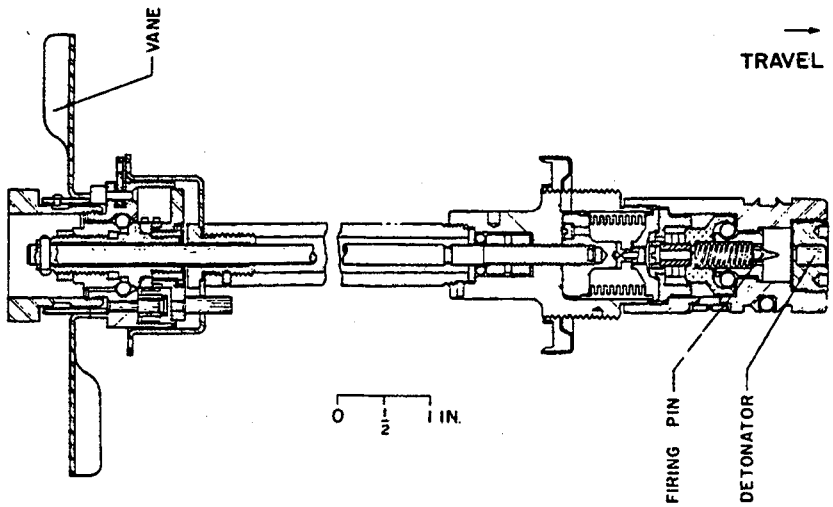

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-199
Parts List
Specification
Previous Number T41

GENERAL

Carriers Bomb with box fins
Cal. — Size 1000, 2000 lb
Location Tail
Use GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M134, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	100 ft (M4 vane)
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	2.6 lb
Total Length (in.)	16.57
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Delay or withdrawal
Type	Mechanical
Delay	Delay or instant.
Time Type	Chemical
Time Setting (sec)	16 minutes
Target	Any
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	

REMARKS

Explosive train not interrupted.

Delay time varies with temperature from 6 min at 120°F to 80 min at 10°F.

Air travel to arm may be increased by use of M5 vane.

This fuze contains an antiwithdrawal device which will detonate regardless of arming status.

SERIES: N CHAPTER: 2
DESIGNATION: M134
Bomb Time Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M135A1, FUZE, BOMB, NOSE, MECHANICAL TIME

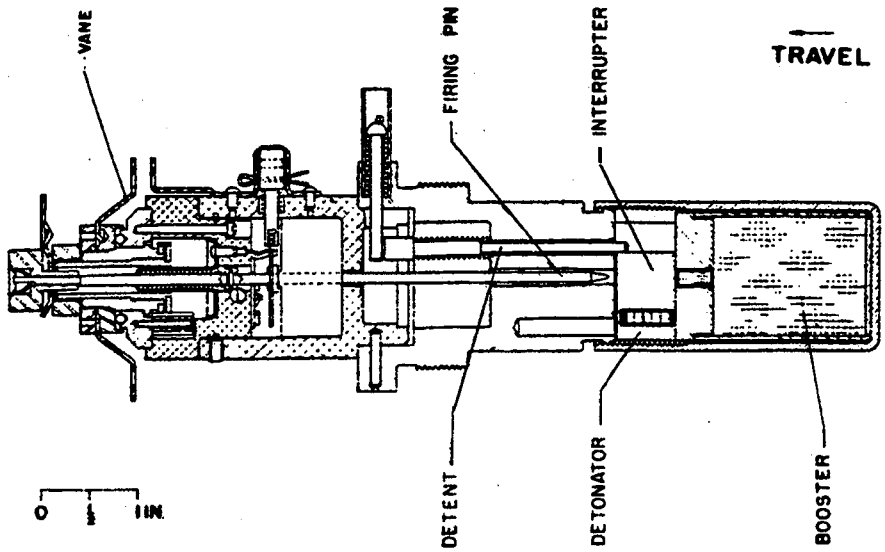

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-215, 78-8-216
Parts List	
Specification	
Previous Number	T56

GENERAL

Carriers	Bomb
Cal. — Size	
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M135A1, FUZE, BOMB, NOSE, MECHANICAL TIME

ARMING DATA

Method	Vane
Delay	1300 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	9.1
Body Diam. (in.)	
Intrusion	5.1 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	5 - 92
Target	Structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M136A1, FUZE, BOMB, NOSE, MECHANICAL TIME

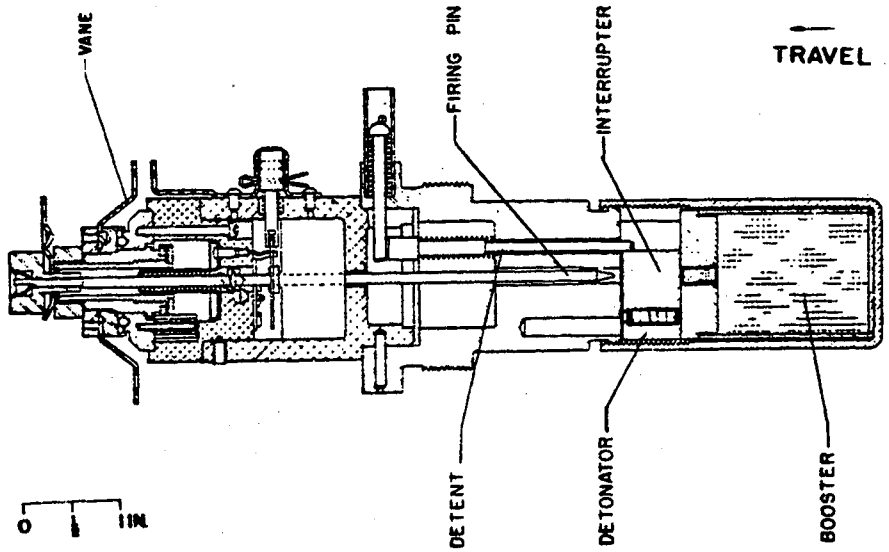

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-215
Parts List	
Specification	
Previous Number	T56E1

GENERAL

Carriers	Bomb
Cal. — Size	
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M136A1, FUZE, BOMB, NOSE, MECHANICAL TIME

ARMING DATA

Method	Vane
Delay	1300 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	9.1
Body Diam. (in.)	
Intrusion	5.1 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PI, time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	5.0-30.0
Target	Structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M137, FUZE, BOMB, TAIL

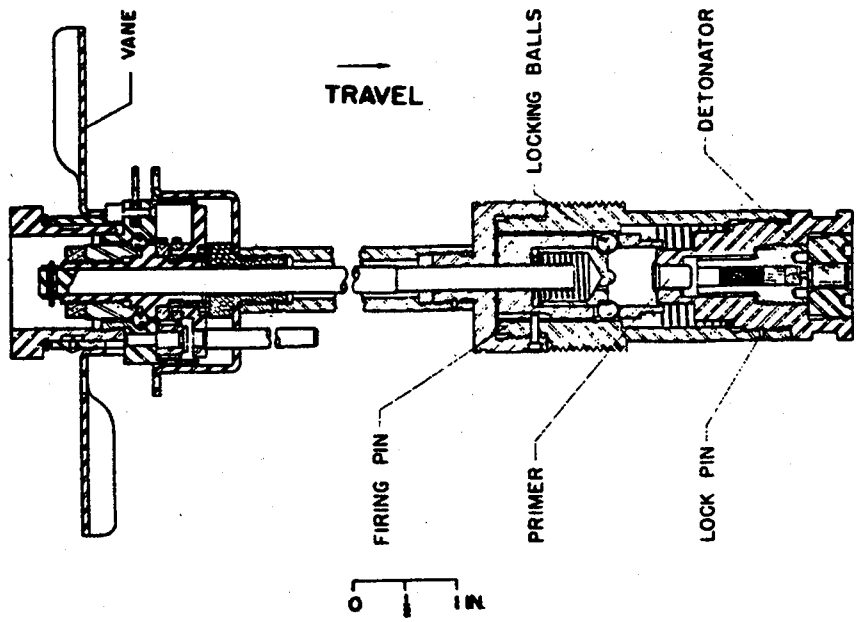

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	73-8-298
Parts List	
Specification	
Previous Number	T61

GENERAL

Carriers	Bomb
Cal. — Size	
Location	Tail
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M137, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	1500 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2.9 lb
Total Length (in.)	12.6
Body Diam. (in.)	
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	4-5 sec
Time Type	
Time Setting (sec)	
Target	Structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M16A1
Detonator	
Booster	

REMARKS

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M138, FUZE, BOMB, NOSE, MECHANICAL TIME

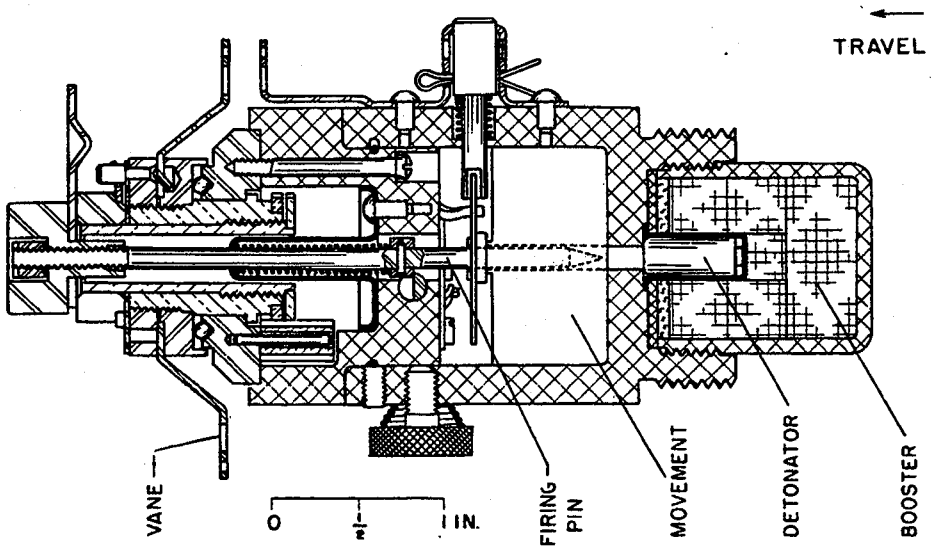

IDENTIFICATION

Agency PMTC, Code 2141, R. Villars
AV 351-6420

Status Obsolete

Ass'y Dwg. No. 73-8-272

Parts List

Specification

Previous Number T39E1

GENERAL

Carriers Bomb

Cal. — Size

Location Nose

Use Incendiary clusters

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M138, FUZE, BOMB, NOSE MECHANICAL TIME

ARMING DATA

Method	Vane
Delay	1300 ft
Rotation (rps)	
Non-arm	**Arm**
Setback (g)	
Non-arm	**Arm**
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.4 lb
Total Length (in.)	4.96
Body Diam. (in.)	
Intrusion	1.3 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	PD, time, select.
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	5 - 92
Target	Structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M15A2
Booster	Tetryl, clay

REMARKS

Replaced by Fuze AN-M145.

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M139A1, FUZE, BOMB, NOSE

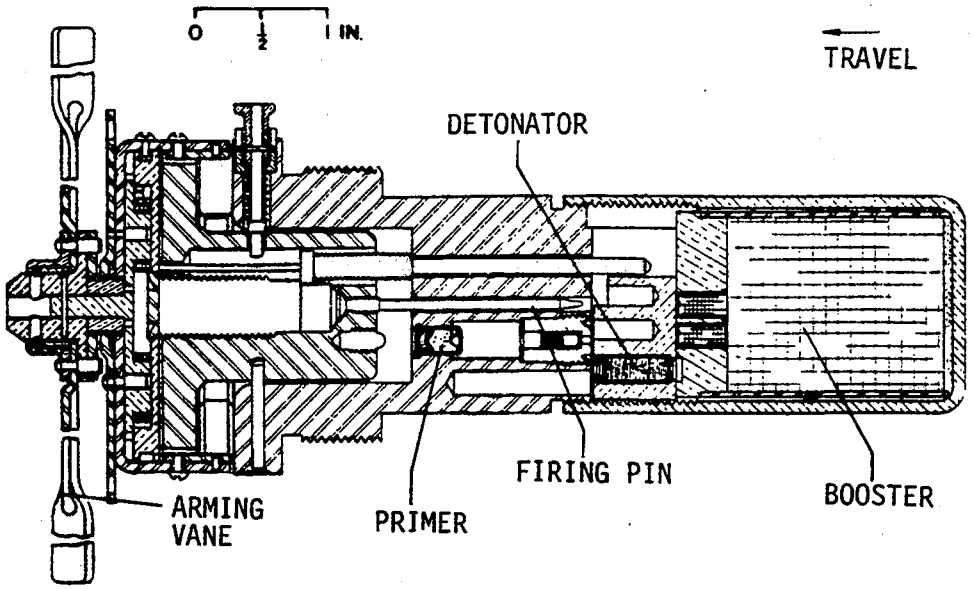

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-14
Parts List
Specification
Previous Number T66

GENERAL

Carriers Bomb
Cal. — Size 90, 100, 260, 350, 500, 1000, 2000 lb
Location Nose
Use GP, fragment., incend., SAP, depth
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M139A1, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	500-1000 ft (M1 vane) 3000-5500 ft (M2 vane)*
Rotation (rps)	
Non-arm	**Arm** 175 revs (delay) 308 revs (inst.)
Setback (g)	
Non-arm	**Arm**
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.7 lb
Total Length (in.)	7.23
Body Diam. (in.)	2.48
Intrusion	5.23 in.
Thread Size	2.0-12NS-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	Instant. or 0.01 sec
Time Type	
Time Setting (sec)	
Target	Hard & moderate hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M39A1
Detonator	M20
Booster	Tetryl
Relay	M6

REMARKS

*Air travel to arm is dependent on size and weight of bomb. Operation of M2 vane is erratic on some bombs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 140, FUZE, BOMB

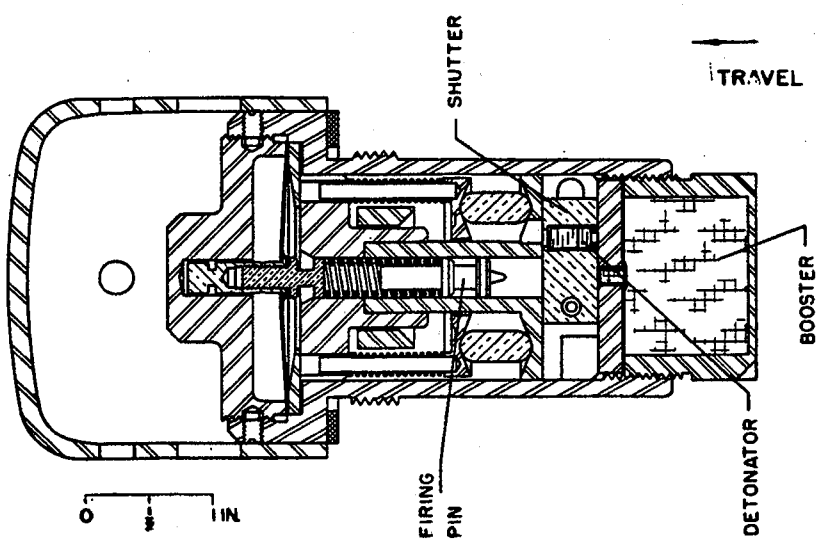

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 375899
Parts List	
Specification	
Previous Number	HIR-3

GENERAL

Carriers	Bomb, depth charge
Cal. — Size	
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 140, FUZE, BOMB

ARMING DATA

Method	Hydro pressure
Delay	50 ft below water
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	No

PHYSICAL DATA

Weight	3.5 lb
Total Length (in.)	5.95
Body Diam. (in.)	
Intrusion	3.438 in.
Thread Size	2-12NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground, submarine
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 1
Booster	Tetryl
Lead	Tetryl

REMARKS

Replaced by Fuzes MKS 131, 136, 156 used in depth charge MK 12, Bomb MK 52, MK 70

SERIES: N CHAPTER: 2
DESIGNATION: MK 140
Bomb Hydrostatic Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M140A1, FUZE, BOMB, NOSE

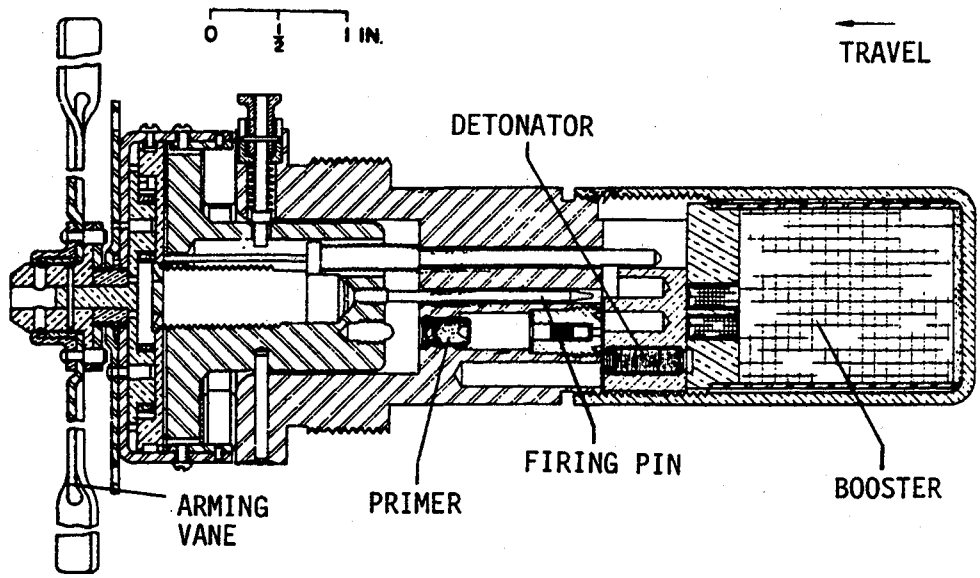

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-14
Parts List
Specification
Previous Number T67

GENERAL

Carriers Bomb
Cal. — Size 90, 100, 260, 350, 500, 1000, 2000 lb
Location Nose
Use GP, fragment., incend., SAP, depth
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M140A1, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	500-1000 ft (M1 vane) 3000-5500 ft (M2 vane)*
Rotation (rps)	
Non-arm	Arm 175 revs (delay) 308 revs (inst)
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.7 lb
Total Length (in.)	7.23 in.
Body Diam. (in.)	2.48
Intrusion	5.23 in.
Thread Size	2.0-12NS-T

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard & moderate hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M39A1
Detonator	M20
Booster	Tetryl
Relay	M6

REMARKS

Air travel to arm is dependent on size and weight of bomb. Operation of M2 vane is erratic on some bombs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M142A1, FUZE, BOMB

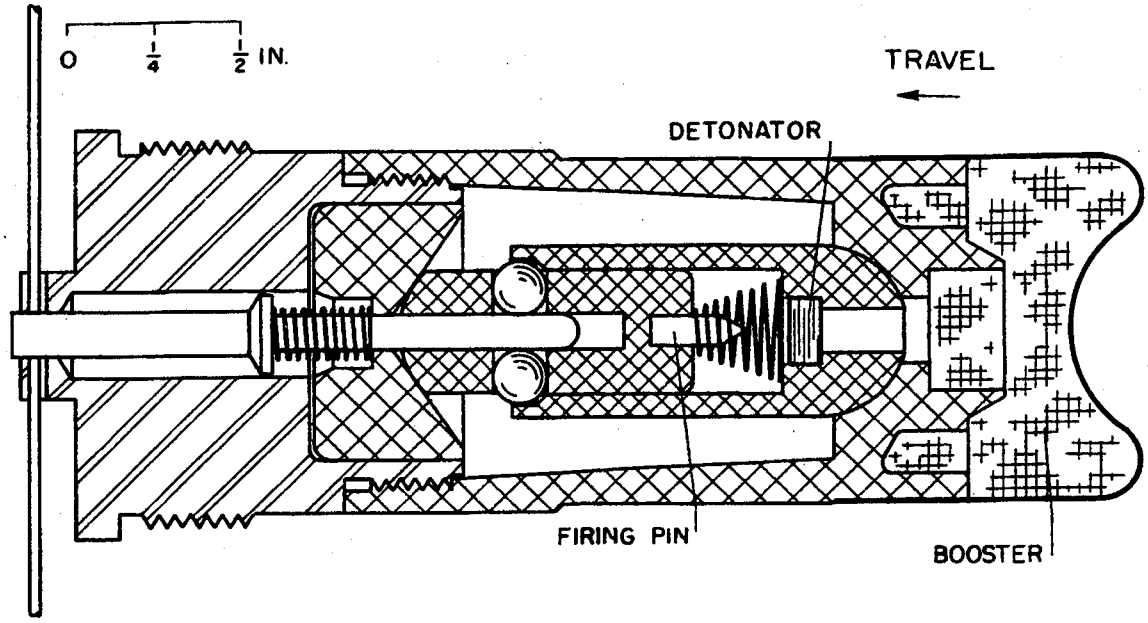

IDENTIFICATION

Agency ARRADCOM, DRDAR-CLN-D
G. Roberts, AV 584-4298

Status Obsolete

Ass'y Dwg. No. B14-15-180

Parts List

Specification MIL-F-10410A
196-131-438

Previous Number E9R33, E9R15, E9R23, T95

GENERAL

Carriers Bomb

Cal. — Size M74 10 lb

Location Nose

Use Chemical

MIL-STD's 331, Tests 101, 104

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M142A1, FUZE, BOMB

ARMING DATA

Method	Release from cluster
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.30 lb
Total Length (in.)	3.172
Body Diam. (in.)	
Intrusion	3.172 in.
Thread Size	1.125-24NS

FUNCTIONING DATA

Action	PI; all ways
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Incendiary
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	
Booster	Black powder, 1 gm; and 81 mm propellant, 3 gm

Explosive train is not interrupted

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M144, FUZE, BOMB, NOSE, MECHANICAL TIME

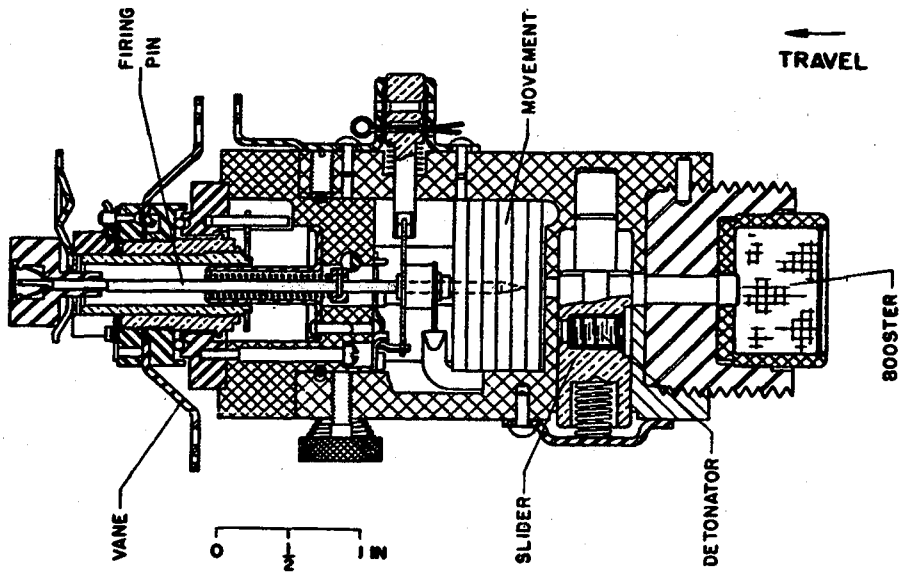

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-332
Parts List	
Specification	
Previous Number	T64

GENERAL

Carriers	Bomb (cluster)
Cal. — Size	
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M144, FUZE, BOMB, NOSE, MECHANICAL TIME

ARMING DATA

Method	Vane
Delay	50 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.6 lb
Total Length (in.)	5.7
Body Diam. (in.)	
Intrusion	0.8 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	PD, time, select.
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	1.6-30.0
Target	Identification, marking
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	Tetryl

REMARKS

Replaced by Fuze AN-M147A1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z .
Check the source to verify that this is the current version before use.

AN-M145A1, FUZE, BOMB, NOSE, MECHANICAL TIME

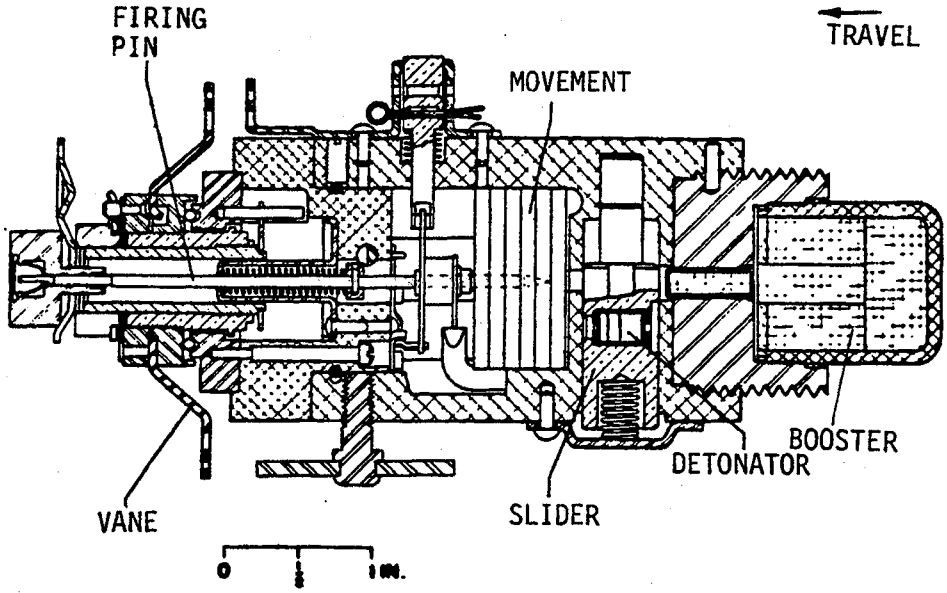

IDENTIFICATION

Agency ARRADCOM-DRDAR, Harris
Status Obsolete
Ass'y Dwg. No. P-84247
Parts List
Specification
Previous Number T55E1

GENERAL

Carriers Bomb
Cal. — Size 220, 260 lb
Location Nose
Use Fragmentation, chemical
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M145A1, FUZE, BOMB, NOSE, MECHANICAL TIME

ARMING DATA

Method	Vane and time
Delay	1000 - 1300 ft
Rotation (rps)	
Non-arm / Arm	260 - 350 revs
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.6 lb
Total Length (in.)	6.3
Body Diam. (in.)	1.93
Intrusion	1.4 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Time and impact
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	5-92
Target	Ground, airburst
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	Tetryl
Lead	Tetryl

REMARKS

Limited standard. Replaced by Fuze M901.

SERIES: N CHAPTER: 2
DESIGNATION: AN-M145A1
Bomb MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M146A1, FUZE, BOMB, NOSE, MECHANICAL TIME

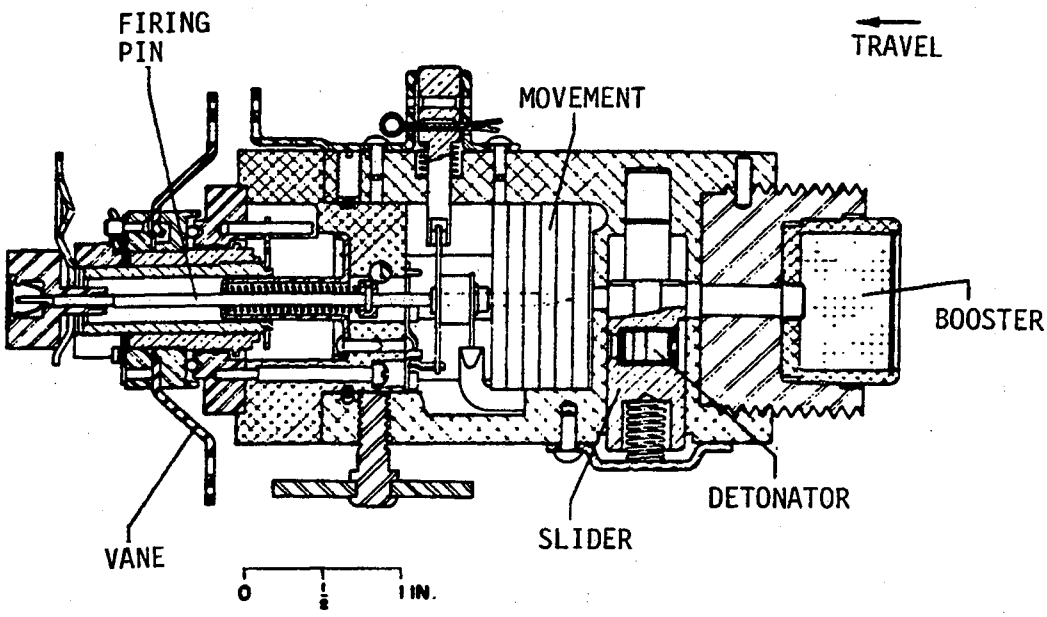

IDENTIFICATION

Agency ARRADCOM-DRDAR, Harris

Status Obsolete

Ass'y Dwg. No. P-83745

Parts List

Specification

Previous Number T55E2

GENERAL

Carriers Bomb

Cal. — Size 220, 260

Location Nose

Use Fragmentation, chemical

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M146A1, FUZE, BOMB, NOSE, MECHANICAL TIME

ARMING DATA

Method	Vane and time
Delay	1000 - 1300 ft
Rotation (rps)	
Non-arm / Arm	260-350 revs
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.6 lb
Total Length (in.)	5.7
Body Diam. (in.)	1.93
Intrusion	1.2 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Time and impact
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	5-92
Target	Ground, airburst
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	Black powder

REMARKS

Limited standard. Replaced by Fuze M198.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the AN-M147A1 Bomb Time Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 2-143 and 2-144 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M148, FUZE, BOMB, NOSE

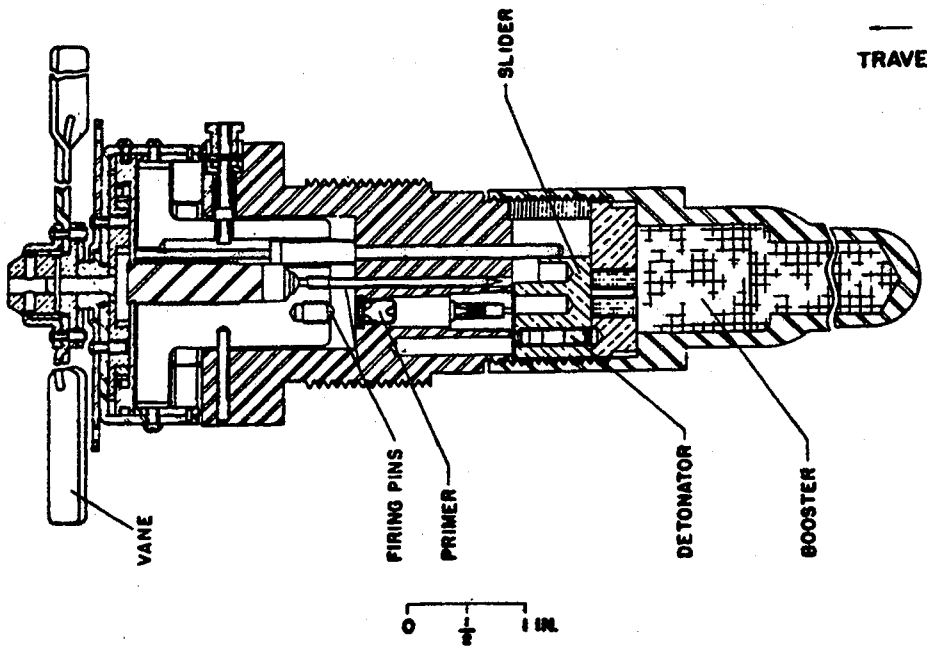

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	73-8-274
Parts List	
Specification	
Previous Number	T54

GENERAL

Carriers	Bomb
Cal. — Size	Japanese Navy bombs up to 250 KG size
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M148, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	510 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.7 lb
Total Length (in.)	9.3
Body Diam. (in.)	
Intrusion	5.8 in.
Thread Size	1.8-10TWS-1

FUNCTIONING DATA

Action	PD, delay, select
Type	Mechanical
Delay	0.1 sec
Time Type	
Time Setting (sec)	
Target	Hard, ships
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Similar to Fuze AN-M103A1 except that body threads and booster cap are modified to fit Japanese Navy bombs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M149, FUZE, BOMB, NOSE

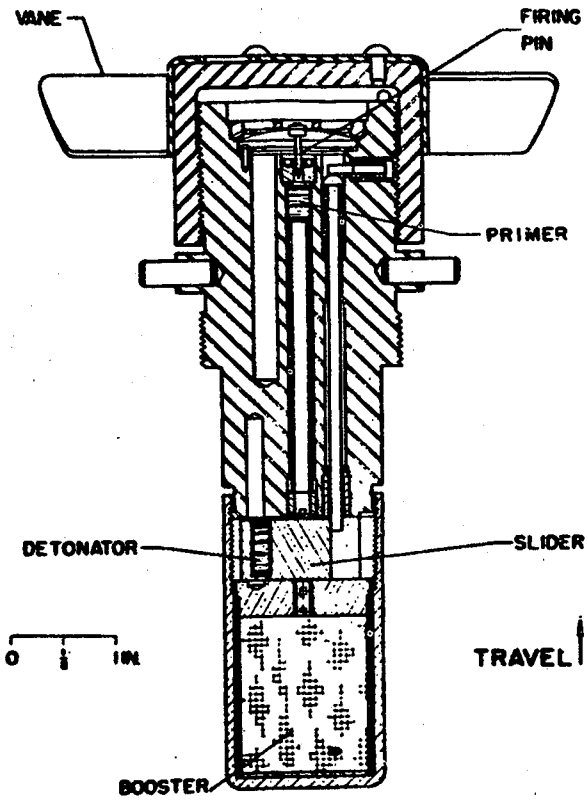

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-344
Parts List	
Specification	
Previous Number	T29E2

GENERAL

Carriers	Bomb
Cal. — Size	90, 220, 260 lb frag; 100, 250, 500, 1000, 2000, 4000 lb GP
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M149, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	250 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	5.1 lb
Total Length (in.)	7.6
Body Diam. (in.)	
Intrusion	5.1 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, airburst
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2, M20
Booster	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M150A1, FUZE, BOMB

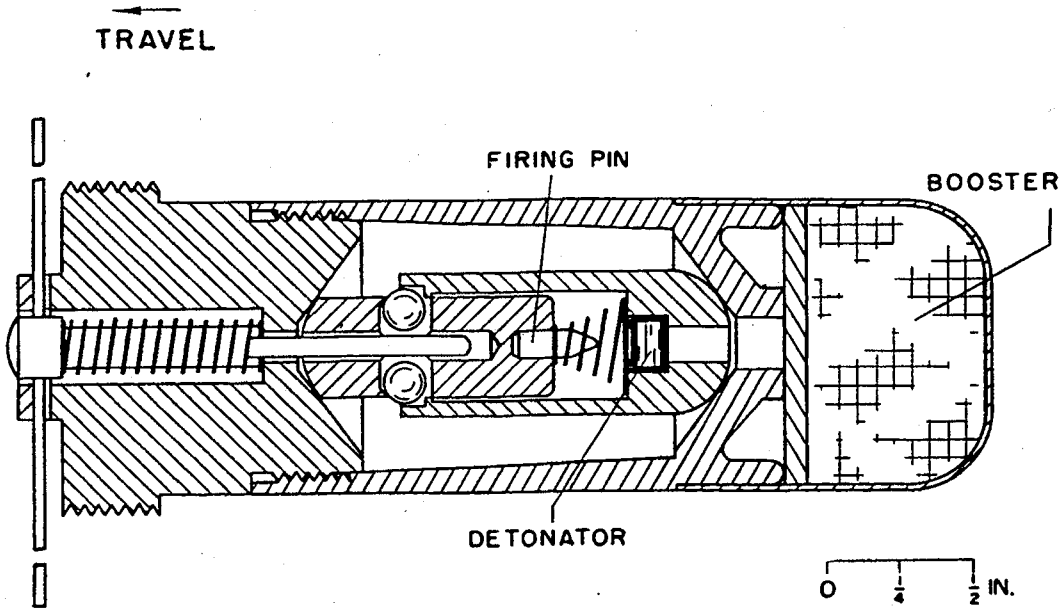

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D
Status	G. Roberts, AV 584-4298 Obsolete
Ass'y Dwg. No.	C14-15-249 (M150A1)
Parts List	B14-15-56 (M150)
Specification	MIL-F-12978, 12767 (M15A1) 96-131-214 (M150)
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	M77; E72 10 lb
Location	Base
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M150A1 FUZE, BOMB

ARMING DATA

Method	Release from cluster
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.30 lb
Total Length (in.)	3.97
Body Diam. (in.)	
Intrusion	3.47 in.
Thread Size	1.125-24 NS

FUNCTIONING DATA

Action	PI; all ways
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Incendiary
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	
Booster	Pyrotechnic starter mix

Explosive train is not interrupted

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M151E2, FUZE, BOMB, TAIL, ANTIRICOCHET

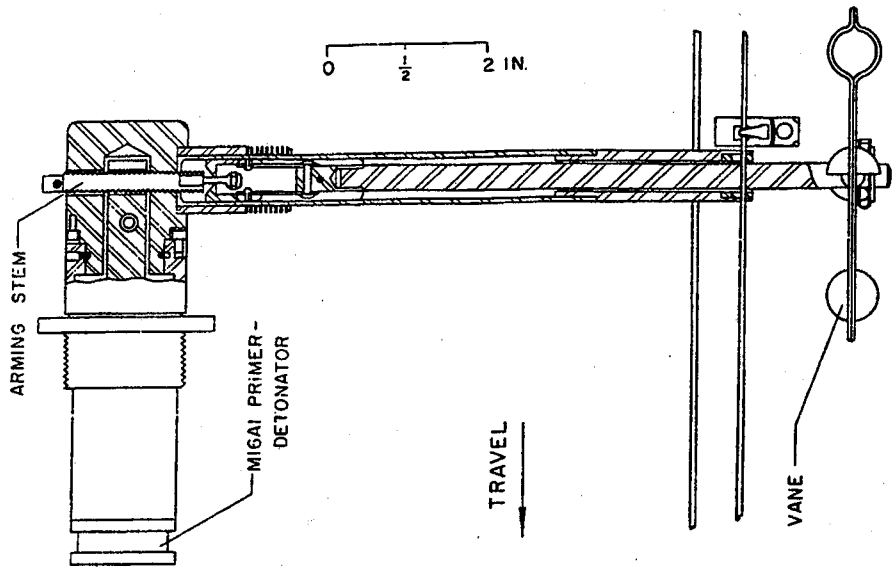

IDENTIFICATION

Agency	NSWC, Code G44
Status	J. Abell
Ass'y Dwg. No.	AV 290-1545 Obsolete
Parts List	P-85303
Specification	
Previous Number	T72E1

GENERAL

Carriers	Bomb without fins (parachute delivery)
Cal. — Size	250, 500 lb
Location	Tail
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Not to be used at air speeds in excess of 350 mph or at altitudes of less than 50 ft.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M151E2, FUZE, BOMB, TAIL, ANTIRICOCHET

ARMING DATA

Method	Vane, anemometer
Delay	
Rotation (rps)	
Non-arm	Arm 26 revs
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2.1 lb
Total Length (in.)	5.6
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact - inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	4 - 5 or 8 - 15
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16A1
Booster	

REMARKS

Explosive train is not interrupted.

Fuze has a spring loaded firing pin giving it an increased sensitivity.

Arming stem is perpendicular to the axis of the fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the AN-M152A1 Bomb Time Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 2-153 and 2-154 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M153, FUZE, BOMB, TAIL, MECHANICAL TIME

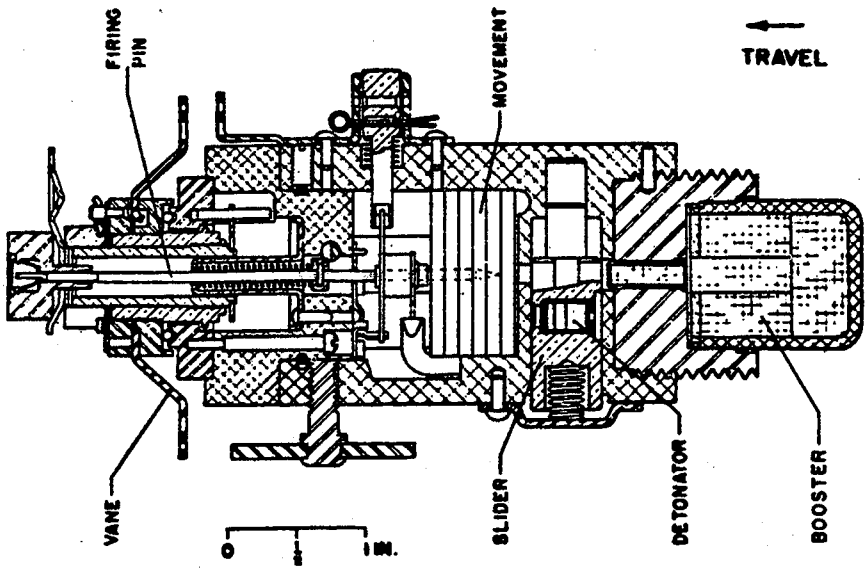

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-340
Parts List	
Specification	
Previous Number	T73

GENERAL

Carriers	Bomb (clusters)
Cal. — Size	
Location	Tail
Use	Chemical, incendiary
MIL-STD's	331, Tests 101, 103, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M153, FUZE, BOMB, TAIL, MECHANICAL TIME

ARMING DATA

Method	Mechanical time, vane
Delay	1300 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	1.6 lb
Total Length (in.)	5.69
Body Diam. (in.)	
Intrusion	1.3 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	PD; time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	5 - 92
Target	Air burst, antipersonnel, structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	Tetryl

REMARKS

Replaced by Fuze M152A1.

Explosive train is not interrupted.

Same as Bomb Fuze M146 with reverse pitched vanes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M155A1 Bomb Time Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 2-157 and 2-158 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M156, FUZE, BOMB, TAIL

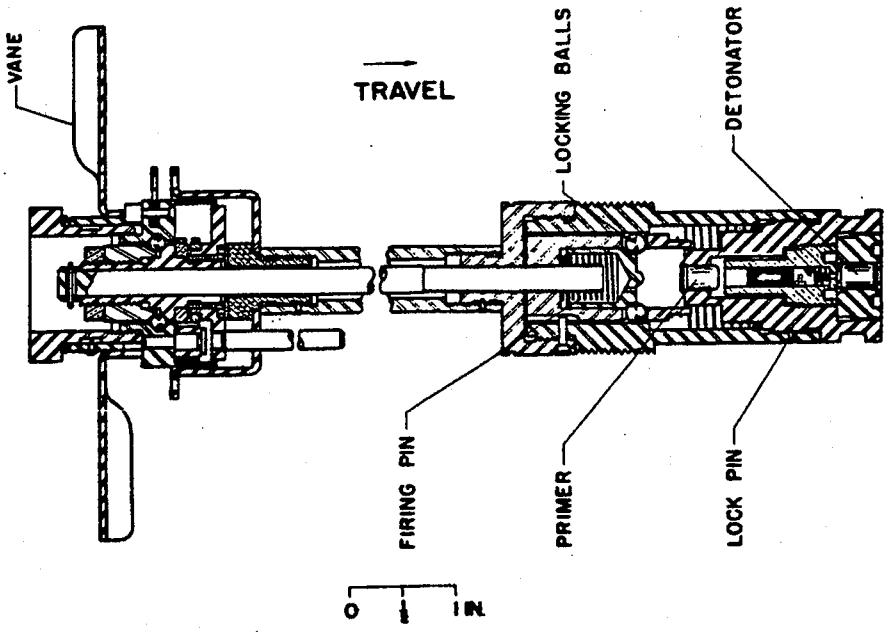

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	73-8-299
Parts List	
Specification	
Previous Number	T68

GENERAL

Carriers	Bomb
Cal. — Size	
Location	Tail
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M156, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	800 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	2.9 lb
Total Length (in.)	12.28
Body Diam. (in.)	
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Delay
Type	Mechanical
Delay	4 - 5 sec
Time Type	
Time Setting (sec)	
Target	Structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16A1
Booster	

REMARKS

SERIES: A CHAPTER: 2
DESIGNATION: M156
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M157, FUZE, BOMB

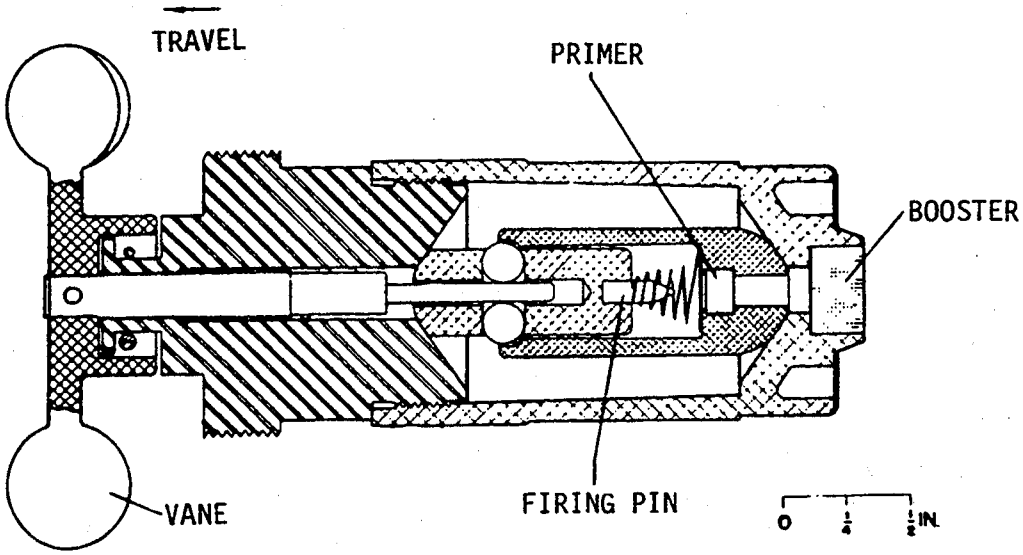

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts, AV 584-4298
Status	Obsolete
Ass'y Dwg. No.	C14-15-191
Parts List	
Specification	MIL-F-1282, 11694
Previous Number	E9R22

GENERAL

Carriers	Bomb
Cal. — Size	Fire bomb fuze
Location	Base
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M157, FUZE, BOMB

ARMING DATA

Method	Vane
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.40 lb
Total Length (in.)	3.38
Body Diam. (in.)	
Intrusion	2.75 in.
Thread Size	1.125-24 NS

FUNCTIONING DATA

Action	PI; all ways
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Incendiary
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	
Booster	Black powder, 0.75 gm
Burster	separate tetryl burster for M15, M16 WP grenades

Explosive train is not interrupted

REMARKS

SERIES: A CHAPTER: 2
DESIGNATION: M157
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM157, ARMING ASSEMBLY

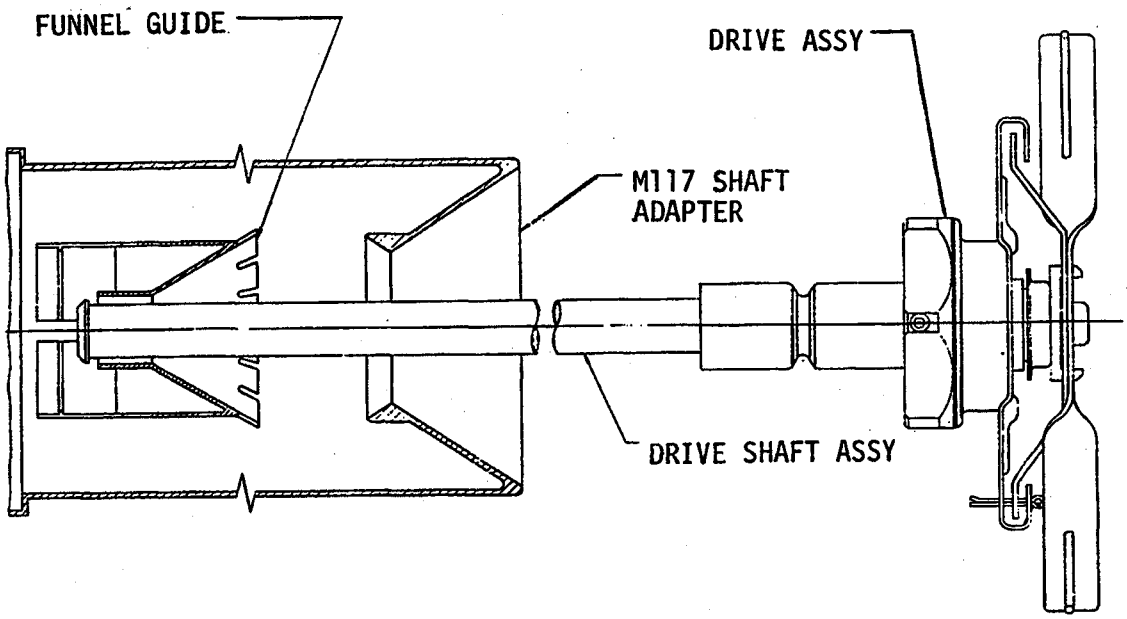

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi AV 290-2400
Status	Cancelled
Ass'y Dwg. No.	D10979648
Parts List	EPL 10979648
Specification	XTL-PD-319
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	250, 500, 700 lb
Location	Tail fin
Use	
MIL-STD's	
Max Values	
Rotat. (rps)	30
Setback (g)	
Velocity (fps)	600

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM157, ARMING ASSEMBLY

ARMING DATA

Method	Air arming
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1 lb
Total Length (in.)	
Body Diam. (in.)	2
Intrusion	
Thread Size	Not applicable

FUNCTIONING DATA

Action	Dependent upon its associated fuze
Type	
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

None

EXPLOSIVE TRAIN

S&A Device	None
Primer	
Detonator	
Booster	

REMARKS

The XM157 arming assembly is an air arming device delivering a constant rotational input to a bomb tail fuze. It employes several shafts to fit various size bomb fins.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the AN-M158 Bomb Impact Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 2-165 and 2-166 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the AN-M159 Bomb Impact Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 2-167 and 2-168 of MIL-HDBK 146.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M160, FUZE, BOMB, TAIL

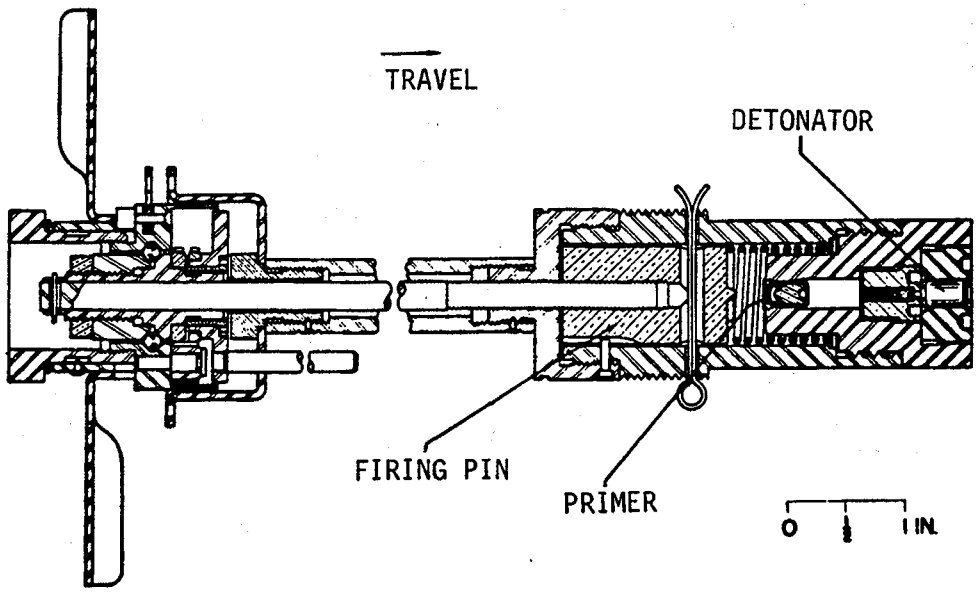

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-359
Parts List
Specification
Previous Number T81

GENERAL

Carriers Bomb with box fins
Cal. — Size 500 lb
Location Tail
Use HE or GP, SAP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M160, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	1780-2680 ft (M4 vane) 4900-5850 ft (M5 vane)
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2.7 lb
Total Length (in.)	9.26
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. or 0.025
Time Type	
Time Setting (sec)	
Target	Hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A non-delay or 0.025 sec delay M14 primer-detonator is standard. An 0.01, 0.1, or 0.24 sec. delay M14 primer-detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

SERIES: N CHAPTER: 2
DESIGNATION: M160
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M161, FUZE, BOMB, TAIL

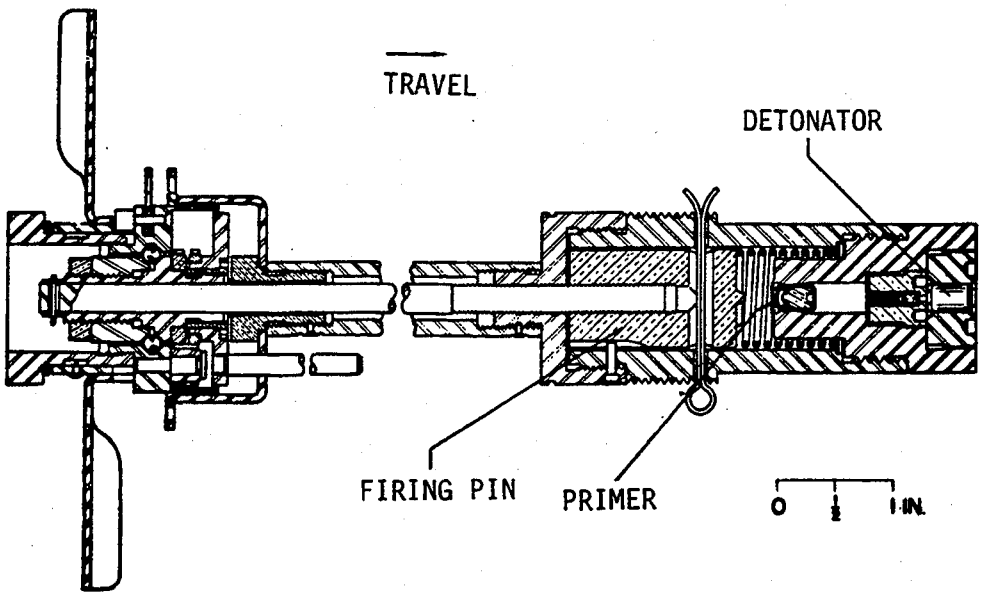

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-359
Parts List
Specification
Previous Number T81

GENERAL

Carriers Bomb with box fins
Cal. — Size 500 lb
Location Tail
Use GP, SAP, HE
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M161, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	1780-2680 ft (M4 vane) 4900-5850 ft (M5 vane)
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2.9 lb
Total Length (in.)	12.26
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A non-delay or 0.025 sec delay M14 primer-detonator is standard. An 0.01, 0.1, or 0.24 sec delay M14 primer-detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

SERIES: N CHAPTER: 2
DESIGNATION: M161
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M162, FUZE, BOMB, TAIL

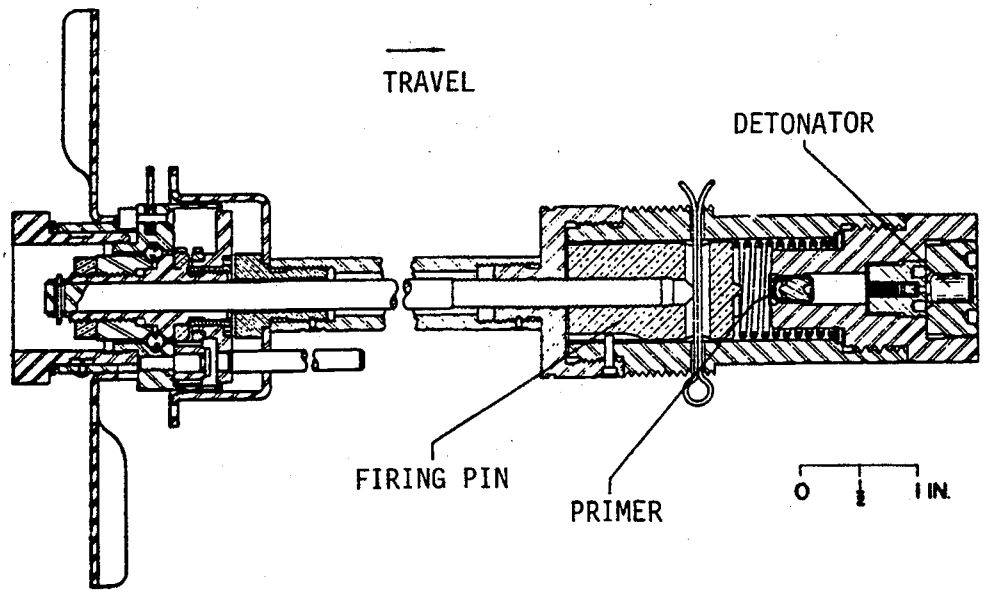

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-359
Parts List
Specification
Previous Number T81

GENERAL

Carriers Bomb with box fins
Cal. — Size 1000, 2000, 4000 lb
Location Base
Use HE, GP, SAP, gas
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M162, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	1780-2680 ft (M4 vane) 4900-5850 ft (M5 vane)
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.2 lb
Total Length (in.)	16.26
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A non-delay or 0.025 sec delay M14 primer-detonator is standard. An 0.01, 0.1, or 0.24 sec delay. M14 primer-detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

SERIES: N CHAPTER: 2
DESIGNATION: M162
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M163, FUZE, BOMB, NOSE

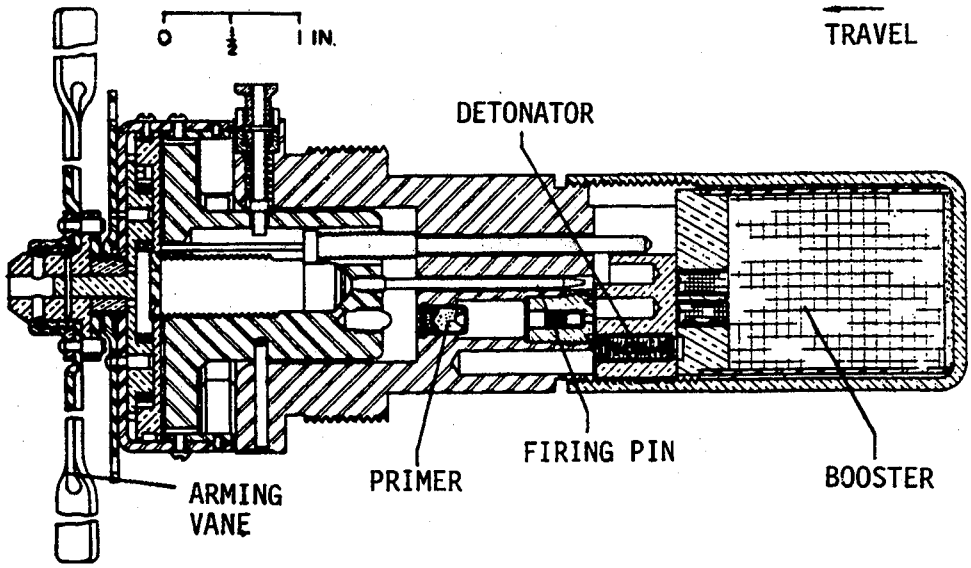

IDENTIFICATION

Agency	NMC, Code 2141, R. Villars, AV 351-6424
Status	Obsolete
Ass'y Dwg. No.	73-8-14
Parts List	
Specification	
Previous Number	T94

GENERAL

Carriers	Bomb
Cal. — Size	90, 100, 260, 350,500, 1000, 2000 lb
Location	Nose
Use	GP, fragmentation, incend., SAP, depth
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M163, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	1140-2420 ft (M1 vane)*
Rotation (rps)	
Non-arm	Arm 410 revs (delay) 690 revs (inst)
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.7 lb
Total Length (in.)	7.23
Body Diam. (in.)	2.48
Intrusion	5.23 in.
Thread Size	2.0-12NS-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	Instant. or 0.1 sec
Time Type	
Time Setting (sec)	
Target	Hard & moderate hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M39A1
Detonator	M20
Booster	Tetryl
Relay	M6

REMARKS

*Air travel to arm is dependent on size and weight of bomb. Further increase in arming time can be provided by use of M3 vane.

SERIES: N CHAPTER: 2
DESIGNATION: M163
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M164, FUZE, BOMB, NOSE

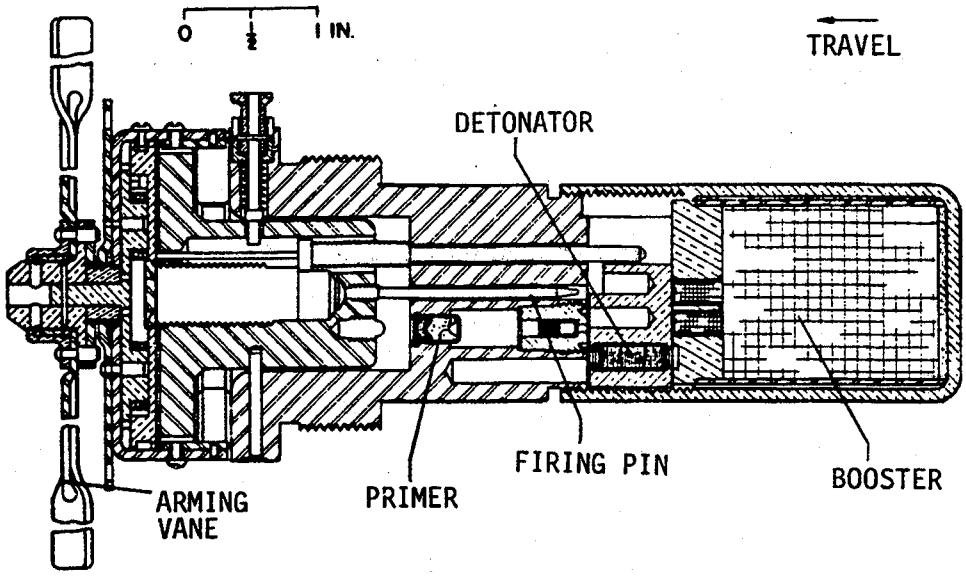

IDENTIFICATION

Agency	NMC, Code 2141, R. Villars, AV 351-6424
Status	Obsolete
Ass'y Dwg. No.	73-8-14
Parts List	
Specification	
Previous Number	T94

GENERAL

Carriers	Bomb
Cal. — Size	90, 100, 260, 350, 500, 1000, 2000 lb
Location	Nose
Use	GP, fragmentation, depth, incend, SAP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M164, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	1140 - 2420 ft (M1 vane)*
Rotation (rps)	
Non-arm / Arm	410 revs (delay) 690 revs (inst)
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.7 lb
Total Length (in.)	7.23
Body Diam. (in.)	2.48
Intrusion	5.23 in.
Thread Size	2.0-12NS-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	Instant. or 0.01 sec
Time Type	
Time Setting (sec)	
Target	Hard & moderate hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M39A1
Detonator	M20
Booster	Tetryl
Relay	M6

REMARKS

*Air travel to arm is dependent on size and weight of bomb.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M165, FUZE, BOMB, NOSE

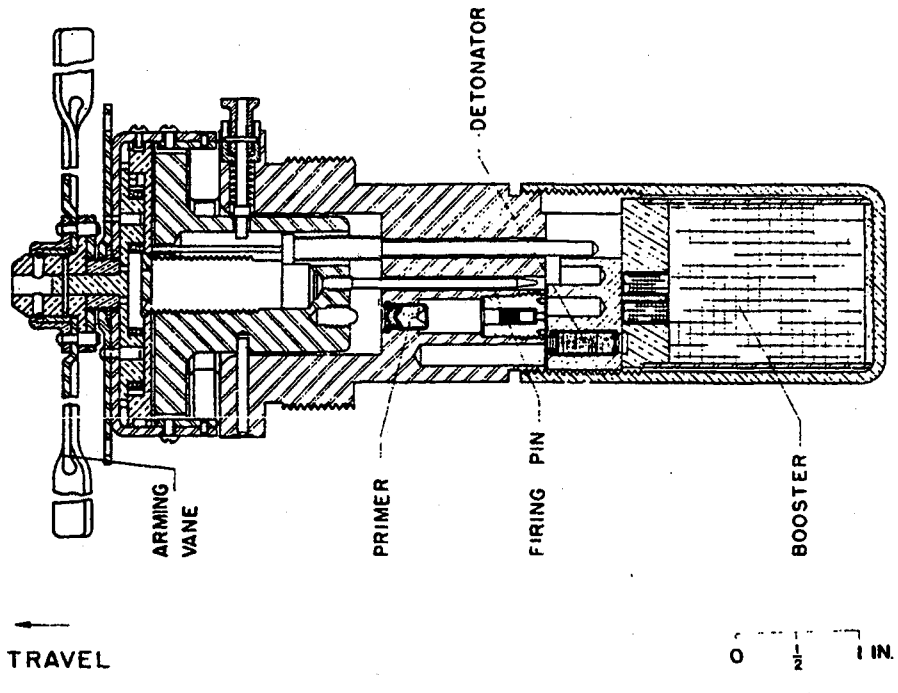

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-14
Parts List
Specification
Previous Number T94

GENERAL

Carriers Bomb
Cal. — Size 90, 100, 260, 350, 500, 1000, 2000 lb
Location Nose
Use GP, fragmentation, depth, incend., SAP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M165, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	1140 - 2420 ft (M1 vane)*
Rotation (rps)	
Non-arm / Arm	410 revs (delay) 690 revs (inst)
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.7 lb
Total Length (in.)	7.23
Body Diam. (in.)	2.48
Intrusion	5.23 in.
Thread Size	2.0-12NS-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard & moderate hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M39A1
Detonator	M20
Booster	Tetryl
Relay	M6

REMARKS

*Air travel to arm is dependent on size and weight of bomb.

SERIES: N CHAPTER: 2
DESIGNATION: M165
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M166E3, FUZE, BOMB, NOSE, PROXIMITY

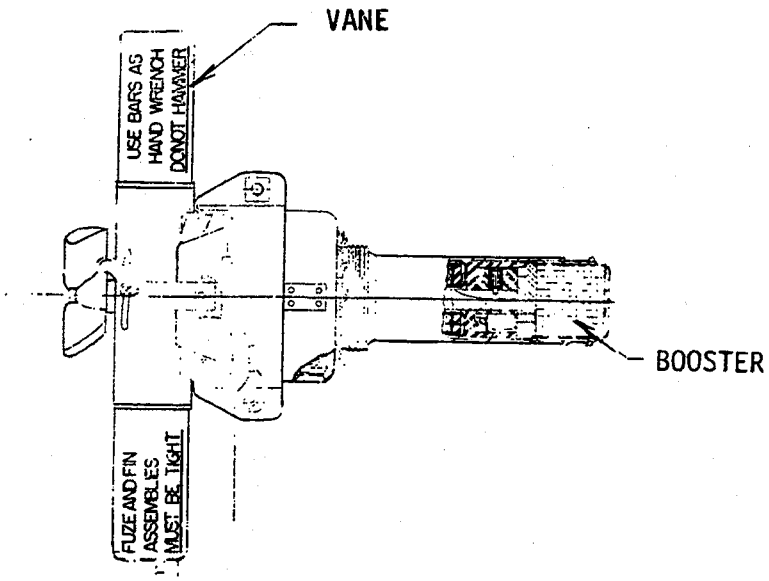

IDENTIFICATION

Agency ERADCOM, DELHO-IT-OE
R. Wyckoff, AV 290-2677

Status Obsolete

Ass'y Dwg. No. 73-11-200

Parts List

Specification

Previous Number T51E1

GENERAL

Carriers Bomb

Cal. — Size 100, 220, 500, 1000, and 2000 lb

Location Nose

Use HE or Fragmentation

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M166E3, FUZE, BOMB, NOSE, PROXIMITY

ARMING DATA

Method	Vane
Delay	2000 ft min. safe air travel
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	4.5 lb
Total Length (in.)	10.065
Body Diam. (in.)	1 1/2
Intrusion	5.09 in.
Thread Size	2-12NS-1A

FUNCTIONING DATA

Action	Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground, water
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Air Driven Alternator

EXPLOSIVE TRAIN

S&A Device	Internal
Primer	
Detonator	M36A1
Booster	Tetryl

REMARKS

Not recommended for high performance aircraft

Similar to Fuze M 188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M167, FUZE, BOMB, TAIL

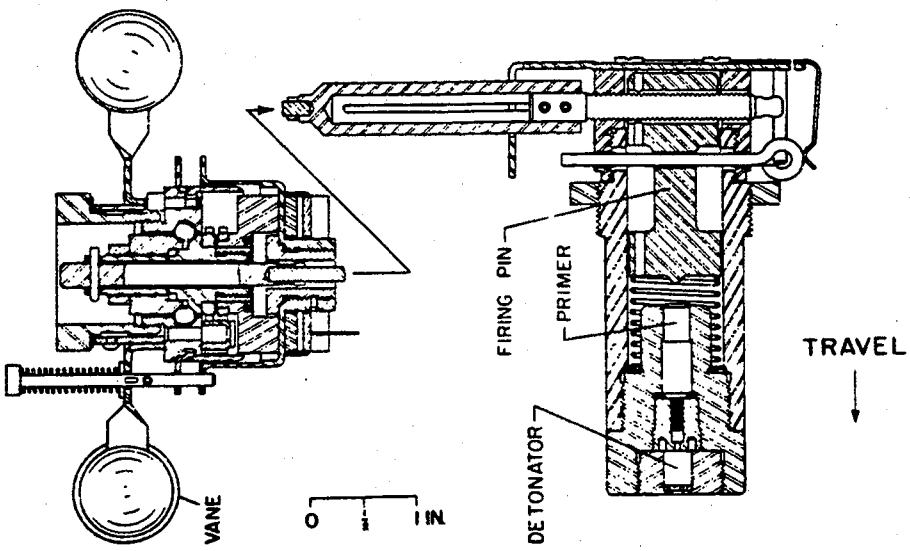

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424

Status Obsolete

Ass'y Dwg. No. 73-8-905

Parts List

Specification

Previous Number T75E2

GENERAL

Carriers Bomb

Cal. — Size 1000 lb

Location Tail

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M167, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	500 ft
Rotation (rps)	
Non-arm / Arm	1360 rev
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.6 lb
Total Length (in.)	2.9
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

REMARKS

Explosive train is not interrupted.

Similar to Fuze AN-M100A2. Modified by right-angle anemometer arming vane.

SERIES: N CHAPTER: 2
DESIGNATION: M167
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M168E2, FUZE, BOMB, PROXIMITY

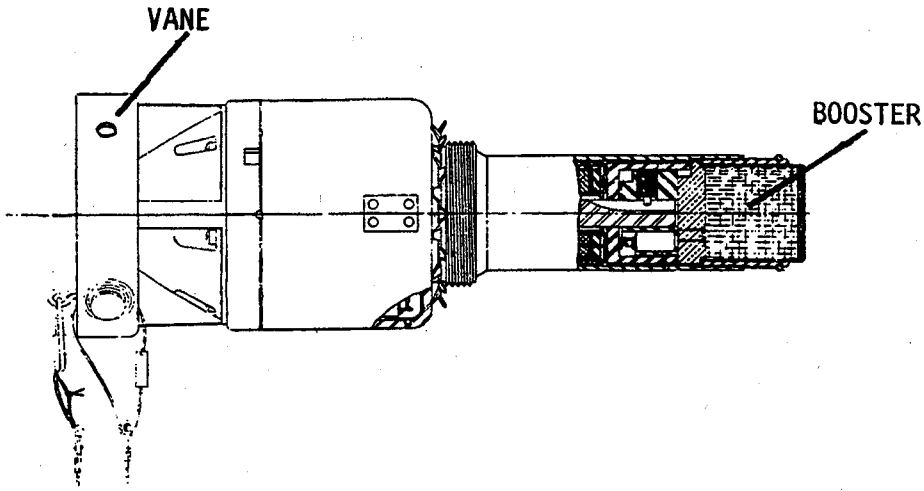

IDENTIFICATION

Agency ERADCOM, DELHO-IT-OE
R. Wyckoff, AV 290-2677

Status Obsolete
Obsolete

Ass'y Dwg. No. FF-4910

Parts List

Specification VE-PD-118

Previous Number T91E1

GENERAL

Carriers Bomb

Cal. — Size 100, 220, 500, 1000, 2000 lb

Location Nose

Use GP, HG, Fragmentation

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M168E2, FUZE, BOMB, PROXIMITY

ARMING DATA

Method	Vane
Delay	2000 ft safe air travel
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	4.5 lb
Total Length (in.)	10.02
Body Diam. (in.)	1 1/2
Intrusion	5.09 in.
Thread Size	2-12NS-1A

FUNCTIONING DATA

Action	Proximity
Type	Electrical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground, water
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Air driven alternator

EXPLOSIVE TRAIN

S&A Device	Interior
Primer	
Detonator	M36A1
Booster	Tetryl

REMARKS

Not recommended for high performance aircraft

Similar to Fuze M188 but with a ring antenna

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M169, FUZE, BOMB, TAIL

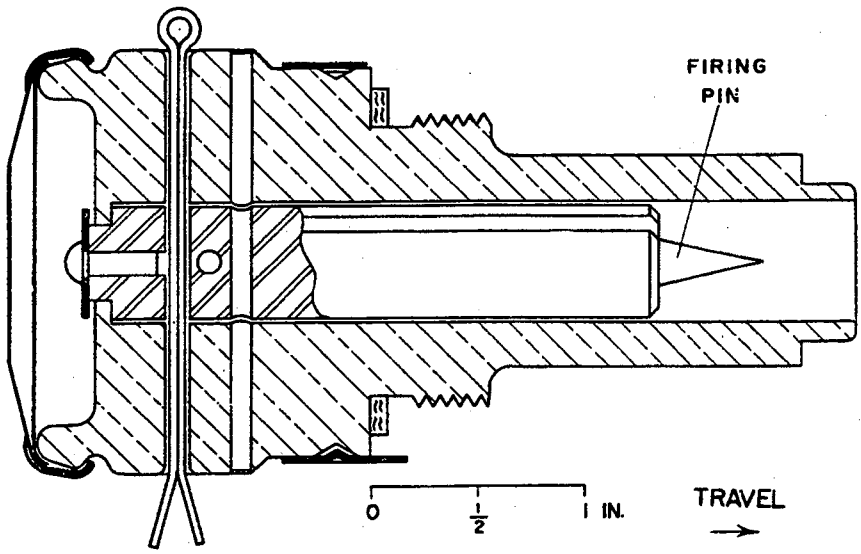

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424

Status Obsolete

Ass'y Dwg. No. P-74487

Parts List

Specification

Previous Number T708

GENERAL

Carriers Bomb

Cal. — Size 12000 & 22000 lb

Location Tail

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M169, FUZE, BOMB, TAIL

ARMING DATA

Method	Arming wire
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.0 lb
Total Length (in.)	9.0
Body Diam. (in.)	2.0
Intrusion	2.3 in.
Thread Size	1.375-14TWS-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target Sensitivity	Structures (block buster)
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

Fuze has no explosive train. Components are assembled in bomb prior to fuzing.

REMARKS

Fuze is for use with British designed bombs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M170, FUZE, BOMB, NOSE

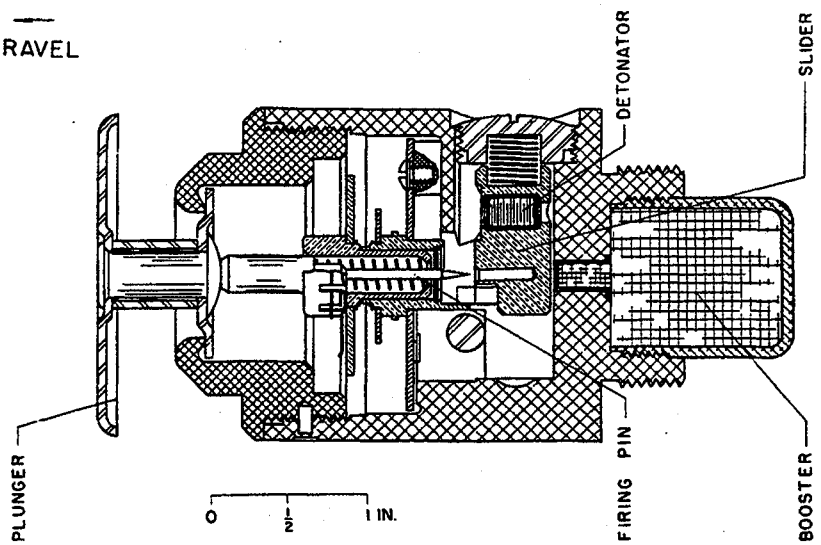

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-367
Parts List
Specification
Previous Number

GENERAL

Carriers Bomb
Cal. — Size 23, 120 lb
Location Nose
Use Parachuate, fragmentation
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M170, FUZE, BOMB, NOSE

ARMING DATA

Method	Time, mechanical
Delay	1.5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.12 lb
Total Length (in.)	4.6
Body Diam. (in.)	2.3
Intrusion	1.3 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	Structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	Tetryl

REMARKS

Similar to Fuze M120A1 except arming delay is 1.5 sec.

SERIES: N CHAPTER: 2
DESIGNATION: M170
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M171, FUZE, BOMB, NOSE

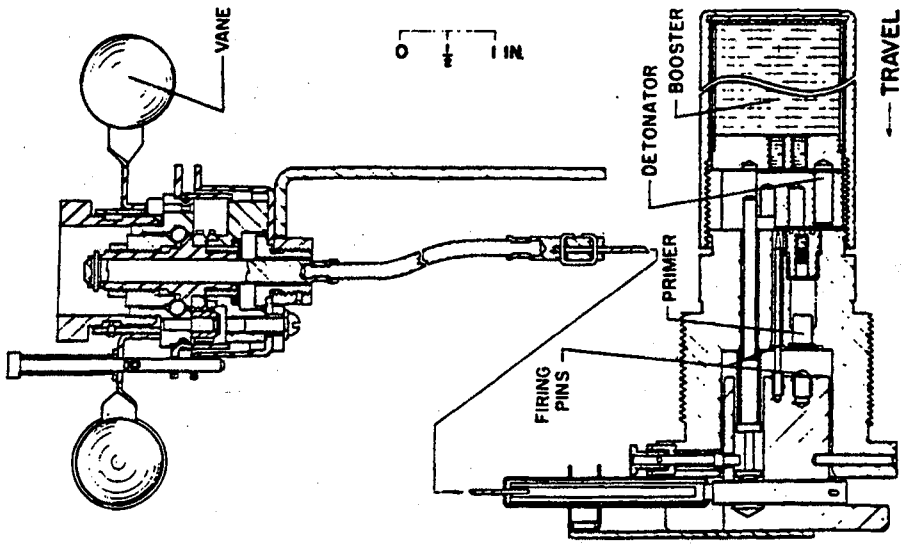

IDENTIFICATION

Agency PMTC, Code 2141, R. Villars AV 351-6420

Status Obsolete

Ass'y Dwg. No. 73-8-411

Parts List

Specification

Previous Number T85

GENERAL

Carriers Bomb

Cal. — Size

Location Nose

Use

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M171, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	
Rotation (rps)	
Non-arm	Arm 875 rev
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.5 lb
Total Length (in.)	6.7
Body Diam. (in.)	2.48
Intrusion	5.23 in.
Thread Size	2.0-12NS-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M39A1
Detonator	M20
Booster	Tetryl
Relay	M6

REMARKS

The arming vanes are anemometer type mounted perpendicular to the fuze axis on a special bracket using a flexible shaft to couple to the fuze arming stem.

Modification of Fuze M163 using the arming head of Tail Fuze AN-M100A2.

SERIES: N CHAPTER: 2
DESIGNATION. M171
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M172, FUZE, BOMB, TAIL

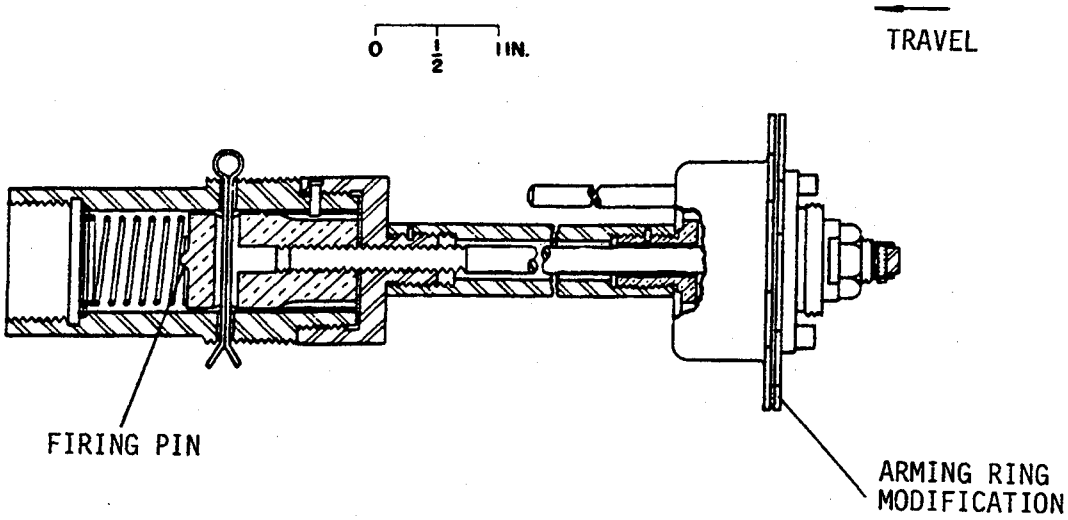

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-469, 73-8-470
Parts List
Specification
Previous Number T738

GENERAL

Carriers Bomb with conical fins
Cal. — Size 100, 220, 250, 260, 500 lb
Location Tail
Use HE, GP, fragmentation
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M172, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	500 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.65 lb
Total Length (in.)	25.29
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A non-delay or 0.025 sec delay M14 primer-detonator is standard. An 0.01, 0.1, or 0.24 sec delay M14 primer-detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

SERIES: N CHAPTER: 2
DESIGNATION: M172
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the AN-M173A1 Bomb Impact Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 2-195 and 2-196 of MIL-HDBK 146.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M174, FUZE, BOMB, IMPACT

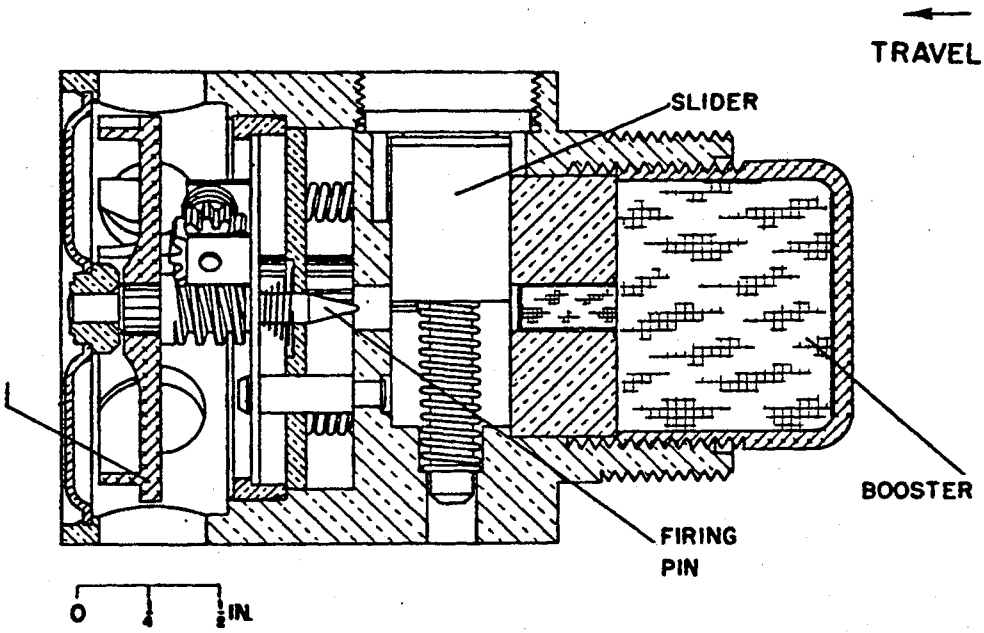

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts, AV 584-4298
Status	Obsolete
Ass'y Dwg. No.	C14-15322
Parts List	
Specification	MIL-F-11242, 11250
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	M114, 4 lb
Location	Nose
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M174, FUZE, BOMB, IMPACT

ARMING DATA

Method	Vane; release from cluster
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.93 lb
Total Length (in.)	2.782
Body Diam. (in.)	
Intrusion	1.092 in.
Thread Size	1.250-24 NS

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Chemical
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	Tetryl; 11.5 gm

REMARKS

SERIES: A CHAPTER: 2
DESIGNATION: M174
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M175, FUZE, BOMB, TAIL

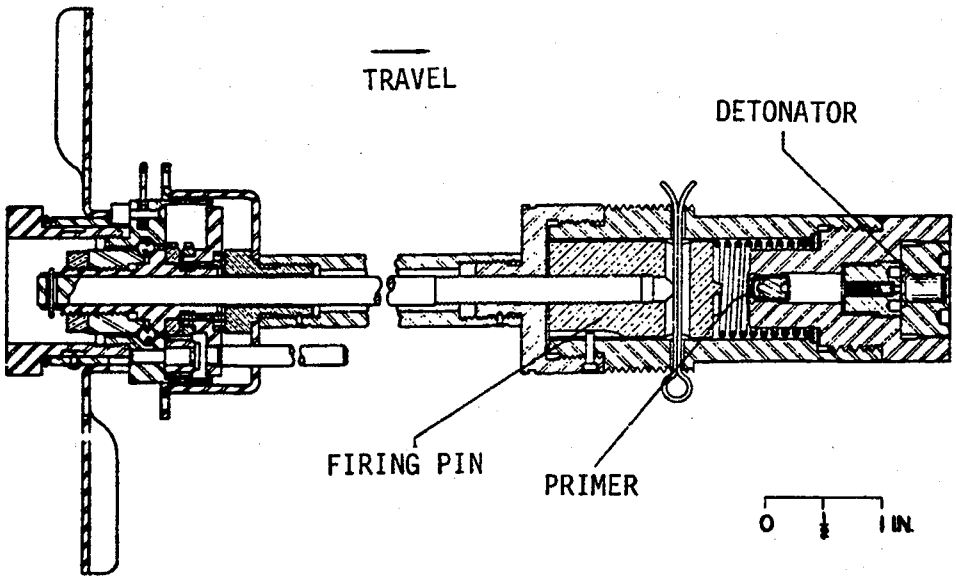

IDENTIFICATION

Agency PMTC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-471
Parts List
Specification
Previous Number

GENERAL

Carriers	Bomb with conical fins
Cal. — Size	100, 220, 250, 260, 500 lb
Location	Tail
Use	HE, GP, fragmentation
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M175, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	1150-1935 ft (M4 vane)
Rotation (rps)	3200-5225 ft (M5 vane)
Non-arm	**Arm** 150-170 rev
Setback (g)	
Non-arm	**Arm**
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.65 lb
Total Length (in.)	25.29
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A nondelay or 0.025 sec delay M14 primer-detonator is standard. An 0.01, 0.1, or 0.24 sec delay M14 primer-detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

SERIES: N CHAPTER: 2
DESIGNATION: M175
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M176, FUZE, BOMB, TAIL

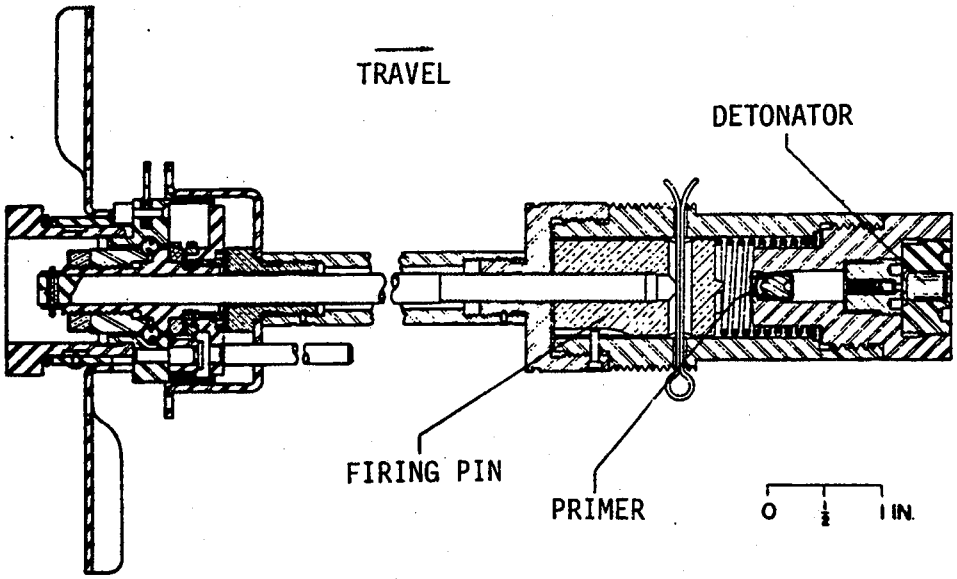

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-471, 73-8-472
Parts List
Specification
Previous Number

GENERAL

Carriers Bomb with conical fins
Cal. — Size 1000 lb
Location Tail
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M176, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	1150-1935 ft (M4 vane) 3200-5225 ft (M5 vane)
Rotation (rps)	
Non-arm	**Arm** 150-170 rev
Setback (g)	
Non-arm	**Arm**
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	4.4 lb
Total Length (in.)	35.05
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A nondelay or 0.025 sec delay M14 primer-detonator is standard. An 0.01, 0.1, or 0.24 sec delay M14 primer-detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

\

SERIES: N CHAPTER: 2
DESIGNATION: M176
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M177, FUZE, BOMB, TAIL

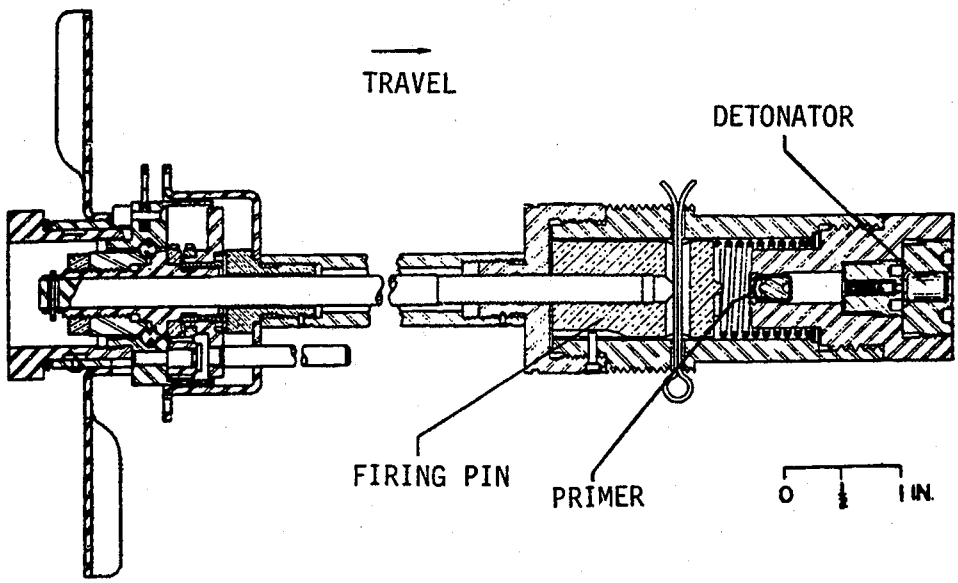

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-471
Parts List
Specification
Previous Number

GENERAL

Carriers Bomb with conical fins
Cal. — Size 1000, 2000 lb
Location Tail
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN-M177, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	1150-1935 ft (M4 vane) 3200-5225 ft (M5 vane)
Rotation (rps)	
Non-arm	Arm 150-170 rev
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	5.0 lb
Total Length (in.)	45.12
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A nondelay or 0.025 sec delay M14 primer-detonator is standard. An 0.01, 0.1, or 0.24 sec delay M14 primer-detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M178, FUZE, BOMB, TAIL

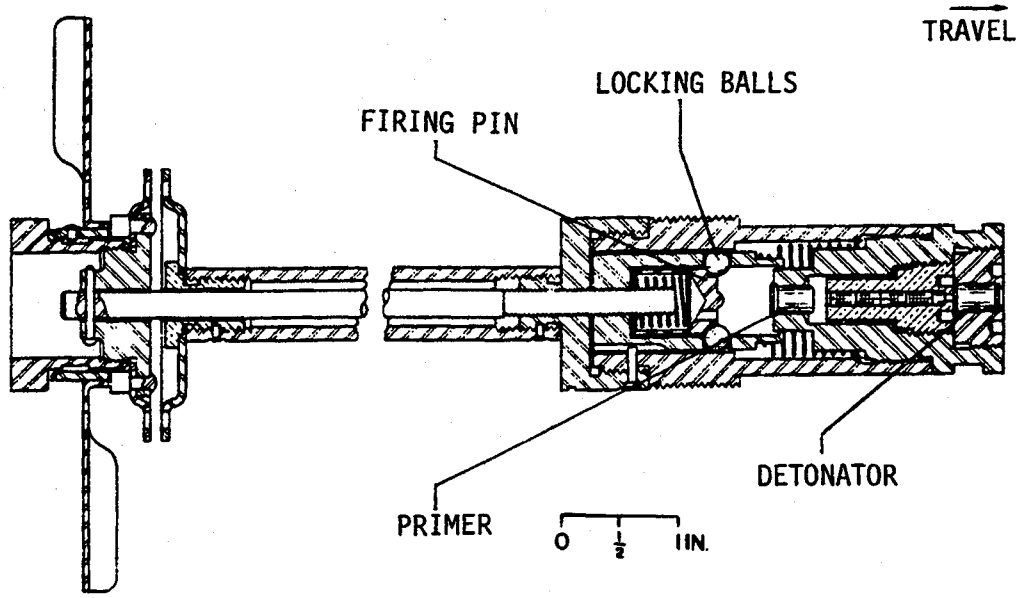

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-473
Parts List
Specification
Previous Number T747

GENERAL

Carriers	Bomb with box fins
Cal. — Size	250, 800, 1000, 2000 lb
Location	Tail
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M178, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	80 ft*
Rotation (rps)	
Non-arm / Arm	18-21 rev
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.4 lb
Total Length (in.)	24.85
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	8-15 or 4-5 sec
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16
Booster	

REMARKS

*M4 vane is standard. M5 vane may be substituted in the field to increase the air travel to arm.

Explosive train is not interrupted.

The standard delay (8-15 sec) may be replaced by a 4-5 sec delay. If so, minimum release altitude is 100 ft. This fuze is used for minimum altitude ("masthead") bombing.

SERIES: N CHAPTER: 2
DESIGNATION: M178
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M179, FUZE, BOMB, TAIL

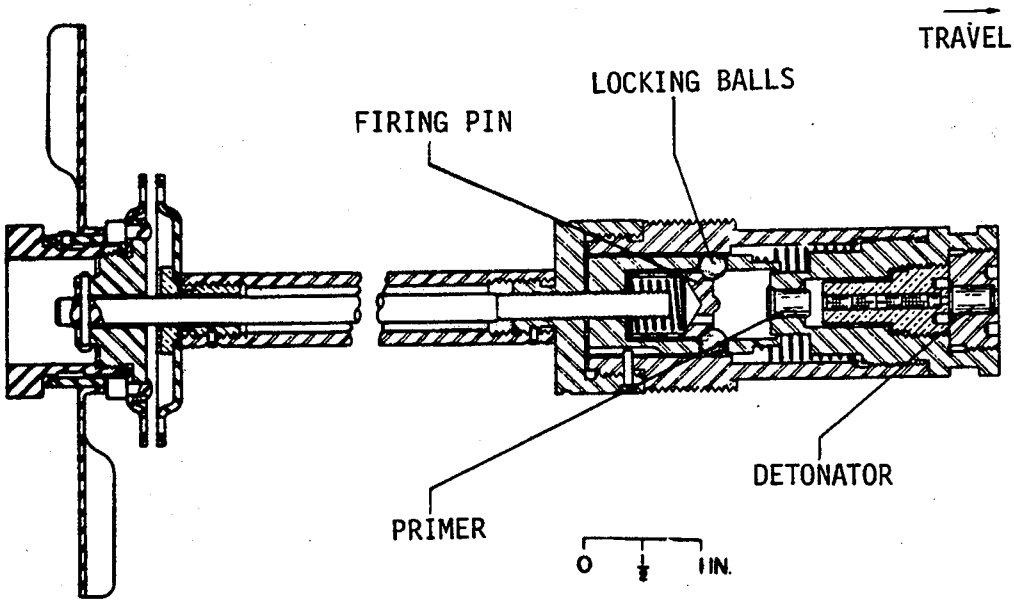

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-473
Parts List
Specification
Previous Number T747

GENERAL

Carriers Bomb with box fins
Cal. — Size 250, 800, 1000, 2000 lb
Location Tail
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M179, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	90 ft*
Rotation (rps)	
Non-arm	Arm 18-21 rev
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	4.1 lb
Total Length (in.)	36.65
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	8-15 or 4-5
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16
Booster	

REMARKS Explosive train is not interrupted.
*M4 vane is standard. M5 vane may be substituted in the field to increase the air travel to arm.

The standard delay (8-15 sec) may be replaced by a 4-5 sec delay. If so, minimum release altitude is 100 ft. This fuze is used for minimum altitude ("masthead") bombing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M180, FUZE, BOMB, TAIL

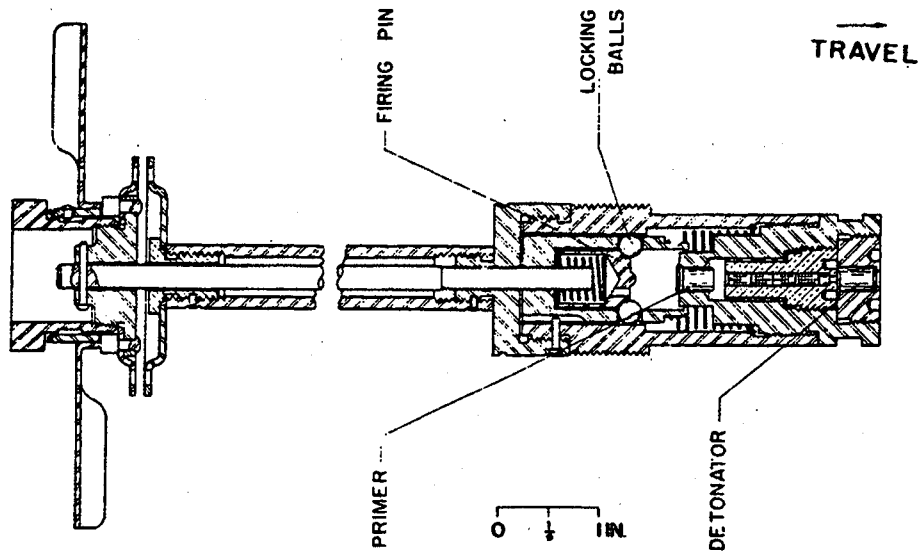

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-473
Parts List
Specification
Previous Number T747

GENERAL

Carriers Bomb with box fins
Cal. — Size 250, 800, 1000, 2000 lb
Location Tail
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M180, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	110 ft*
Rotation (rps)	
Non-arm / Arm	18-21 rev
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	4.6 lb
Total Length (in.)	44.71
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	8-15 or 4-5
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16
Booster	

REMARKS

Explosive train is not interrupted.

*M4 vane is standard. M5 vane may be substituted in the field to increase the air travel to arm.

The standard delay (8-15 sec) may be replaced by a 4-5 sec delay. If so, minimum release altitude is 100 ft. This fuze is used for minimum altitude ("masthead") bombing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M181, FUZE, BOMB, TAIL

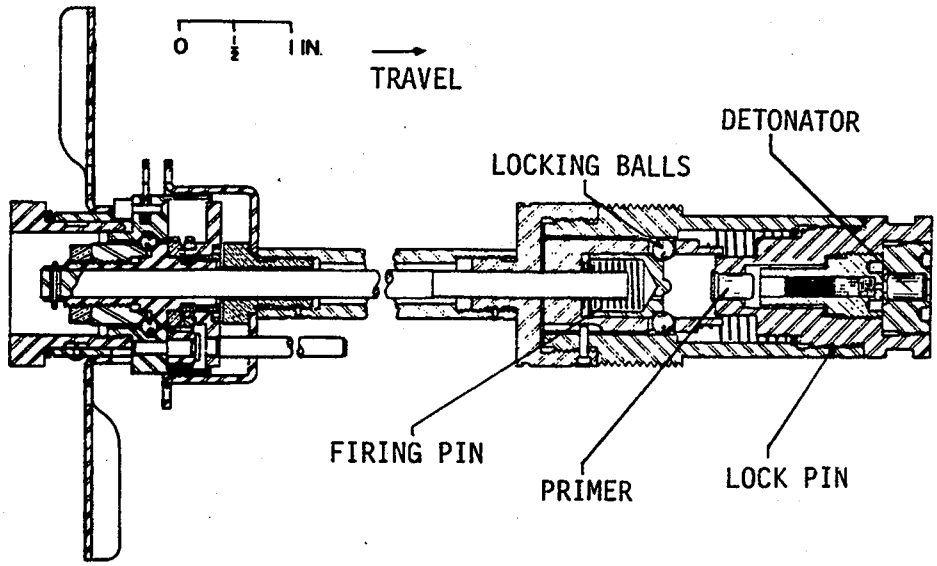

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-475
Parts List
Specification
Previous Number T781

GENERAL

Carriers Bomb with box fins
Cal. — Size 250, 800, 1000 2000 lb
Location Tail
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M181, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	485 ft*
Rotation (rps)	
Non-arm	Arm 18-21 rev
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.65 lb
Total Length (in.)	24.6
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	8-15 or 4-5
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16
Booster	

REMARKS

Explosive train is not interrupted.

*M4 vane is standard. M5 vane may be substituted in the field to increase the air travel to arm.

The standard delay (8-15 sec) may be replaced by a 4-5 sec delay. If so, minimum release altitude is 100 ft. This fuze is used for minimum altitude ("masthead") bombing.

SERIES: N CHAPTER: 2
DESIGNATION: M181
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M182, FUZE, BOMB, TAIL

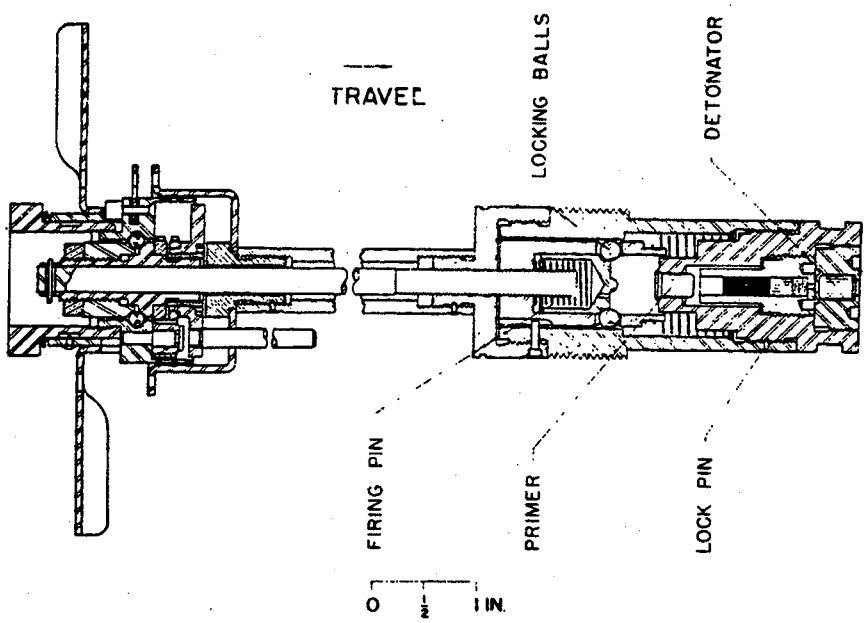

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-475
Parts List
Specification
Previous Number T782

GENERAL

Carriers	Bomb with box fins
Cal. — Size	250, 800, 1000, 2000 lb
Location	Tail
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M182, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	555 ft*
Rotation (rps)	
Non-arm / Arm	18-21 rev
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	4.4 lb
Total Length (in.)	36.97
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-21NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	8-15 or 4-5
Target	Hard or soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16
Booster	

REMARKS

Explosive train is not interrupted.

*M4 vane is standard. M5 vane may be substituted in the field to increase the air travel to arm.

The standard delay (8-15 sec) may be replaced by a 4-5 sec delay. If so, minimum release altitude is 100 ft. This fuze is used for minimum altitude ("masthead") bombing.

SERIES: N CHAPTER: 2
DESIGNATION: M182
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M183, FUZE, BOMB, TAIL

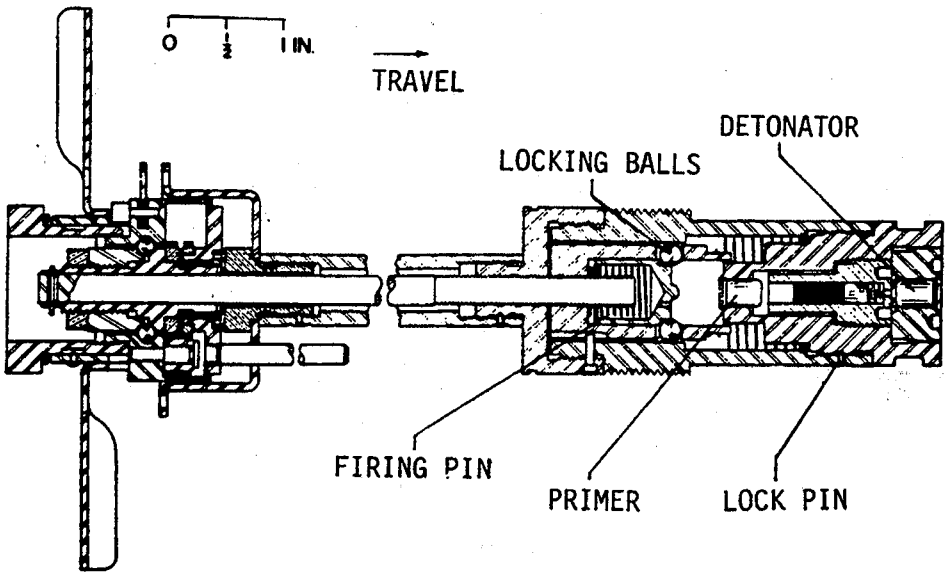

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-475
Parts List
Specification
Previous Number T783

GENERAL

Carriers	3omb with box fins
Cal. — Size	250, 800, 1000, 2000 lb
Location	Tail
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M183, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	565 ft*
Rotation (rps)	
Non-arm	Arm 18-21 rev
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	5.0 lb
Total Length (in.)	45.03
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	8-15 or 4-5
Target	Hard of soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M16
Booster	

REMARKS

Explosive train is not interrupted.

*M4 vane is standard. M5 vane may be substituted in the field to increase the air travel to arm.

The standard delay (8-15 sec) may be replaced by a 4-5 sec delay. If so, minimum release altitude is 100 ft. This fuze is used for minimum altitude ("masthead") bombing.

SERIES: N CHAPTER: 2
DESIGNATION: M183
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M184, FUZE, BOMB, TAIL

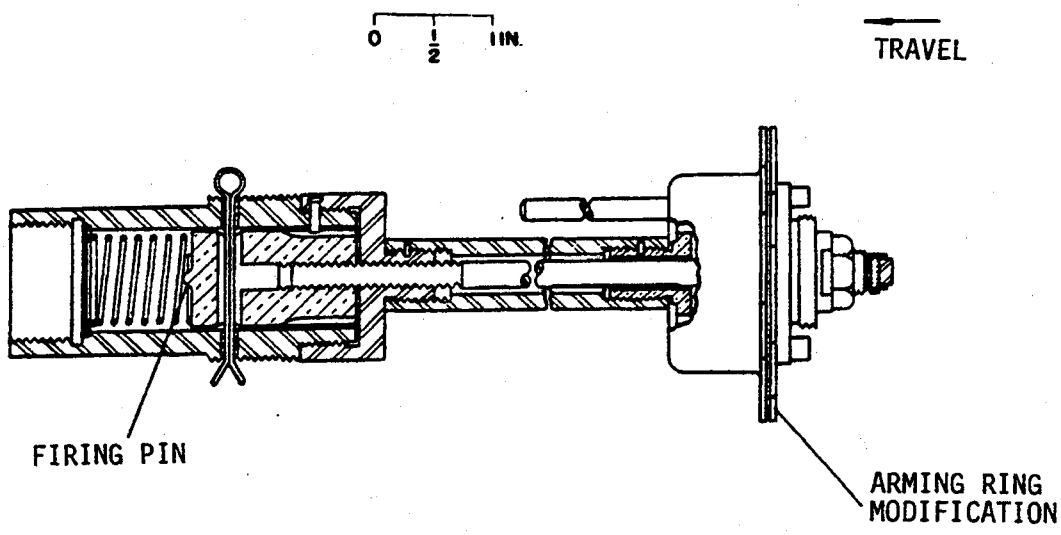

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-469, 73-8-470
Parts List
Specification
Previous Number T739

GENERAL

Carriers Bomb with conical fins
Cal. — Size 1000 lb
Location Tail
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M184, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	500 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	4.4 lb
Total Length (in.)	37.05
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A nondelay or 0.025 sec delay M14 primer detonator is standard. An 0.01, 0.1, or 0.24 sec delay M14 primer detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

SERIES: N CHAPTER: 2
DESIGNATION: M184
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M185, FUZE, BOMB, TAIL

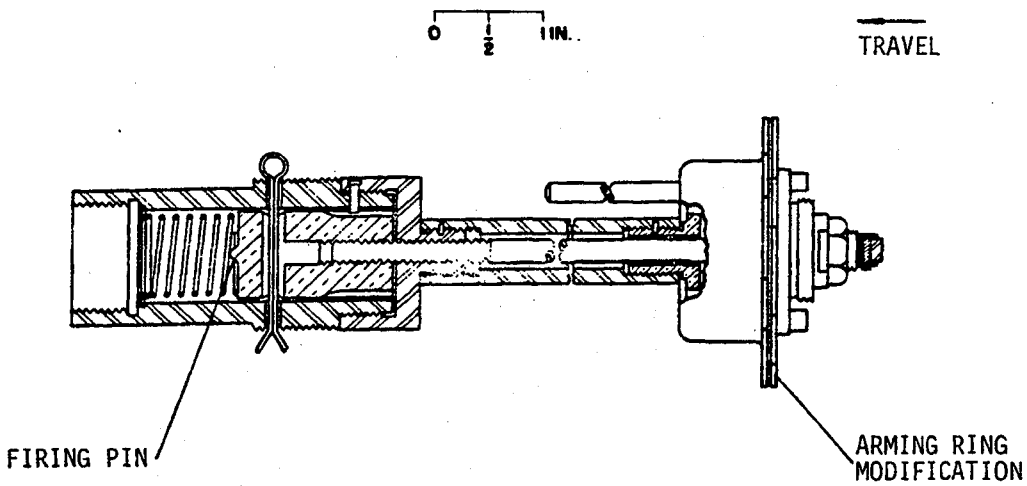

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-470
Parts List
Specification
Previous Number T740

GENERAL

Carriers Bomb with conical fins
Cal. — Size 1000, 2000 lb
Location Tail
Use HE or GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M185, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	500 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	5.0 lb
Total Length (in.)	45.12
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A nondelay or 0.025 sec delay M14 primer detonator is standard. An 0.01, 0.1, or 0.24 sec delay M14 primer detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M186, FUZE, BOMB, NOSE

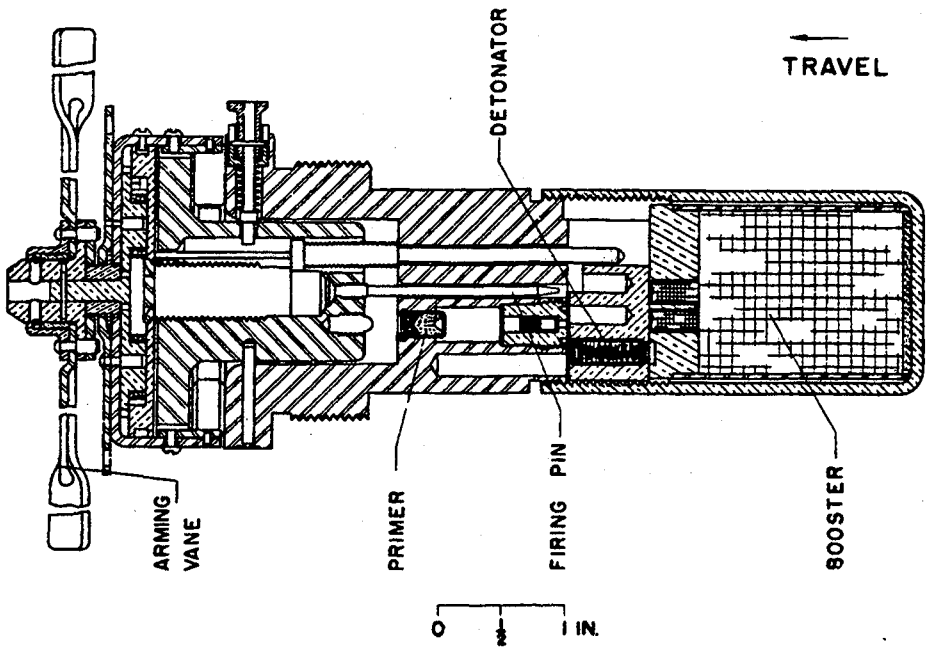

IDENTIFICATION

Agency PMTC, Code 2141, R. Villars AV 351-6420

Status Obsolete

Ass'y Dwg. No. 73-8-14

Parts List

Specification

Previous Number

GENERAL

Carriers Bomb, aircraft mine

Cal. — Size 90, 220, 260 lb Frag; 100,250,500,1000,2000,4000 lb,GP;350 lb Depth; 1000 lb Aircraft Mine

Location Nose

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M186, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	55-200 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

M1 & M2 vanes may be used interchangeably to vary arming time.

PHYSICAL DATA

Weight	3.7 lb
Total Length (in.)	7.23
Body Diam. (in.)	
Intrusion	5.1 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	Delay, select.
Type	Mechanical
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target	Water & structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M39A1
Detonator	M20
Booster	

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M187, FUZE, BOMB, NOSE

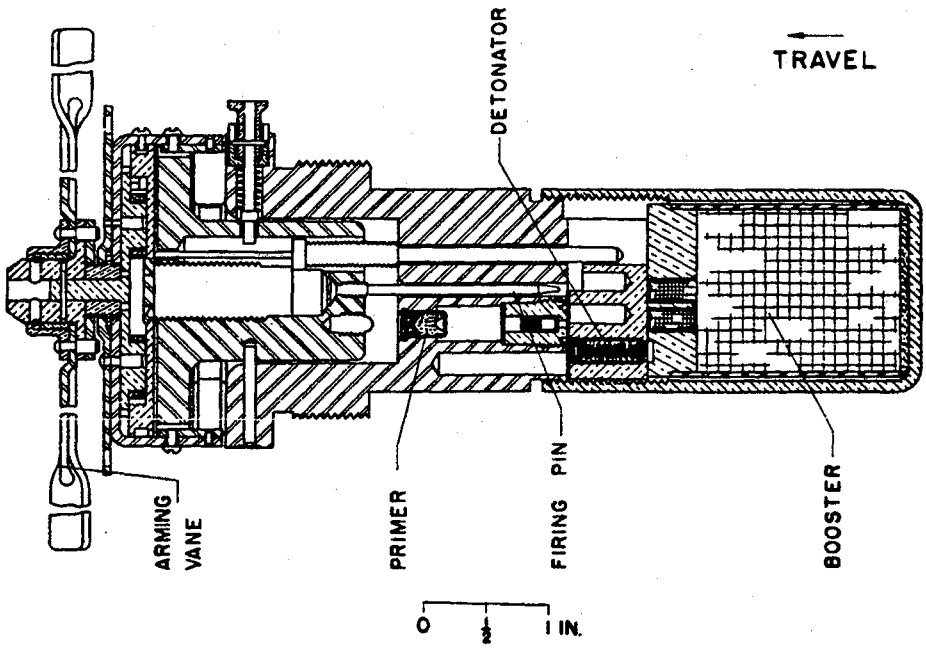

IDENTIFICATION

Agency PMTC, Code 2141, R. Villars AV 351-6420

Status Obsolete

Ass'y Dwg. No. 73-8-363

Parts List

Specification

Previous Number

GENERAL

Carriers Bomb; aircraft mine

Cal. — Size 90, 220, 260 lb Frag; 10,250,500,1000,2000,4000 lb GP; 350 lb Depth; 1000 lb Aircraft mine

Location Nose

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M187, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	230-900 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.7 lb
Total Length (in.)	7.23
Body Diam. (in.)	
Intrusion	5.1 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	Delay, select.
Type	Mechanical
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target	Water, structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M39A1
Detonator	M20
Booster	
Relay	M6

REMARKS

Similar to Fuze AN-M103A1 but longer arming.

SERIES: N CHAPTER: 2
DESIGNATION: M187
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M188, FUZE, BOMB, PROXIMITY

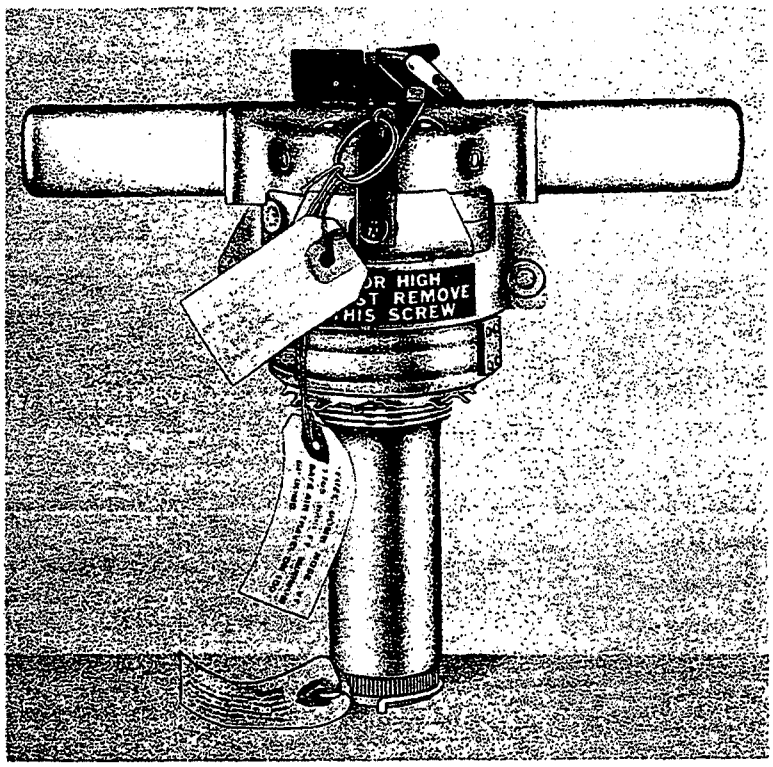

IDENTIFICATION

Agency ERADCOM, DELHO-IT-OE
R. Wyckoff, AV 290-2677

Status Obsolete

Ass'y Dwg. No. FF-4901

Parts List

Specification VE-PD-154

Previous Number T765

GENERAL

Carriers Bomb

Cal. — Size 100, 220, 500, 1000, and 2000 lb

Location Nose

Use GP, Fragmentation

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M188, FUZE, BOMB, PROXIMITY

ARMING DATA

Method	Vane
Delay	3600 ft safe air travel
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	4.5 lb
Total Length (in.)	10.065
Body Diam. (in.)	1 1/2
Intrusion	5.09 in.
Thread Size	2-12NS-1A

FUNCTIONING DATA

Action	Proximity
Type	Electrical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground, water
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Air driven alternator

EXPLOSIVE TRAIN

S&A Device	Interior
Primer	
Detonator	M36A1
Booster	Tetryl

REMARKS

This fuze is identical to Fuze M166E1, except for minimum safe air travel.

Not recommended for high performance aircraft.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M189, FUZE, BOMB, TAIL

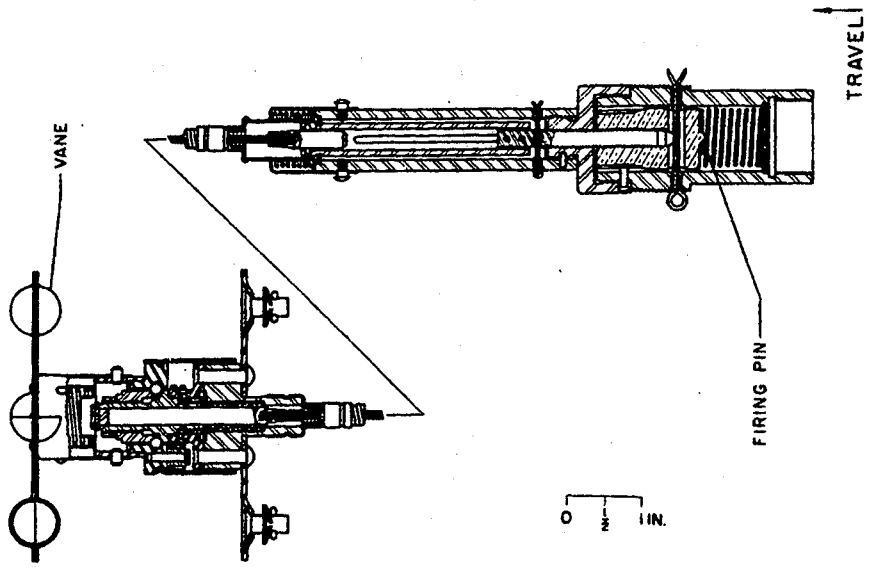

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424

Status Obsolete

Ass'y Dwg. No. 73-8-479

Parts List

Specification

Previous Number T789

GENERAL

Carriers	Bomb with conical fins
Cal. — Size	750, 3000, 10,000, 12,000, 25,000 lb
Location	Tail
Use	HE or GP
MIL-STD's	331, Tests 101-105,107
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M189, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	10 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.0 lb
Total Length (in.)	27.4
Body Diam. (in.)	
Intrusion	2.55 in.
Thread Size	1.5-12

FUNCTIONING DATA

Action	Delay
Type	Mechanical
Delay	0.01, 0.025, 0.1, 0.24 sec
Time Type	
Time Setting (sec)	
Target	Water & structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

Nondelay M14 primer detonator is standard. 0.01, 0.025, 0.1 and 0.24 sec delay M14 primer detonator may also be substituted in the field.

REMARKS

This series includes Fuzes T759E1, T760E1, T761E3 and T789.

This fuze is side arming using a flexible shaft and anemometer type arming vane.

SERIES: N CHAPTER: 2
DESIGNATION: M189
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M190, FUZE, BOMB, TAIL

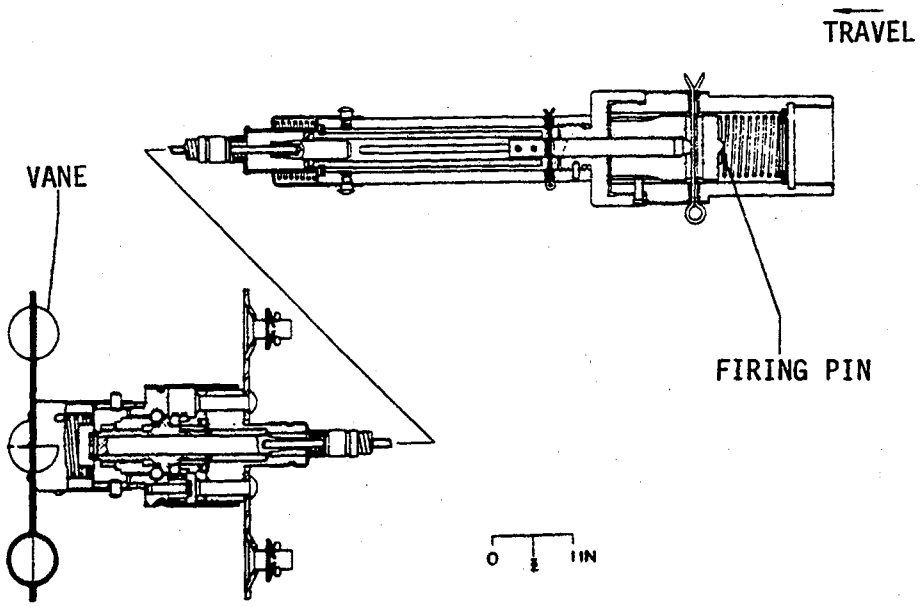

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-479
Parts List
Specification
Previous Number T759E1

GENERAL

Carriers Bomb with conical fins
Cal. — Size 750 lb
Location Tail
Use HE or GP
MIL-STD's 331. Tests 301-305,307
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M190, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	9 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.1 lb
Total Length (in.)	20.8
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Water, structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

Nondelay M14 primer detonator is standard. 0.01, 0.025, 0.1 and 0.24 sec delay M14 primer detonator may be substituted in the field.

REMARKS

The arming vanes are anemometer type mounted perpendicular to fuze axis using a flexible shaft to couple to fuze arming stem.

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M191, FUZE, BOMB, TAIL

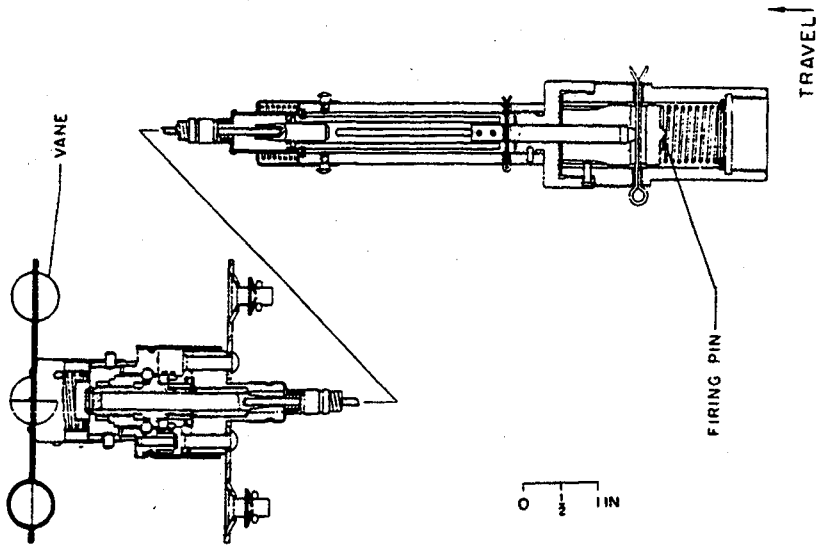

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424

Status Obsolete

Ass'y Dwg. No. 73-8-479

Parts List

Specification

Previous Number T760E1

GENERAL

Carriers Bomb with conical fins

Cal. — Size 3000 lb

Location Tail

Use HE or GP

MIL-STD's 331, Tests 301-305,307

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M191, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	8 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.2 lb
Total Length (in.)	25.3
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-479

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard & mod. hard,water
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

Nondelay M14 primer detonator is standard, 0.01, 0.025, 0.1 and 0.24 sec delay M14 primer detonator may be substituted in the field.

REMARKS

Fuze is side-arming using a flexible shaft and anemometer type arming vane.

Explosive train is not interrupted.

Similar to Fuze M189.

SERIES: N CHAPTER: 2
DESIGNATION: M191
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M192, FUZE, BOMB, TAIL

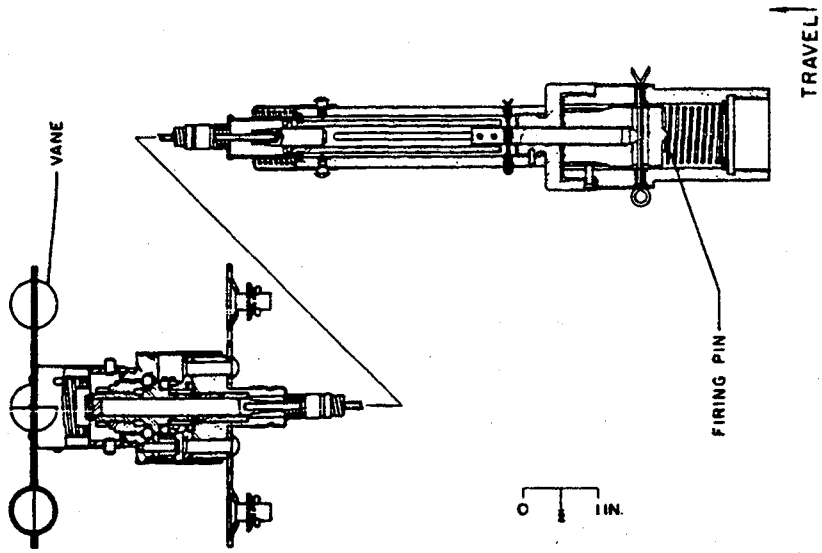

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-479
Parts List
Specification
Previous Number T761E1

GENERAL

Carriers Bomb with conical fins
Cal. — Size 10,000 lb
Location Tail
Use HE or GP
MIL-STD's 331, Tests 101-105,107
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M192, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	6 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.6 lb
Total Length (in.)	36.0
Body Diam. (in.)	
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	BD
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Water & structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

Nondelay M14 primer detonator is standard. 0.01, 0.025, 0.1 and 0.24 sec delay M14 primer detonator may be substituted in the field.

REMARKS

The arming vanes are anemometer-type mounted perpendicular to the fuze axis using a flexible shaft to couple to fuze arming stem.

Similar to Fuze M189.

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M193, FUZE, BOMB, NOSE

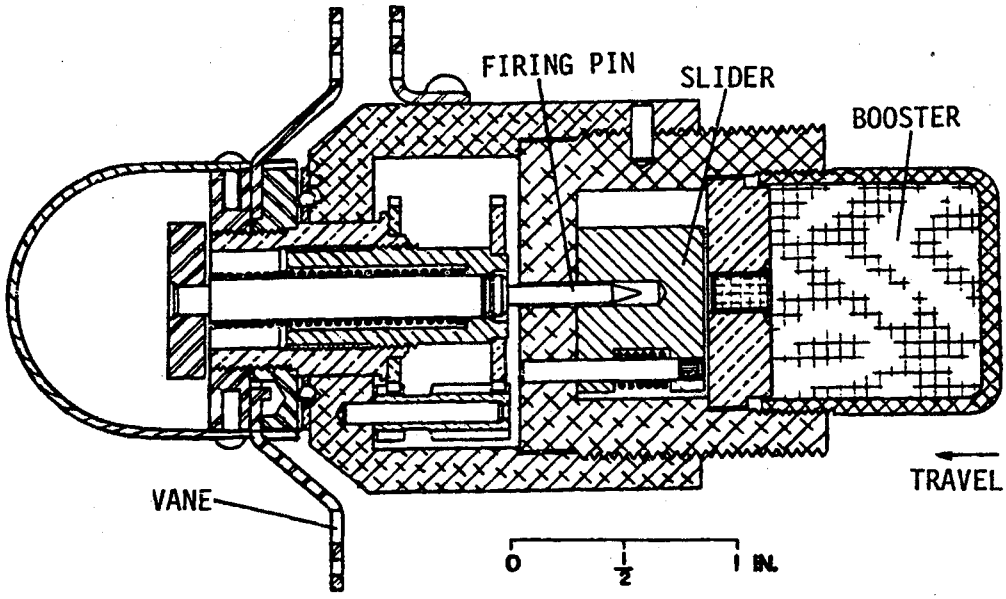

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-490
Parts List
Specification
Previous Number T778

GENERAL

Carriers Bomb
Cal. — Size 259 lb
Location Nose
Use HE, GP; Practice
MIL-STD's 331, Tests 101-104
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M193, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	4.8 sec
Rotation (rps)	
Non-arm	Arm 528 rev
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.04 lb
Total Length (in.)	4.4
Body Diam. (in.)	1.75
Intrusion	1.4 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	Hard or moderate hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M20
Booster	Tetryl

REMARKS

Similar to Fuze AN-M158 except for modified vane and nose shield.

SERIES: N CHAPTER: 2
DESIGNATION: M193
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M194, FUZE, BOMB, TAIL

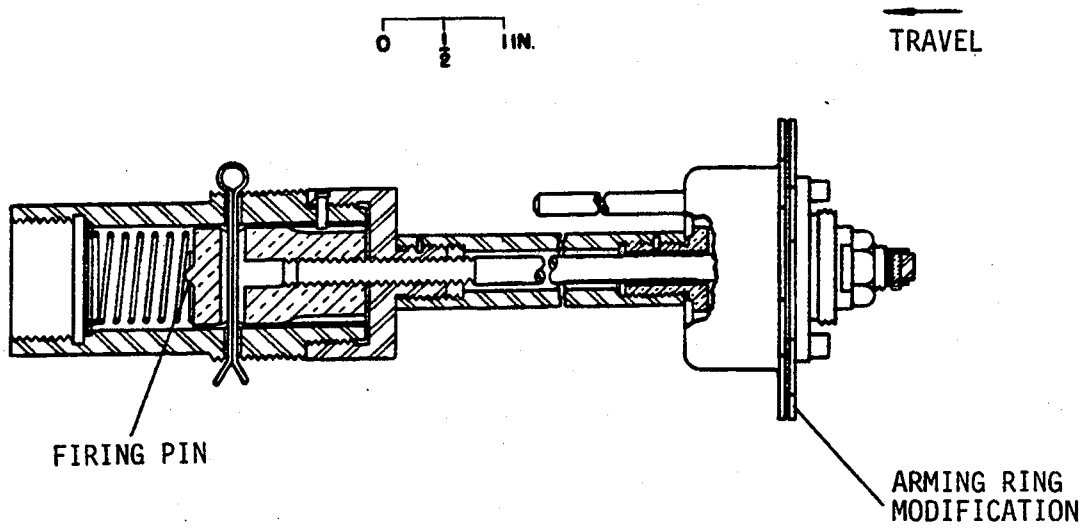

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424
Status Obsolete
Ass'y Dwg. No. 73-8-470
Parts List
Specification
Previous Number T791

GENERAL

Carriers	Bomb with conical fins
Cal. — Size	250 lb
Location	Tail
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M194, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	500 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	4.1 lb
Total Length (in.)	31.035
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A nondelay or 0.025 sec delay M14 primer detonator is standard. An 0.01, 0.1, or 0.24 sec delay M14 primer detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

SERIES: N CHAPTER: 2
DESIGNATION: M194
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M195, FUZE, BOMB, TAIL

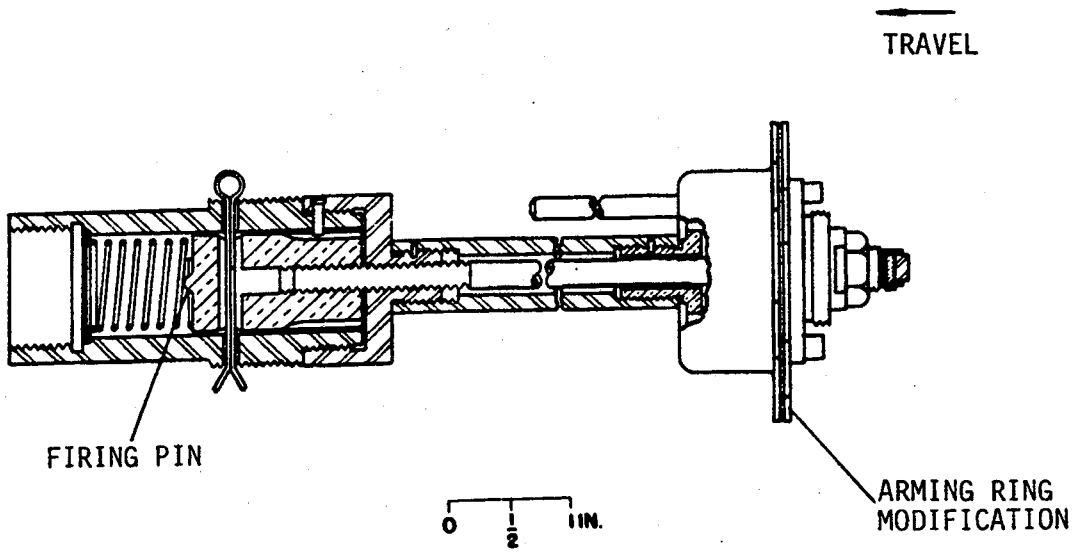

IDENTIFICATION

Agency NMC, Code 2141, R. Villars, AV 351-6424

Status Obsolete

Ass'y Dwg. No. 73-8-470

Parts List

Specification

Previous Number T792

GENERAL

Carriers Bomb with conical fins

Cal. — Size 500 lb

Location Tail

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

SERIES: N CHAPTER: 2
DESIGNATION: M195
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M195, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	500 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3.9 lb
Total Length (in.)	28.972
Body Diam. (in.)	1.5
Intrusion	3.0 in.
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	Instant. or 0.025 sec
Time Type	
Time Setting (sec)	
Target	Hard
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M14
Booster	

A nondelay or 0.025 sec delay M14 primer detonator is standard. An 0.01, 0.1, or 0.24 sec delay M14 primer detonator may be substituted in the field.

REMARKS

Explosive train is not interrupted.

SERIES: N CHAPTER: 2
DESIGNATION: M195
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M196, FUZE, BOMB

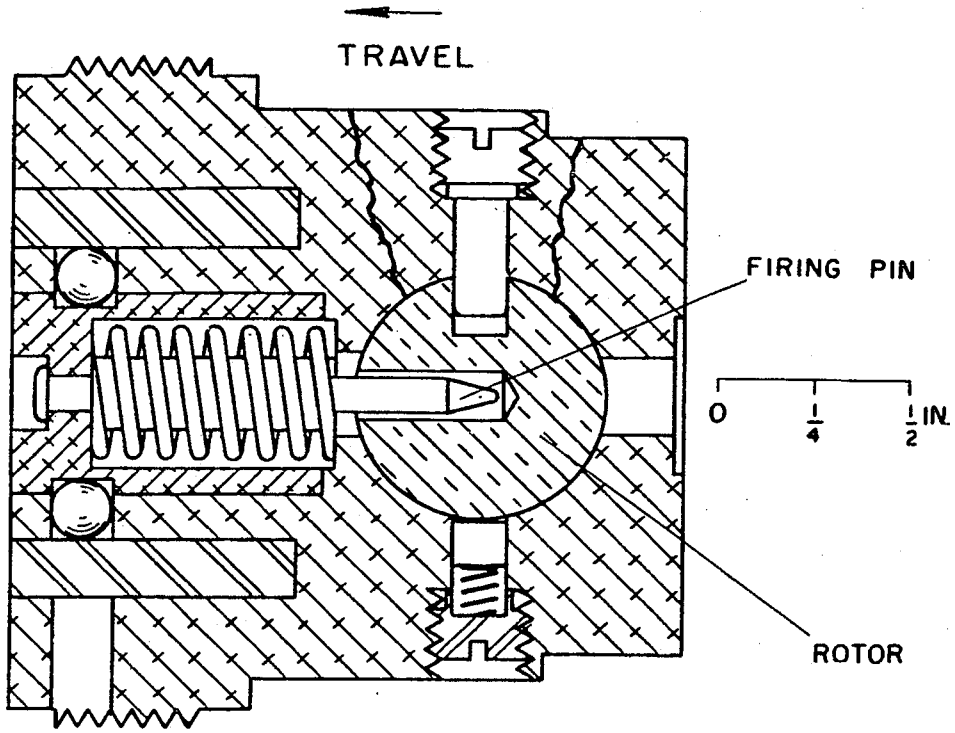

IDENTIFICATION

Agency	ARRADCOM, DRDAR-CLN-D G. Roberts, AV 584-4298
Status	obsolete
Ass'y Dwg. No.	D14-15-515
Parts List	
Specification	
Previous Number	E24R1

GENERAL

Carriers	Bomb
Cal. — Size	E54R6 - 10 lb
Location	Nose
Use	Chemical
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M196, FUZE, BOMB

ARMING DATA

Method	Opening of parachute
Delay	4 - 7 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.34 lb
Total Length (in.)	1.75
Body Diam. (in.)	
Intrusion	1.75 in.
Thread Size	1.75-16

FUNCTIONING DATA

Action	PD
Type	Mechanial
Delay	
Time Type	
Time Setting (sec)	
Target	Chemical
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M15A2
Booster	
Burster	Tetryl, 225 gr

REMARKS

Auxiliary delay mechanism E10R2 restrains fuze arming and parachute release for 4-7 seconds after release from cluster.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M198, FUZE, BOMB, NOSE, MT

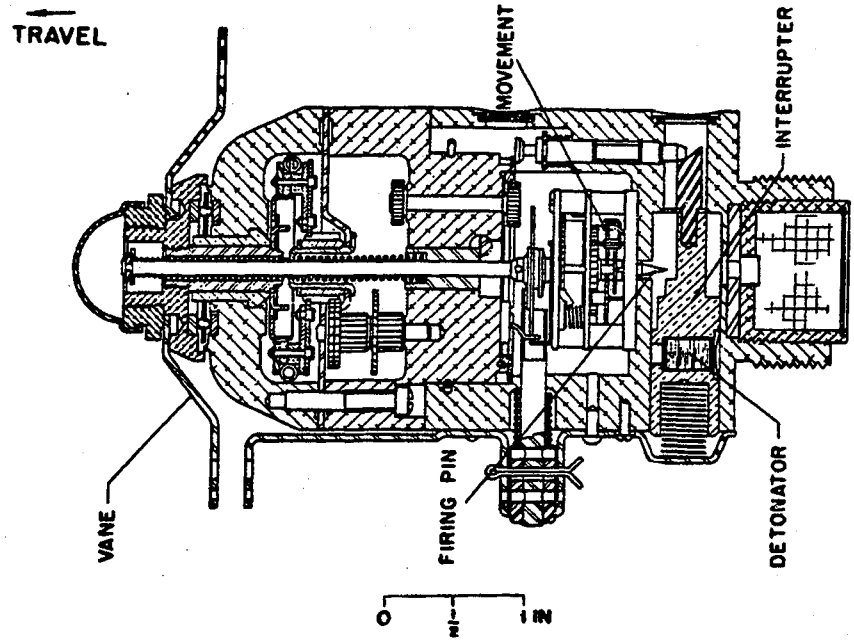

IDENTIFICATION

Agency PMTC, Code 2141, R. Villars AV 351-6420
Status Obsolete
Ass'y Dwg. No. 73-8-496, 73-8-494
Parts List
Specification
Previous Number T730E3

GENERAL

Carriers Bomb, cluster, dispenser
Cal. — Size
Location Nose
Use Photoflash flares
MIL-STD's 331, Tests 101-104,106
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M198, FUZE, BOMB, NOSE, MT

ARMING DATA

Method	Vane
Delay	2-46 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	1.816 approx.
Total Length (in.)	5.737
Body Diam. (in.)	
Intrusion	0.76 in.
Thread Size	1.5-12NS-1

FUNCTIONING DATA

Action	Time, impact
Type	Mechanical
Delay	
Time Type	Mech.,Junghans Esc.
Time Setting (sec)	9 - 92
Target	Illumination,leaflet
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M72
Detonator	
Booster	Black powder (100 gram)

REMARKS

Fuze will function on ground impact if set time does not permit airburst.

Similar to Fuzes M901 and M902 except for slider and booster. Replaced by Fuze M907E2.

Uses a constant speed arming device (clutch) which provides a constant rate of arming independent of vane speed above a threshold vane speed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-200 MOD 4, FUZE, BOMB

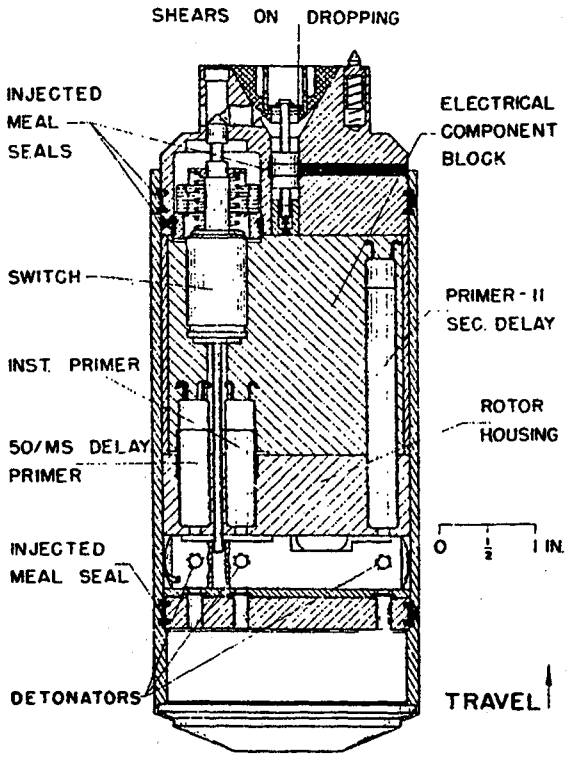

IDENTIFICATION

Agency NSWC, G44, Abell

Status Obsolete

Ass'y Dwg. No. Daystrom Elect. 4506-3807

Parts List

Specification

Previous Number

GENERAL

Carriers	Bomb
Cal. — Size	250, 1000, 2000 lb
Location	Tail
Use	HE or GP
MIL-STD's	331 tests 101-105
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	1000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-200 MOD 4, FUZE, BOMB

ARMING DATA

Method	Electric, & pyro delay
Delay	6.5-10 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

100 lb pull on cable required to unlock rotor and charge fuze

PHYSICAL DATA

Weight	5.84 lb
Total Length (in.)	7.406
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	SQ, delay, select
Type	Electric
Delay	0.05 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	.125
Max Obliq. (°)	90
Velocity (fps)	1000
Carrier	EX-2

POWER SUPPLY

Special DC supply

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 127, MK 129
Detonator	MK 62 MOD 0
Booster	Tetryl 96 gm
Lead	Tetryl

Pyro delays 2 sec or 4 sec

REMARKS

Never put into production.

SERIES: N CHAPTER: 2
DESIGNATION: EX 200 MOD 4
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN MK 219, FUZE, BOMB

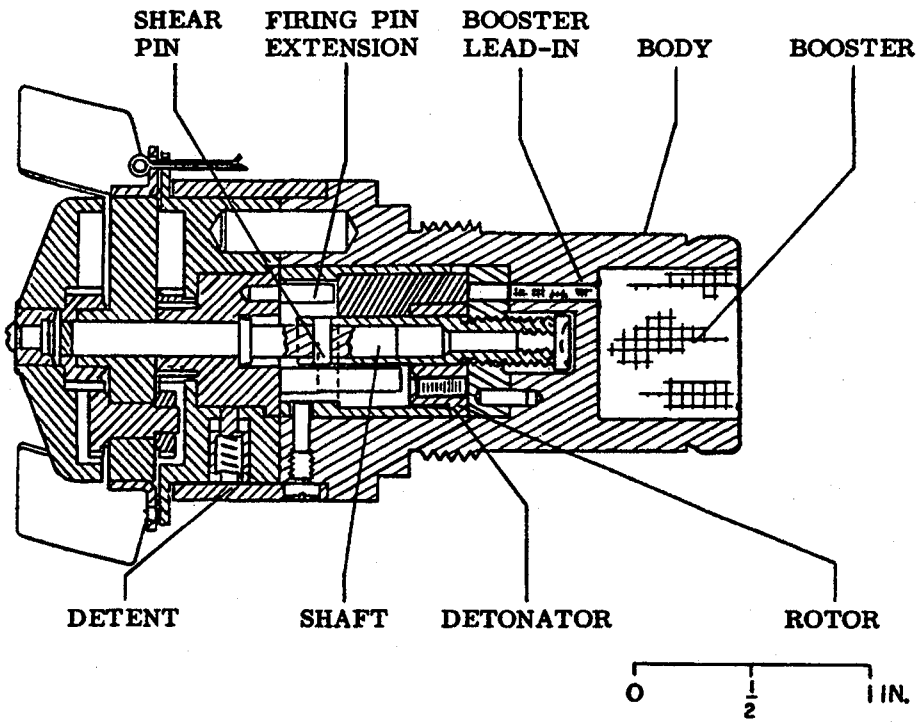

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 202656
Parts List	
Specification	
Previous Number	MK XIX

GENERAL

Carriers	Bomb
Cal. — Size	100, 500, 1000 lb GP; 100 lb 30 lb Frag; 500, 1000 lb LC. All depth Army GP. All service types
Location	Nose
Use	HE or GP, chemical, depth
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN MK 219, FUZE, BOMB

ARMING DATA

Method	Vane
Delay	1000 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	4.1 lb
Total Length (in.)	5.5
Body Diam. (in.)	2.75
Intrusion	2.6 in.
Thread Size	1.75-14NS

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 21 MOD 0
Booster	Tetryl, 25.5 gm
Lead	Tetryl

REMARKS

Identical to Fuze MK 152 except for arming vane arrangement

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M220, FUZE, BOMB, TIME

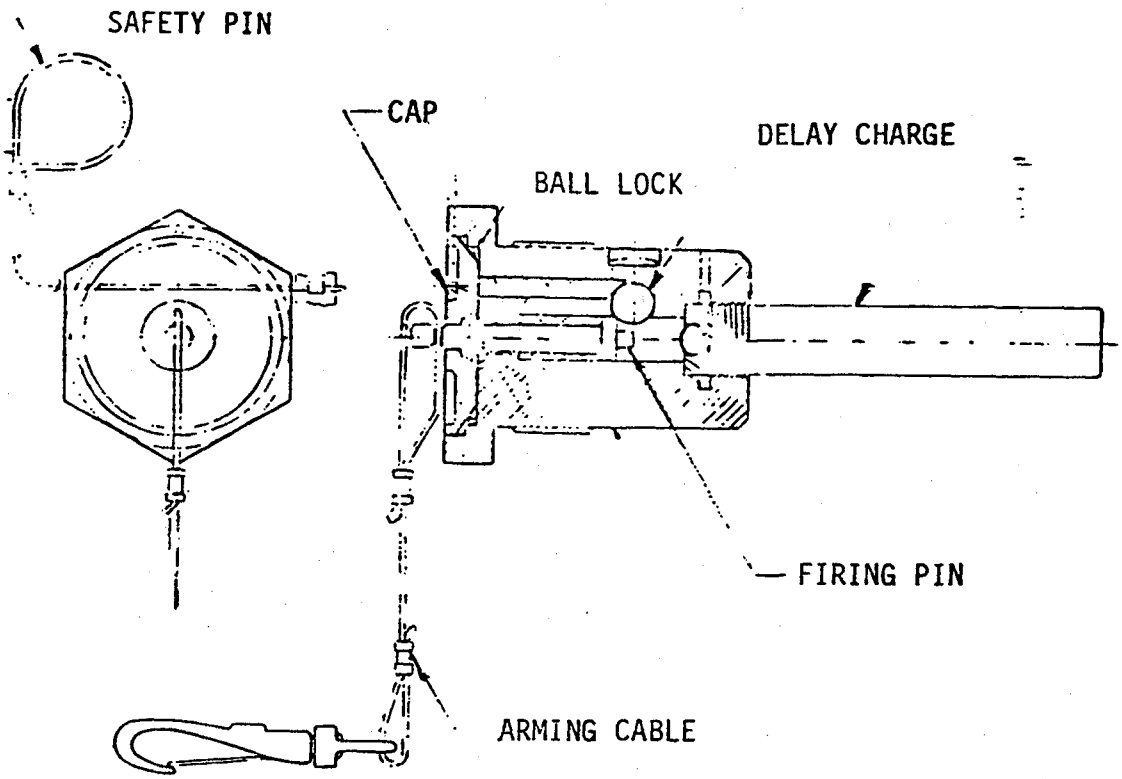

IDENTIFICATION

Agency: ARRADCOM, DRDAR-CLN-D
G. Roberts, AV 584-4298

Status: Obsolete

Ass'y Dwg. No.: D31-23-3

Parts List: B31-23-1

Specification: PD196-131-785

Previous Number:

GENERAL

Carriers: Bomb, Parachute

Cal. — Size: 50 lb

Location: Top

Use: Chemical

MIL-STD's: 331, Tests 101-105, 107, 108, 112, 114

Max Values

Rotat. (rp.

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M220, FUZE, BOMB CLUSTER

ARMING DATA

Method	Parachute
Delay	12 sec (Pyrotechnic)
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	8 oz
Total Length (in.)	3.08
Body Diam. (in.)	1.375
Intrusion	
Thread Size	1.18 - 18UNF-2A

FUNCTIONING DATA

Action	Mechanical, chemical
Type	Pyrotechnic
Delay	12 sec
Time Type	
Time Setting (sec)	
Target	Chemical
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M42
Detonator	
Booster	Ignition mix (pyrotechnic)

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 221, FUZE, BOMB

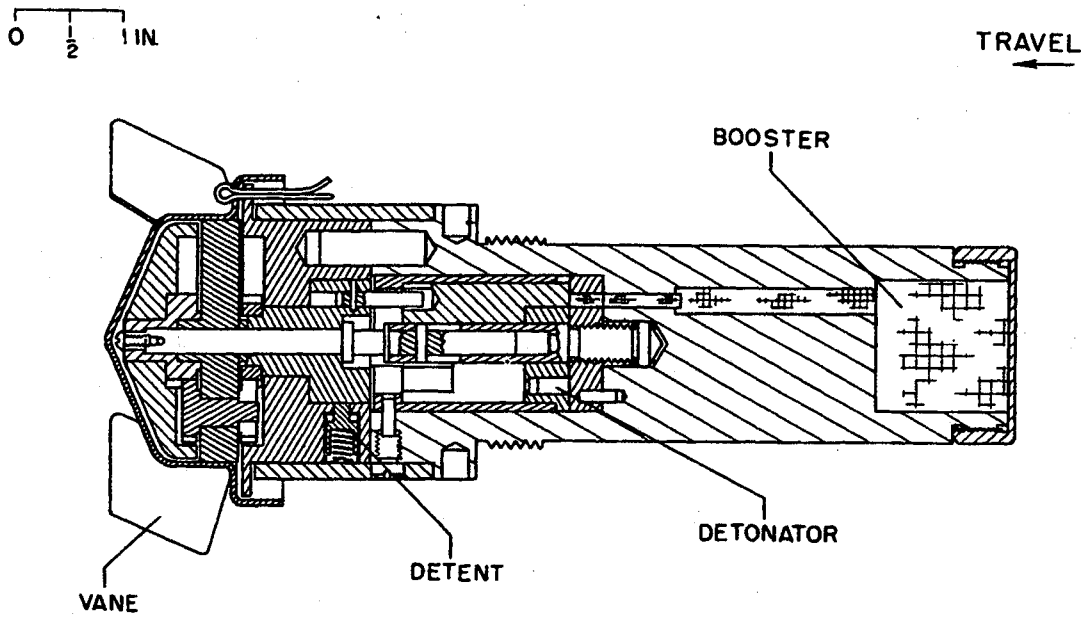

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 202618
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	500 lb GP, Demo, 1000 lb GP, Demo
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	400

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 221, FUZE, BOMB

ARMING DATA

Method	Vane
Delay	850-1000 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	7.67 lb
Total Length (in.)	8.5
Body Diam. (in.)	
Intrusion	5 in.
Thread Size	2-12NS-3

FUNCTIONING DATA

Action	PI
Type	Mechanical
Delay	0.01 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	Mercury fulminate
Detonator	Mercury fulminate
Booster	Tetryl, 1.4 oz
Delay	Blk. powder
Aux. Booster Lead in	Tetryl

REMARKS

SERIES: N CHAPTER: 2
DESIGNATION: MK 221
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 223, FUZE, BOMB

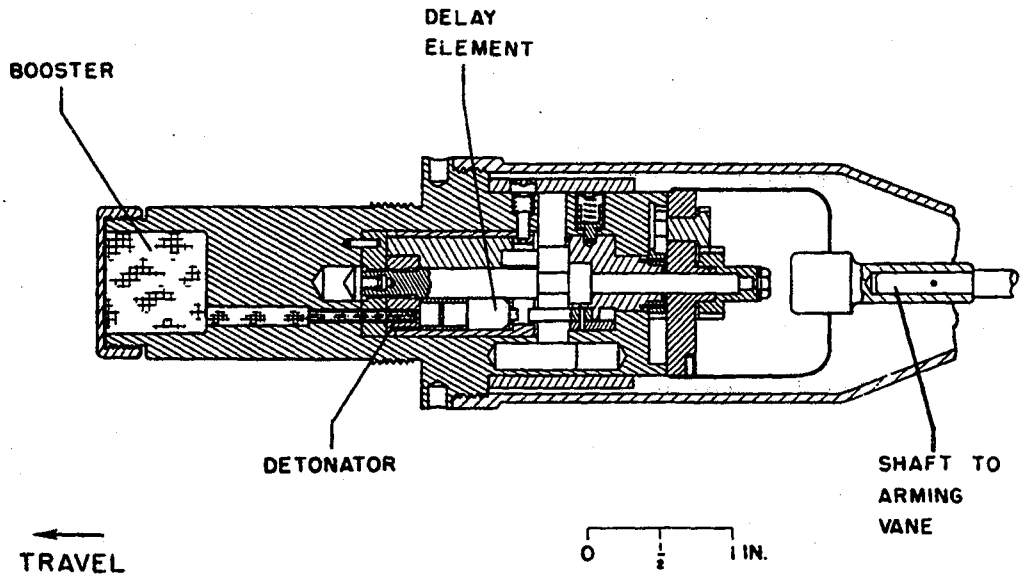

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 202619
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	500 lb GP, 600 lb, Demo, 1000 lb GP, Demo
Location	Tail
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	400

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 223, FUZE, BOMB

ARMING DATA

Method	Vane
Delay	850-1100 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	10.5 lb
Total Length (in.)	16.4
Body Diam. (in.)	
Intrusion	4.0 in.
Thread Size	2-12NS-2

FUNCTIONING DATA

Action	PI
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

None

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 105 MOD 1
Detonator	MK 40 MOD 0
Booster	Tetryl 1.4 oz
Delay	Blk. powder
Aux. Booster	Tetryl

REMARKS

SERIES: N CHAPTER: 2
DESIGNATION: MK 223
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 227, FUZE, BOMB

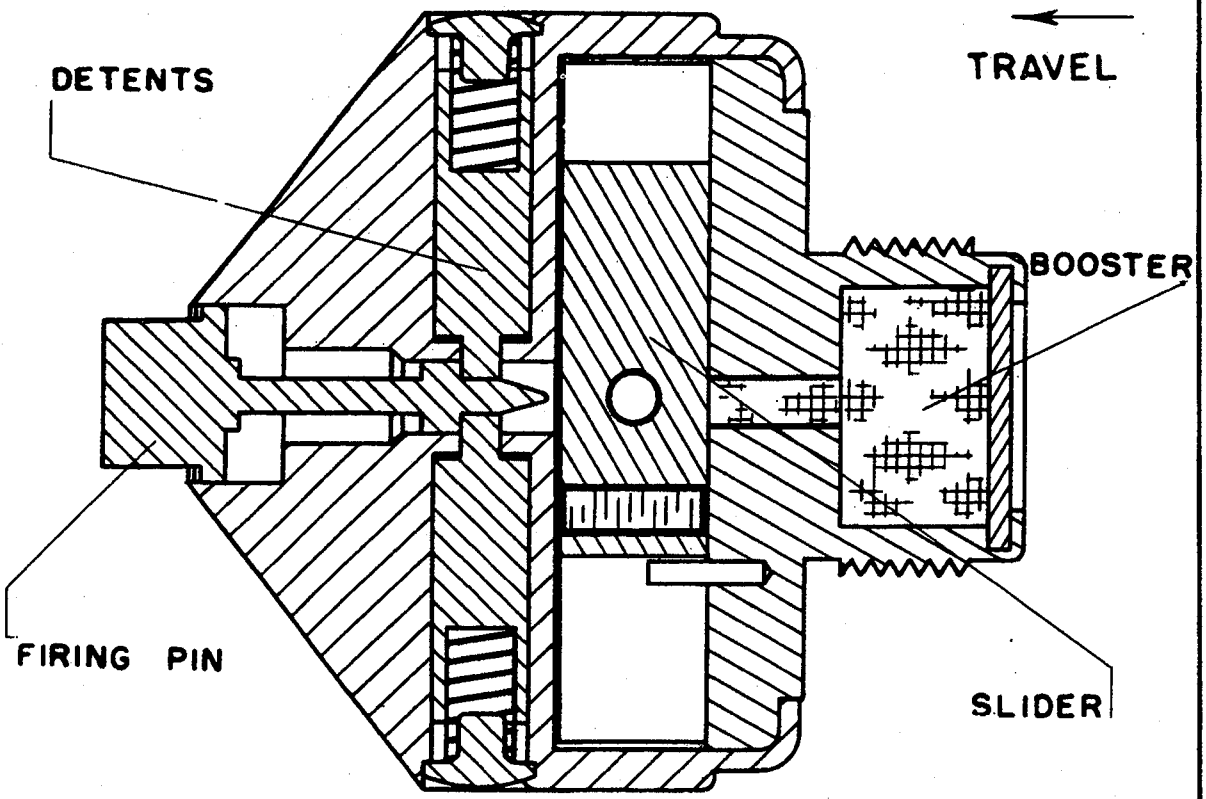

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 236875
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	5 lb Antiaircraft bomb
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 227, FUZE, BOMB

ARMING DATA

Method	Spin
Delay	500-3000 ft
Rotation (rps)	
Non-arm	**Arm** 25
Setback (g)	
Non-arm	**Arm**
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.7 lb
Total Length (in.)	2.21
Body Diam. (in.)	
Intrusion	0.56 in.
Thread Size	

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	0.001 (inherent) sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

None

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	Mercury fulminate
Booster	Tetryl 0.1 oz

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN MK 228, FUZE, BOMB

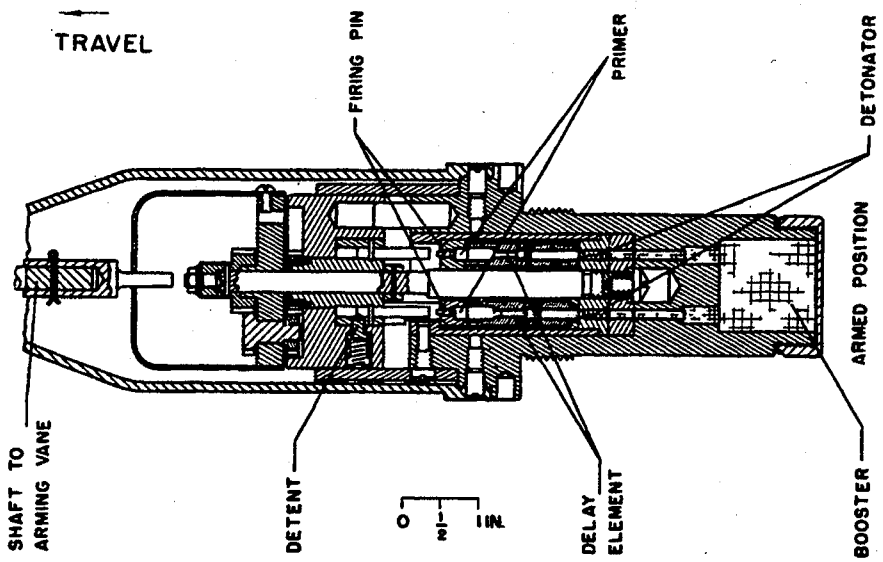

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 236220
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	1000 lb AP, 1600 lb AP, 1600 lb AP
Location	Tail
Use	AP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AN MK 228, FUZE, BOMB

ARMING DATA

Method	Vane
Delay	1100 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes (glass windows)

PHYSICAL DATA

Weight	10.5 lb
Total Length (in.)	16.4
Body Diam. (in.)	
Intrusion	4.0 in.
Thread Size	2-12NS-3

FUNCTIONING DATA

Action	BD
Type	Mechanical
Delay	0.08 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 105 MOD 1
Detonator	MK 58 MOD 0
Booster	Tetryl 38.2 gm
Det.	MK 40 MOD 0 (rotor)

REMARKS

Fuze will operate on water impact when bomb is released from attitudes in excess of 4500 ft

Fuze has two explosive trains for greater reliability

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 230 MOD 4B, FUZE, HYDROSTATIC BOMB

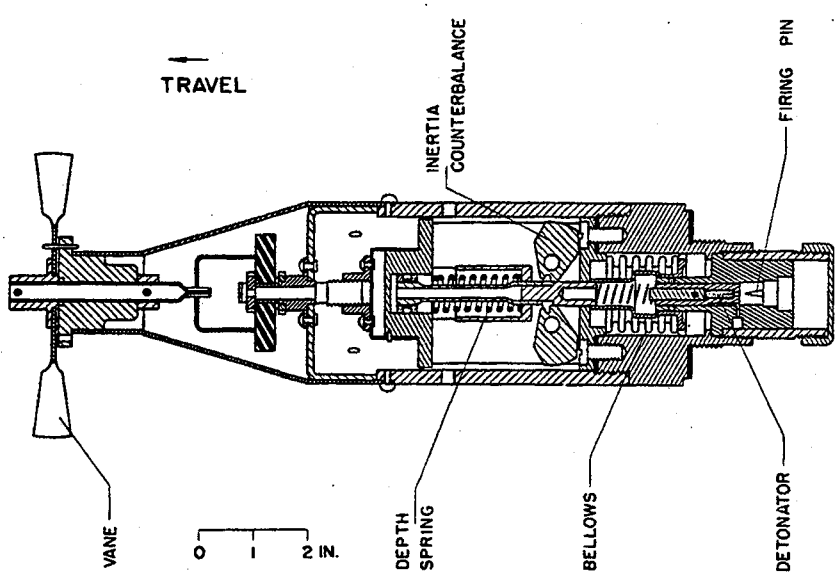

IDENTIFICATION

Agency NSWC, G44, Abell

Status Obsolete

Ass'y Dwg. No. GA 344724 (MOD 4)

Parts List GA 344703 (MOD 6)

Specification GA 344740 (MOD 5)

Previous Number

GENERAL

Carriers Bomb

Cal. — Size 350, 500, 1000, 2000 lb

Location Tail

Use HE, GP, Depth

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 230 MOD 4B, FUZE, HYDROSTATIC BOMB

ARMING DATA

Method	Vane
Delay	300-400 ft air travel
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	No

Cannot arm accidentally when bomb is dropped safe

PHYSICAL DATA

Weight	15 lb
Total Length (in.)	15.4
Body Diam. (in.)	3.38
Intrusion	2.6 in.
Thread Size	2-12NS-3

FUNCTIONING DATA

Action	BD, Hydrostatic pressure
Type	Mechanical, hydrostatic
Delay	
Time Type	
Time Setting (sec)	
Target	Submarine
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

None

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 65 MOD 0
Booster	Tetryl 13 gm (5)
Other	22 gm (4&6)

Bomb MK 54, depth only, uses Aux. Booster MK 1

REMARKS

MODS 4, 5, and 6 are obsolesent

Bomb MK 54, depth only, uses Aux. Booster MK 1

MOD 4 has accuracy of 50 ft setting emphasized

MODS 5, 6 have accuracy of 25 ft setting emphasized

Depth setting (ft) 25, 50, 75, 100, 125

SERIES: N CHAPTER: 2
DESIGNATION: MK 230 MOD 4B
Bomb Hydrostatic Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 243 MOD 0, FUZE, BOMB

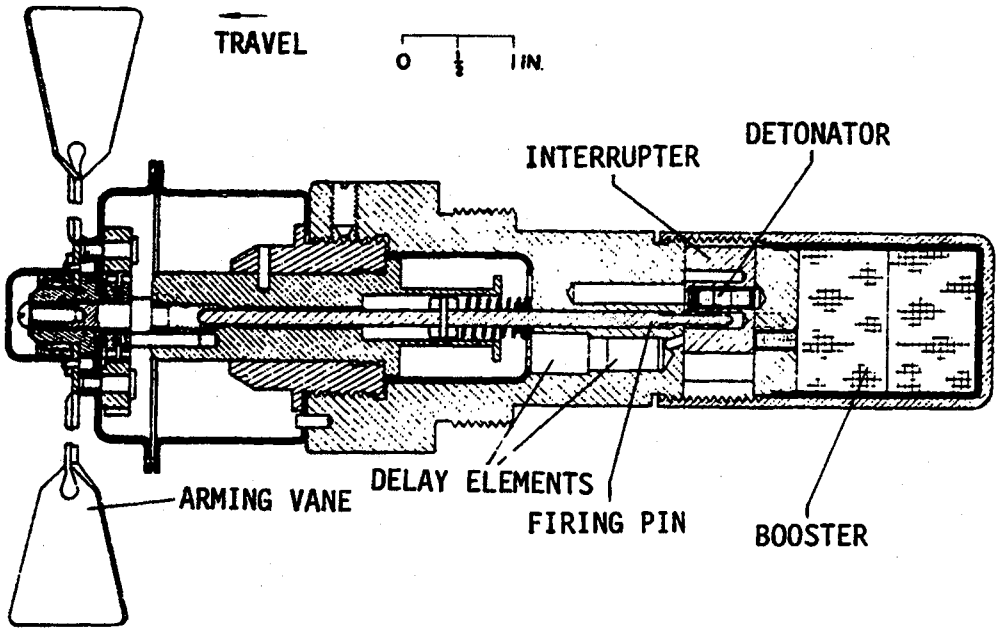

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 344638
Parts List	SK 102967
Specification	MIL-F-18663
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	500, 1000, 2000 lb GP
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 243 MOD 0, FUZE, BOMB

ARMING DATA

Method	Vane
Delay	450 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	4.4 lb
Total Length (in.)	8.9
Body Diam. (in.)	2.5
Intrusion	5.0 in.
Thread Size	2-12NS-2

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	0.025 sec
Time Type	
Time Setting (sec)	
Target	Subs & surface vessels
Sensitivity	
Material	Steel plate
Thickness (in.)	.025
Max Obliq. (°)	45
Velocity (fps)	
Carrier	

POWER SUPPLY

None

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 105 MOD 0
Detonator	MK 58 MOD 0
Booster	Tetryl 53.5 gm
Det.	MK 22 MOD 0 (rotor)
Lead	Tetryl
Adapter Booster	T45E1, E4

REMARKS

Will not function on water impact on release altitudes less than 20,000 ft

Similar to Fuze MK 244, except it is less sensitive

SERIES: N CHAPTER: 2
DESIGNATION: MK 243 MOD 0
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 244 MOD 1, FUZE, BOMB

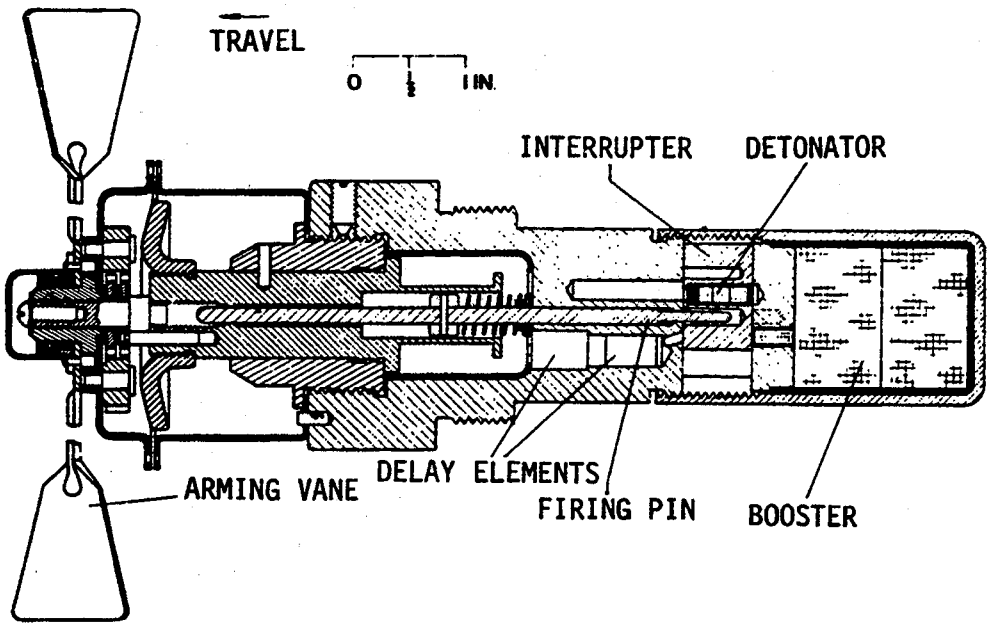

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 344764
Parts List	LD 166511
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	500, 1000, 2000 lb GP
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 244 MOD 1, FUZE, BOMB

ARMING DATA

Method	Vane
Delay	450 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	4.4 lb
Total Length (in.)	8.9
Body Diam. (in.)	2.5
Intrusion	5.0 in.
Thread Size	2-12NS-2

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	4.0 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

None

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 105 MOD 1
Detonator	MK 85 MOD 0
Booster	T45E1, E4
Det.	MK 22 MOD 0 (rotor)

REMARKS

Similar to Fuze MK 243 except more sensitive because of added striker plate and reduced shear threads

Will fire on water impact from 3000 ft

Will fire on soft earth from 1000 ft

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 247 MOD 0, FUZE, BOMB

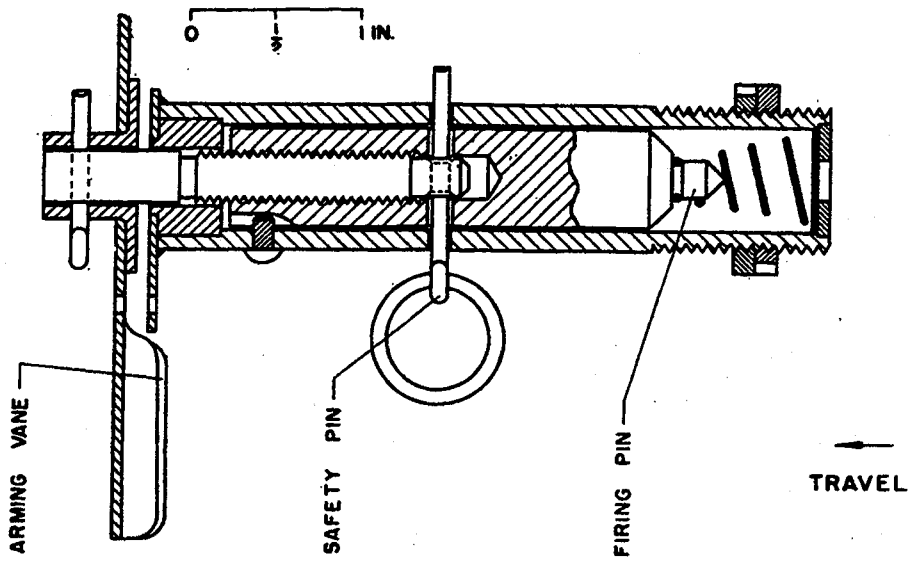

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 398792
Parts List	PL 166545
Specification	OS 3786
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	
Location	Tail
Use	Practice
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 247 MOD 0 FUZE, BOMB

ARMING DATA

Method	Vane, Jumpout pin
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	0.625 lb
Total Length (in.)	4.6
Body Diam. (in.)	
Intrusion	0.75 in.
Thread Size	0.5-NPSL

FUNCTIONING DATA

Action	BD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

None

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

Fuze has no self contained explosive train. A blank .38 cal cartridge is used with it to set off main charge of signal which is in turn fastened to appropriate practice Bomb.

REMARKS

SERIES: N CHAPTER: 2
DESIGNATION: MK 247 MOD 0
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 255 MOD 0, FUZE, BOMB ELECTRIC

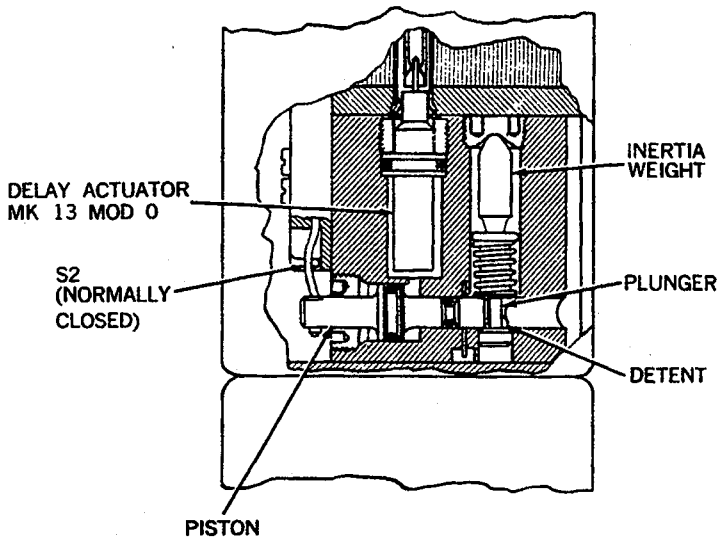

IDENTIFICATION

Agency NSWC, G44, Abell
Status Obsolete
Ass'y Dwg. No. GA 2118442
Parts List LD 496889
Specification OS 7841
Previous Number XB-113A

GENERAL

Carriers Bomb
Cal. — Size 250, 500, 1000, 2000 lb

Location Tail
Use HE
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 255 MOD 0, FUZE, BOMB ELECTRIC

ARMING DATA

Method	Electric, impact
Delay	1.5 sec, completed at impact
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	5.0 lb
Total Length (in.)	7.612
Body Diam. (in.)	2.875
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Impact
Type	Electro-Mechanical
Delay	5 min
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

None

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 145 MOD 0
Detonator	MK 50 MOD 0
Booster	Tetryl
Delay Actuator	MK 13 MOD 0

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 256, FUZE, BOMB

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	1800438
Parts List	LD 486281
Specification	
Previous Number	XB125A

GENERAL

Carriers	Bomb
Cal. — Size	
Location	Nose
Use	Practice
MIL-STD's	331, Tests 101-107
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 256, FUZE, BOMB

ARMING DATA

Method

Delay

Rotation (rps)

Non-arm **Arm**

Setback (g)

Non-arm **Arm**

Arming Wire

External Indicat.

This practice fuze contains no arming device

PHYSICAL DATA

Weight

Total Length (in.) 3.238

Body Diam. (in.)

Intrusion 0.890 in.

Thread Size 1-1/2

FUNCTIONING DATA

Action Time

Type Mechanical

Delay

Time Type Mechanical, Junghans

Time Setting (sec) Esc.

Target Ground

Sensitivity

Material

Thickness (in.)

Max Obliq. (°)

Velocity (fps)

Carrier

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

T3 movement started by arming wire; at end of set time, fires signal cartridge

SERIES: N CHAPTER: 2
DESIGNATION: MK 256
Bomb MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 257 MOD 0, FUZE, BOMB ELECTRIC

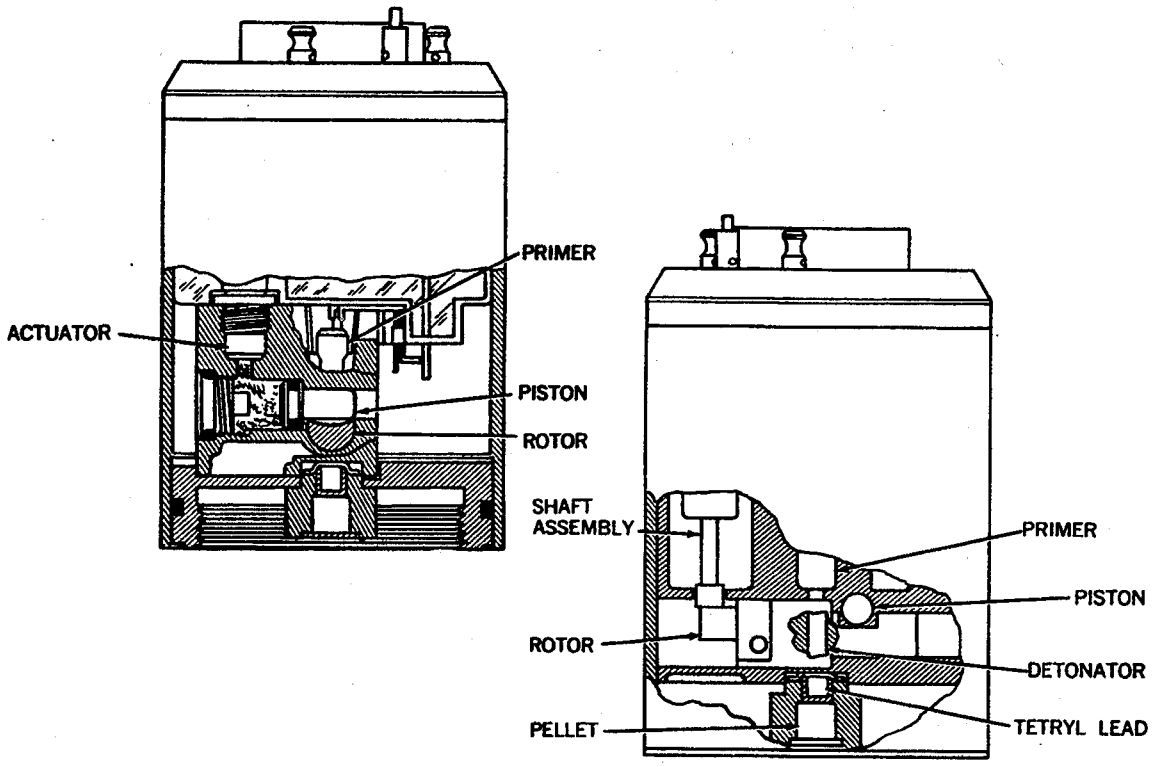

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 1519294
Parts List	LD 479816
Specification	
Previous Number	XB-66C

GENERAL

Carriers	Bomb
Cal. — Size	1000 lb Fire bomb
Location	Sidewell
Use	Fire bomb
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 257 MOD 0, FUZE, BOMB ELECTRIC

ARMING DATA

Method	RF impulse, DC voltage
Delay	1.6 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	2.0 lb
Total Length (in.)	5.0
Body Diam. (in.)	2.75
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Impact, proximity
Type	Electro-Mechanical
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 114 MOD 1
Detonator	MK 50 MOD 0
Booster	
Lead	Tetryl
Delay Actuator	MK 14 MOD 0

REMARKS

M20 sensing element used with this fuze for airburst capability

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 347 MOD 0, FUZE, BOMB

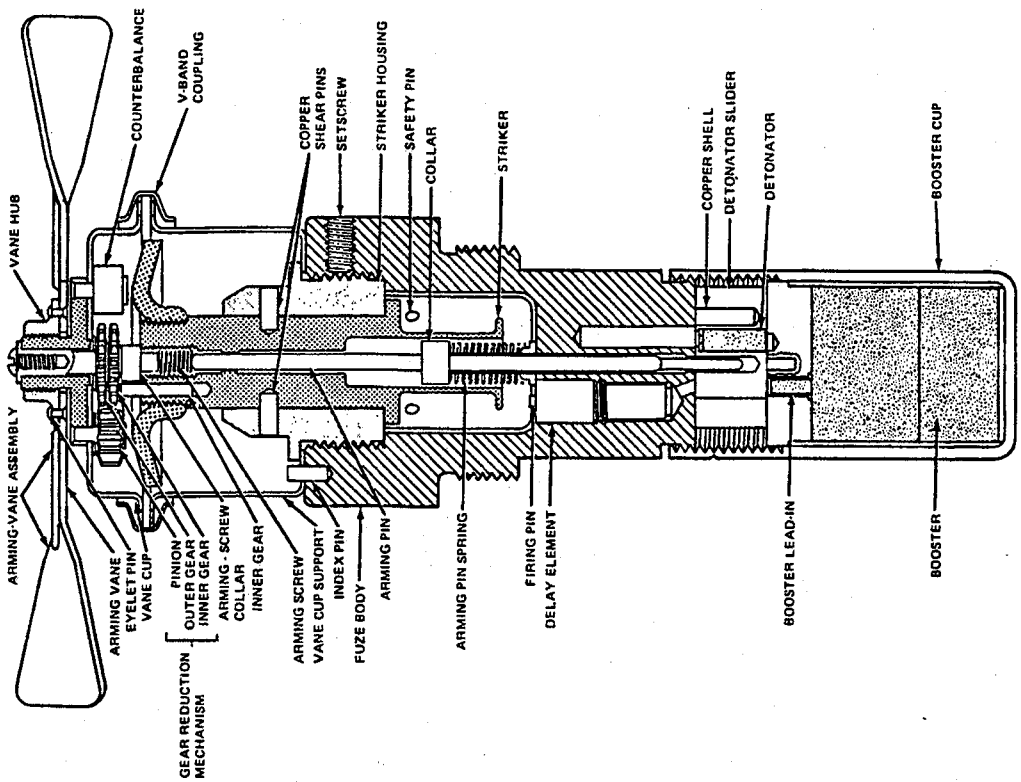

IDENTIFICATION

Agency NSWC, G44, Abell

Status Obsolete

Ass'y Dwg. No. 2421476

Parts List LD 549709

Specification

Previous Number

GENERAL

Carriers Bomb

Cal. — Size 250, 500, 1000, 2000 lb

Location Nose

Use HE, GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

Group 3

KEY FEATURES

Will fire on soft target impact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 347 MOD 0, FUZE, BOMB

ARMING DATA

Method	Vane
Delay	450 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	5.0 lb
Total Length (in.)	8.9
Body Diam. (in.)	2.5
Intrusion	5.0 in.
Thread Size	2 in.

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	12 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

None

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Adapter T45E1, or T45E4
Lead	Tetryl

REMARKS

Low speed delivery from A-1 aircraft.

Modified MK 244 MOD 1.

12-SEC (nominal) firing delay.

Compatible with Mk 81 and Mk 82 SNAKEYE I Bombs on A-1 aircraft.

SERIES: N CHAPTER: 2
DESIGNATION: MK 347 MOD 0
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

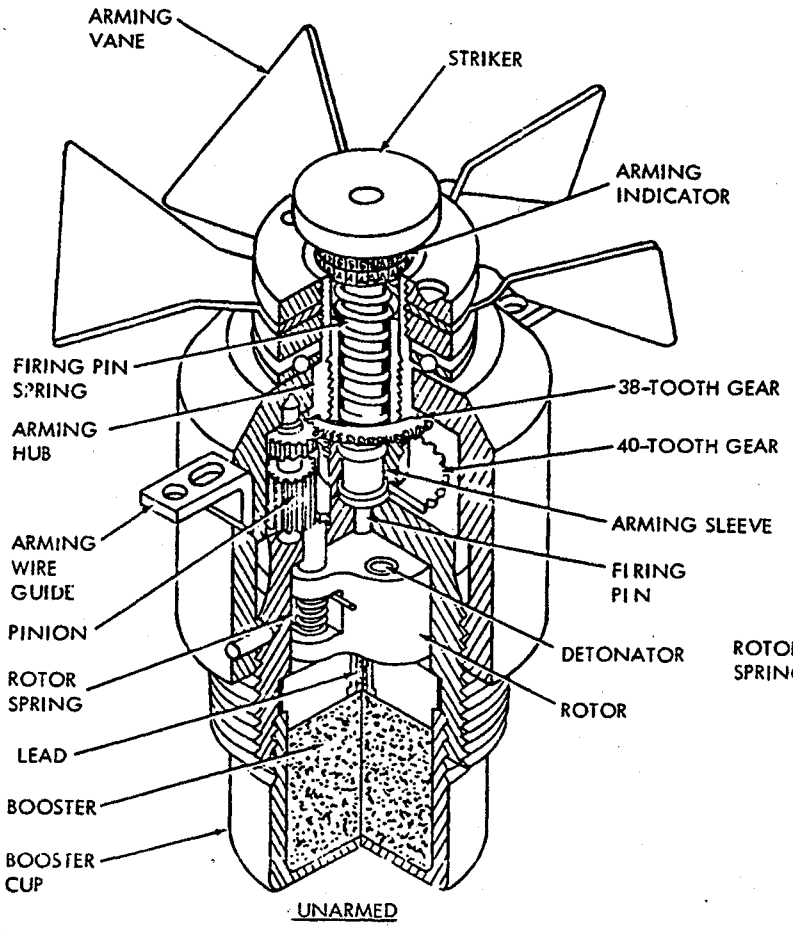

UNARMED

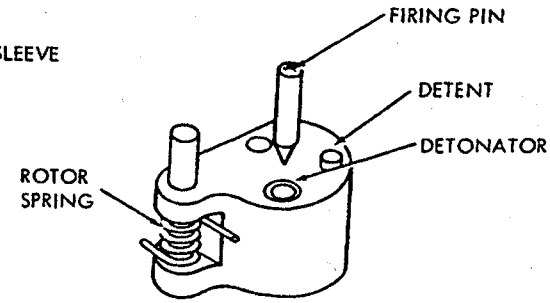

ROTOR IN ARMED POSITION

- OVERALL SIZE -	- INTRUSION -	WT: 1.02 lb (462.7 g)
LG: 3.8 in (96.5 mm)	DP: 1.352 in (34.3 mm)	THD: 1.5-12NF-1
XSECT: 1.75 in (44.5 mm)	DIA: 1.5 in (38.1 mm)	THD DP: 0.5 in (12.7 mm)

IDENTIFICATION
- AGENCY: NAWC, Point Mugu
- CONTACT: Morgan, D
- PHONE: DSN 351-6416
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 2 499 565
- PARTS LIST: 2 498 122
- SPEC: AS 1098
- PUB: NAVAIR 11-1F-2

- NATIONAL STOCK NO: 1325-00-935-6079
- DODIC: F689
- PRIOR MODEL NO: EX 374
- SIMILAR TO: M158, M159

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: Bomb

- AMMUNITION: HE, Mk 115-0 Helicopter Trap Weapon (HTW)

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY: 150 KIAS

- CREEP:
- FLIGHT TIME: NA

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 2-275 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Arming wire

SECOND SAFETY:
Vane
200 turns to arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Armed if red indicator between striker head and body is showing
ARMING TIME OR DISTANCE:
Bomb trajectory

EXPLOSIVE COMPONENTS

S&A DEVICE: Spring-driven, out-of-line explosive train
PRIMER: None

DETONATOR: M20

LEAD: 96 mg Tetryl

BOOSTER: 16 g Tetryl

OTHER: None

FUNCTIONING DATA
MODES: Impact
TYPE: Mechanical
CHARACTERISTICS:
0.000 s

TARGET: Ground
SENSITIVITY:
Functions on water

FUNCTION TEMP:

MODE ON DELIVERY:
Impact

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0408
US HCSDS: None
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: A
NET EXPL WT: 16.456 g
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
The Mk 374 Mod 0 Bomb Fuze has an out-of line explosive train and functions instantaneously on impact. On release, the arming wire is withdrawn from the vane, freeing it to rotate in the airstream. Rotation of the vane through a gear train produces forward motion of the arming sleeve. This motion moves the firing pin with its striker head forward about 1/4 to 1/3 inch. Extraction of the firing pin from a hole in the rotor allows the rotor to move to the armed position by the force of a spring. This aligns the detonator with the firing pin. On impact, the striker head is driven inward against the firing pin spring, driving the firing pin into the detonator initiating the firing train. The Mk 374-1 is the same except the arming vane pitch is 75 degrees instead of 45 degrees and it requires a longer time to arm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

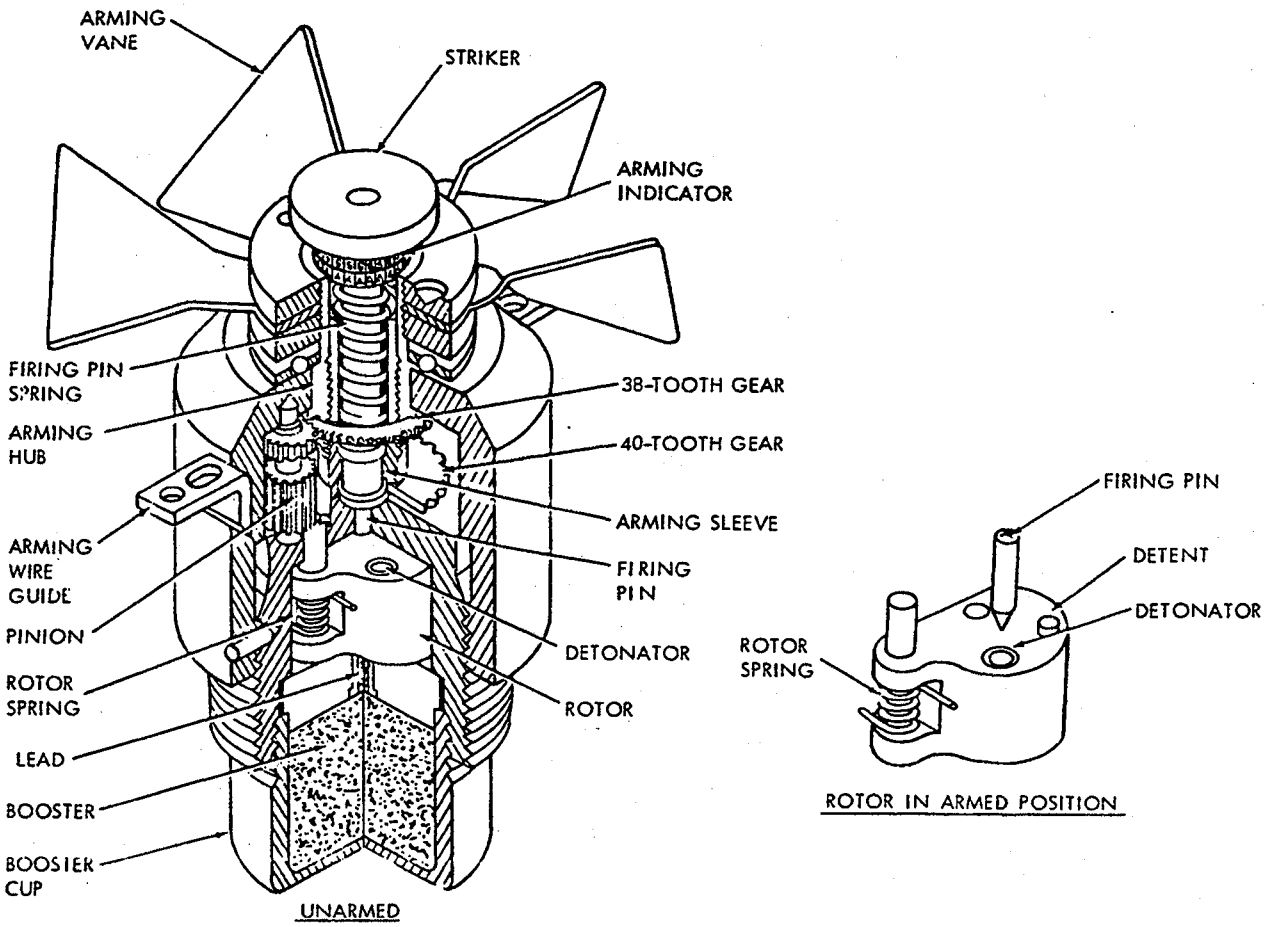

- OVERALL SIZE -	- INTRUSION -	WT: 1.02 lb (462.7 g)
LG: 3.93 in (99.8 mm)	DP: 1.352 in (34.3 mm)	THD: 1.5-12NF-1
XSECT: 1.75 in (44.5 mm)	DIA: 1.5 in (38.1 mm)	THD DP: 0.5 in (12.7 mm)

IDENTIFICATION
- AGENCY: NAWC, Point Mugu
- CONTACT: Morgan, D
- PHONE: DSN 351-6416
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 2 495 085
- PARTS LIST:
- SPEC: AS 1098
- PUB: NAVAIR 11-1F-2

- NATIONAL STOCK NO:
  1325-00-402-8600
- DODIC: F736
- PRIOR MODEL NO: EX 374
- SIMILAR TO: M158, M159

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: Bomb

- AMMUNITION:
  HE, Mk 115-0 Helicopter
  Trap Weapon (HTW)

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY: 300 KIAS

- CREEP: HD (parachute)
- FLIGHT TIME: NA

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Arming wire

SECOND SAFETY:
Vane

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Armed if red indicator between striker head and body is showing
ARMING TIME OR DISTANCE:
Bomb trajectory

EXPLOSIVE COMPONENTS

S&A DEVICE: Spring-driven out-of-line explosive train
PRIMER: None

DETONATOR: M20

LEAD: 96 mg Tetryl

BOOSTER: 16 g Tetryl

OTHER: None

FUNCTIONING DATA
MODES: Impact
TYPE: Mechanical
CHARACTERISTICS:
0.000 s

TARGET: Ground
SENSITIVITY:
Functions on water

FUNCTION TEMP:

MODE ON DELIVERY:
Impact

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0408
US HCSDS: None
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: A
NET EXPL WT: 16 g
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
The Mk 374 Mod 1 Bomb Fuze has an out-of-line explosive train and functions instantaneously on impact. On release, the arming wire is withdrawn from the vane, freeing it to rotate in the airstream. Rotation of the vane through a gear train produces forward motion of the arming sleeve. This motion moves the firing pin with its striker head forward about 1/4 to 1/3 inch. Extraction of the firing pin from a hole in the rotor allows the rotor to move to the armed position by the force of a spring. This aligns the detonator with the firing pin. On impact, the striker head is driven inward against the firing pin spring, driving the firing pin into the detonator initiating the firing train. The Mk 374-0 is the same except the arming vane pitch is 45 degrees instead of 75 degrees and it requires a shorter time to arm.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM590E2, FUZE, TIME

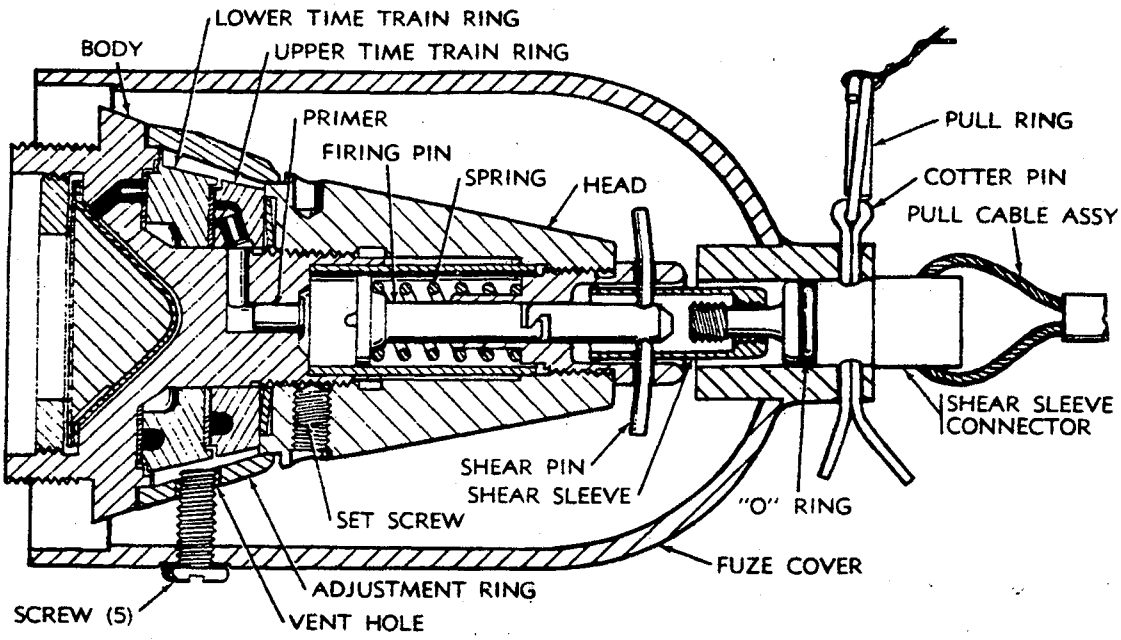

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCN-T 3060 McCann
Status	Terminated
Ass'y Dwg. No.	F9219113
Parts List	9219113
Specification	MIL-F-60367
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	5 in.
Location	Nose
Use	Pyrotechnic
MIL-STD's	331 Tests 101 - 105, 106, 111, 114
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	32

KEY FEATURES

Fuze can be preset by turning a time graduated ring similar to the M84 fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM590E2, FUZE, TIME

ARMING DATA

Method	200 lb pull on pull cable assembly
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Lanyard
External Indicat.	Yes

PHYSICAL DATA

Weight	35 oz
Total Length (in.)	8 1/2
Body Diam. (in.)	3 1/2
Intrusion	0.29 in.
Thread Size	2.400-18NS-1A

FUNCTIONING DATA

Action	PI, time
Type	Mechanical
Delay	500 - 4500 ft
Time Type	Pyrotechnic
Time Setting (sec)	5 - 25 sec
Target	Flare
Sensitivity	Pull cable assembly arrested by pull of 200 lb
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M39A1
Detonator	Pellets, blk pdr & $BKNO_3$
Booster	
Expelling Charge	Black powder, 1/4 gm

REMARKS

SERIES: A CHAPTER: 2
DESIGNATION: XM590E2
Time Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T702E1, FUZE, BOMB, NOSE, PROXIMITY

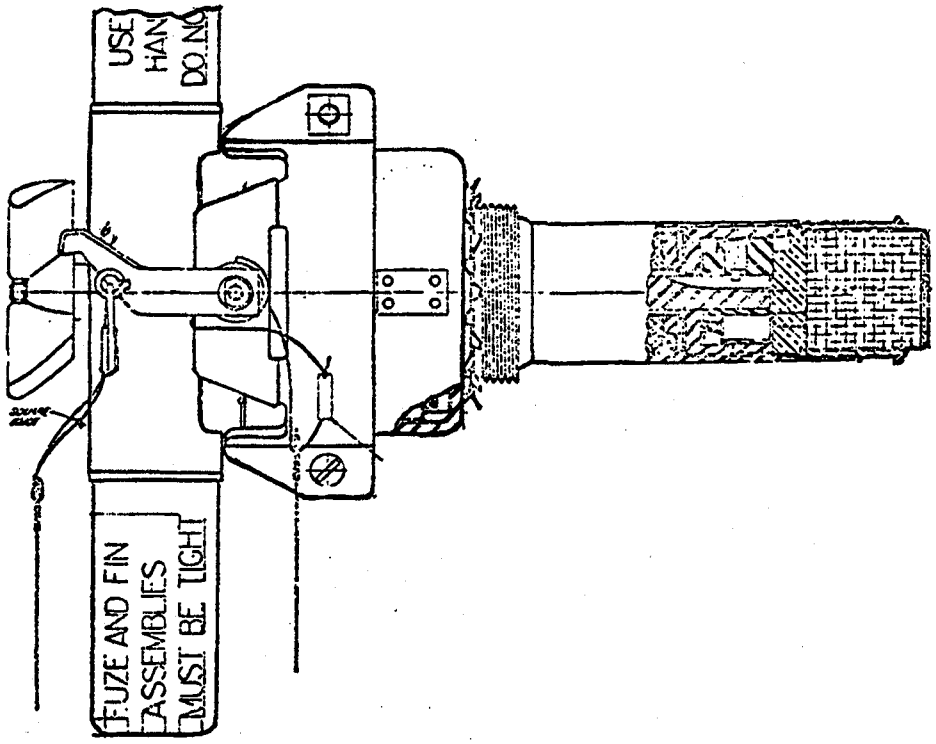

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE
	L. Tozzi
Status	AV 290-2400
	Terminated
Ass'y Dwg. No.	FF4064
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	100, 260, 500, 1000 and 2000 lb
Location	Nose
Use	Shaped charge
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T702E1, FUZE, BOMB, NOSE, PROXIMITY

ARMING DATA

Method	Vane
Delay	2000 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	4.5 lb
Total Length (in.)	10.065
Body Diam. (in.)	
Intrusion	5.09 in.
Thread Size	2-12NS-1A

FUNCTIONING DATA

Action	Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M36A1
Booster	Tetryl

REMARKS

Requirement withdrawn after a small pilot production run was made

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T704, FUZE, BOMB, PROXIMITY

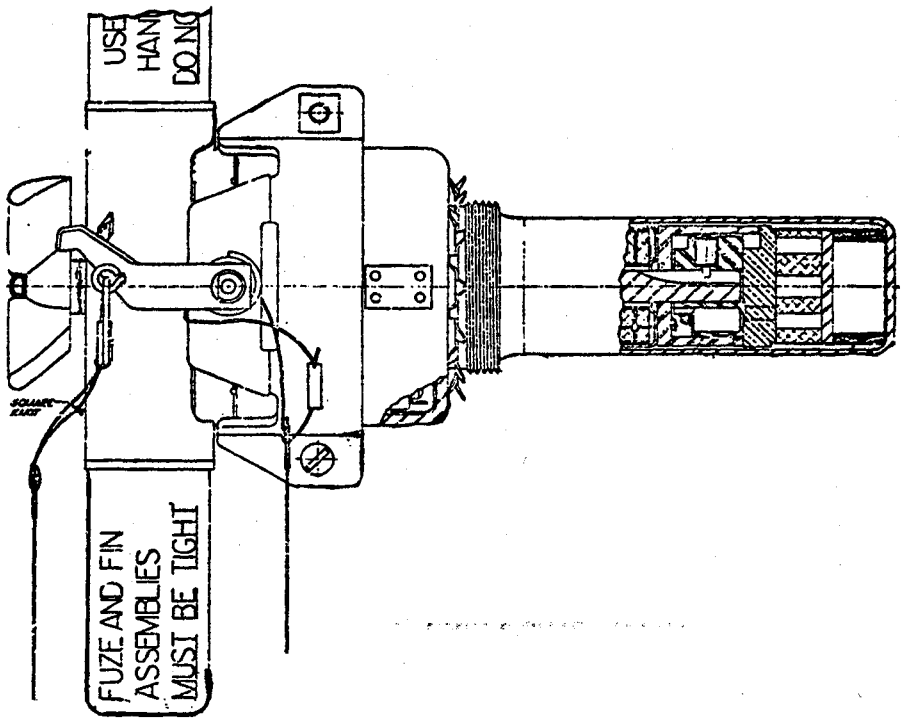

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi AV 290-2400
Status	Terminated
Ass'y Dwg. No.	FF4036
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	100, 260 and 500 lb
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T704, FUZE, BOMB, PROXIMITY

ARMING DATA

Method	Vane
Delay	2000 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	4.5 lb
Total Length (in.)	10.065
Body Diam. (in.)	
Intrusion	5.09 in.
Thread Size	2-12NS-1A

FUNCTIONING DATA

Action	BD, Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M36A1
Booster	

REMARKS

When VT fuze functioned, setback produced by propellant in explosive train initiated tail fuze of T57 type

Requirement withdrawn just prior to service evaluation

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T736, FUZE, BOMB, TAIL, MECHANICAL TIME

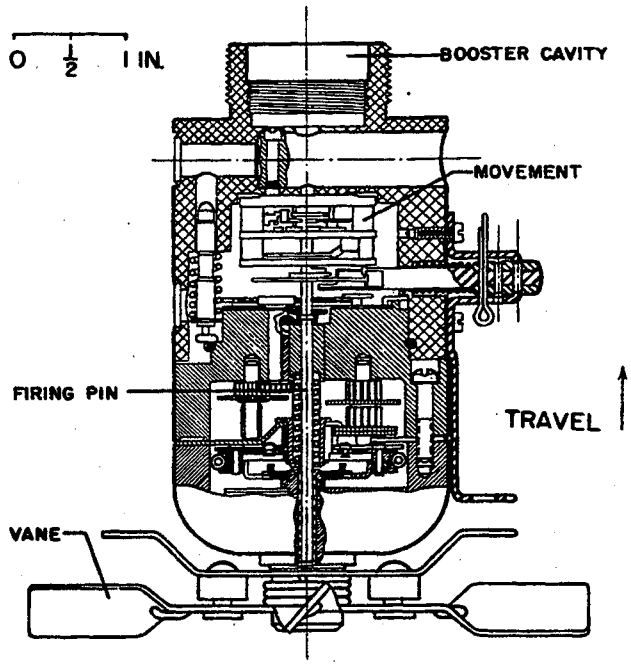

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Terminated
Ass'y Dwg. No.	KR-53649
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb (clusters)
Cal. — Size	
Location	Tail
Use	Fragmentation
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T736, FUZE, BOMB, TAIL, MECHANICAL TIME

ARMING DATA

Method	Vane
Delay	2 - 46
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2 lb approx.
Total Length (in.)	5.75
Body Diam. (in.)	
Intrusion	0.75 in.
Thread Size	1.5-12NS-1

FUNCTIONING DATA

Action	Time, air burst
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	4 - 92
Target	Illumination
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M72
Detonator	
Booster	Black powder, 100 grain

REMARKS

SERIES: A CHAPTER: 2
DESIGNATION: T736
Bomb MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T763, FUZE, BOMB, TIME

IDENTIFICATION

Agency	ERADCOM, DELHD-RT-CE B. Dobriansky AV 290-3190
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	8 in.
Location	Nose, base
Use	Chemical (photo flash)
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T763, FUZE, BOMB, TIME

ARMING DATA

Method	Vane
Delay	12 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

Governor provides constant arming delay time

PHYSICAL DATA

Weight	3 lb nose, 6 lb base
Total Length (in.)	9.0 nose, 10.0 base
Body Diam. (in.)	
Intrusion	7.0 in. nose, 1.0 in. base
Thread Size	3.5-12NS-2

FUNCTIONING DATA

Action	Time
Type	Electric
Delay	2 sec after set
Time Type	
Time Setting (sec)	20-80
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M54
Detonator	M52
Booster	Tetryl

REMARKS

SERIES: A CHAPTER: 2
DESIGNATION: T763
Bomb ET Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T766, FUZE, BOMB, PROXIMITY

IDENTIFICATION

Agency ERADCOM, DELHD-DE-OE
L. Tozzi
AV 290-2400

Status Terminated

Ass'y Dwg. No. FF4922

Parts List

Specification

Previous Number

GENERAL

Carriers Bomb

Cal. — Size 100, 260, 500 and 1000 lb

Location Nose

Use GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T766, FUZE, BOMB, PROXIMITY

ARMING DATA

Method	Vane
Delay	3600 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	4.5 lb
Total Length (in.)	10.065
Body Diam. (in.)	
Intrusion	5.09 in.
Thread Size	2-12NS-1A

FUNCTIONING DATA

Action	Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M36A1
Booster	Tetryl

REMARKS

This fuze is similar to Fuze T765

With an adapter booster, it can be used on new series low drag bombs 250 to 10,000 lb

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T779, FUZE, BOMB, PROXIMITY

IDENTIFICATION

Agency ERADCOM, DELHD-DE-OE
L. Tozzi
AV 290-2400

Status R&D Terminated

Ass'y Dwg. No.

Parts List

Specification

Previous Number

GENERAL

Carriers Bomb

Cal. — Size 4 in. sphere

Location Center

Use Chemical

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T779, FUZE, BOMB, PROXIMITY

ARMING DATA

Method	Spin
Delay	10 sec
Rotation (rps)	
Non-arm / Arm	33
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3 lb
Total Length (in.)	
Body Diam. (in.)	4
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T79
Booster	

REMARKS

SERIES: A CHAPTER: 2
DESIGNATION: T779
Bomb Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T787E4, FUZE, BOMB, DELAY

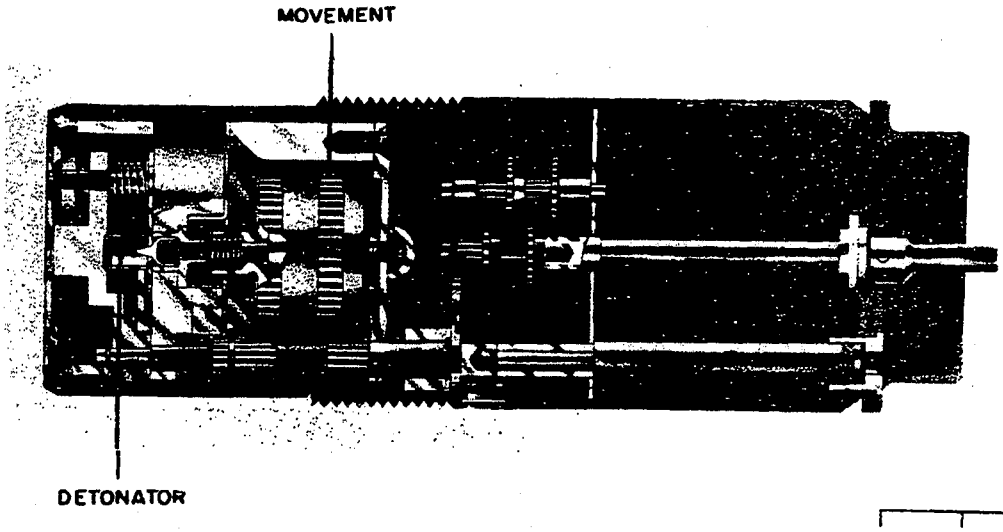

IDENTIFICATION

Agency ERADCOM, DELHD-DE-OE
L. Tozzi
AV 290-2400

Status R&D
Terminated

Ass'y Dwg. No.

Parts List

Specification

Previous Number

GENERAL

Carriers Bomb

Cal. — Size 250 lb and larger of new series Navy

Location

Use

MIL-STD's

Max Values

Rotat. (rps)

Setback (g) 30,000

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T787E4, FUZE, BOMB, DELAY

ARMING DATA

Method	Deceleration
Delay	Air unlock impact arming
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1.8 lb
Total Length (in.)	6.10
Body Diam. (in.)	
Intrusion	2.65 in.
Thread Size	2.00-12UN-2A

FUNCTIONING DATA

Action	Delay
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	30 min to 33 hours intervals of 15 min
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	

REMARKS

The antiwithdrawal features does not function unless the fuze is armed

SERIES: A CHAPTER: 2
DESIGNATION: T787E4
Bomb Long Delay Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T796, FUZE, BOMB, PROXIMITY

IDENTIFICATION

Agency ERADCOM, DELHD-DE-OE
L. Tozzi
Status AV 290-2400
Terminated
Ass'y Dwg. No.
Parts List
Specification
Previous Number

GENERAL

Carriers Bomb
Cal. — Size T72 bomb, 20 lb FRAG (M41A1 type)
Location Base
Use GP
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T796, FUZE, BOMB, PROXIMITY

ARMING DATA

Method	Vane
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	5 1/2
Body Diam. (in.)	
Intrusion	1 1/4 in.
Thread Size	1-1/2-12UNF1A

FUNCTIONING DATA

Action	BD, Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T81
Booster	Tetryl

REMARKS

Bomblet is assembled with fuze well at tail position. Fuze is made an integral part of the tail boom and fin assembly. No parts are used in old tail boom socket which is the nose of this round in the application

Release conditions are those of cluster bomb

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M903, FUZE, BOMB, NOSE

IDENTIFICATION

Agency ERADCOM, DELHO-IT-OE
R. Wyckoff, AV 290-2677

Status Obsolete

Ass'y Dwg. No. MF70-186

Parts List

Specification

Previous Number T770

GENERAL

Carriers Bomb

Cal. — Size GP 100 lb up

Location Nose

Use GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g) 10,000

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M903, FUZE, BOMB, NOSE

ARMING DATA

Method	Vane
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	3.75 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	2-12NS

FUNCTIONING DATA

Action	
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T22E1
Booster	Tetryl

REMARKS

SERIES: N CHAPTER: 2
DESIGNATION: M903
Bomb AD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M905 Bomb Impact Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 2-297 and 2-298 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M906, FUZE, BOMB, TAIL

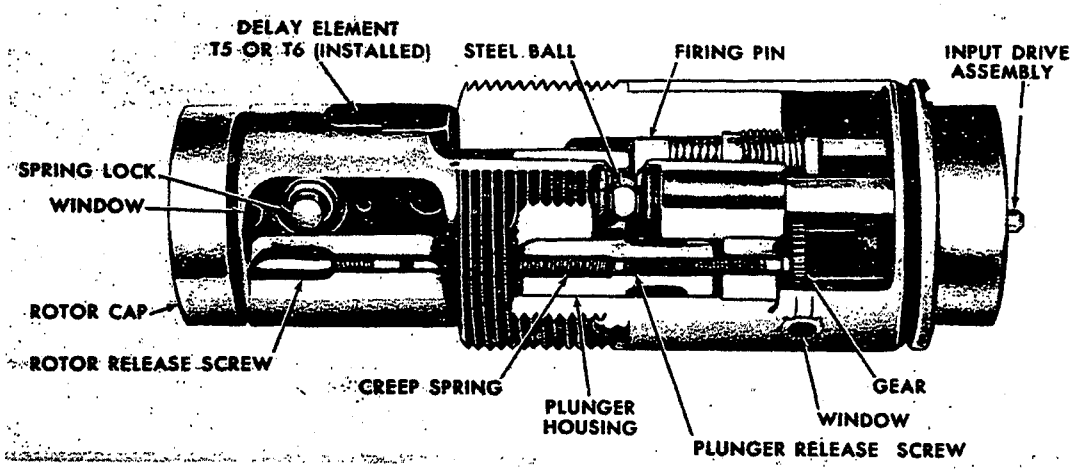

IDENTIFICATION

Agency NSWC, CODE G44
J. Abell, AV 290-1545

Status Obsolete

Ass'y Dwg. No. P86939, 8846795 (796)

Parts List

Specification

Previous Number T788E3

GENERAL

Carriers Bomb

Cal. — Size All new series equipped for tail fuzing

Location Tail

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version.before use.

M906, FUZE, BOMB, TAIL

ARMING DATA

Method	Vane
Delay	2.0 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	Yes*

PHYSICAL DATA

Weight	1.1 lb
Total Length (in.)	6.50
Body Diam. (in.)	2.0
Intrusion	3.25 in.
Thread Size	2.0-12UNS-1

FUNCTIONING DATA

Action	Impact, inertia
Type	Mechanical
Delay	5.0 or 12.5 sec
Time Type	
Time Setting (sec)	
Target Sensitivity	Moderate to hard (skip bombing)
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	Out-of-line train
Primer	
Detonator	M35
Booster	External (M147)
Relay	XM9
Delay	T5E3 or T6E4

REMARKS

This fuze uses the M44 arming drive with an appropriate flexible shaft drive (M40, M41, M42, M43).

*Inspection windows provide an indication of the armed condition of the fuze, however these windows may not be visible when fuze is installed in the bomb.

SERIES: N CHAPTER: 2
DESIGNATION: M906
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T906, FUZE, BOMB, NOSE

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi AV 290-2400
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	Any photoflash and cluster (750 lb up)
Location	Nose, base
Use	Cluster opening
MIL-STD's	
Max Values	
Rotat. (rps)	30
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T906, FUZE, BOMB, NOSE

ARMING DATA

Method	
Delay	2, 4.5, 8, 20 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.5 lb
Total Length (in.)	6.585
Body Diam. (in.)	
Intrusion	6.585 in. plus nose cap
Thread Size	2.75 o.d.

FUNCTIONING DATA

Action	Time
Type	Electric
Delay	
Time Type	Mechanical, Junghans Esc.
Time Setting (sec)	2-92
Target	Air burst
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M52
Booster	Booster may be varied to accomodate various cluster bomb requirements; max. value 1900 gr

REMARKS

Remote selection while air borne until release

This is one of the T905 series of electric bomb fuzes. It requires the same wiring and equipment except a new control panel is in place of the T13 (T905 panel). The two are directly interchangeable. Bombs must be equiped with charging plug and internal wiring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M907 Bomb MT Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 2-303 and 2-304 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M908, FUZE, BOMB, MECHANICAL TIME

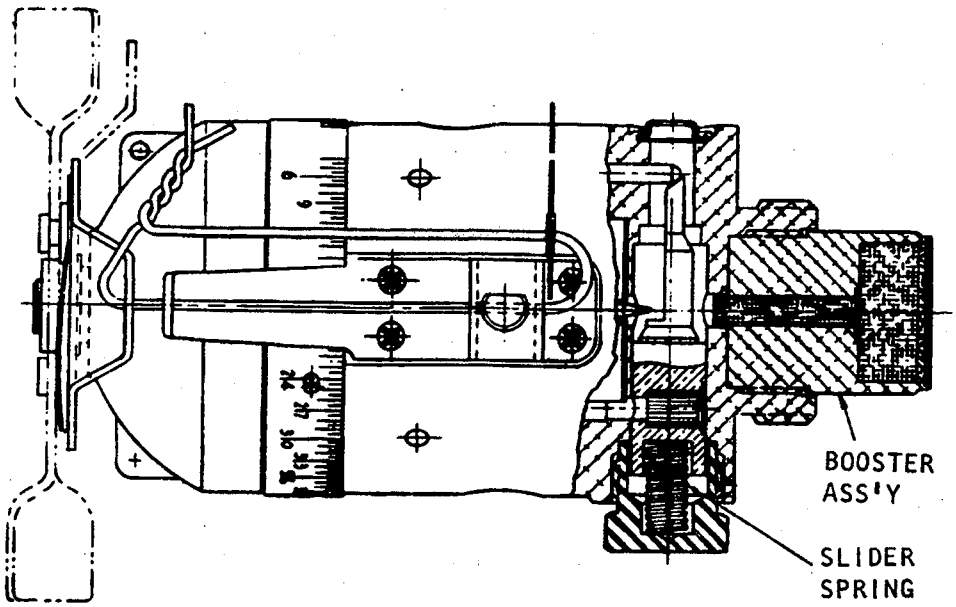

IDENTIFICATION

Agency PMTC, Code 2141, R. Villars
AV 351-6420

Status Obsolete

Ass'y Dwg. No. D8835227

Parts List

Specification

Previous Number T784
M901 (Dwg. #73-8-496)

GENERAL

Carriers	Bomb
Cal. — Size	220,260,500,750, 1000 lb
Location	Nose or tail
Use	Frag, gas, incendiary
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M908, FUZE, BOMB, MECHANICAL TIME

ARMING DATA

Method	Vane
Delay	One-half function time
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	2.2 lb
Total Length (in.)	6.08
Body Diam. (in.)	2.75
Intrusion	
Thread Size	1.5-12NF-1

FUNCTIONING DATA

Action	Mechanical time
Type	Mechanical
Delay	Instantaneous
Time Type	Mech., Junghans Esc.
Time Setting (sec)	4 to 92 sec
Target	Aerial burst, anti-personnel, structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	Tetryl

REMARKS

When used as nose fuze, vane T5E2 is standard. When used as tail fuze, either vane T3 or T4 is standard.

Replaces Fuzes AN-M145A1, M152A1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T908E4, FUZE, BOMB, NOSE

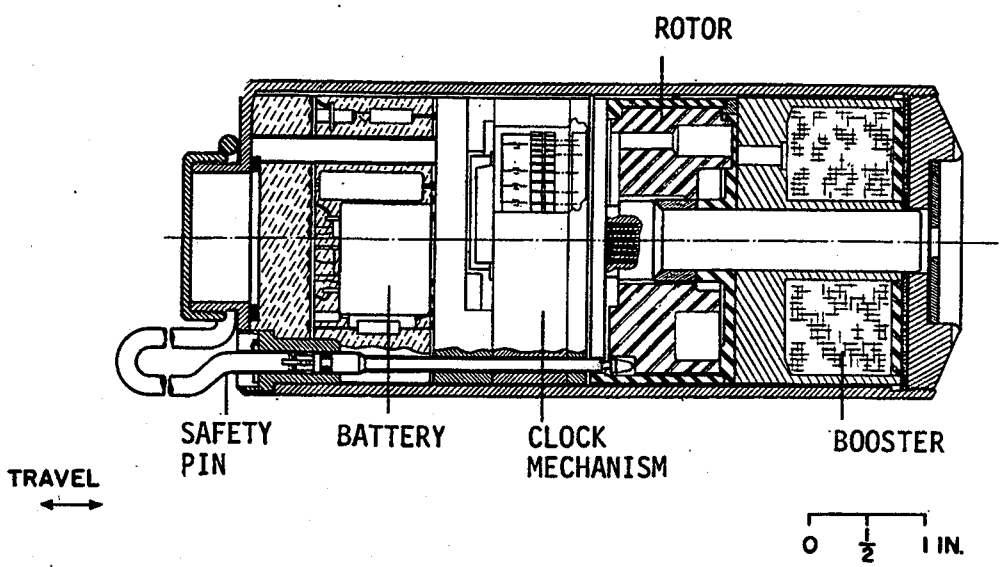

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi AV 290-2400
Status	Terminated
Ass'y Dwg. No.	TL3D-4700
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	250 lb and larger
Location	Nose, base
Use	GP
MIL-STD's	
Max Values.	
Rotat. (rps)	15
Setback (g)	20,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T908E4, FUZE, BOMB, NOSE

ARMING DATA

Method	Deceleration and Elect. time
Delay	Remarks
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.5 lb
Total Length (in.)	6.58
Body Diam. (in.)	
Intrusion	6.58 in. plus nose cap
Thread Size	2.75 o.d.

FUNCTIONING DATA

Action	Delay
Type	Mechanical
Delay	15 min to 168 hr
Time Type	mech. clock
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M52
Booster	Tetryl 1900 gr

REMARKS

Antidisturbance features do not function unless fuze is armed

Fuze T908 is one of the T905 series of electronic bomb fuzes. Arming is initiated by impact but is not completed until 90 seconds after release. The fuze sterilizes itself, if impact does not occur between 2 and 50 seconds after release.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M909 Bomb MT Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 2-309 and 2-310 of MIL-HDBK 146.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M910, FUZING SYSTEM

IDENTIFICATION

Agency ERADCOM, DELHO-IT-OE
R. Wyckoff, AV 290-2677

Status Obsolete

Ass'y Dwg. No.

Parts List

Specification

Previous Number T750E2

GENERAL

Carriers Bomb

Cal. — Size 750 lb and larger
USAF, new series

Location

Use HE

MIL-STD's

Max Values

Rotat. (rps) Random spin, about 2

Setback (g)

Velocity (fps)

KEY FEATURES

SERIES: N CHAPTER: 2
DESIGNATION: M910

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M910, FUZING SYSTEM

ARMING DATA

Method	Arming wire and air driven vane
Delay	4-20 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	3 lb
Total Length (in.)	M20A1 11-1/2 T771 6
Body Diam. (in.)	M20A1 2-3/4 T771 2
Intrusion	M20A1 7 in. T771 3 in.
Thread Size	M20A1 3-1/2 in. T771 1-7/8 in.

FUNCTIONING DATA

Action	Proximity with impact backup
Type	Electric, mechanical
Delay	None
Time Type	Mechanical
Time Setting (sec)	
Target	Ground, water
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Thermal, PS 207

EXPLOSIVE TRAIN

S&A Device	T771
Primer	
Detonator	
Booster	

REMARKS

This system consists of a T18 nose sensor, a T771 tail fuze and a T25 or T6 type tail drive

Fuze consists of a M20A1 proximity nose element in the nose fuze well and a T771E4 impact fuze and T56 adapter booster in the tail fuze

There are no explosives in the nose

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	
LG: 11.7 in (297.2 mm)	DP: 6.8 in (172.7 mm)	WT: 3.1 lb (1406 g)
XSECT: 2.75 in (69.9 mm)	DIA:	THD: 3.5-12UN-2A
		THD DP:

IDENTIFICATION
- AGENCY: ARL
- CONTACT: Wyckoff, R
- PHONE: DSN 290-2677
- STATUS: Terminated
- USER:
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: T768
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Bomb

- AMMUNITION:
  - HE

LOCATION: Nose, base
BALLISTIC LEVELS:
- ROTATION: 15 rps
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 2-313 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
Yes

ARMING TIME OR DISTANCE:
4.5, 8, & 20 s by
M990 only

EXPLOSIVE COMPONENTS

S&A DEVICE: M990 Fuze

PRIMER: None

DETONATOR: Mk 100

LEAD:

BOOSTER: Tetryl

OTHER:

FUNCTIONING DATA
MODES: BD, prox w/impact backup
TYPE: Electric
CHARACTERISTICS:
Instantaneous impact follow-up

TARGET: Ground, water
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Thermal, PS 207

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M914E1, FUZE, BOMB, NOSE, PROXIMITY

IDENTIFICATION

Agency HDL, 48500, Lofgren

Status Obsolete

Ass'y Dwg. No. F10984928

Parts List EPL 10084928

Specification

Previous Number

GENERAL

Carriers Bomb

Cal. — Size

Location Nose

Use HE, GP or Fragmentation

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M914E1, FUZE, BOMB, NOSE, PROXIMITY

ARMING DATA

Method	Vane
Delay	2300 ft min safe air travel
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	4.5 lb
Total Length (in.)	10.06
Body Diam. (in.)	1 1/2
Intrusion	5.09 in.
Thread Size	2-12NS-1A

FUNCTIONING DATA

Action	Proximity, delay
Type	Electrical, pyrotechnic
Delay	75 millisec
Time Type	
Time Setting (sec)	
Target	Ground, water
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Air driven alternator

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	DD16A0
Booster	Tetryl

REMARKS

Not recommended for high performance aircraft

For use as a jungle penetrator

SERIES: N CHAPTER: 2
DESIGNATION: M914E1
Bomb Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M990 Bomb Impact Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 2-317 and 2-318 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2006-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1301, FUZE, BOMB, PROXIMITY

IDENTIFICATION

Agency ERADCOM, DELHD-DE-OE
L. Tozzi
Status AV 290-2400
Terminated
Ass'y Dwg. No. C100,357
Parts List
Specification
Previous Number

GENERAL

Carriers Bomb
Cal. — Size
Location Nose
Use HE
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1301, FUZE, BOMB, PROXIMITY

ARMING DATA

Method	Mechanical train, vane
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	4 lb 14 oz
Total Length (in.)	10.942
Body Diam. (in.)	
Intrusion	5.0 in.
Thread Size	2 in. nominal

FUNCTIONING DATA

Action	Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M36
Booster	Tetryl

REMARKS

Modified M166 S&A system arming angle 230°

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FAE, FUZE, BOMB

IDENTIFICATION

Agency: ERADCOM, DELHD-DE-OE
L. Tozzi
AV 290-2400

Status: Obsolete

Ass'y Dwg. No.

Parts List

Specification

Previous Number

GENERAL

Carriers	FAE bomb
Cal. — Size	75 lb
Location	Nose, Tail
Use	HE, Liq. expl.
MIL-STD's	
Max Values	
Rotat. (rps)	1-2
Setback (g)	
Velocity (fps)	

KEY FEATURES

Active infrared target detecting device, M940 tail fuze, analog type second event package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FAE, FUZE, BOMB

ARMING DATA

Method	Electric
Delay	5.5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	About 5 lb total (3 pcs.)
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Proximity
Type	Electrical
Delay	Second Event
Time Type	Electrical
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Thermal

EXPLOSIVE TRAIN

S&A Device	M990
Primer	
Detonator	MK 100, T77
Booster	Tetryl, for Second Event

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

OPENER (ELECTRONIC) WITH OPENER SWITCH

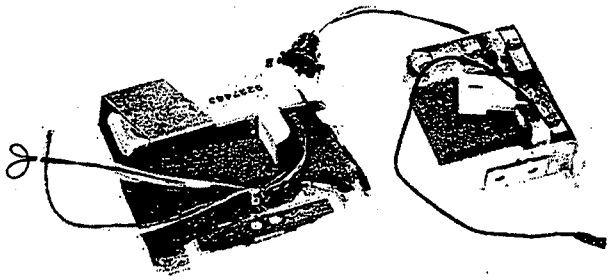

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCU
Status J.Meyer AV 880-2575 Obsolete
Ass'y Dwg. No. 9227439
Parts List
Specification
Previous Number

GENERAL

Carriers Aerial mine cannister
Cal. — Size
Location
Use HE
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

OPENER (ELECTRONIC) WITH OPENER SWITCH

ARMING DATA

Method	First motion - electronically
Delay	25 millisec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Electronic setter and switch

PHYSICAL DATA

Weight	110 gram
Total Length (in.)	3 x 3 x 3/4 in.
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	First motion
Type	Electronic - RC
Delay	25 millisec
Time Type	
Time Setting (sec)	1 - 23
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Aircraft, 23-28 VDC

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Electronic time settable (dispenser) device which actuates an explosive train for aerial mine cannister.
This item requires an external power supply, time selector switch and electronic setter. Energy output is 500 ergs minimum or a minimum of 1 volt for 100 microsec.

SERIES: A CHAPTER: 2
DESIGNATION: OPENER
ET Opener

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CHAPTER 3

Source: https://assist.dla.mil/ Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

BLU7A/B, BOMBLET, FUZE FOR

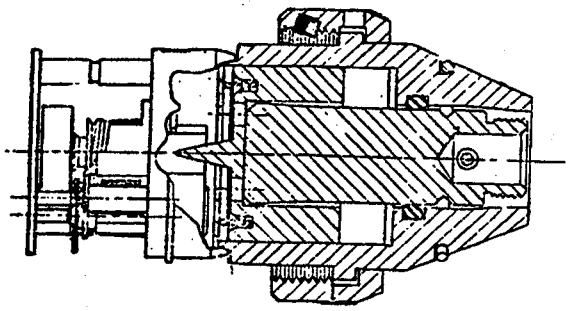

IDENTIFICATION

Agency	ARRADCOM, DRDAR-ASP M. Chase, AV 880-5543
Status	Obsolete
Ass'y Dwg. No.	D-9204142
Parts List	9204142
Specification	AEI 272
Previous Number	XM917

GENERAL

Carriers	Aircraft bomb
Cal. — Size	
Location	Nose
Use	HE, AP
MIL-STD's	MIL-A-8591
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 3
DESIGNATION: BLU- 7A/B
Bomblet, Fuze for

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

BLU7A/B, FUZE, BOMB

ARMING DATA

Method	Mechanical, release from plane
Delay	0.8/1.3 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.15 lb
Total Length (in.)	1.95
Body Diam. (in.)	0.95
Intrusion	1.23 in.
Thread Size	1-28F

FUNCTIONING DATA

Action	Time - impact
Type	Mechanical
Delay	
Time Type	Escapement type
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	Soft impact medium like sand or gravel
Thickness (in.)	
Max Obliq. (°)	30 off horizontal
Velocity (fps)	35
Carrier	BLU-7A/B Bomb

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M55
Booster	
Lead	RDX, 81 mg

REMARKS

SERIES: A CHAPTER: 3
DESIGNATION: BLU- 7A/B
Bomblet, Fuze for

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FUZE FOR BLU-25/B, BOMBLET

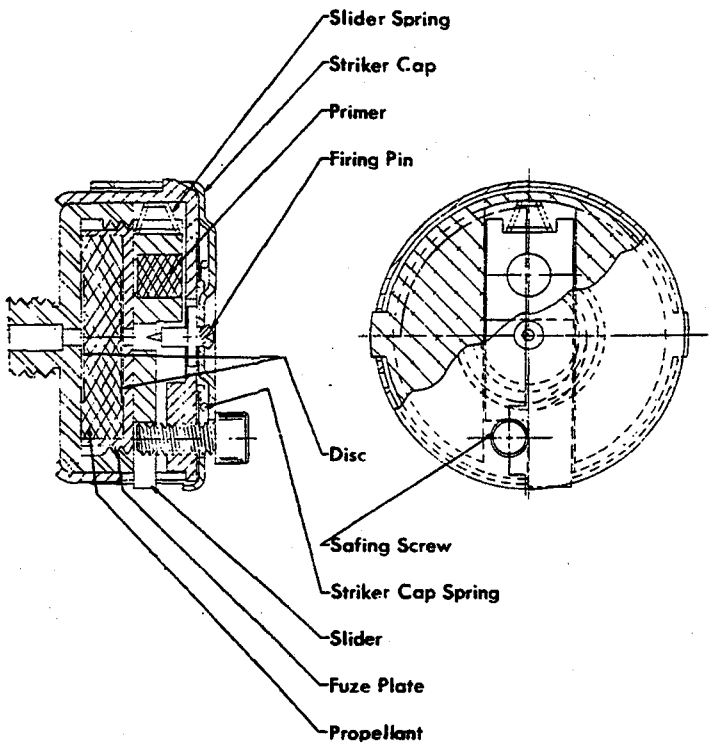

IDENTIFICATION

Agency	Eglin AFB, Arm Div R. Mabry, AV 872-2223
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomblet
Cal. — Size	7/8 D x 1-1/2 in.
Location	Nose
Use	GP
MIL-STD's	331 Tests 101-107, 111, 112, 115; 810
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FUZE FOR BLU-25/B, BOMBLET

ARMING DATA

Method	Borerider
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Borerider protruding from fuze housing indicates armed condition.

PHYSICAL DATA

Weight	
Total Length (in.)	3/8 approx.
Body Diam. (in.)	0.88
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	1 millisec
Time Type	Pyrotechnic
Time Setting (sec)	
Target	Surface,antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device		
Primer	NN-PR-207	21 mg
Detonator	Lead azide	13 mg
Booster		

Delay

REMARKS

SERIES: AF CHAPTER: 3
DESIGNATION: BLU- 25/B
Bomblet, Fuze for

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-50/B, FUZE, BOMB

IDENTIFICATION

Agency	Eglin AFB, Arm Div R. Mabry, AV 872-2223
Status	Terminated
Ass'y Dwg. No.	28000782 (Honeywell)
Parts List	64D 10875
Specification	
Previous Number	

GENERAL

Carriers	Bomblet
Cal. — Size	4-5/8 D x 9.4 L (10 lb approx)
Location	
Use	GP, chemical
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	70

KEY FEATURES

Will abort after shipping safety wire is removed and a subsequent impact of 600 g is received.

Omnidirectional functioning on impact 1.5 sec after ejection from dispenser.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-50/B, FUZE, BOMB

ARMING DATA

Method	Borerider
Delay	1.5 sec after ejection
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	No

Shipping safety wire in place and borerider not extended.

PHYSICAL DATA

Weight	0.23 lb
Total Length (in.)	1.7
Body Diam. (in.)	1.375
Intrusion	
Thread Size	

Held in place with spring ring retainer.

FUNCTIONING DATA

Action	Impact, all-ways
Type	Mechanical
Delay	10 msec
Time Type	Mechanical
Time Setting (sec)	
Target	
Sensitivity	600 g omnidirectional
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M55
Booster	
Lead	RDX, 175 mg

REMARKS

SERIES: AF CHAPTER: 3
DESIGNATION: FMU- 50/B
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-65/B, FUZE, BOMB

IDENTIFICATION

Agency	Eglin, AFB, Arm Div R. Mabry, AV 872-2223
Status	Terminated
Ass'y Dwg. No.	28000241 (Honeywell)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomb
Cal. — Size	1 1/4 x 2 1/2 in. approx.
Location	Tail
Use	Dispenser munition
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-65/B, FUZE, BOMB

ARMING DATA

Method	Escapement
Delay	0.7 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	No

S&A plate attached

PHYSICAL DATA

Weight	25 gm
Total Length (in.)	0.35
Body Diam. (in.)	1.20
Intrusion	0.35 in.
Thread Size	

FUNCTIONING DATA

Action	Impact, all ways
Type	Mechanical
Delay	0.350 sec
Time Type	Mech., escapement
Time Setting (sec)	
Target	Terrain
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	Double pins
Primer	XM-91
Detonator	
Booster	

REMARKS

SERIES: AF CHAPTER: 3
DESIGNATION: FMU- 65/B
Bomb Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-73/B (XI-1), FUZE, INERTIAL, BOMB

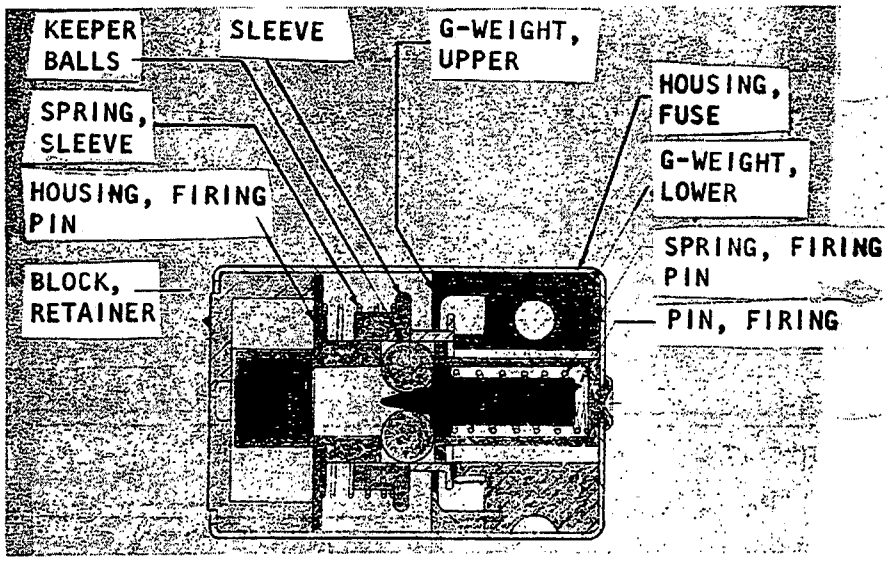

IDENTIFICATION

Agency	Eglin AFB, Arm Div R. Mabry, AV 872-2223
Status	Terminated
Ass'y Dwg. No.	521584 (Aerojet)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Bomblet
Cal. — Size	1-1/4 x 5 in.
Location	Center
Use	Biological/chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-73/B (XI-1), FUZE, INERTIAL, BOMB

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	33
Arm	63
Setback (g)	
Non-arm	
Arm	
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	8.01 gm
Total Length (in.)	0.7
Body Diam. (in.)	0.5
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Spin decay
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M55
Booster	

REMARKS

Will not impact arm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

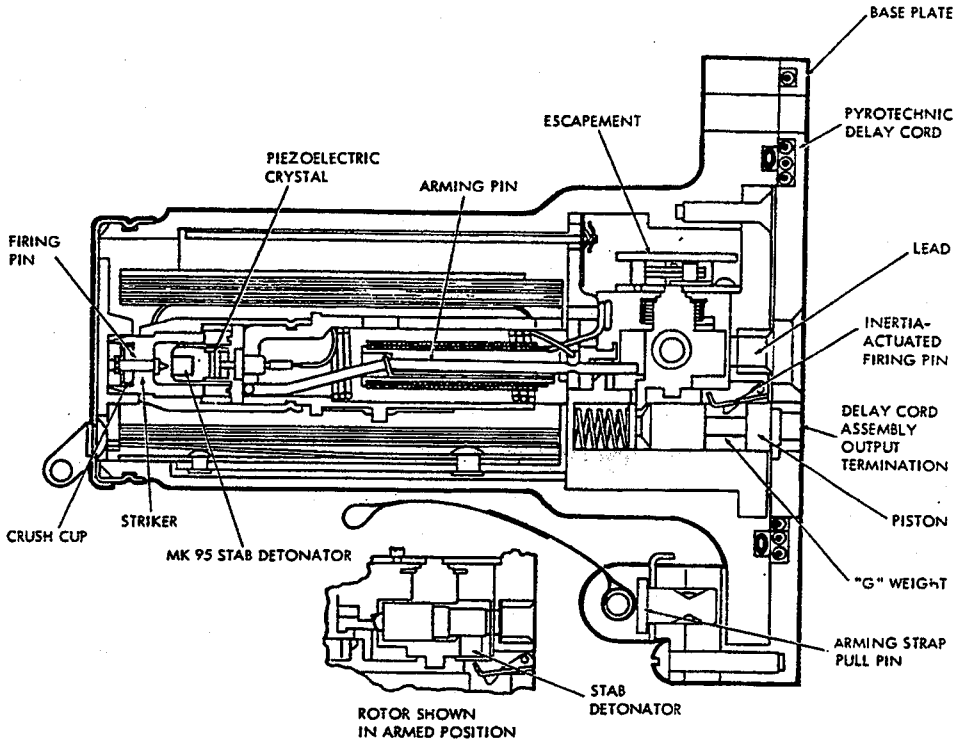

- OVERALL SIZE -	- INTRUSION -	WT: 2.0 lb (907.18 g)
LG: 5.0 in (127 mm)	DP:	THD: None
XSECT: 4.25 in (108 mm) base	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NAWC, Pt Mugu
- CONTACT: Morgan, D
- PHONE: DSN 351-6416
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 68-A-85-D
- PARTS LIST: PL 68A85D98
- SPEC: AS 1911
- PUB: NAVAIR 11-1F-2

- NATIONAL STOCK NO: 1325-00-151-4373
- DODIC: F750
- PRIOR MODEL NO: EX-2
- SIMILAR TO: FMU-95/B

- REPLACES: Nothing
- REPLACED BY: FMU-95/B

GENERAL
- WEAPON: Submunition (bomb)

- AMMUNITION: BLU-73/B Fuel-air Explosive Bomb in CBU-55/B Dispenser System

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY: 300 KTAS

- CREEP: High-drag
- FLIGHT TIME: NA

SAFETY STD: MIL-STD-1316

SETTERS: None

Supersedes page 3-13 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Electrical signal generated by dispenser fuze

SECOND SAFETY:
Lanyard removes probe cover

OTHER SAFETY:
Events above must occur in given sequence

SAFE/ARM INDICATION:
Safe when cover in place and probe not deployed

ARMING TIME OR DISTANCE:
2.1 d nominal after cover removal

EXPLOSIVE COMPONENTS

S&A DEVICE: Spring-driven out-of-line explosive train

PRIMER:

DETONATOR: Mk 96 Mod 0 (Electric)
Mk 95 Mod 0 (Stab)

LEAD: Tetryl, 135 mg

BOOSTER:

OTHER: M42 Primer/Delay cord assy.; Explosive Actuator BBU-16/B

FUNCTIONING DATA

MODES: Impact (stand-off) or SD

TYPE: Mechanical/pyrotechnic

CHARACTERISTICS:
Functions 4 ft (1.2 m) above ground level; SD at 115 s nominal after cover removal.

TARGET: Surface

SENSITIVITY:
Impact sensing element assembly functions on mud and water

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER. NO: 0408
US HCSDS: None
UN CL/DIV SCG: 1.1 D
US DOT SHIP CL: A
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Operation of the dispenser bomb fuze causes the cover on the FMU-74/B Submunition fuze to come off and stresses 3 piezo crystals. Energy generated by the crystals removes the explosive lock from the fuze rotor. Drag causes removal of the submunition from the dispenser. Lanyards connect the parachutes of each submunition with the munition behind it. At lanyard pull, the pull-top cover of the fuze is removed, the arming strap pull pin is pulled starting the SD timer, and the parachute of the forward munition is extracted and deployed. Extension of the probe places the impact sensing element about 4 ft (1.2 m) in front of the body and frees the rotor to turn, governed by an escapement, to the armed position. On impact, the sensing element operates firing a Mk 95 detonator which stresses a piezo crystal. Energy from the crystal fires the Mk 96 Detonator, then the lead and burster. On failure of the standoff probe, deceleration moves a g-weight igniting another Mk 95 Detonator located in the rotor. Then the Mk 96 Detonator and remaining explosive com- ponents are detonated. Since the stand-off and inertial mechanism may not function at impact angles greater than 45 degrees, SD occurs after 75 to 120 s.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M130A1, FUZE, BOMB

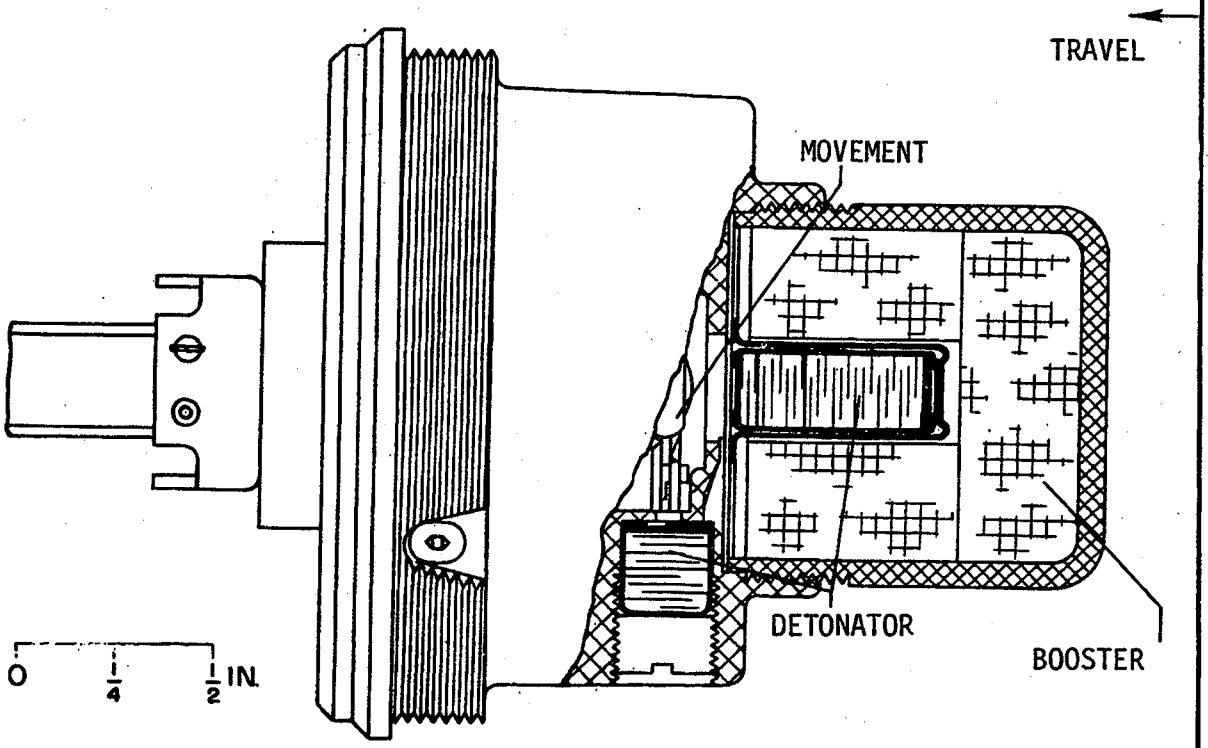

IDENTIFICATION

Agency	NMC, Code 2141, R. Villars
Status	AV 351-6424 Obsolete
Ass'y Dwg. No.	73-8-225
Parts List	
Specification	
Previous Number	T48E2

GENERAL

Carriers	Bomb
Cal. — Size	4 lb
Location	Amidships
Use	Fragmentation
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Engineering cognizance transferred from Army to Navy in 1978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M130A1, FUZE, BOMB

ARMING DATA

Method	Vane
Delay	50 ft
Rotation (rps)	
Non-arm	Arm 3.5 - 5 rev
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	No

Some fuzes have been modified with an inspection window.

PHYSICAL DATA

Weight	0.4 lb
Total Length (in.)	3.14
Body Diam. (in.)	1.75
Intrusion	1.94 in.
Thread Size	1.75-24NS-1

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	10, 20,30,40,50, & 60
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M41A1
Detonator	M31
Booster	Tetryl

REMARKS

Explosive train is not interrupted.

Fuze is for use in butterfly bombs.

SERIES: N CHAPTER: 3
DESIGNATION: M130A1
Bomb MT Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M206A2E2 Grenade Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 3-17 and 3-18 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

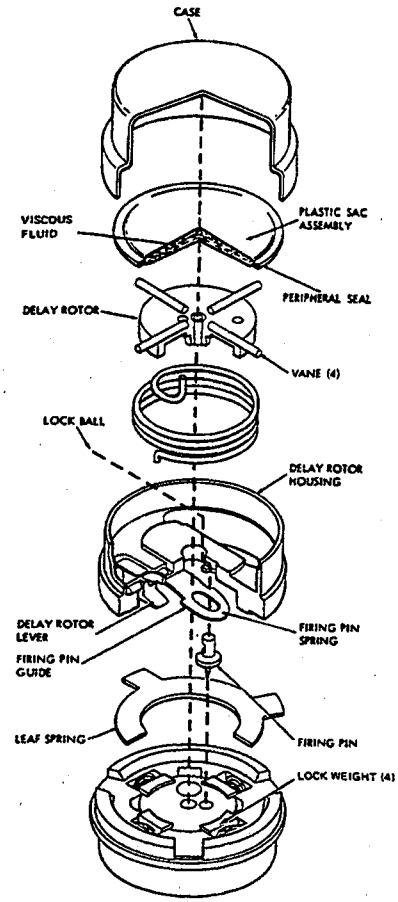

- OVERALL SIZE -	- INTRUSION -	
LG: 0.782 in (19.9 mm)	DP:	WT: 0.06 lb (25 g)
XSECT: 1.006 in (25.4 mm)	DIA:	THD:
		THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-FSA-M
- CONTACT:
- PHONE: DSN 880-
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 8 864 140
- PARTS LIST: PL 8 864 140
- SPEC: AEI-112
- PUB: NAVAIR 11-1F-2

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY:

GENERAL
- WEAPON: Submunition grenade

AMMUNITION:
- HE, BLU-36/B Fragmentation Bomb

LOCATION: On spin axis
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 3-19 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 2000 rpm no arm,
3200 rpm all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Arms about 1 s after exposure to airstream

EXPLOSIVE COMPONENTS

S&A DEVICE: Spring-driven out-of-line explosive train

PRIMER: None

DETONATOR: M55

LEAD: 36 mg RDX

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical (fluidic)
CHARACTERISTICS:
Range 0 to 120 min
Random time: 50% will function within 10 min of arming

TARGET: Personnel
SENSITIVITY:
In use, impact occurs before the lapse of the time delay

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
After fragmentation bombs are released from dispenser case, flutes on each bomb are caught by airstream and bombs spin. When a fragmentation bomb reaches required 3200 rpm rotational velocity, centrifugal force causes rotor lockweights to retract into rotor housing, thus freeing rotor. Rotor drive spring moves rotor to in-line position. As rotor moves, it releases delay rotor lever, which frees spring-driven delay rotor allowing it to turn. Delay rotor vanes press against a fluid-filled plastic sac and as delay rotor moves vanes deform sac, forcing viscous fluid ahead of rotor vanes. Flow of this viscous fluid pass vanes controling delay rotor's rate of rotation. Firing pin is held in place by lock ball. When delay rotor completes its rotation, a notch in delay rotor is aligned with notch in firing pin. Lock ball now can move into notch in delay rotor, releasing spring-loaded firing pin causing detonation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M219, M219A1 & M219A2 Submunition Impact Fuzes may be found in MIL-HDBK-145B.

Supersedes pages 3-21and 3-22 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM221, FUZE, GENERAL PURPOSE, GRENADE

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCU-CM
Status	King Terminated
Ass'y Dwg. No.	D9209000
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	XM41 Missile Grenade
Cal. — Size	
Location	
Use	XM188 Non nuclear Lance
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM221, FUZE, GENERAL PURPOSE, GRENADE

ARMING DATA

Method	Spin plus de-spin
Delay	
Rotation (rps)	
Non-arm	25
Arm	50
Setback (g)	
Non-arm	
Arm	
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	25 gm
Total Length (in.)	0.585
Body Diam. (in.)	1.07
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Impact
Type	Instantaneous
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel, anti-materiel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M55
Booster	
Lead	RDX, 31 mg

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM222, FUZE, GENERAL PURPOSE GRENADE

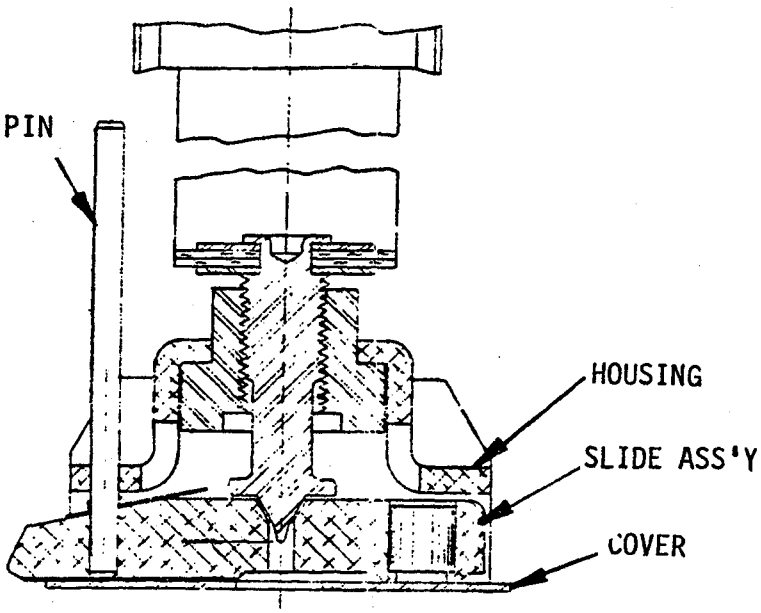

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCU-SS
Status	Ulrich
Ass'y Dwg. No.	Obsolete
Parts List	D9215250
Specification	9215250
Previous Number	AEI-419

GENERAL

Carriers	Grenades
Cal. — Size	
Location	
Use	GP, HE
MIL-STD's	331, Tests 104 & 115
Max Values	
Rotat. (rps)	210
Setback (g)	15,500
Velocity (fps)	2150

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2024-10-26 16:37Z
Check the source to verify that this is the current version before use.

XM222, FUZE, GENERAL PURPOSE GRENADE

ARMING DATA

Method	Spin
Delay	None
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	None
External Indicat.	

PHYSICAL DATA

Weight	0.02 lb
Total Length (in.)	1
Body Diam. (in.)	1
Intrusion	
Thread Size	None

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	None
Time Type	
Time Setting (sec)	
Target	Lightly armored veh.
Sensitivity	
Material	Steel
Thickness (in.)	1/32
Max Obliq. (°)	60
Velocity (fps)	100
Carrier	XM42E1 & XM46 grenade

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	None
Detonator	M55
Booster	None

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

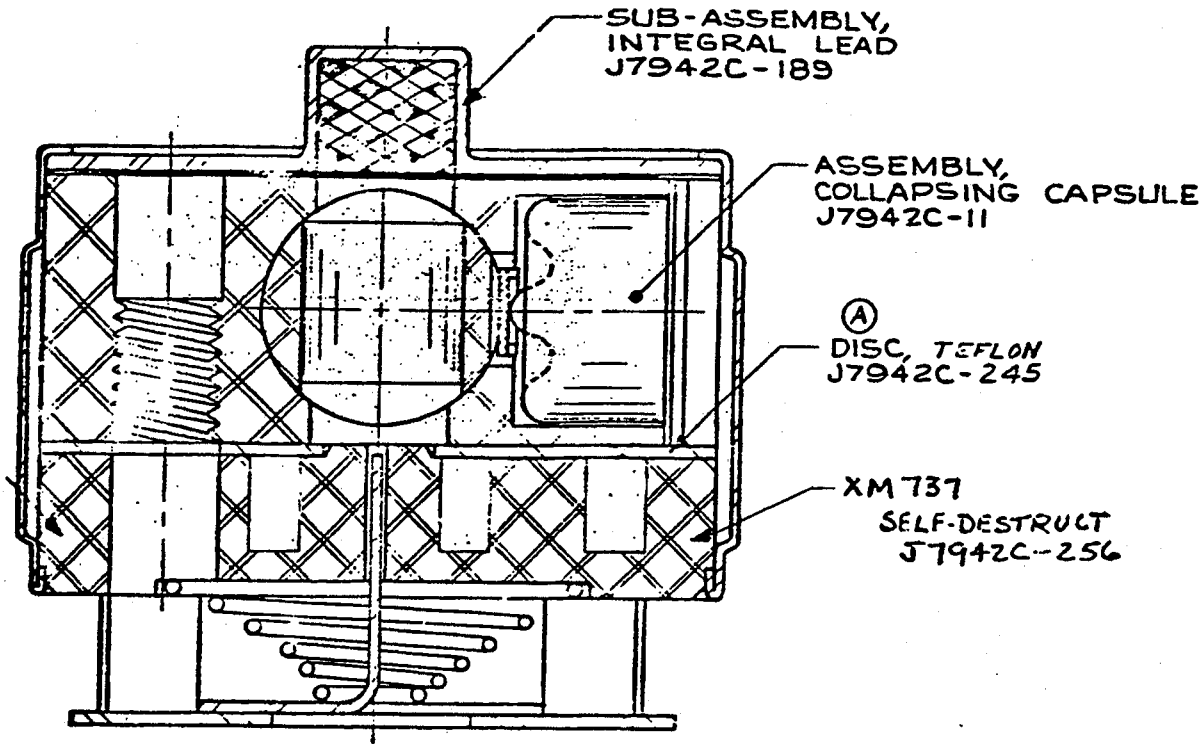

IDENTIFICATION

AGENCY: ARRADCOM, DRDAR-LCU-SS

CONTACT: J. Mazzel
AV 880-5355

STATUS: Terminated

USER: Army

ASSY DWG: 9298267

PARTS LIST:

SPEC: MIL-F-63082

NSN: Not assigned

PRIOR NOMENCLATURE: None

REPLACES: None

GENERAL

MUNITION: Submunition Grenade f/105mm How, M1A1, M108, XM 204

USE: XM53E2 Grenade for shell, HE, XM710E1

LOCATION: Base of Grenade

BALLISTIC LEVELS:

ROTATION: 383 rps

SETBACK: 23,000 g

VELOCITY: 494 m/s

CREEP:

SERIES: A CHAPTER: 3
DESIGNATION: XM737
Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Gas pressure from 1st stage ejection charge

SECOND SAFETY:

Expulsion from 105mm shell, firing pin detent

OTHER SAFETY:

spin decay 40 gm

DELAY:

SAFE/ARM CONDITION:

Yes
Meets MIL-STD-1316B

FUNCTIONING DATA

MODE(S): Impact and SD

TYPE: Mechanical, pyrotechnic

CHARACTERISTICS:

SQ, 12-15 sec SD

TARGET: Ground-Personnel

SENSITIVITY:

Unknown

PHYSICAL DATA

WEIGHT: 0.2 lb (90.7 gm)

TOTAL LENGTH: 0.54 in (1.37 cm)

CROSS SECTION: 0.65 in (1.65 cm)

INTRUSION: 0.50 in (1.27 cm)
0.65 in (1.65 cm)

THREAD SIZE: None

OTHER:

POWER SUPPLY:

Loaded slider spring
Loaded FP detent

EXPLOSIVE TRAIN

S&A DEVICE:

PRIMER: None

DETONATORS: M55 Stab

LEAD: 34 mg Comp A-5

BOOSTER: None

OTHER:

REMARKS

Volute insures impact on firing pin of submunition 1st stage gage press initiates pyro SD.

CHAPTER: 3 SERIES: A
DESIGNATION: XM737
Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM922, FUZE, BOMB

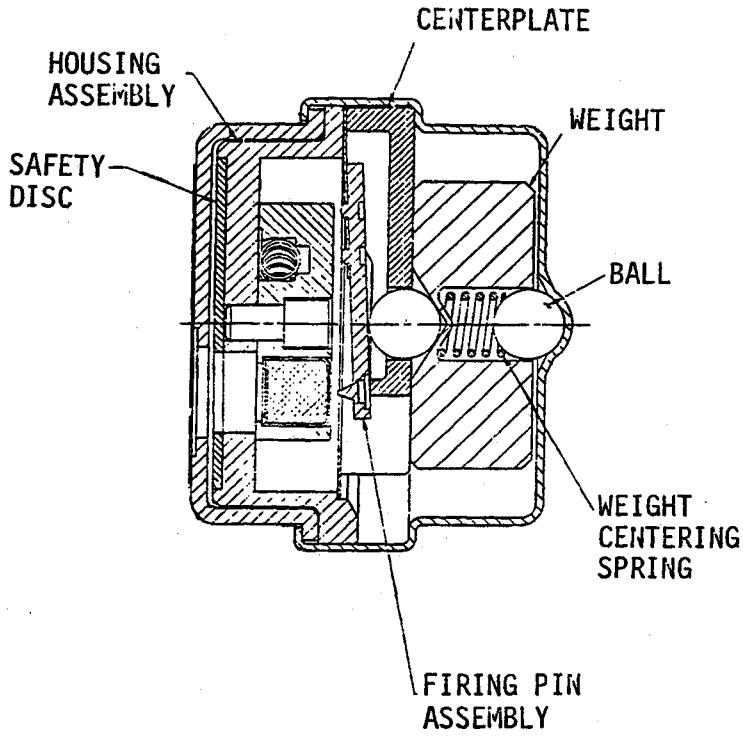

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCE-M
Status N. King, AV 880-3970 Terminated
Ass'y Dwg. No. F9229759
Parts List PL9229759
Specification AEI 479
Previous Number

GENERAL

Carriers Bomb, incendiary
Cal. — Size
Location Spin Axis
Use Incendiary
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Low cost item

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM922, FUZE, BOMB

ARMING DATA

Method	Spin, centrifugal release of weights
Delay	Instantaneous
Rotation (rps)	
Non-arm	40
Arm	53
Setback (g)	
Non-arm	
Arm	
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	24.1 gm
Total Length (in.)	0.842
Body Diam. (in.)	1.006
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Point detonation
Type	Mechanical
Delay	Instantaneous
Time Type	
Time Setting (sec)	Ground - incendiary
Target	
Sensitivity	600 g perpendicular to spin axis, impact sensitivity (funct.)
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	XM91
Booster	

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM928, FUZE, OMNI DIRECTIONAL

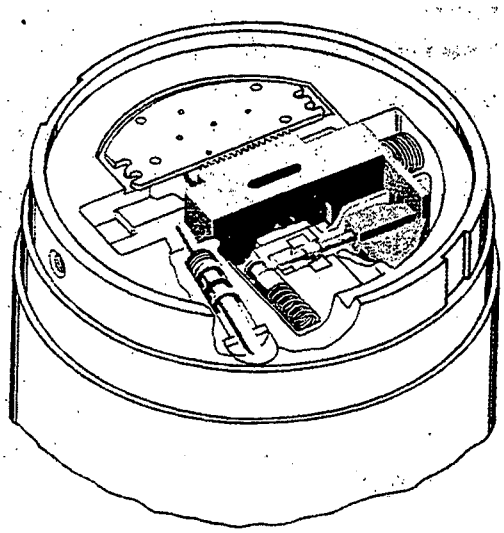

SAFE POSITION

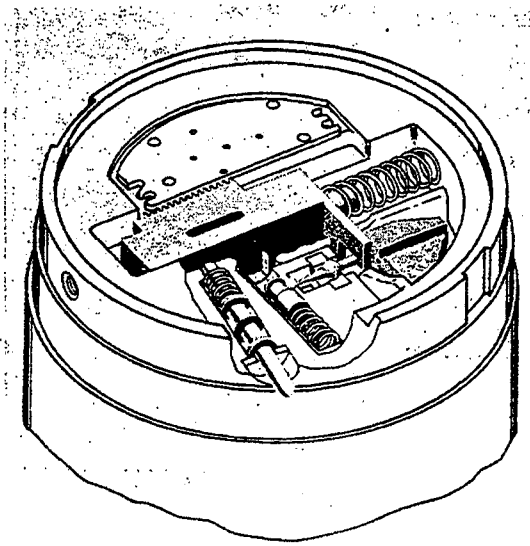

ARMED POSITION

IDENTIFICATION

Agency ARRADCOM-DRDAR-LCN-M, Zacharin 6477

Status Terminated

Ass'y Dwg. No.

Parts List

Specification

Previous Number

GENERAL

Carriers Bomb

Cal. — Size 2.75 in.

Location

Use HE

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Dual safe, omni-directional, low speed delivery.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM928, FUZE, OMNI DIRECTIONAL

ARMING DATA

Method	Air drop
Delay	3.5 - 4.5 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	4.5 oz
Total Length (in.)	3/4
Body Diam. (in.)	2 1/2
Intrusion	1/4 in.
Thread Size	2 1/4-24NS

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	Mechanical
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	XM144
Primer	
Detonator	M55
Booster	RDX, 0.230 diam. x 0.250 in. long

REMARKS

Fuze for BLU-3 bomb

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

DADT

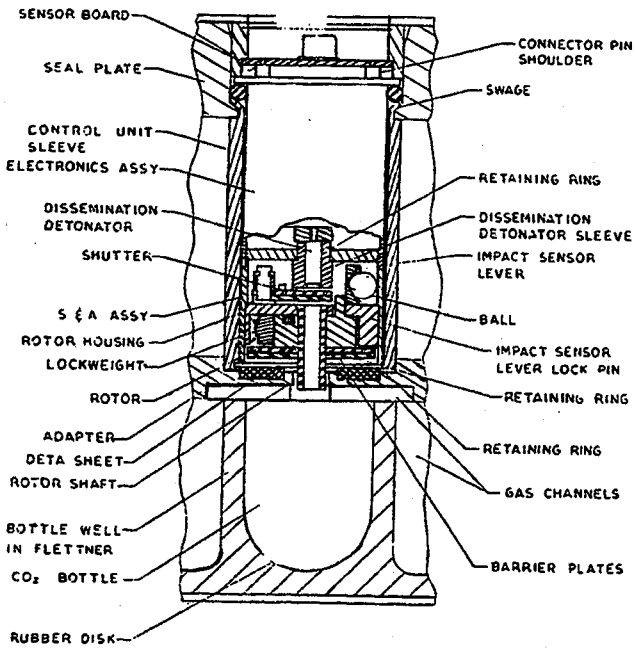

IDENTIFICATION

Agency	Eglin AFB, Arm Div
Status	R. Mabry, AV 872- 2223 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Autorotating bomblet
Cal. — Size	0.8 D x 0.18 L, 1.5 in^3
Location	Internal
Use	Biological
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Antidisturbance (tamper) feature.

Temperature, humidity, light, time sensitive. Self destruct mechanism.

Delayed Action Dissemination Technique = DADT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

DADT

ARMING DATA

Method	Spin arm
Delay	Spin decay, impact actuate
Rotation (rps)	
Non-arm	2700 Arm 2700
Setback (g)	600
Non-arm	400 Arm 600
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	25 gm
Total Length (in.)	1.8
Body Diam. (in.)	0.8
Intrusion	1.8 in.
Thread Size	

FUNCTIONING DATA

Action	Electric detonation
Type	Mech, electrical
Delay	Variable
Time Type	E cell
Time Setting (sec)	0-72 hour
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M55
Booster	

REMARKS

SERIES: AF CHAPTER: 3
DESIGNATION: DADT
Bomblet AD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CHAPTER 4

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

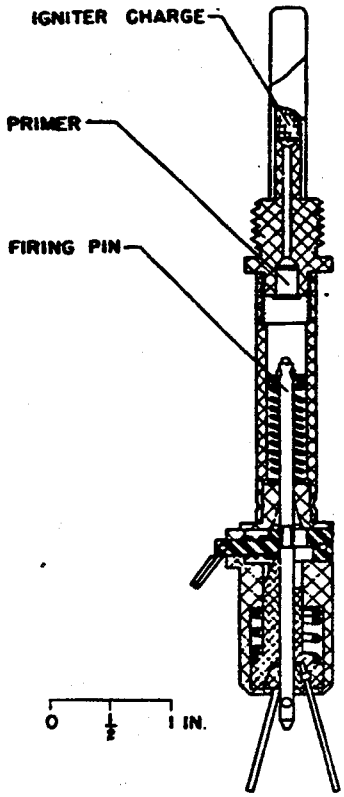

- OVERALL SIZE -	- INTRUSION -	WT: 0.375 lb (170 g)
LG: 6.62 in (168.1 mm)	DP: 1.91 in (48.5 mm)	THD: 9/16-12UNC-1A
XSECT: 1.103 in (28.0 mm)	DIA: 0.56 in (14.3 mm)	THD DP:

IDENTIFICATION
AGENCY: ARDEC, SMCAR-AEF-
CONTACT:
PHONE: DSN 880-
STATUS: Obsolete
USER: Army
ASSY DWG: 73-9-13
PARTS LIST:
SPEC:
PUB: TM 43-0001-36

NATIONAL STOCK NO:
1345-00-028-5110
DODIC: K091
PRIOR MODEL NO: T12E2
SIMILAR TO: M7A1

REPLACES:
REPLACED BY:

GENERAL
WEAPON: Combination AP mines

AMMUNITION:
M2 AP Mine

LOCATION: Mounting tube, side of mine
BALLISTIC LEVELS:
ROTATION: NA
SETBACK: NA
VELOCITY: NA

CREEP: NA
FLIGHT TIME: NA
SAFETY STD: MIL-STD-1316 is NA
SETTERS: None

Supersedes page 4-3 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Two safety pins

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Two safety pins installed

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: No. 3 Western

DETONATOR: None

LEAD: None

BOOSTER: None

OTHER: 10 gr (0.648 g) black powder igniter

FUNCTIONING DATA

MODES: Pressure or pull
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Personnel
SENSITIVITY:
8 to 20 lb pressure on prongs or
3 to 10 lb pull on the release pin

FUNCTION TEMP:
-40 to +52 deg C
MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0410
US HCSDS:
UN CL/DIV SCG: 1.4 D
US DOT SHIP CL: C
NET EXPL WT: Unknown
NET PROP WT: 0.648 g
STORAGE TEMP: -51 to +71 deg C

REMARKS/DESCRIPTION:
The fuze has a three-pronged pressure firing device and a pull wire release pin. The fuze body houses a spring-loaded firing pin and a cocking mechanism. The firing mechanism consists of a cylindrical metal case containing a trigger pin, release pin and firing pin each fitted with a coil spring. Two safety pins render the fuze safe during shipment and handling. A cotter pin fits through the release pin and bears against the body of the fuze. A safety firing pin passes through the end of the firing pin that protrudes above the top of the fuze. Either pressure on the prongs or pull on the release pin frees the spring-loaded firing pin causing it to strike the primer. The primer initiates the igniter charge and, in turn, the firing train of the mine. Similar to M7A1 which has a blasting cap instead of an igniter charge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

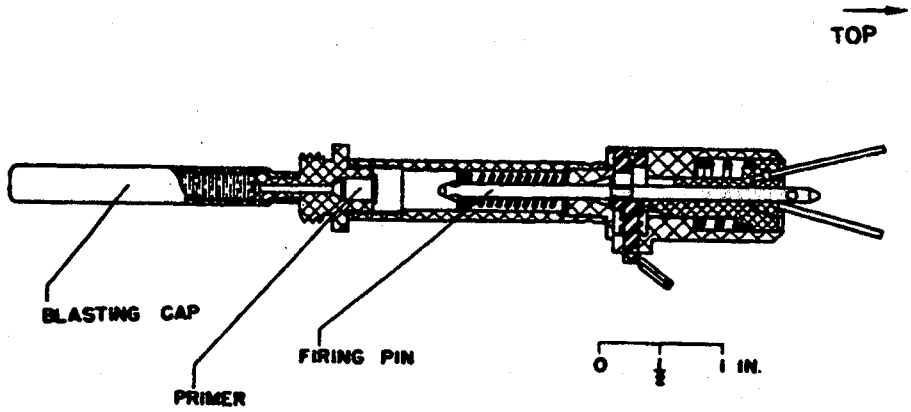

- OVERALL SIZE -	- INTRUSION -	
LG: 6.37 in (162 mm)	DP: 2.9 in (74 mm)	WT: 0.375 lb (170 g)
XSECT: 1.103 in (28 mm)	DIA:	THD: 0.563-12UNC-1A
		THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-
- CONTACT:
- PHONE: DSN 880-
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-9-13-7
- PARTS LIST:
- SPEC:
- PUB: TM 43-0001-36

- NATIONAL STOCK NO: 1345-00-28-5079
- DODIC: K054
- PRIOR MODEL NO: T13E2
- SIMILAR TO: M6A1

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Combination AP mines

- AMMUNITION: M3 AP Mine

LOCATION: Top of mine
BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK: NA
- VELOCITY: NA

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: MIL-STD-1316 is NA
SETTERS: None

Supersedes page 4-5 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Two safety pins

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Two safety pins installed

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: No. 3 Western

DETONATOR: None

LEAD: None

BOOSTER: Blasting Cap Type I

OTHER: None

FUNCTIONING DATA

MODES: Pressure or pull
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Personnel
SENSITIVITY:
8 to 20 lb pressure on prongs or
3 to 10 lb pull on the release pin

FUNCTION TEMP:
-40 to +52 deg C
MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0409
US HCSDS:
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: C
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP: -51 to + 71 deg C

REMARKS/DESCRIPTION:
The fuze has a three-pronged pressure firing device and a pull wire release pin. The fuze body houses a spring-loaded firing pin and a cocking mechanism. The firing mechanism consists of a cylindrical metal case containing a trigger pin, release pin and firing pin each fitted with a coil spring. Two safety pins render the fuze safe during shipment and handling. A cotter pin fits through the release pin and bears against the body of the fuze. A safety firing pin passes through the end of the firing pin that protrudes above the top of the fuze. Either pressure on the prongs or pull on the release pin frees the spring-loaded firing pin causing it to strike the primer. The primer initiates the blasting cap and, in turn, the firing train of the mine. Similar to the M6A1 which has an igniter charge instead of a blasting cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

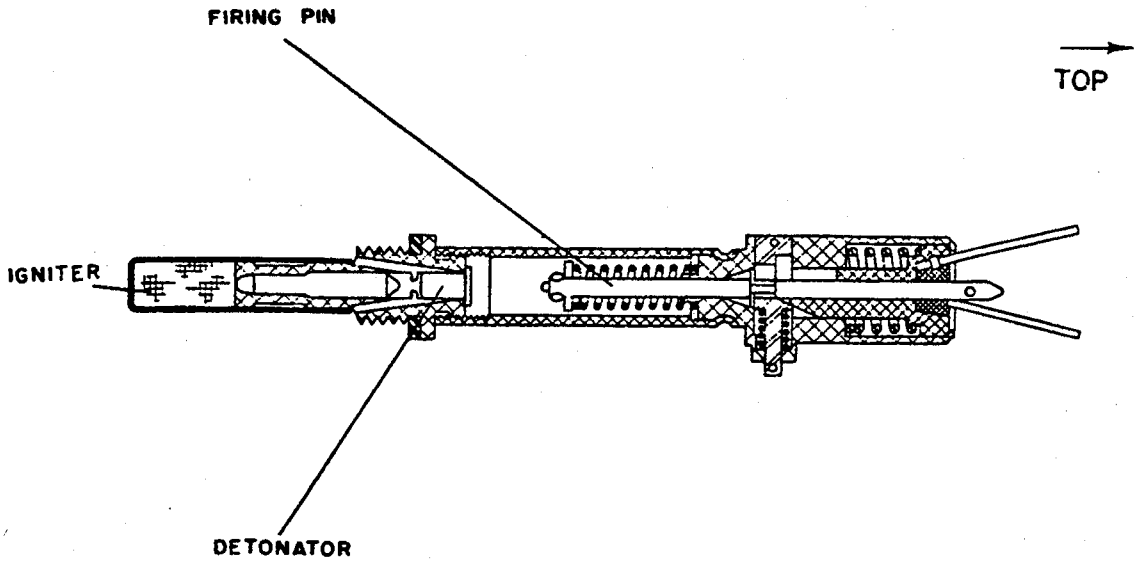

- OVERALL SIZE -	- INTRUSION -	WT: 0.375 lb (170 g)
LG: 6.875 in (174.6 mm)	DP: 2.34 in (59.4 mm)	THD: 0.5625-12UNC-1A
XSECT: 1.103 in (28.0 mm)	DIA: 0.31 in (7.8 mm)	THD DP: 0.35 in (8.9 mm)

IDENTIFICATION
AGENCY: ARDEC, SMCAR-FSM-M
CONTACT: Devine, D
PHONE: DSN 880-6114
STATUS: Obsolete
USER: Army, Marines
ASSY DWG: 73-9-25 (M10); 82-1-46 (A3)
PARTS LIST:
SPEC: MIL-F-20481B
PUB: TM 43-0001-36

NATIONAL STOCK NO:
1345-00-538-5448 (M10A2)
DODIC: K055 (M10A2)
PRIOR MODEL NO: T14
SIMILAR TO: M6A1, M7A1

REPLACES: Nothing
REPLACED BY:

GENERAL
WEAPON: AP Practice Mine

AMMUNITION:
M8 (M10), M8A3 (M10A2)
AP Training Mines

LOCATION: Top of mine
BALLISTIC LEVELS:
ROTATION: NA
SETBACK: NA
VELOCITY: NA

CREEP: NA
FLIGHT TIME: NA
SAFETY STD: MIL-STD-1316 is NA
SETTERS: None

Supersedes page 4-7 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Two safety pins

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Safety pins installed

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: In-line explosive train

PRIMER: Mk 5 (M10, A3), M39A1 (M10A2)

DETONATOR: See remarks

LEAD: None

BOOSTER: None

OTHER: 972mg blk pdr ign chg (M10), 725mg smk comp ign chg (M10A2)

FUNCTIONING DATA

MODES: Delay
TYPE: Mechanical/pressure
CHARACTERISTICS:
4 to 5 s delay

TARGET: Personnel
SENSITIVITY:
8-20 lb (3.6-9.1 kg) on any prongs or 3-10 lb (1.4-4.5 kg) on release pin
FUNCTION TEMP:
-40 to + 52 deg C
MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0409
US HCSDS:
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: C
NET EXPL WT: 2.1 g
NET PROP WT: None
STORAGE TEMP: -51 to +71 deg C

REMARKS/DESCRIPTION:
M10 series combination fuzes have a three-pronged pressure firing device at the top and a pull wire release pin ring at the side. The body houses a spring-loaded firing pin and a cocking mechanism. The base contains a primer and a length of safety fuse. The firing mechanism consists of a cylindrical metal case containing a trigger pin, a release pin, and a firing pin, each fitted with a coil spring. Two safety pins render the fuze safe during shipment and handling. A cotter pin passes through the end of the release pin and bears against the body of the fuze. A second pin, called the safety firing pin, passes through the end of the firing pin that protrudes above the top of the fuze. The fuze igniter assemblies are replaceable. The fuzes may be used many times by replacing the fired igniter assembly and recocking the firing mechanism. The firing mechanism is activated by a force on any of the prongs or a pull on the release pin. Either action causes the firing pin to strike the primer which initiates the delay fuse and after 4 or 5 s, the igniter charge. M10 has safe fuze, 4.5 s delay; M10A2 has 100 mg Type I comp and 650 mg Type III comp delays.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M12, FUZE, MINE

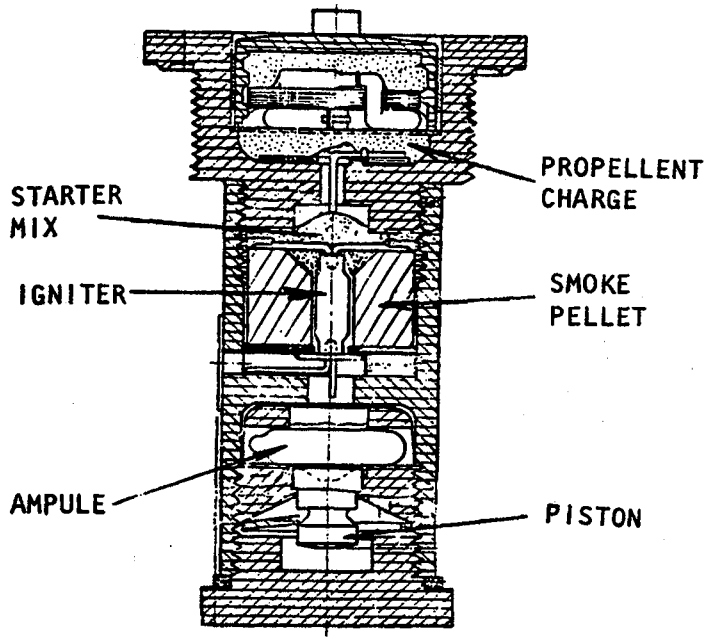

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCU-SA L. Coon AV 880-5565
Status	Obsolete
Ass'y Dwg. No.	73-9-26
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Land mine
Cal. — Size	
Location	
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 4
DESIGNATION: M 12
AT Mine Practice Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M12, FUZE, MINE

ARMING DATA

Method	Manual
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	1200 grain
Total Length (in.)	3.35
Body Diam. (in.)	
Intrusion	3.1 in.
Thread Size	1.50-14NS-2 MOD

FUNCTIONING DATA

Action	Pressure
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Practice, antitank
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	
Delay	Quick match type II
Lead	Spitter-fuze

REMARKS

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

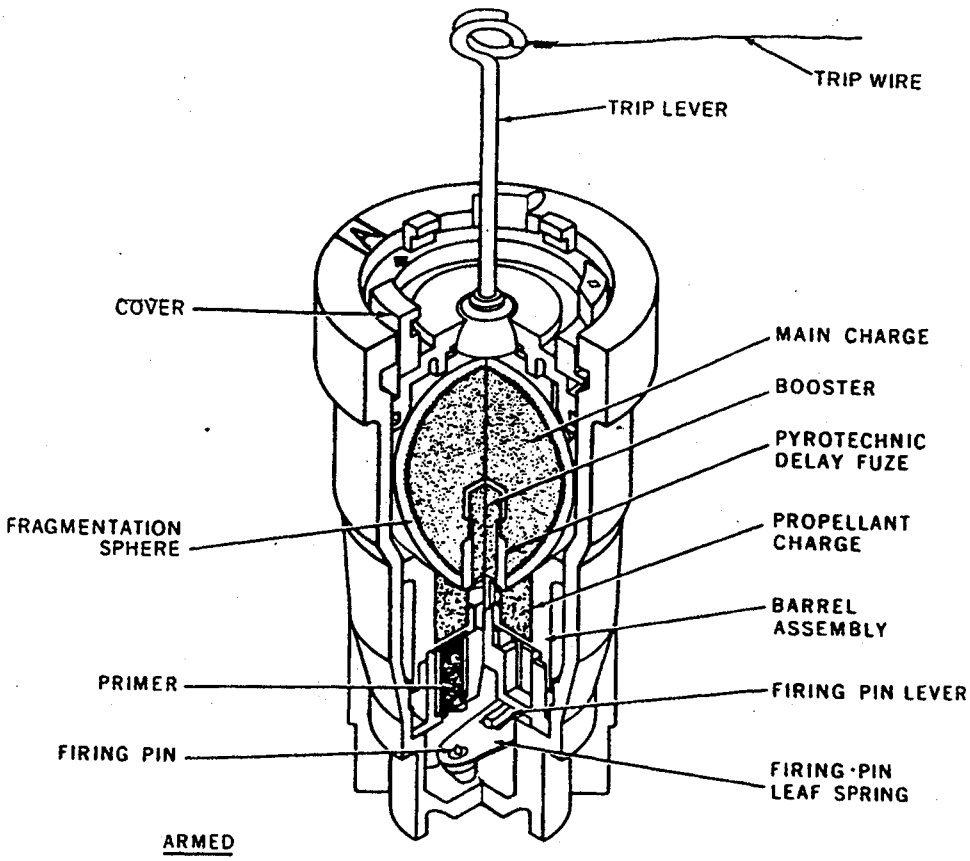

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-FSM-M
- CONTACT: Devine, D
- PHONE: DSN 880-6114
- STATUS: Obsolete
- USER: Army
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Land Mines

- AMMUNITION:
  - M26 AP Mine

LOCATION: Integral
BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK: NA
- VELOCITY: NA

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: MIL-STD-1316 is NA
SETTERS: None

Supersedes page 4-10A of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Rotation of barrel

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Yes

ARMING TIME OR DISTANCE:
1.0 s

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

FUNCTIONING DATA

MODES: Delay
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Personnel
SENSITIVITY:
14 to 28 lb (6.4 to 12.7 kg)

FUNCTION TEMP:
-40 to +71 deg C
MODE ON DELIVERY:
Safe

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-30A/B, FUZE, MINE

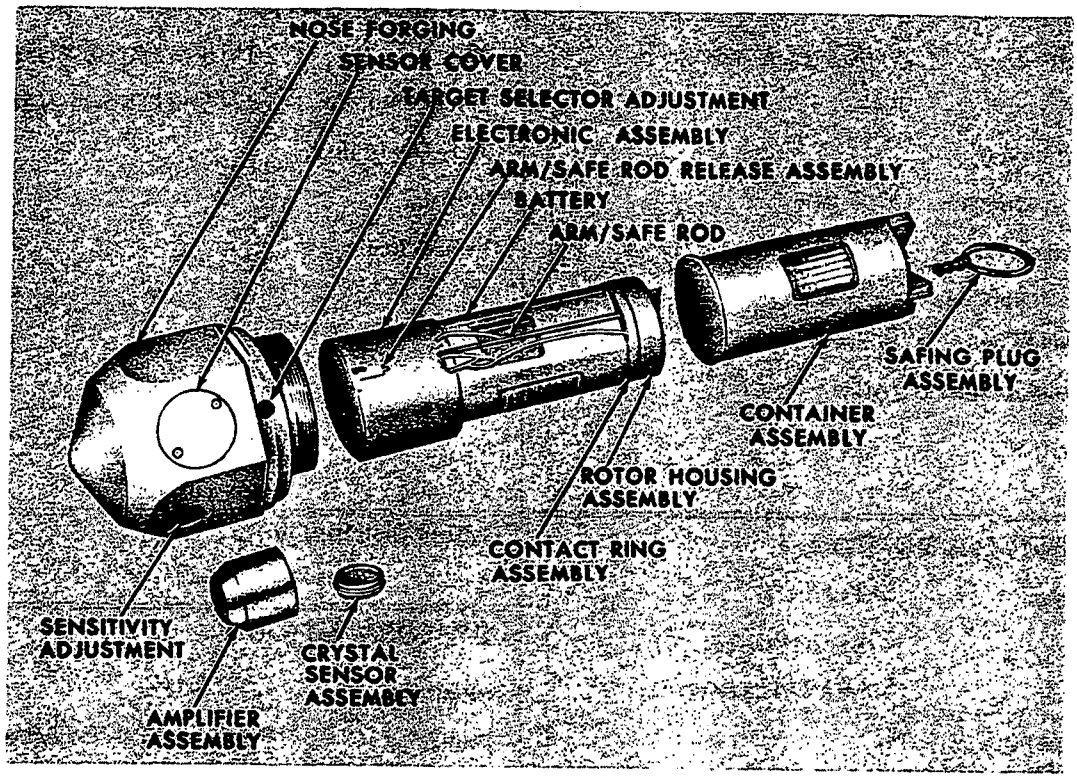

IDENTIFICATION

Agency	Eglin AFB, Arm Div H. Garner
Status	Terminated
Ass'y Dwg. No.	63D10302
Parts List	DL63D10302
Specification	
Previous Number	

GENERAL

Carriers	Mine
Cal. — Size	500 lb (MK 82), 750 lb (MK17), 800 lb (BLU31/B)
Location	Top
Use	HE
MIL-STD's	331, Tests 101-108,
Max Values	111-115, 205; 810
Rotat. (rps)	
Setback (g)	
Velocity (fps)	875

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-30A/B, FUZE, MINE

ARMING DATA

Method	Bellows motor
Delay	12.5 min
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Lanyard
External Indicat.	No

PHYSICAL DATA

Weight	20 lb w/fuze forgings
Total Length (in.)	12.15 without safety pin
Body Diam. (in.)	4.90
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Seismic
Type	Electronic
Delay	Self destruct
Time Type	
Time Setting (sec)	
Target	Antivehicles
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	Percussion cap/battery
Detonator	M36A1
Booster	RDX, 45 gm

REMARKS

Fuze designed to replace FMU-8/B and updates FMU-30/B.

Illustration shows FMU-30/B.

SERIES: AF CHAPTER: 4
DESIGNATION: FMU- 30A/B
Mine Seismic Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM44, MINE ASSEMBLY, WARNING, ANTI-INTRUSION

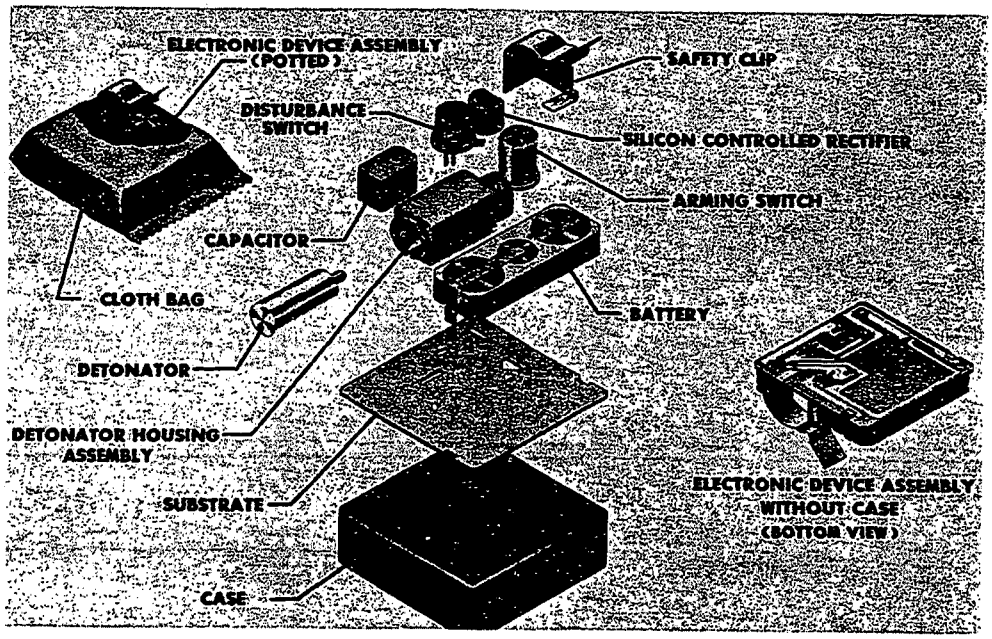

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-T H. Rand, AV 880-5655
Status	Terminated
Ass'y Dwg. No.	P9229427
Parts List	9229427
Specification	X-PA-PD-3045
Previous Number	

GENERAL

Carriers	Mine, aircraft deployed
Cal. — Size	
Location	
Use	Warning device
MIL-STD's	810A
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM44, MINE ASSEMBLY, WARNING, ANTI-INTRUSION

ARMING DATA

Method	*
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	14 gm
Total Length (in.)	1 3/8 by 1 3/8 in.
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Functions on disturbance
Type	
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

4.2 volt battery

EXPLOSIVE TRAIN

S&A Device	
Primer	XM114 squib
Detonator	
Booster	

REMARKS

*Ejection from subpack plus freon evaporation.

SERIES: A CHAPTER: 4
DESIGNATION: XM 44
Anti-Instrusion Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

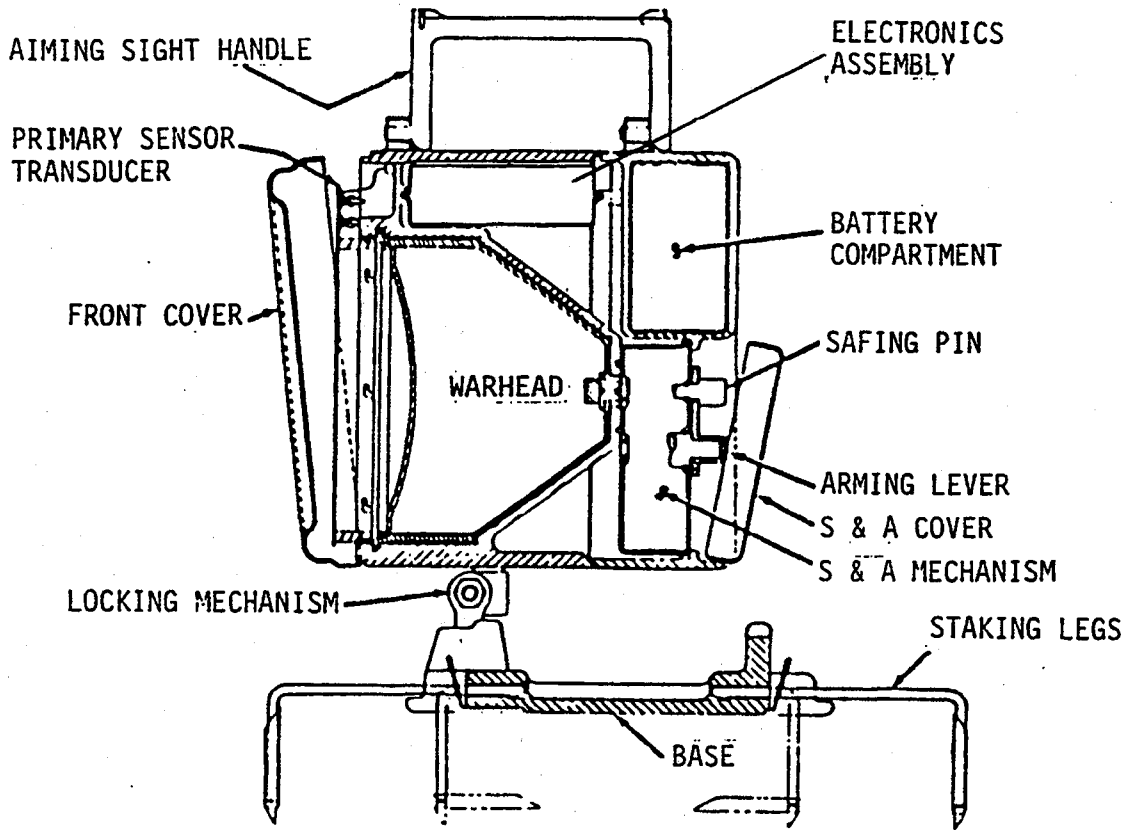

- OVERALL SIZE -	- INTRUSION -	WT: 35 lb (15.876 g)
LG: To be determined	DP: To be determined	THD: None
XSECT: To be determined	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, AMCPM-MCD
- CONTACT: Andrejkovics, R
- PHONE: DSN 880-3981
- STATUS: Terminated
- USER: Army, Marines
- ASSY DWG: Not yet assigned
- PARTS LIST:
- SPEC: Not yet prepared
- PUB:

- NATIONAL STOCK NO: Not yet assigned
- DODIC:
- PRIOR MODEL NO: STORMS
- SIMILAR TO:

- REPLACES: None
- REPLACED BY:

GENERAL
- WEAPON: AT/AV Mine

- AMMUNITION: XM 84 Wide Area Side Penetrating Mine (WASPM)

LOCATION: Face
BALLISTIC LEVELS:
- ROTATION: None
- SETBACK: None
- VELOCITY: None

- CREEP: None
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Switch & pull wire

SECOND SAFETY:
Electronic Timeout

OTHER SAFETY:
Barrier removal

SAFE/ARM INDICATION:
Yes

ARMING TIME OR DISTANCE:
Classified

EXPLOSIVE COMPONENTS

S&A DEVICE: Out-of-line explosive train

PRIMER: None

DETONATOR: In design

LEAD: In design

BOOSTER: In design

OTHER:

FUNCTIONING DATA

MODES: Remote, Acoustic w/IR or RF

TYPE: See Remarks

CHARACTERISTICS:
Acoustic alerter signature
RF or IR final signature

TARGET: Ground-Tank, Vehicle

SENSITIVITY:
Classified

FUNCTION TEMP:
See AR 70-38

MODE ON DELIVERY:

POWER SUPPLY:

Primary lithium battery

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
The XM84 Mine cover is removed and the system deployed. Pulling the safety pin removes the arming lever (spring winder) barrier, and connects the battery to the Command Link Receiver (CLR). An SD timer is set using the safing pin as a tool. The CLR can be programmed. The arming lever is rotated 90 deg and locked. This winds a rotor torsion spring and applies power to the safe separation timers, SD circuits, piston actuators and their fire circuits. The capacitors of the initial and final safe separation timers (ISST and FSST) are charged. The first piston actuator fires when the ISST times out shearing a wire and removing the first lock. The second actuator fires when the FSST times out shearing a second wire removing the second lock and completely unlocking the rotor. The rotor turns 60 degrees under torsion spring force aligning the detonator with the explosive train, removing shorts on the detonator and permitting the firing circuit to charge. The Pre-alerter/alerter circuit checks for alert criteria. If the criteria are met, the signal processor validates the signal. A primary senor monitors target range and angular position initiating a fire signal when the target crosses the aimpoint.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

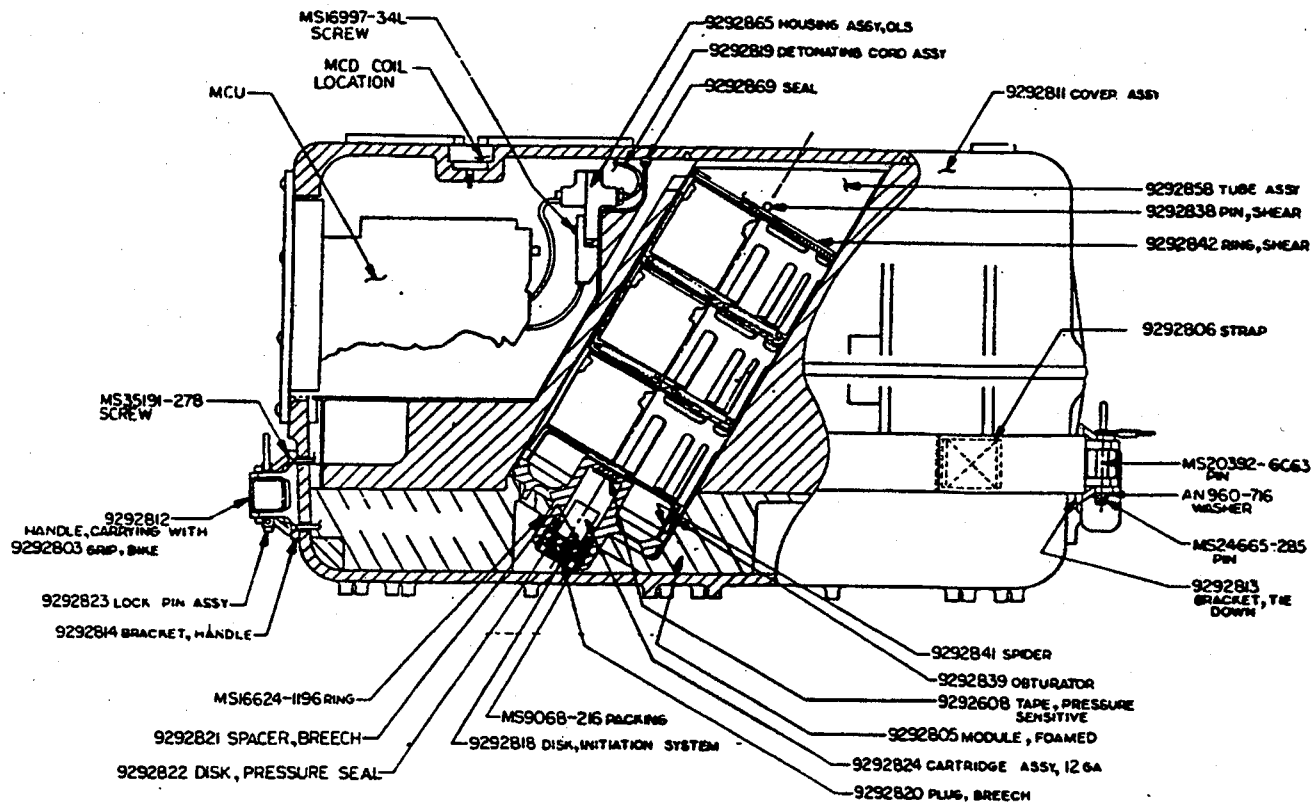

- OVERALL SIZE -	- INTRUSION -	WT: 0.22 lb (99.8 g) S&A
LG: 1.75 in (44.5 mm)	DP: 1.75 in (44.5 mm)	THD: None
XSECT: 1.17 in (29.7 mm)	DIA: 1.17 in (29.7 mm)	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-FSM-S
- CONTACT: Smith, K
- PHONE: DSN 880-6101, -6129
- STATUS: Terminated
- USER: Army
- ASSY DWG: 9 328 692
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:
  - Not assigned
- DODIC: Not assigned
- PRIOR MODEL NO: None
- SIMILAR TO:

- REPLACES: None
- REPLACED BY:

GENERAL
- WEAPON: AT Mines

- AMMUNITION:
  - Scatterable Land Mines
  - System Manually Emplaced
  - Dispenser, XM132

LOCATION: Center and Face of Mine

BALLISTIC LEVELS:
- ROTATION: Neg
- SETBACK: Neg
- VELOCITY: Neg

- CREEP: Neg
- FLIGHT TIME:

SAFETY STD:

SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
RF or hard wire signal

SECOND SAFETY:
Bore rider, ejection from Dispenser

OTHER SAFETY:
Magnetic inductive coupling
Digital Electronic Timer

SAFE/ARM INDICATION:
Yes, S & A

ARMING TIME OR DISTANCE:
Yes, Classified

EXPLOSIVE COMPONENTS

S&A DEVICE: Same as BLU-91 PEP 2

PRIMER: Elec Bat F/M74 Mine, 9292624

DETONATOR: M100 Elec
PA506 Elec Delay

LEAD: PA513 center, PA517 main 4 ea
PA516 transfer 4 ea (in mine)

BOOSTER: 13.6 g PBXN-5 (in mine)

OTHER: MDF, PBXN-5 and HMX 2 ea
(in mine) Clear Chg: 750 mg
M5 Prop 2 ea (in mine)

FUNCTIONING DATA

MODES: Influence, SD
TYPE: Magnetic
CHARACTERISTICS:
Senses Tracked & Wheeled Vehicles
Digital Elec SD, Fixed Time,
RF recycleable.

TARGET: Gnd-Tank Vehicle
SENSITIVITY:
Classified
SD's on low voltage

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Lithium Reserve Cell 9275567
High Energy Density Cell
9328787, 2 each

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
The XM132 nomenclature has been terminated. AT mines are now incorporated into the M131 Modular Pack Mine System (MOPMS). See MIL-HDBK-145.

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M604 AT Mine Practice Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 4-15and 4-16 of MIL-HDBK 146.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M608 AT Mine Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 4-17and 4-18of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

UNCLASSIFIED

M609, FUZE, MINE, ANTITANK

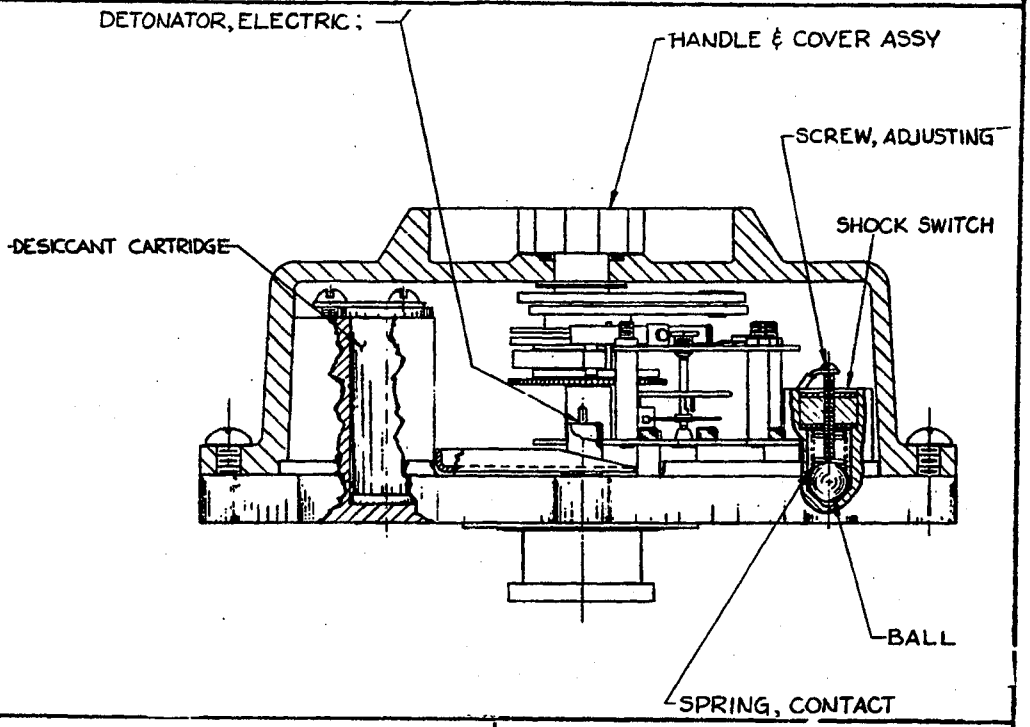

IDENTIFICATION

Agency	ERADCOM, DELHD-IT-EA
Status	R. Wyckoff, AV 290-2677 Obsolete
Ass'y Dwg. No.	D10982737
Parts List	EPL 10982737
Specification	XTL-PD-144
Previous Number	T1212E1

GENERAL

Carriers	Mine, Antitank
Cal. — Size	Heavy
Location	Top
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Influence fuze, concealable, hand or machine plantable

SERIES: A CHAPTER: 4
DESIGNATION: M609
AT Mine Influence Fuze

UNCLASSIFIED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

UNCLASSIFIED

M609, FUZE, MINE, ANTITANK

ARMING DATA

Method	Hand lever
Delay	35 min
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	1.5 lb
Total Length (in.)	2.25
Body Diam. (in.)	4.25
Intrusion	0.5 in.
Thread Size	3/4-12

FUNCTIONING DATA

Action	Proximity (influence)
Type	Electric
Delay	None
Time Type	Mechanical (escapement)
Time Setting (sec)	
Target	Tanks and other vehicles
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

PS-308, Zamboni pile

EXPLOSIVE TRAIN

S&A Device	M609
Primer	
Detonator	M67
Booster	
Lead	Tetryl

REMARKS

SERIES: A CHAPTER: 4
DESIGNATION: M609
AT Mine Influence Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM611, FUZE, MINE, APERS

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCU-SA
Status	L. Coon, AV 880-5565 Terminated
Ass'y Dwg. No.	SK-620418
Parts List	8864079
Specification	
Previous Number	

GENERAL

Carriers	Mine
Cal. — Size	
Location	
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM611, FUZE, MINE, APERS

ARMING DATA

Method	Removal of shipping cap & pull pin
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	8 oz
Total Length (in.)	7
Body Diam. (in.)	2 3/4
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Pressure or tripwire
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M46
Booster	

REMARKS

Was to replace Fuze M605.

Similar to Fuze M607 (upper ass'y).

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

UNCLASSIFIED

M612, FUZE, MINE, ANTITANK

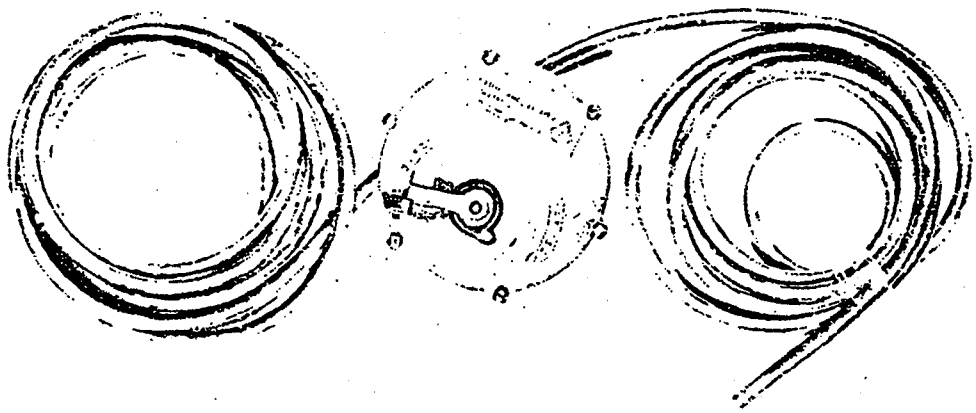

IDENTIFICATION

Agency	ERADCOM, DELHD-IT-EA
Status	R. Wyckoff, AV 290-2677 Obsolete
Ass'y Dwg. No.	D10967803
Parts List	EPL 10967803
Specification	XTL-PD-108
Previous Number	T1217E2

GENERAL

Carriers	Mine antitank, M21
Cal. — Size	Heavy
Location	Top
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Small rubber tubes are emplaced across path of vehicle

Supersedes Item M612 of 20 Feb 70

SERIES: A CHAPTER: 4
DESIGNATION: M612
AT Mine Fuze

UNCLASSIFIED

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

UNCLASSIFIED

M612, FUZE, MINE, ANTITANK

ARMING DATA

Method	Manual
Delay	35 min
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1 1/2 lb
Total Length (in.)	2 1/2
Body Diam. (in.)	6
Intrusion	1/2 in.
Thread Size	3/4-12

FUNCTIONING DATA

Action	Contact
Type	Electric
Delay	None
Time Type	Mechanical
Time Setting (sec)	
Target	Vehicles
Sensitivity	Compress 1 in. of 3/8 in. diam. tube
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY
PS-308, Zamboni pile

EXPLOSIVE TRAIN

S&A Device	M612
Primer	None
Detonator	M67
Booster	
Lead	Tetryl

REMARKS

SERIES: A CHAPTER: 4
DESIGNATION: M612
AT Mine Fuze

UNCLASSIFIED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 2 lb (907 g)
LG: 2.5 in (63.5 mm)	DP:	THD:
XSECT: 5.5 in (139.7 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-FSM-M
- CONTACT: Devine, D
- PHONE: DSN 880-6114
- STATUS: Terminated
- USER: Army
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:
  1345-00-148-6535
- DODIC: K064
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: AT mine

- AMMUNITION:

LOCATION:
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316 is NA
SETTERS:

Supersedes page 4-25 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Manual set of mechanical clock

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
10 to 15 min

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: T44

LEAD: RDX

BOOSTER:

OTHER:

POWER SUPPLY:

FUNCTIONING DATA

MODES:
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: none
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM617, FUZE, MINE

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCU-SA L. Coon, AV 880-5565
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine, repeating
Cal. — Size	
Location	
Use	HE, fragmentation
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Arm, disarm state remotely controllable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM617, FUZE, MINE

ARMING DATA

Method	Manual set of mech. clock
Delay	6 min.
Rotation (rps)	
Non-arm	**Arm**
Setback (g)	
Non-arm	**Arm**
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2 lb (approx.)
Total Length (in.)	8 (approx.)
Body Diam. (in.)	5 (approx.)
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Influence
Type	Radio doppler
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

9 volt battery

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

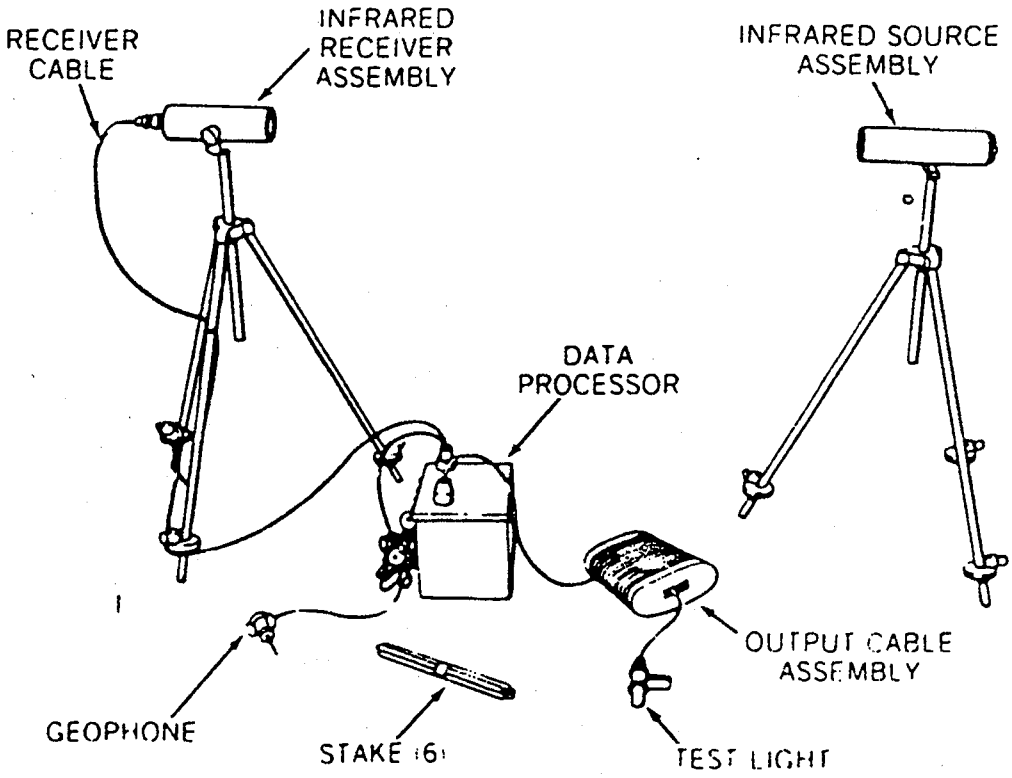

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-FSM-M
- CONTACT: Devine, D
- PHONE: DSN 880-6114
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 9 235 367
- PARTS LIST: 9 235 367
- SPEC: MIL-F-50807
- PUB:

- NATIONAL STOCK NO: 1345-00-182-3146
- DODIC: K060
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: XM66 Mine

- AMMUNITION: HE, 3.5-in rocket

LOCATION:
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316 is NA
SETTERS: None

Supersedes page 4-29 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
Lamp

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

FUNCTIONING DATA
MODES: Infrared-seismic
TYPE: Electronic
CHARACTERISTICS:

TARGET: Heavy vehicles
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

2 batteries

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0410
US HCSDS: None
UN CL/DIV SCG: 1.4 D
US DOT SHIP CL: C
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
This fuze is an electronic detector/discriminator which operates on the principle of remote detection and automatic functioning and consists of five components: (1) Source assembly is a tripod mounted infra red (IR) beam generator; (2) receiver assembly is a tripod mounted IR beam receiver; (3) stabilizing stakes is for source and receiver assemblies; (4) geophone is a seismic device; and (5) data processor receives inputs from receiver and geophone. The output cable transmits firing command to the rocket. Functioning sequence is as follows: Geophone detects an approaching vehicle through ground vibration and signals the data processor that a target is enroute. When the target vehicle breaks the infrared (IR) beam generated by the source assembly, the receiver signals the data processor. The processor releases electrical energy to fire the rocket only under conditions of a broken IR beam and a proper seismic signal. This system is inhibited against personnel and animals by a filter in the data processor. Influence of small vehicles on system functioning increases in some areas depending on closeness to geophones, speed of vehicle and terrain at the emplacement site. Fuze in the 3.5 in. rocket is M404A2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM621, FUZE

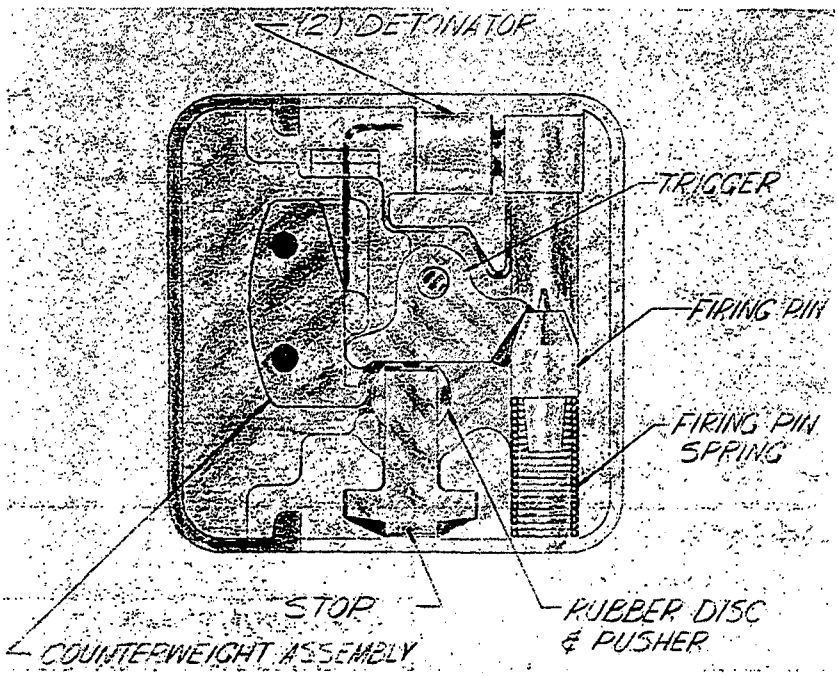

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCU-CV
Status	Juliano Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Cannister
Cal. — Size	
Location	
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 4
DESIGNATION: XM621
Anti Disturb Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM621, FUZE

ARMING DATA

Method	Chemical, mechanical
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	No
Arming Time	15 - 30 min.
Safing Time	15 - 30 min.

PHYSICAL DATA

Weight	6 gram
Total Length (in.)	0.3 in. thick
Body Diam. (in.)	0.850 in. square plastic
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Disturbance or pressure
Type	Mechanical
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

Functions on movement from emplacement

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M55 (2)
Booster	No

REMARKS

Aerially emplaced by cannister.

Designed as antidisturbance feature for mines or separately emplaced anti-disturbance warning device, generating noise with foot or other pressures or disturbances.

Also called button bomblet.

SERIES: A CHAPTER: 4
DESIGNATION: XM621
Anti Disturb Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1200E1, FUZE, MINE

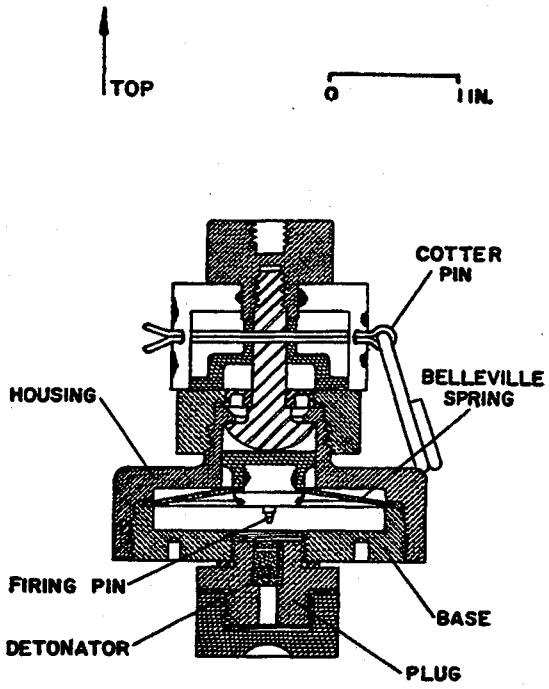

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCU-SA L. Coon AV 880-5565
Status	Terminated
Ass'y Dwg. No.	P-82937
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine
Cal. — Size	
Location	Top
Use	GP
MIL-STD's	331, Tests, 101, 105, 201
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1200E1, FUZE, MINE

ARMING DATA

Method	Manual
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	4.78 lb
Total Length (in.)	3
Body Diam. (in.)	
Intrusion	
Thread Size	0.625-12NF-2

FUNCTIONING DATA

Action	Pressure
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M46
Booster	

REMARKS

Explosive train is not interrupted.

Superceded by Fuze M607.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1205, FUZE, MINE, GP, NM

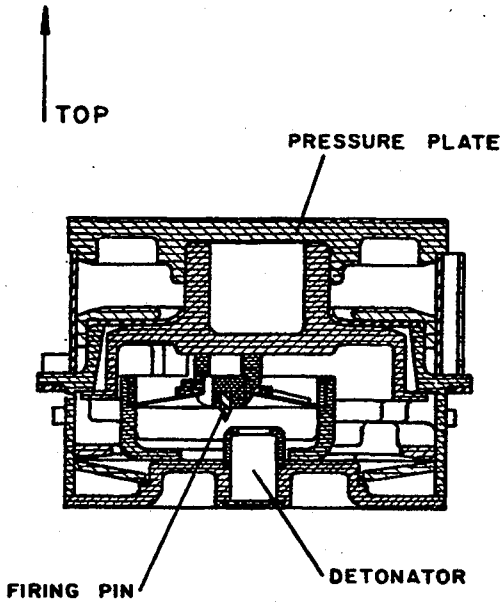

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCU-SA L. Coon AV 880-5565
Status	Terminated
Ass'y Dwg. No.	P 82739 (P 42704)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine, T20
Cal. — Size	4.5 in.
Location	Top of mine
Use	GP
MIL-STD's	331 Tests, 101-105, 107, 108
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1205, FUZE, MINE, GP, NM

ARMING DATA

Method	Manual
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	3.007
Body Diam. (in.)	
Intrusion	1.25 in.
Thread Size	None, see remarks

FUNCTIONING DATA

Action	Pressure
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel, antivehicles
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T37
Booster	

REMARKS

Set safe, APERS, or at action. Three lugs equally spaced on the fuze body (exterior wall) engage with three similar lugs located in the fuze wall of Mine T20. Slight right-hand rotation locks the fuze in the mine.

SERIES: A CHAPTER: 4
DESIGNATION: T1205
GP Mine Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1214, FUZE, MINE

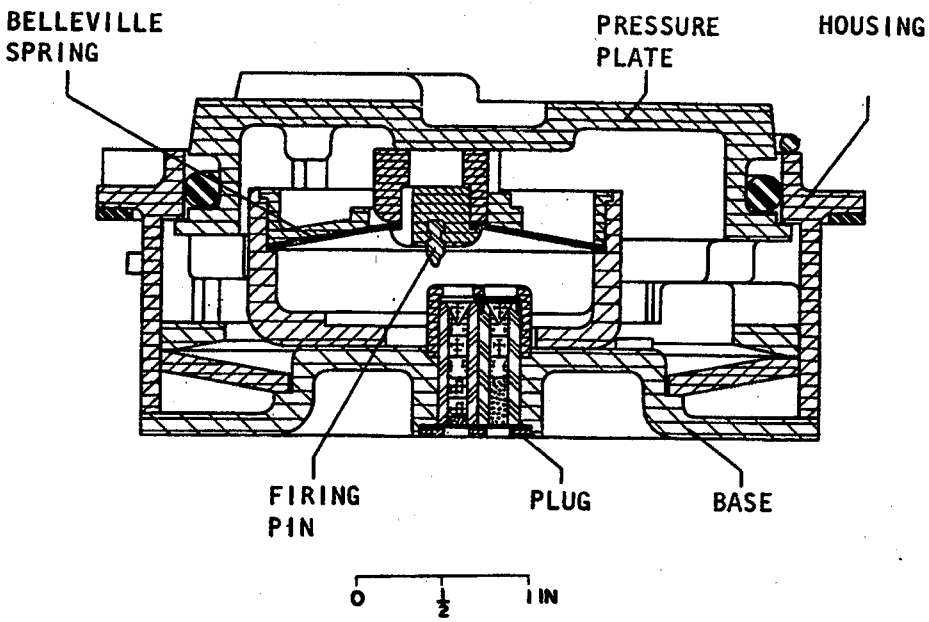

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCU-SA L. Coon AV 880-5565
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine
Cal. — Size	4.5 in.
Location	Top
Use	Practice
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1214, FUZE, MINE

ARMING DATA

Method	Manual
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	0.64 lb
Total Length (in.)	2.13
Body Diam. (in.)	
Intrusion	1.25 in.
Thread Size	

FUNCTIONING DATA

Action	Pressure
Type	Mechanical
Delay	5.5 and 5.1 sec
Time Type	Pyrotechnic
Time Setting (sec)	
Target	Antitank, antiarmour
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	
Delay	Black powder

REMARKS

Simulates Mine T20 GP, NM.

Can be set safe, APERS, or AT.

SERIES: A CHAPTER: 4
DESIGNATION: T1214
AT Mine Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1215, FUZE, MINE, AT, NM, PRACTICE

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCU-SA L. Coon
Status	AV 880-5565 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine
Cal. — Size	10 in.
Location	Top
Use	Practice
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1215, FUZE, MINE, AT, NM, PRACTICE

ARMING DATA

Method	Manual
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	2.43 lb
Total Length (in.)	2 5/8
Body Diam. (in.)	
Intrusion	1 25/32 in.
Thread Size	

FUNCTIONING DATA

Action	Pressure
Type	Mechanical
Delay	5.5 sec
Time Type	Pyrotechnic
Time Setting (sec)	5.5
Target	Armour
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	
Delay	Black powder

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1216, FUZE, MINE

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi
Status	AV 290-2400 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine, AT, M21
Cal. — Size	
Location	Top
Use	HE, Antitank
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Uses pneumatic hoses, 1 in. diam. by 8 ft long to detect treads

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1216, FUZE, MINE

ARMING DATA

Method	Manual
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	2
Body Diam. (in.)	3
Intrusion	
Thread Size	3-20

FUNCTIONING DATA

Action	Pneumatic hose
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

None

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T122lE1, FUZE, MINE, NM, COMBINATION, PRACTICE

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCU-SA L. Coon AV 880-5565
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine
Cal. — Size	
Location	Top
Use	Practice
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1221E1, FUZE, MINE, NM, COMBINATION, PRACTICE

ARMING DATA

Method	Manual
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	1/2 lb
Total Length (in.)	Fuze 2 1/2 in, rod 20 in.
Body Diam. (in.)	
Intrusion	0.3 in.
Thread Size	0.625-12NF-2, 75UNS-2A

FUNCTIONING DATA

Action	Pressure
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Armour
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

This is the practice fuze for combination mine, Fuze T1200E1. Functioning is accomplished by vertically depressing the pressure ring 1/8 in., 340 lb, and tilting a 20 in. extension rod through 20°, 5.25 lb, at the end of the tilt rod.

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1223, FUZE, MINE, AT

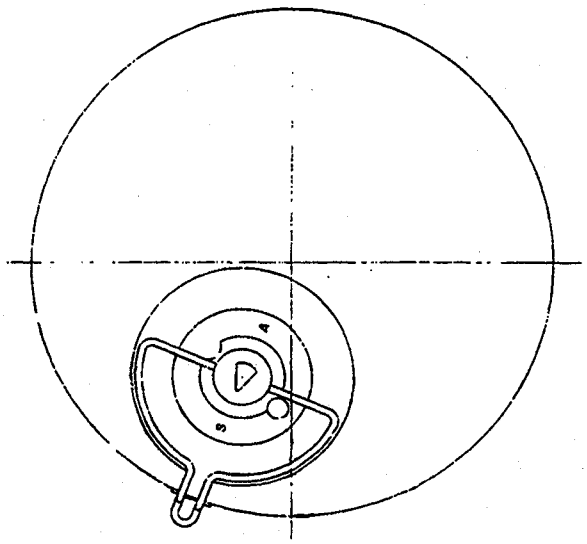

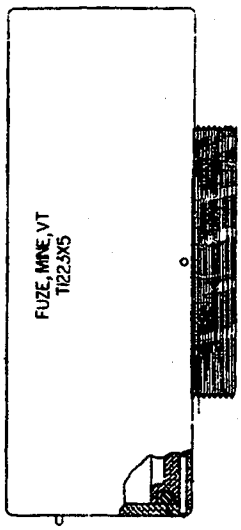

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCU-SA L. Coon AV 880-5565
Status	Terminated
Ass'y Dwg. No.	FD 18527 (Armour)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine, T29
Cal. — Size	
Location	Top
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1223, FUZE, MINE, AT

ARMING DATA

Method	Mechanical train
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	1.5 lb
Total Length (in.)	2.5
Body Diam. (in.)	
Intrusion	0.375 in.
Thread Size	3-20

FUNCTIONING DATA

Action	Influence
Type	Magnetic & seismic
Delay	
Time Type	Electric
Time Setting (sec)	Indeterminable
Target	Antitank
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	T22E1
Detonator	
Booster	

REMARKS

Unlimited cycles of arming & disarming.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1224E1, FUZE, MINE

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi AV 290-2400
Status	Terminated
Ass'y Dwg. No.	TL3D-2888
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine, At, M21
Cal. — Size	
Location	Top
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 4
DESIGNATION: T1224E1
AT Mine Influence Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1224E1, FUZE, MINE

ARMING DATA

Method	Hand lever
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1.75 lb
Total Length (in.)	2.5
Body Diam. (in.)	4
Intrusion	
Thread Size	3-20

FUNCTIONING DATA

Action	Magnetic, vibration
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Battery (solid state)

EXPLOSIVE TRAIN

S&A Device	Clock
Primer	
Detonator	T76
Booster	

REMARKS

Predecessor to XM609

SERIES: A CHAPTER: 4
DESIGNATION: T1224E1
AT Mine Influence Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1226, FUZE, MINE, AT

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCU-SA L. Coon AV 880-5565
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine
Cal. — Size	
Location	Offset
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1226, FUZE, MINE, AT

ARMING DATA

Method	Mechanical train
Delay	35 min
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	3
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Load of 350 lb
Type	Electrical
Delay	0.25 sec
Time Type	
Time Setting (sec)	
Target	Armour
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Thermal

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M36A1
Booster	

REMARKS

Explosive train is not interrupted.

SERIES: A CHAPTER: 4
DESIGNATION: T1226
AT Mine Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1228, FUZE, MINE

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCU-SA L. Coon AV 880-5565
Status	Terminated
Ass'y Dwg. No.	NPI 4-01-180
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine
Cal. — Size	
Location	Top
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1228, FUZE, MINE

ARMING DATA

Method	Manual
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	4 oz
Total Length (in.)	1.5
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Pressure
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Armour
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	No. 6 cap
Booster	

REMARKS

An inexpensive fuze that could be made by native labor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1229, FUZE, MINE, AT

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCU-SA L. Coon AV 880-5565
Status	Terminated
Ass'y Dwg. No.	P-87056
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine
Cal. — Size	
Location	Top
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1229, FUZE, MINE, AT

ARMING DATA

Method	Manual
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Pressure
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Armour
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M46
Booster	

REMARKS

The actuating spring is normally unstressed. A gear release mechanism locks the firing mechanism up to the instant of functioning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1231, FUZE, MINE, NM

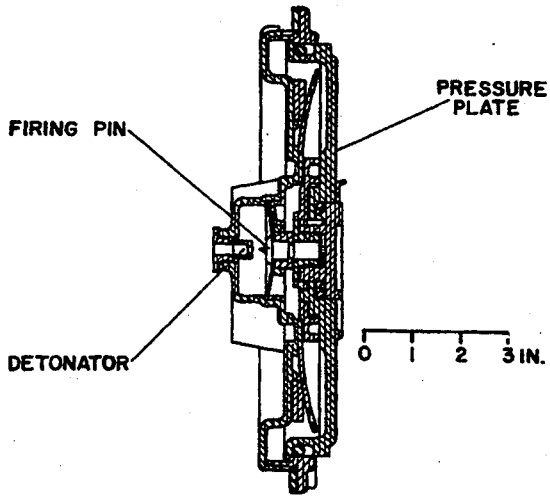

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCU-SA L. Coon AV 880-5565
Status	Terminated
Ass'y Dwg. No.	1231-55F
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine
Cal. — Size	10 in.
Location	Top
Use	GP
MIL-STD's	331 Tests, 101-107, 108
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1231, FUZE, MINE, NM

ARMING DATA

Method	Manual
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	2.44 lb
Total Length (in.)	2
Body Diam. (in.)	
Intrusion	1 25/32 in.
Thread Size	

FUNCTIONING DATA

Action	Pressure
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Armour
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T36
Booster	

REMARKS

Modified Fuze M606, NM mine. Four equally spaced lugs about the fuze housing engage with 4 similar lugs in the fuze well of the mine.

Slight right hand rotation locks the fuze in the mine.

SERIES: A CHAPTER: 4
DESIGNATION: T1231
AT Mine Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1233, T1234, T1235, FUZE, MINE

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi
Status	AV 290-2400 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Mine, AT, M21
Cal. — Size	
Location	Top
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

T1233 - Magnetic, vibration
T1234 - Infrared
T1235 - Gamma ray backscatter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1233, T1234, T1235, FUZE, MINE

ARMING DATA

Method: Hand lever
Delay:
Rotation (rps):
Non-arm: Arm:
Setback (g):
Non-arm: Arm:
Arming Wire:
External Indicat.: Yes

PHYSICAL DATA

Weight:
Total Length (in.):
Body Diam. (in.):
Intrusion:
Thread Size: 3-20

FUNCTIONING DATA

Action: See key features
Type: Electric
Delay:
Time Type:
Time Setting (sec):
Target: Antitank
Sensitivity:
Material:
Thickness (in.):
Max Obliq. (°):
Velocity (fps):
Carrier:

POWER SUPPLY

Batteries (solid state)

EXPLOSIVE TRAIN

S&A Device: Clock
Primer:
Detonator: T76
Booster:

REMARKS

These fuzes are classified

SERIES: A CHAPTER: 4
DESIGNATION: T1233
AT Mine Influence Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FUZE (for BOMINE)

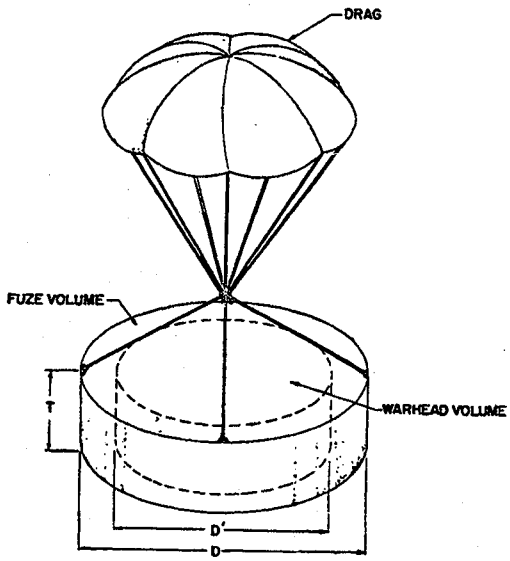

PROPOSED MUNITION SIZES	D	T	D'	FUZE VOLUME
WARHEAD NO.1	6 IN.	2 IN.	4 IN.	31.4 IN.
WARHEAD NO.2	8IN.	2 IN.	6 IN.	43.6 IN.

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCN-T
Status	Rand, AV 880-5655 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	QDRI No. PA-56
Previous Number	

GENERAL

Carriers	Aircraft or missile
Cal. — Size	
Location	Outer ring
Use	Armor piercing
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

The fuze is designed to function upon impact with a metal surface or switch to a proximity fuzing mode if impacted on a non-metalic surface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM-, FUZE (for BOMINE)

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm 1200 **Arm** 1500	
Setback (g)	
Non-arm **Arm**	
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	1 lb
Total Length (in.)	*
Body Diam. (in.)	
Intrusion	
Thread Size	

*Cylinder
2 in. high
6 in. inside diam.
8 in. outside diam.

FUNCTIONING DATA

Action	PI & proximity
Type	Electrical
Delay	0 & 0.1 sec
Time Type	Electrical
Time Setting (sec)	
Target	Tank & antipersonnel car.
Sensitivity	
Material	Iron or steel
Thickness (in.)	Any
Max Obliq. (°)	45
Velocity (fps)	Above 10 fps & 3 mph
Carrier	Individual munition

POWER SUPPLY

Reserve power supply

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

To date the effort has been exclusively to demonstrate the feasibility of the sensor, therefore all data to environmental and physical characteristics are conjecture at this time.

SERIES: A CHAPTER: 4
DESIGNATION: F/BOMINE
PI and Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CHAPTER 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1E4, FUZE, PD

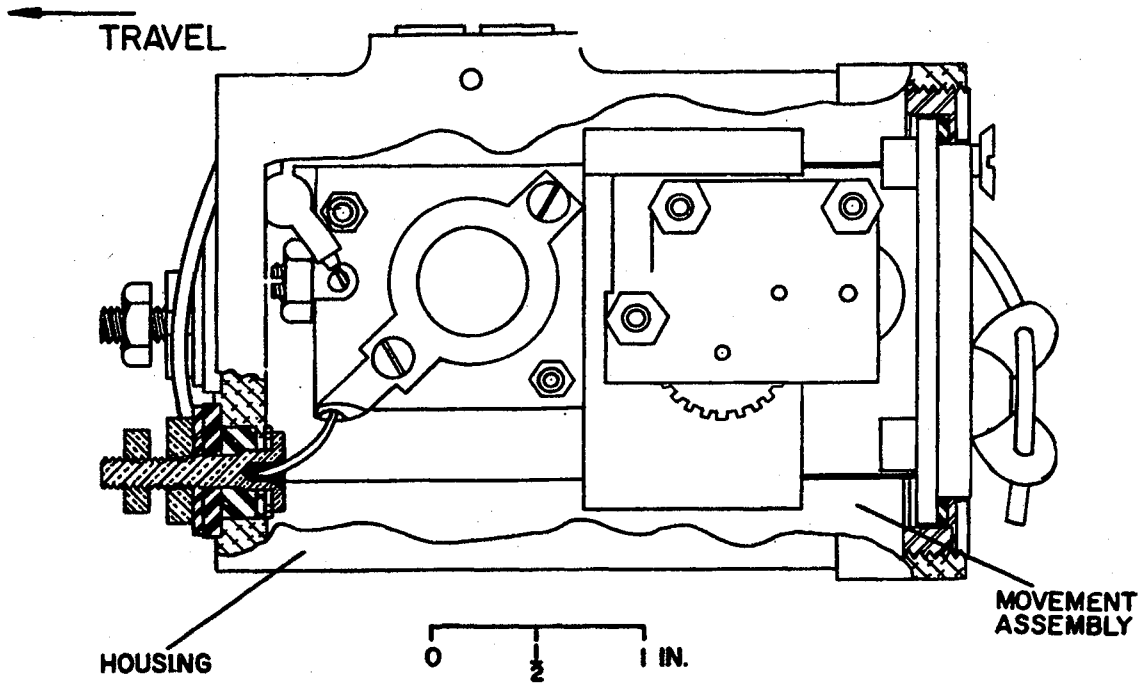

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	FF 7472 (FA)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket, Accelerometer
Cal. — Size	Honest John Rocket 760 mm
Location	Internal
Use	GP
MIL-STD's	331, Test 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Functions as a switch in electrical circuit of Fuze T1400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1E4, FUZE, PD

ARMING DATA

Method	Setback
Delay	2.5-3 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	14 Arm 16
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	3.59
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	Inert
Detonator	
Booster	

REMARKS

Similar to safety and arming mechanism T93E7 (NIKE) except it is inert.

SERIES: A CHAPTER: 5
DESIGNATION: T 1E4
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 3 lb (1360.8 mm)
LG: 5.545 in (140.8 mm)	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF
- CONTACT:
- PHONE:
- STATUS: Terminated
- USER: Army
- ASSY DWG: FF 7642
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO: T332

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 760 mm rocket

- AMMUNITION:
  - Honest John Rocket

LOCATION: Internal
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback, deceleration

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
2.5 s before set time

EXPLOSIVE COMPONENTS

S&A DEVICE: Inert

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

FUNCTIONING DATA

MODES: Time
TYPE: Mechanical
CHARACTERISTICS:
7 to 100 s

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Can be used as either a safety device or arming mechanism and has an initiating switch,.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AIR-3, FUZE, ROCKET

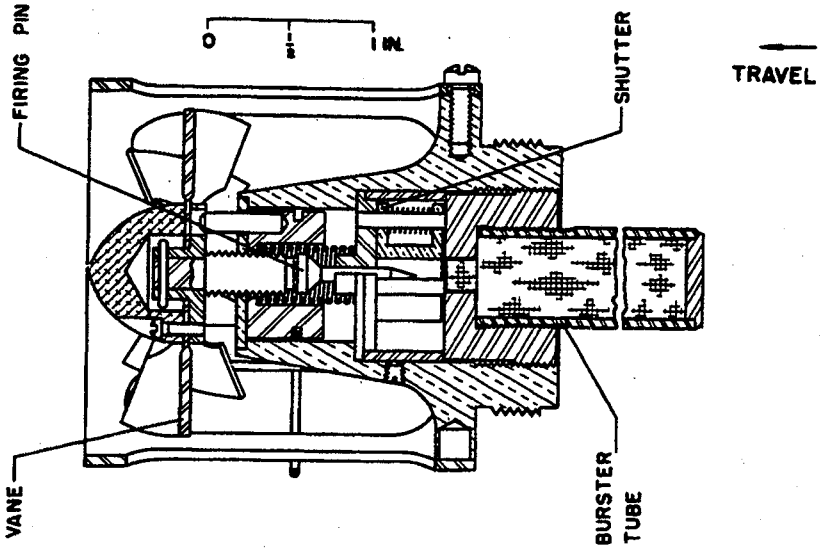

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Obsolete
Ass'y Dwg. No.	GA CIT-B2-01
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	7.0
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AIR-3, FUZE, ROCKET

ARMING DATA

Method	Vane
Delay	225 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	10
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1.1 lb
Total Length (in.)	2.9*
Body Diam. (in.)	
Intrusion	14.25 in.
Thread Size	1.70-14NS-2

*Less burster

Contains tetryl burster tube through center of head

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 0
Booster	Tetryl 9 gm

REMARKS

SERIES: N CHAPTER: 5
DESIGNATION: AIR- 3
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M4A2, FUZE, ROCKET, PD

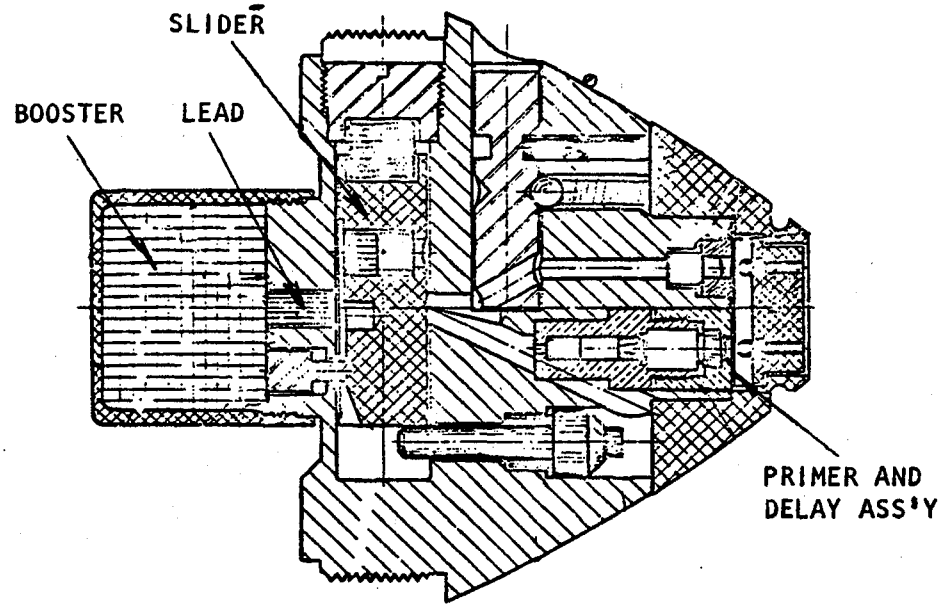

IDENTIFICATION ARRADCOM, DRDAR-LCN-M

Agency L. Horowitz, AV 880-5581

Status Obsolete

Ass'y Dwg. No. 73-10-1

Parts List

Specification

Previous Number

GENERAL

Carriers Rocket (M8)

Cal. — Size 4.5 in.

Location Nose

Use HE

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M4A2, FUZE, ROCKET, PD

ARMING DATA

Method	Setback
Delay	At end of burnout
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Pull pin
External Indicat.	

PHYSICAL DATA

Weight

Total Length (in.)

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action	Impact
Type	Mechanical
Delay	SQ or 0.05 sec.
Time Type	
Time Setting (sec)	
Target	Antipersonnel, light structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

PIR-8, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Terminated
Ass'y Dwg. No.	GA CIT-R3d-01
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	7"2
Location	Base
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

PIR-8, FUZE, ROCKET

ARMING DATA

Method	Setback, gas pressure
Delay	50ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3.15 lb
Total Length (in.)	6.17
Body Diam. (in.)	
Intrusion	6.17 in.
Thread Size	2.25-14NS-2

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.020 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 31 MOD 0
Booster	Tetryl 12 gm

REMARKS

Modification of Fuze MK 157
Used with 7!!2 demolition rocket

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AIR-9-1 , FUZE, ROCKET

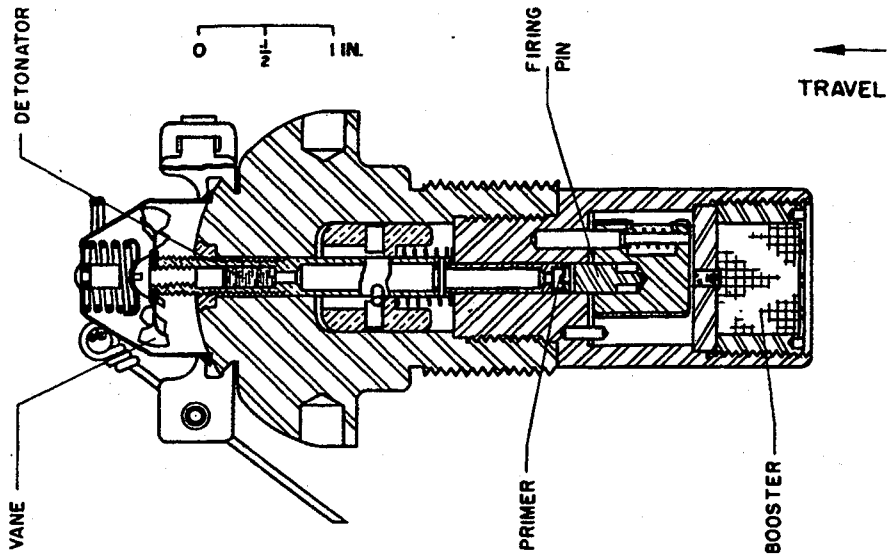

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Obsolete
Ass'y Dwg. No.	GA CIT-C9-01
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5.0 in, 11.75 in.
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AIR-9 , FUZE, ROCKET

ARMING DATA

Method	Setback, vane
Delay	50-90 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	10
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.5 lb
Total Length (in.)	5.65
Body Diam. (in.)	
Intrusion	3.457 in.
Thread Size	1.5-12NF-2

FUNCTIONING DATA

Action	PD, Delay
Type	Mechanical
Delay	0.010 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Light steel plate
Thickness (in.)	0.125
Max Obliq. (°)	60
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 102 MOD 0
Detonator	MK 23 MOD 0
Booster	Tetryl 12 gm
Nose Det.	MK 21 MOD 0

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

PIR-9, FUZE, ROCKET

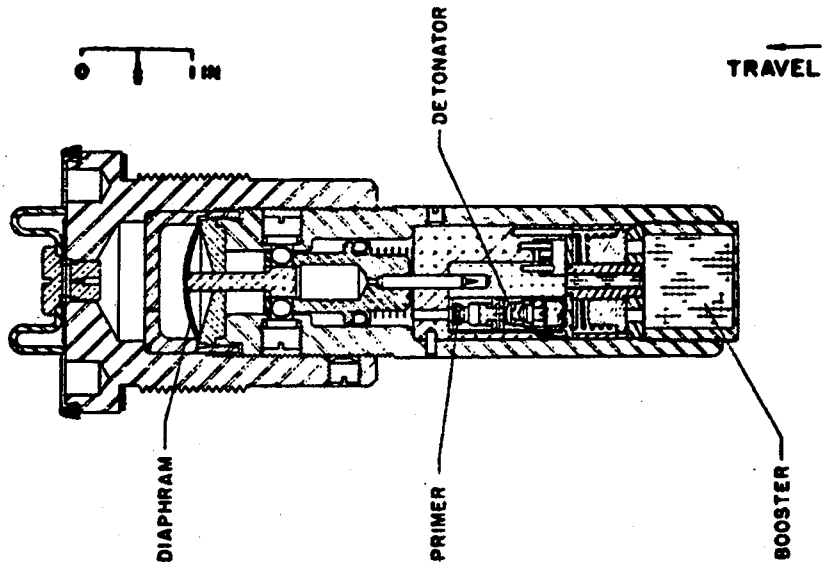

IDENTIFICATION

Agency	NSWC Code G44 J. Abell, AV 290-1545
Status	Terminated
Ass'y Dwg. No.	GA CITR3e-01
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	11.75
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

PIR-9, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3.15 lb
Total Length (in.)	6.84
Body Diam. (in.)	
Intrusion	
Thread Size	2.0-12NF-2

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.020 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.375
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 31 MOD 0
Booster	Tetryl 12 gm

REMARKS

Developed to correct the defects of Fuze MK 157

SERIES: N CHAPTER: 5
DESIGNATION: PIR- 9
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AIR-12 — 1, FUZE, ROCKET

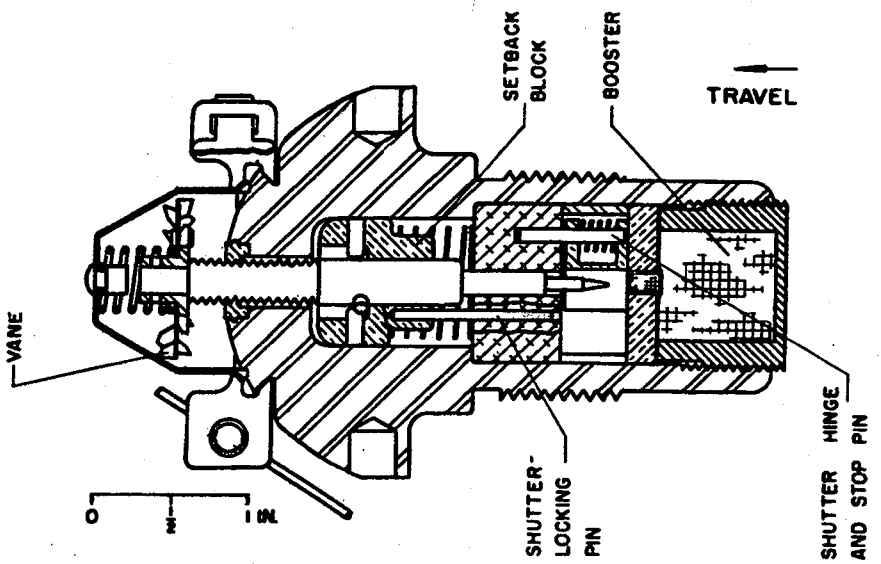

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Obsolete
Ass'y Dwg. No.	GA CIT C12
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5"0, 11"75
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

May be launched safe or armed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

AIR-12 1, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	300-600 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	10
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.25 lb
Total Length (in.)	4.45
Body Diam. (in.)	
Intrusion	2.461 in.
Thread Size	1.5-12NF-2

FUNCTIONING DATA

Action	PD, Select
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq.(°)	75
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 0
Booster	Tetryl 9 gm

REMARKS

Same as Fuze M149 except for setback weight and body

SERIES: N CHAPTER: 5
DESIGNATION: AIR- 12-1
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

PIR-14, FUZE, ROCKET

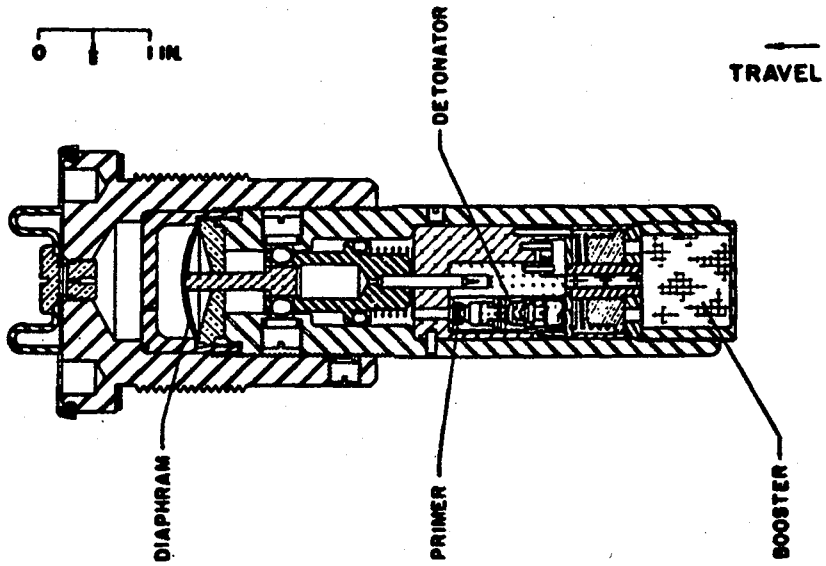

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Terminated
Ass'y Dwg. No.	GA CITR3J-01
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5"0
Location	Base
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

PIR-14, FUZE, ROCKET

ARMING DATA

Method	Setback, motor gas pressure
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3.15 lb
Total Length (in.)	6.34
Body Diam. (in.)	
Intrusion	
Thread Size	2.0-12NF-2

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.020 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.375
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 31 MOD 0
Booster	Tetryl 12 gm

REMARKS

SERIES: N CHAPTER: 5
DESIGNATION: PIR- 14
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

PIR-22, FUZE, ROCKET

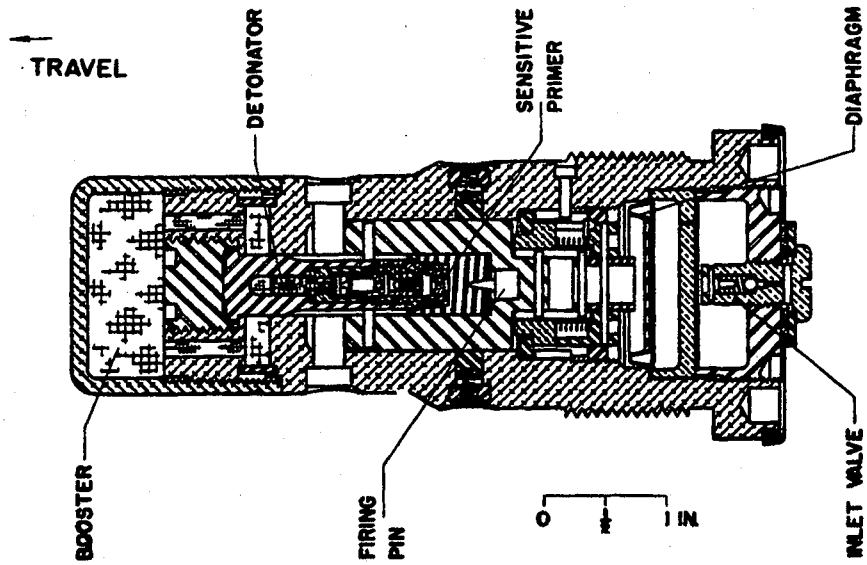

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Terminated
Ass'y Dwg. No.	GA CITR4a-01
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5"/0 HVAR
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	1800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

PIR-22, FUZE, ROCKET

ARMING DATA

Method	Motor gas pressure
Delay	450 to 580 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	No

PHYSICAL DATA

Weight	2.0 lb
Total Length (in.)	6.06
Body Diam. (in.)	
Intrusion	5.74 in.
Thread Size	2.125-12NS

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.010 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.375
Max Obliq. (°)	75
Velocity (fps)	1800
Carrier	5 in.

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

PIR-23, FUZE, ROCKET

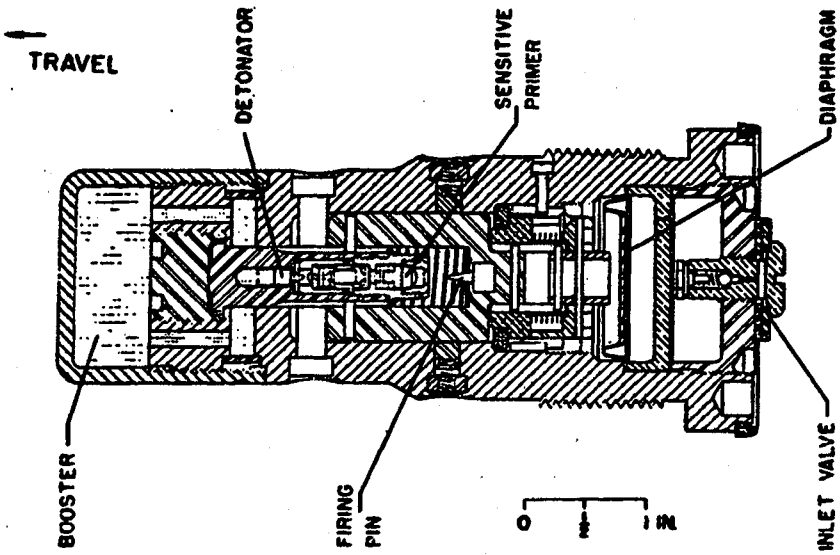

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs
Status	AV 290-1529 Terminated
Ass'y Dwg. No.	GA C1TR5A-01
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	11.75
Location	Base
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	1800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

PIR-23, FUZE, ROCKET

ARMING DATA

Method	Setback, motor gas pressure
Delay	Over 400 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.0 lb
Total Length (in.)	6.06
Body Diam. (in.)	
Intrusion	5.74 in.
Thread Size	2.125-12NS

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.010 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.375
Max Obliq. (°)	75
Velocity (fps)	1800
Carrier	5 in.

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl

REMARKS

SERIES: N CHAPTER: 5
DESIGNATION: PIR- 23
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

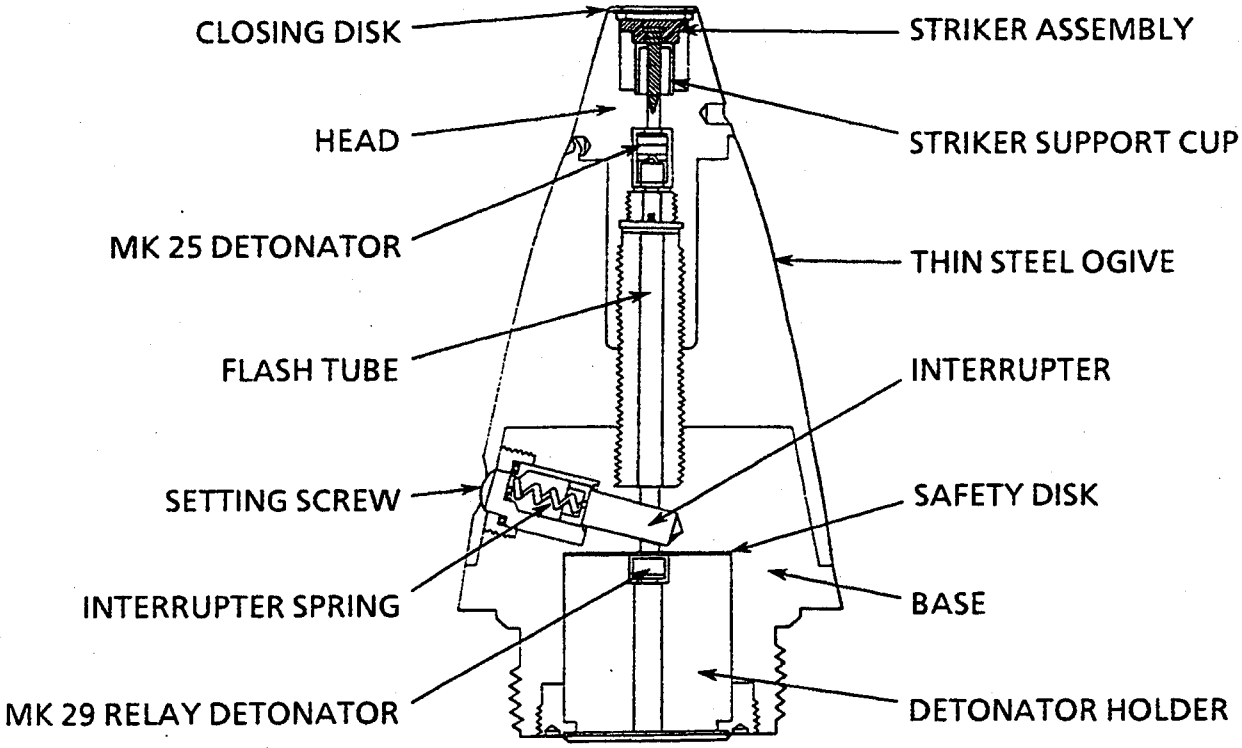

- OVERALL SIZE -	- INTRUSION -	
LG: 4.57 in (116 mm)	DP: 0.81 in (20 mm)	WT: 1.38 lb (640 g)
XSECT: 2.41 in (61 mm)	DIA: 1.70 in (43.2 mm)	THD: 1.70-14NS-1
		THD DP: 0.713 in (18.1 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 562 339
- PARTS LIST: LD 165 551
- SPEC: Unknown
- PUB: SW030-AA-MMO-010; OP 2211

NATIONAL STOCK NO:
1340-00-038-9057

- DODIC: J300
- PRIOR MODEL NO: XP-15A, XP-16A
- SIMILAR TO: Mk 29, Mk 66

- REPLACES: Nothing
- REPLACED BY: Nothing

GENERAL
- WEAPON: 5-in, spin-stabilized rockets

AMMUNITION:
Mk 10, 12 & 13 Rockets

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 338 rps
- SETBACK: 20,600 g
- VELOCITY: 2700 ft/s (823 m/s)

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: Doesn't meet MIL-STD-1316B

SETTERS: Manually by screwdriver

Supersedes page 5-22A of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 25 rps no arm,
33 rps all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: None

DETONATOR: Mk 25 Mod 0 Stab
Mk 29 Mod 0 Relay

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: SQ
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Surf, Pers, Lt Material
SENSITIVITY:
1 in (25.4 mm) plywood; obliquity,
0 deg.; Velocity, 2625 ft/s
(800 mps); Water 45 deg obliquity
FUNCTION TEMP:
-29 to +54 deg C
MODE ON DELIVERY:
OFF

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO: 0409
US HCSDS:
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: C
NET EXPL WT: 0.438 g
NET PROP WT: None
STORAGE TEMP: -29 to +54 deg C

REMARKS/DESCRIPTION:
The Mk 30 Mod 4 requires a Mk 44 AD fuzes for handling and in-bore safety. Prior to launch, the fuze is set to ON for PD SQ action. On firing, centrifugal force moves the slider outward against its spring and into the setting sleeve, unblocking the flash tube. This action takes place after the projectile has left the gun. On impact, the firing pin support collapses and the firing pin is driven into the nose detonator. The flash from the nose detonator passes down the flash tube and initiates the relay detonator which, in turn, causes the AD fuze to function and explode the burster charge of the projectile. The round will dud if fired in the OFF setting. The Mk 30 is the same as the Mk 29 except for contour. The Mk 66 is similar except for contour and the addition of an out-of-line rotor in place of the relay detonator holder. Mods 4 is rain sensitive. The fuze has a thin steel ogive. A 0.01 in metal disk is has been added between the relay detonator and flash channel for added safety.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XR-36, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs
Status	AV 290-1529 Terminated
Ass'y Dwg. No.	GA 1370503
Parts List	LD 186141
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5"0 HVAR
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	1800

KEY FEATURES

SERIES: N CHAPTER: 5
DESIGNATION: XR- 36
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XR-36, FUZE, ROCKET

ARMING DATA

Method	Setback, gas pressure
Delay	400-1200 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	4.3 lb
Total Length (in.)	7.100
Body Diam. (in.)	
Intrusion	6.460 in.
Thread Size	2.375-12N-2

FUNCTIONING DATA

Action	BD, SQ, Delay
Type	Mechanical
Delay	0.005 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.375
Max Obliq. (°)	
Velocity (fps)	1800
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 102 MOD 1
Detonator	MK 33 MOD 0
Booster	Tetryl 28 gm
Delay	Blk. powder

REMARKS

Modification of Fuze MK 166

SERIES: N CHAPTER: 5
DESIGNATION: XR- 36
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M43, S&A

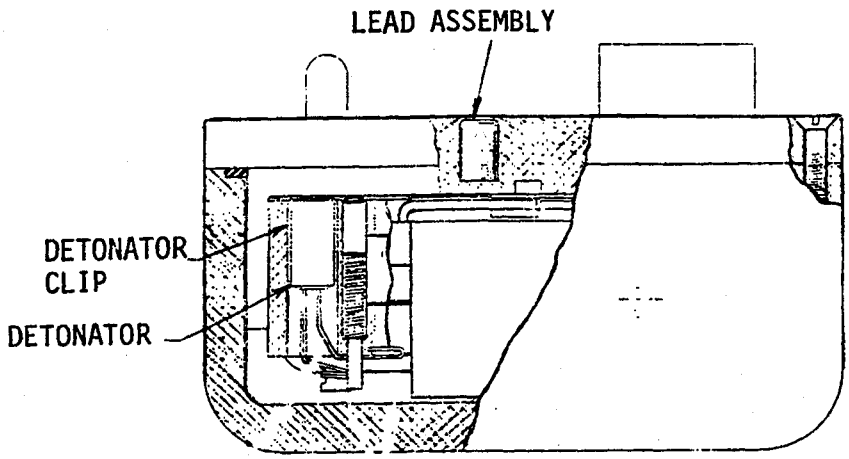

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz, AV880-5581
Status	Standard LCC-B
Ass'y Dwg. No.	8827405
Parts List	8827405
Specification	X-PA-PD-1737
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	762 mm (Honest John)
Location	Control panel
Use	HE-Blast
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	80
Velocity (fps)	

KEY FEATURES

Fails safe if time delay fails. 1 1/2 sec commit time positve lock in arm position.

SERIES: A CHAPTER: 5
DESIGNATION: M 43
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M43, S&A

ARMING DATA

Method	Acceleration
Delay	4 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm 9	Arm 11
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.57 lb
Total Length (in.)	2 3/4
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel, mat.
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	M43
Primer	
Detonator	M51
Booster	
Lead	Tetryl

REMARKS

This item is identical to the M30A1 safety and arming device except that it includes a positive detent in the armed condition.

A component of the M415 fuze.

SERIES: A CHAPTER: 5
DESIGNATION: M 43
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XR-51, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Terminated
Ass'y Dwg. No.	GA SK187230
Parts List	LD SK186203
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5"0 HVAR
Location	Base
Use	HE or GP, AP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	1800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XR-51, FUZE, ROCKET

ARMING DATA

Method	Motor gas pressure
Delay	400-1200 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3.70 lb
Total Length (in.)	5.834
Body Diam. (in.)	
Intrusion	5.334 in.
Thread Size	2.375-12N-2

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.005 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.25
Max Obliq. (°)	
Velocity (fps)	1800
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 102 MOD 1
Detonator	MK 33 MOD 1
Booster	Tetryl 20 gm
Delay	Blk. powder

REMARKS

SERIES: N CHAPTER: 5
DESIGNATION: XR- 51
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XR78, FUZE, ROCKET BD

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	
Location	Base
Use	AP, HEP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	120
Velocity (fps)	2200

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XR78, FUZE, ROCKET BD

ARMING DATA

Method	Setback
Delay	400-800 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	13 Arm 20
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2 lb
Total Length (in.)	5.5
Body Diam. (in.)	
Intrusion	4.725 in.
Thread Size	2.375-12N-2

FUNCTIONING DATA

Action	BD, SQ, Delay
Type	Electric
Delay	0.005, 0.010 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.125
Max Obliq. (°)	60
Velocity (fps)	2200
Carrier	ZUNI

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	XD4A
Detonator	XF28A
Booster	Tetryl 20.6 gm

REMARKS

Utilizes 24V DC plane charging gear for diode charging on firing

SERIES: N CHAPTER: 5
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM79, S&A DEVICE

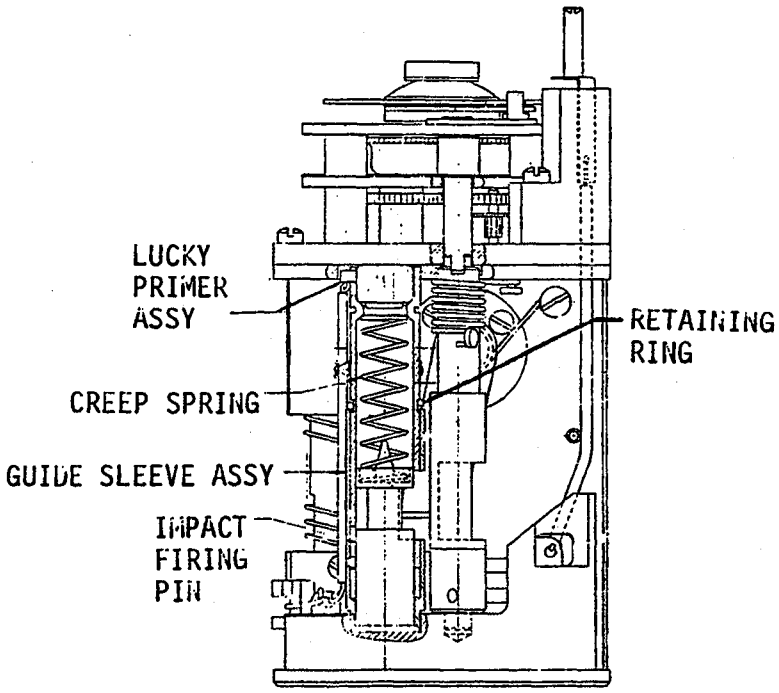

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi, AV 290-2400
Status	Terminated
Ass'y Dwg. No.	10992451
Parts List	10992451
Specification	XTL-PD-172
Previous Number	T2061

GENERAL

Carriers	Rocket
Cal. — Size	115 mm
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM79, ARMING DEVICE

ARMING DATA

Method	Setback
Delay	4-70 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	10 / 18
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1 1/2 lb
Total Length (in.)	6 1/2
Body Diam. (in.)	1 3/4
Intrusion	4 5/8 in.
Thread Size	2-12

FUNCTIONING DATA

Action	Proximity with impact backup
Type	Electrical
Delay	
Time Type	Mechanical
Time Setting (sec)	4-70 sec by 1 sec
Target	Ground, water
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

PS-204A Thermal

EXPLOSIVE TRAIN

S&A Device	XM79
Primer	
Detonator	M62
Booster	RDX

REMARKS

Time can be set

Reset to safe; reset for different time

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

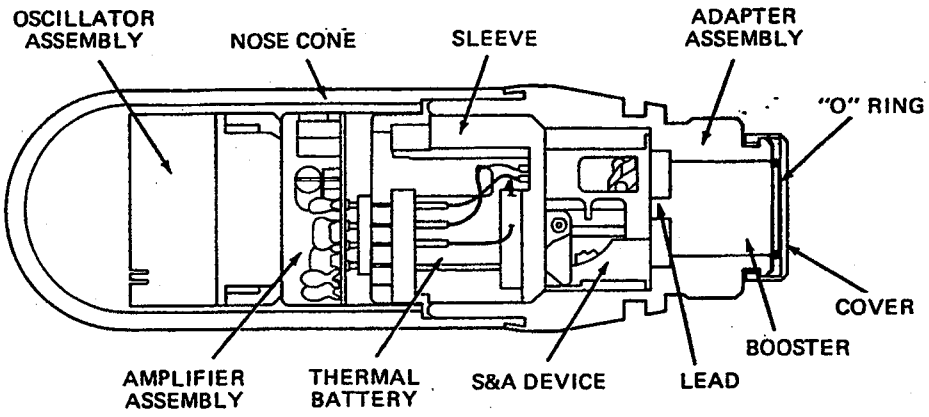

- OVERALL SIZE -	- INTRUSION -	WT: 0.939 lb (426 g)
LG: 5.91 in (150.0 mm)	DP: 0.90 (22.9 mm)	THD: 1 7/16-16UNS-2A
XSECT: 1.89 in (48.0 mm)	DIA: maj thread	THD DP: 0.615 in (15.6 mm)

IDENTIFICATION
AGENCY: ARDEC, SMCAR-AEF-A
CONTACT: McNally, G
PHONE: DSN 290-3710
STATUS: Terminated
USER: Army, Navy, AF, Marines
ASSY DWG: 11 004 808
PARTS LIST: 11004808
SPEC: MIL-F-60971
PUB:

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO: None
SIMILAR TO: M429

REPLACES: M414A1, M429, Mk 93
REPLACED BY:

GENERAL
WEAPON: 2.75-in Rocket
5-in Rocket (ZUNI)

AMMUNITION:
2.75-in M151 & M229 HE;
5-in Mk 24 HE, Mk 32 AT AP
& Mk 63 HE FRAG
LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: (Zuni) 50 rps
SETBACK: 65 g
VELOCITY: 2200 ft/s (671 m/s)
(ZUNI); 3660 f/s
(1116 m/s) HS A/C
CREEP: NA
FLIGHT TIME: NA
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 5-33 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Acceleration: 12 g no arm,
20 all arm
Boost 1.04 to 1.34 s at 27 g

SECOND SAFETY:
Battery voltage rise delay

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
150-300 m, explosive train in line;
500-700 m, impact enabled

EXPLOSIVE COMPONENTS

S&A DEVICE: Double integrating accelerometer
PRIMER: M42G (in Battery)
DETONATOR: M84 Elec
LEAD: 300 mg Tetryl
BOOSTER: 9 g Tetryl
OTHER: BBU-15/B Adapter Booster required for 5 in Zuni

FUNCTIONING DATA

MODES: Proximity, impact backup
TYPE: CW doppler
CHARACTERISTICS:
5 m nominal burst height

TARGET: Ground-Personnel
SENSITIVITY:

FUNCTION TEMP:
-54 to +71 deg C
MODE ON DELIVERY:
Proximity

POWER SUPPLY:

PS113A Thermal Battery, 11001712
initiated by setback

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL: A
NET EXPL WT: 9.457 g
NET PROP WT: None
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:

The FMU-98/B Fuze arms on the acceleration-time integration principle. On launch, acceleration moves the setback weight to the rear, releasing the unbalanced rotor which turns towards the armed position, delayed by a runaway escapement. After 25 degrees of rotation (0.5 to 0.7 s after launch), the rotor releases a spring-driven firing pin which functions the primer of the thermal battery. The battery is activated and begins to power the fuze electronics. If acceleration is sustained for at least 500 feet, the rotor reaches the armed position; otherwise it returns to the safe position. When armed, the rotor detonator is aligned with the lead and booster, and the firing circuit for the proximity mode is closed. A doppler signal having the proper amplitude can now cause the fuze to function. Following rocket motor burnout, an inertia switch is enabled permitting the fuze to function on impact. A fire signal initiates the electric detonator and, in turn, the lead and booster. Failure of the proximity system will cause the detonator to fire through the inertia switch on impact. The M429 is the same except the impact mode is enabled when the rotor is fully armed instead of after rocket motor burnout.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 100 MOD 0-2, FUZE, ROCKET

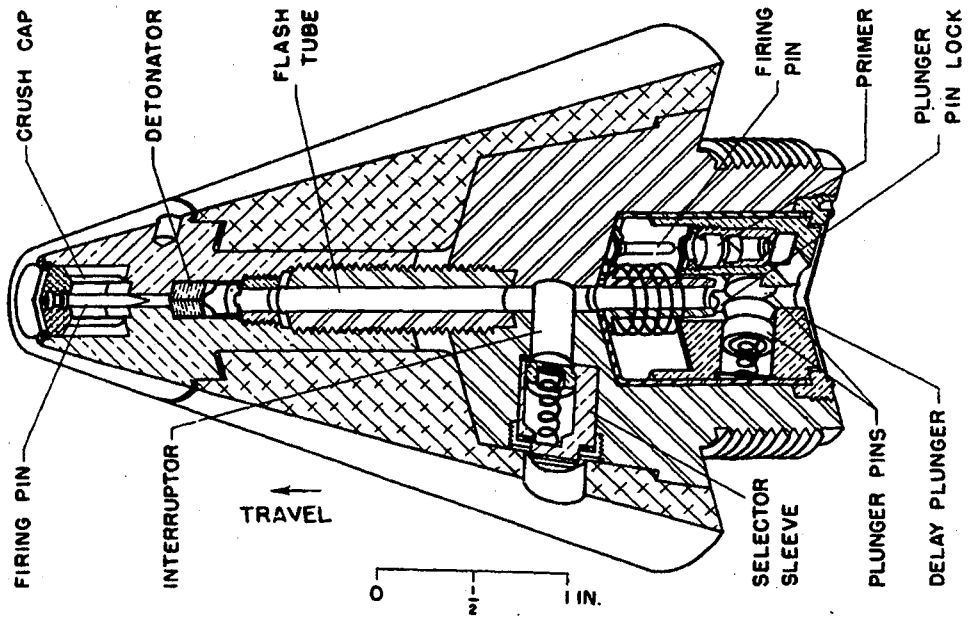

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 425156 (MOD 2)
Parts List	LD 165472 (MOD 2)
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	3.0, 4.0, 5.0
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Sensitive to firing on water impact

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 100 MOD 0-2, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	3.5-7.6 ft
Rotation (rps)	
Non-arm	25
Arm	33
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.60 lb
Total Length (in.)	4.15
Body Diam. (in.)	3.0
Intrusion	0.81 in.
Thread Size	1.7-14NS-1

FUNCTIONING DATA

Action	PD, SQ, delay, select
Type	Mechanical
Delay	0.05 (MOD 0) .025 (MOD 1,2) sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 104 MOD 0
Detonator	MK 25 MOD 0
Booster	Tetryl
AUX. DET.	MK 44 MOD 2
Relay Dets.	(2) MK 49 MOD 0
Delay	Blk. powder

REMARKS

Similar to Fuze MK 30

Combines features of Fuzes MK 29 & M48A2

SERIES: N CHAPTER: 5
DESIGNATION: MK 100 MOD 0-2
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-104 MOD 0, FUZE, ROCKET

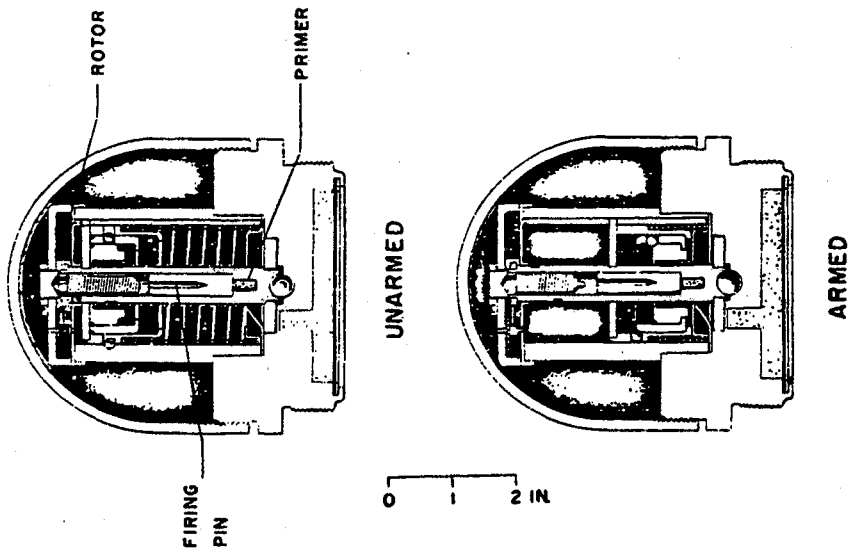

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Terminated
Ass'y Dwg. No.	GA SK244177
Parts List	LD 320885
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5"0
Location	Nose
Use	Flare
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	40
Velocity (fps)	

KEY FEATURES

SERIES: N CHAPTER: 5
DESIGNATION: EX 104 MOD 0
Rocket Time Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-104 MOD 0, FUZE, ROCKET

ARMING DATA

Method	Setback		
Delay	600-1000 ft		
Rotation (rps)			
Non-arm		Arm	
Setback (g)			
Non-arm	14	Arm	20
Arming Wire	No		
External Indicat.	No		

PHYSICAL DATA

Weight	5.75 lb
Total Length (in.)	5.5
Body Diam. (in.)	
Intrusion	1.187 in.
Thread Size	

FUNCTIONING DATA

Action	Delay, Time
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	10,700 ft
Target	Illumination
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	70
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 0
Booster	

Expelling charge det.
MK 31 MOD 0

REMARKS

Superseded by NOTS Model 516A

Same as Fuze EX-110 except for time setting

SERIES: N CHAPTER: 5
DESIGNATION: EX 104 MOD 0
Rocket Time Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-107, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5.0 in.
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	100
Velocity (fps)	

KEY FEATURES

SERIES: N CHAPTER: 5
DESIGNATION: EX 107
Rocket Time & SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-107, FUZE, ROCKET

ARMING DATA

Method	Mechanical, Time
Delay	400 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	13 / 20
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	SQ, Time, Select
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	0.02
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Similar to Fuze T2032

SERIES: N CHAPTER: 5
DESIGNATION: EX 107
Rocket Time & SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-110A, FUZE, ROCKET

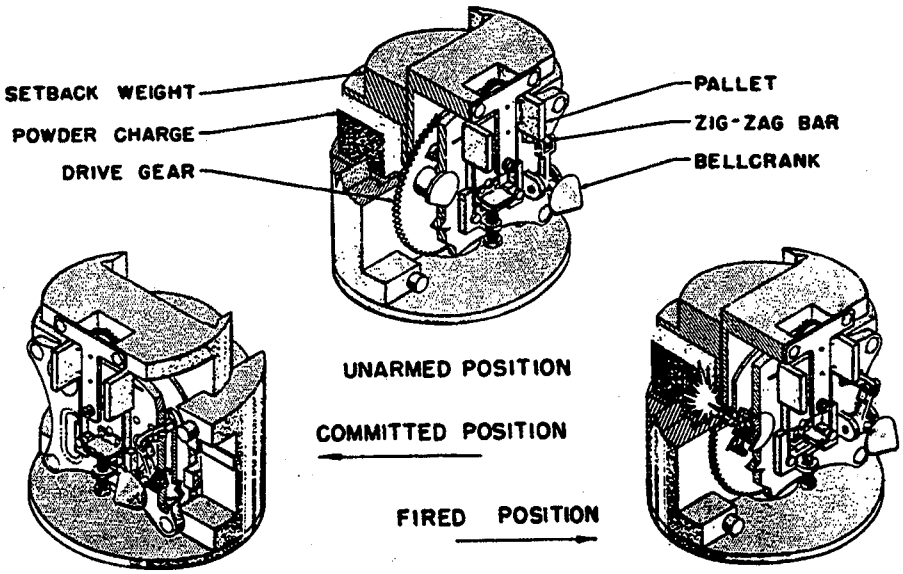

IDENTIFICATION

Agency NSWC, Code G43
G. Briggs
AV 290-1529

Status Terminated

Ass'y Dwg. No.

Parts List

Specification

Previous Number

GENERAL

Carriers Rocket

Cal. — Size 5"0

Location Nose

Use Flare head

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

SERIES: N CHAPTER: 5
DESIGNATION: EX 110A
Rocket MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-110A, FUZE, ROCKET

ARMING DATA

Method	Setback		
Delay			
Rotation (rps)			
Non-arm		Arm	
Setback (g)			
Non-arm	13	Arm	20
Arming Wire	No		
External Indicat.	No		

PHYSICAL DATA

Weight

Total Length (in.)

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc.
Time Setting (sec)	10,700 ft
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

Same as Fuze EX-104 except for time setting

SERIES: N CHAPTER: 5
DESIGNATION: EX 110A
Rocket MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-111, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs AV 290-1529
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	6.0 in.
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	15
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-111, FUZE, ROCKET

ARMING DATA

Method	Setback, decel.
Delay	15-25 ft (under water)
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 10 / Arm 13	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2 lb
Total Length (in.)	4.8
Body Diam. (in.)	
Intrusion	4.8 in.
Thread Size	2-12NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.25
Max Obliq. (°)	85
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 114 MOD 1
Detonator	MK 59 MOD 0
Booster	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 131, FUZE, ROCKET

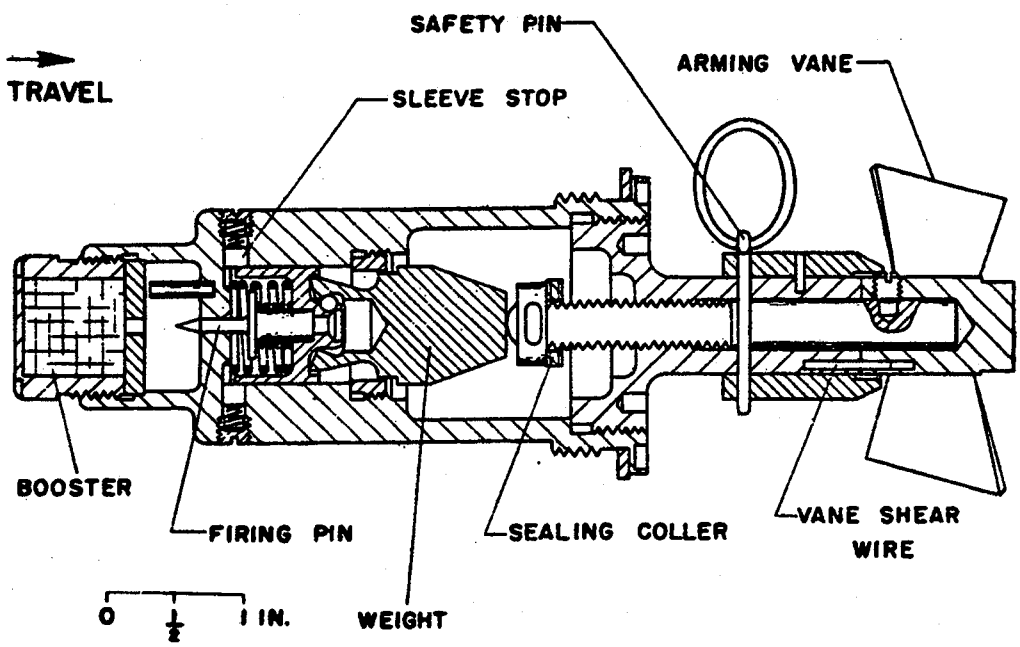

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 328804
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	7.2
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 131, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	10-15 water ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm 5	Arm 35
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.81 lb
Total Length (in.)	7.20
Body Diam. (in.)	2.25
Intrusion	4.515
Thread Size	2.0-12NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Wood deck
Thickness (in.)	1
Max Obliq. (°)	75
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl
Lead	Tetryl

REMARKS

Similar to Fuze MK 136

Replaced by Fuze MK 156

SERIES: N CHAPTER: 5
DESIGNATION: MK 131
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 132 MOD 0, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 423849
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	4.5
Location	Nose
Use	Chemical, incendiary
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Diameter of burster tube reduced from 5/8 in. to 3/8 in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 132 MOD 0, FUZE, ROCKET

ARMING DATA

Method	Setback, vane
Delay	125
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1.1 lb
Total Length (in.)	19.5
Body Diam. (in.)	
Intrusion	18.2 in.
Thread Size	1.50-12NF-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 0
Booster	Tetryl
Lead	Tetryl
Burster tube	

REMARKS

Similar to Fuzes MK 137 and MK 131

Formerly Nose Fuze MK 154 MOD 1, similar to MK 154 MOD 3

SERIES: N CHAPTER: 5
DESIGNATION: MK 132 MOD 0
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 133, FUZE, ROCKET

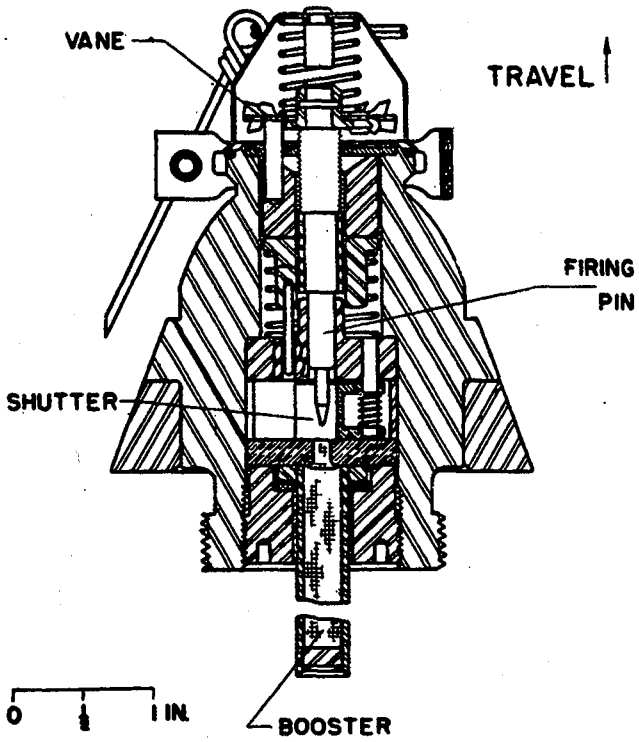

IDENTIFICATION

Agency	NSWC, Code G44
	J. Abell
Status	AV 290-1545
	obsolete
Ass'y Dwg. No.	GA 423846
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	3.5, 5.0
Location	Nose
Use	Chemical, incendiary
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Diameter of burster tube reduced from 5/8 in. to 3/8 in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 133, FUZE, ROCKET

ARMING DATA

Method	Spin, vane
Delay	425-900 ft
Rotation (rps)	No
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.9 lb
Total Length (in.)	20.6
Body Diam. (in.)	
Intrusion	16.865 in.
Thread Size	1.7-14NS-2

FUNCTIONING DATA

Action	PD, SQ, Select
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.187
Max Obliq. (°)	75
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 0
Booster	Tetryl
Lead	Tetryl
Burster tube	

REMARKS

Similar to Fuze MK 149 except that it has long booster tube for the smoke head

It may be fired as a dud

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 134 MOD 0, FUZE, ROCKET, DELAY

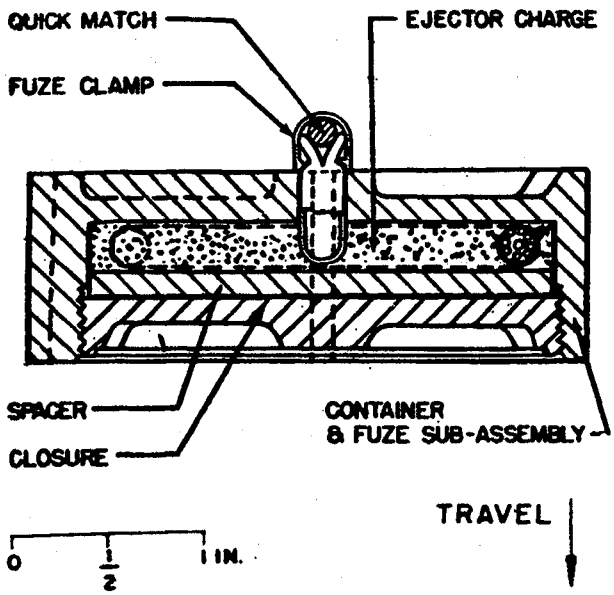

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 423866
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	3.5
Location	Nose
Use	Flare & Window
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 134 MOD 0, FUZE, ROCKET, DELAY

ARMING DATA

Method	
Delay	
Rotation (rps)	Yes
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.20 lb
Total Length (in.)	1.28
Body Diam. (in.)	
Intrusion	
Thread Size	None

FUNCTIONING DATA

Action	SD, Delay, Select
Type	Pyrotechnic
Delay	15 sec
Time Type	
Time Setting (sec)	
Target	see remarks
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Black powder 20 gm

REMARKS

Ejector delay for flare & window rockets

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 135, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, Code G44
	J. Abell
Status	AV 290-1545
	Obsolete
Ass'y Dwg. No.	GA 33039
Parts List	
Specification	
Previous Number	HIR

GENERAL

Carriers	Rocket
Cal. — Size	7!!2
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

SERIES: N CHAPTER: 5
DESIGNATION: MK 135
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 135, FUZE, ROCKET

ARMING DATA

Method	Hydro pressure
Delay	11-20 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	5.1 lb
Total Length (in.)	5.511
Body Diam. (in.)	
Intrusion	5.001 in.
Thread Size	2.9-14NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.25
Max Obliq. (°)	75
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl 30 gm

REMARKS

Replaced by Fuze MK 140

SERIES: N CHAPTER: 5
DESIGNATION: MK 135
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 136, FUZE, ROCKET

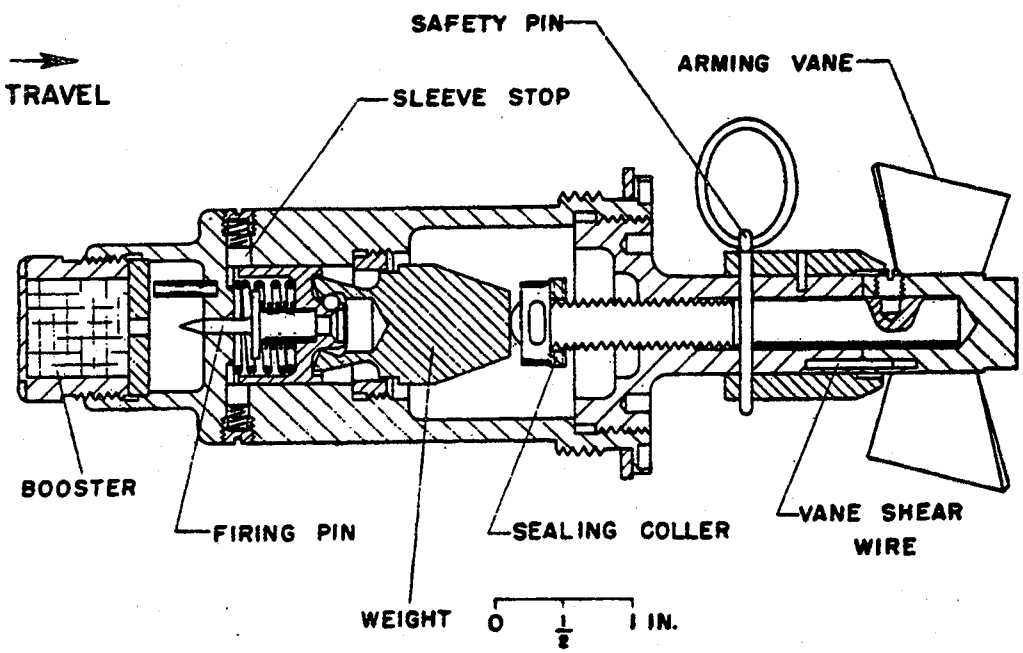

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 330845
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projector
Cal. — Size	7!!2
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 136, FUZE, ROCKET

ARMING DATA

Method	Vane
Delay	10-15 ft (water)
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	5 / 5
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.81 lb
Total Length (in.)	7.345
Body Diam. (in.)	2.25
Intrusion	4.515 in.
Thread Size	2-12NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Wood deck
Thickness (in.)]	
Max Obliq. (°)	75
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl
Lead	Tetryl

REMARKS

Replaced by Fuze MK 158 MOD 0

Similar to Fuze MK 131

SERIES: N CHAPTER: 5
DESIGNATION: MK 136
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 137 MOD 0-2, FUZE, ROCKET

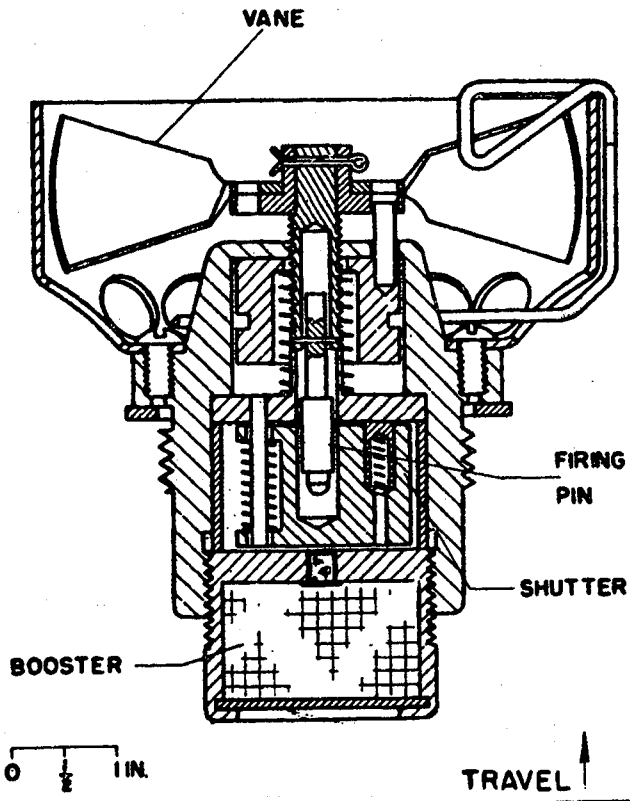

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 437988, 344523
Parts List	
Specification	OS 2864
Previous Number	AIR-2

GENERAL

Carriers	Rocket
Cal. — Size	7!2
Location	Nose
Use	HE or GP, Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 137 MOD 0-2, FUZE, ROCKET

ARMING DATA

Method	Setback, vane
Delay	125
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.9 lb
Total Length (in.)	2.96
Body Diam. (in.)	
Intrusion	1.548 in.
Thread Size	1.50-12NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 1
Booster	Tetryl 9 gm

REMARKS

Similar to Fuze MK 132

Differs from Fuze MK 154 in having booster instead of burster tube

For Barrage Rocket (6 round launched)

SERIES: N CHAPTER: 5
DESIGNATION: MK 137 MOD 0-2
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 139, FUZE, ROCKET

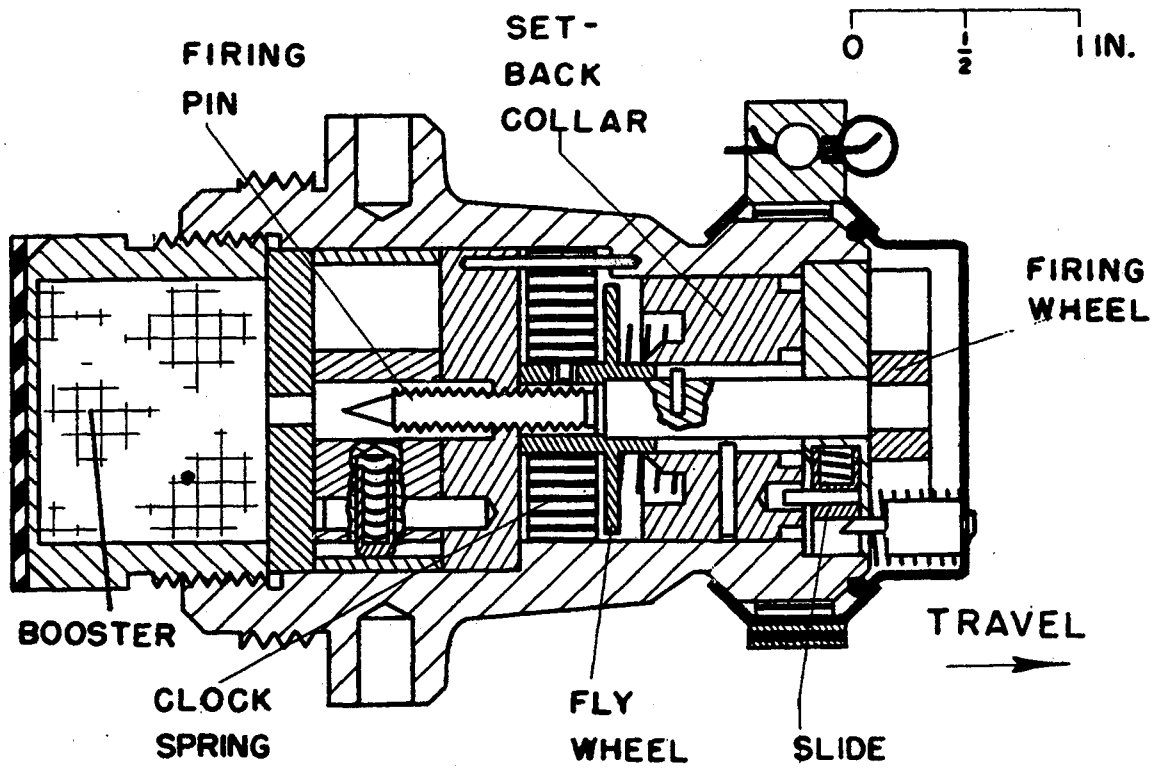

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 375593
Parts List	
Specification	
Previous Number	SIR

GENERAL

Carriers	Rocket
Cal. — Size	7.2
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 139, FUZE, ROCKET

ARMING DATA

Method	Setback, vane
Delay	14-300 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.25 lb
Total Length (in.)	4.25
Body Diam. (in.)	
Intrusion	1.401 in.
Thread Size	2.0-12NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Wood deck
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl

REMARKS

SERIES: N CHAPTER: 5
DESIGNATION: MK 139
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 141 MOD 0, FUZE, ROCKET

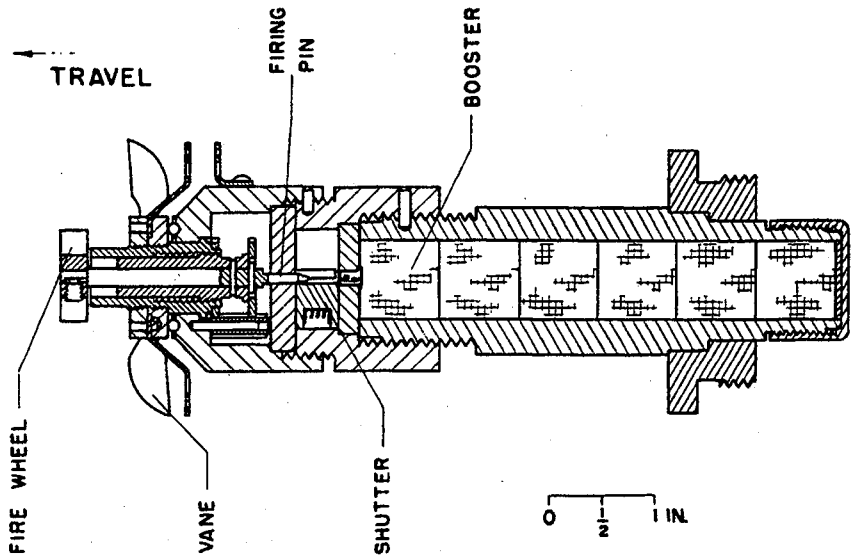

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 440263
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	7.2
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Will not function on water impact, but will function upon hitting ocean bottom if water not over 15 ft deep

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 141 MOD 0, FUZE, ROCKET

ARMING DATA

Method	Vane
Delay	300 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.7 lb
Total Length (in.)	7.6
Body Diam. (in.)	
Intrusion	
Thread Size	2.0-12NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 1
Booster	Tetryl 54 gm
Lead	Tetryl

REMARKS

Replaces Fuze MK 152

Water discriminating

SERIES: N CHAPTER: 5
DESIGNATION: MK 141 MOD 0
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 144, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, Code G44
Status	J. Abell AV 290-1545
Ass'y Dwg. No.	Obsolete
Parts List	
Specification	
Previous Number	NIR-2

GENERAL

Carriers	Rocket
Cal. — Size	5"/0 HVAR
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 144, FUZE, ROCKET

ARMING DATA

Method	Air pressure
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.6 lb
Total Length (in.)	4.175
Body Diam. (in.)	
Intrusion	0.810 in.
Thread Size	1.7-14NS-1

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 0
Booster	Tetryl
Lead	Tetryl

REMARKS

Work was suspended after design phase

SERIES: N CHAPTER: 5
DESIGNATION: MK 144
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 145 MOD 0, 1, FUZE, ROCKET

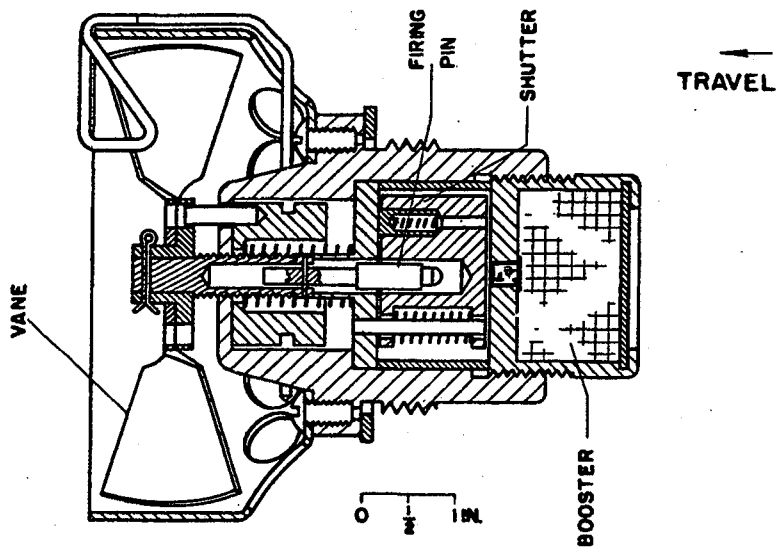

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 422548 (MOD 0) GA 344601 (MOD 1)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	4.5
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 145 MOD 0, 1, FUZE, ROCKET

ARMING DATA

Method	Setback, vane
Delay	125 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.9 lb
Total Length (in.)	3.0
Body Diam. (in.)	
Intrusion	1.5 in.
Thread Size	1.5-12NS-2

FUNCTIONING DATA

Action	PD, Delay, Select
Type	Mechanical
Delay	0.02 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 106 MOD 0
Detonator	MK 31 MOD 0
Booster	Tetryl 12 gm
Lead	Tetryl
Delay	Blk. powder

REMARKS

For beach barrage prior to landing

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 146 MOD 1, FUZE, ROCKET

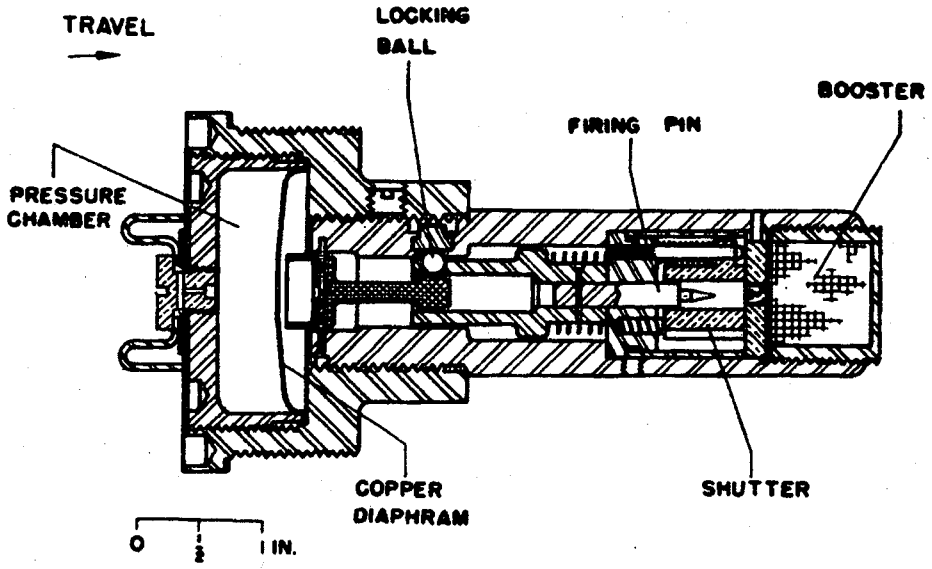

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 393777 (MOD 0) GA 438182 (MOD 1)
Parts List	
Specification	
Previous Number	PIR-1

GENERAL

Carriers	Rocket
Cal. — Size	3.5, 5.0, 7.2
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	9
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 146 MOD 1, FUZE, ROCKET

ARMING DATA

Method	Motor gas pressure
Delay	250-675 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	9
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3.15 lb
Total Length (in.)	6.17
Body Diam. (in.)	
Intrusion	6.17 in.
Thread Size	2.75-14NS-2

FUNCTIONING DATA

Action	BD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.25
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 24 MOD 1A
Booster	Tetryl 12 gm
Lead	Tetryl

REMARKS

Replaced in 5"/0 rocket head by Fuze MK 157 MOD 0

Replaced in 7"/2 rocket head by Fuze MK 181 MOD 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 147 MOD 0, 1, FUZE, ROCKET

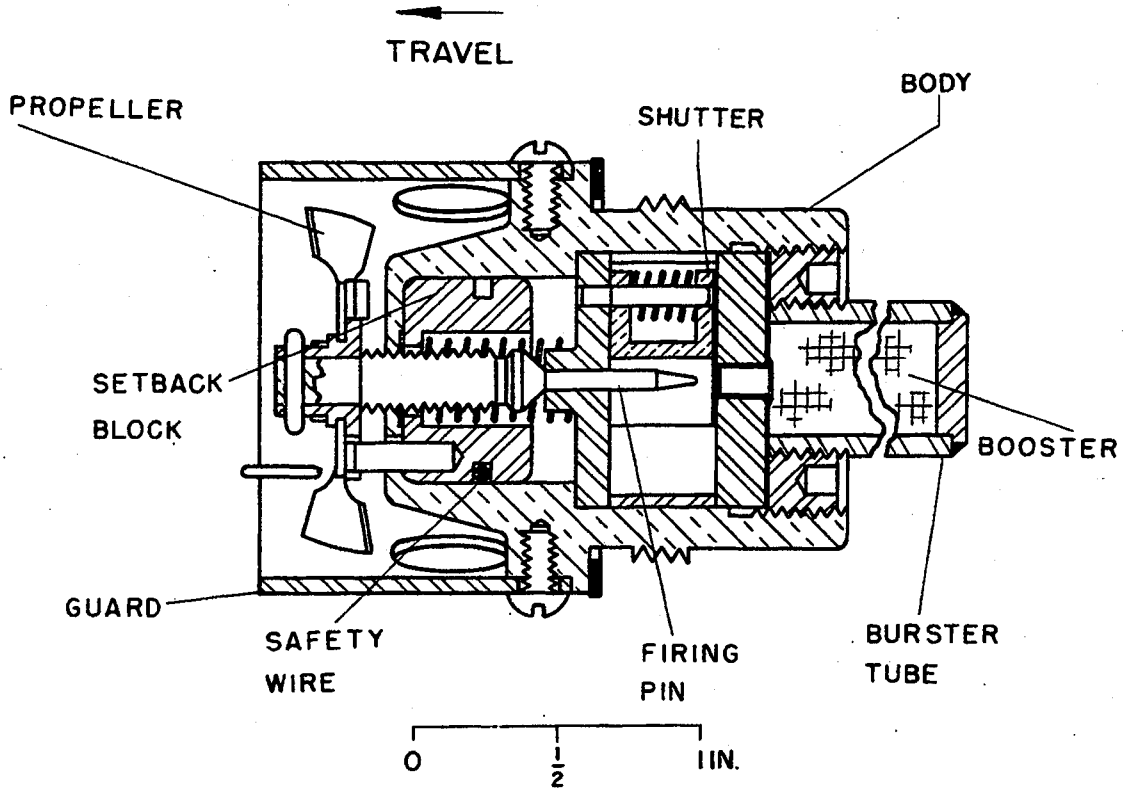

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 394940 (MOD 0) GA 423842 (MOD 1)
Parts List	
Specification	OS 3579
Previous Number	AIR-5

GENERAL

Carriers	Rocket
Cal. — Size	7"2
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 147 MOD 0, 1, FUZE, ROCKET

ARMING DATA

Method	Vane
Delay	200 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1.3 lb
Total Length (in.)	16.1
Body Diam. (in.)	
Intrusion	14.77
Thread Size	1.5-12NF-2

FUNCTIONING DATA

Action	PD, Graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 1
Booster	Tetryl 65 gm
Lead	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 148, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 394766
Parts List	
Specification	
Previous Number	AIR-7

GENERAL

Carriers	Rocket
Cal. — Size	3"5, 5"0
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 148, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	250-650 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1.6 lb
Total Length (in.)	2.96
Body Diam. (in.)	
Intrusion	1.55 in.
Thread Size	1.5-12NF-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 1
Booster	Tetryl 9 gm
Lead	Tetryl

REMARKS

Used in conjunction with a base fuze with a 1.7-14NS-2 adapter
Similar to Fuze MK 137
Replaced by Fuze MK 140
It may be fired as a dud

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 149 MOD 0, 1, FUZE, ROCKET, PD

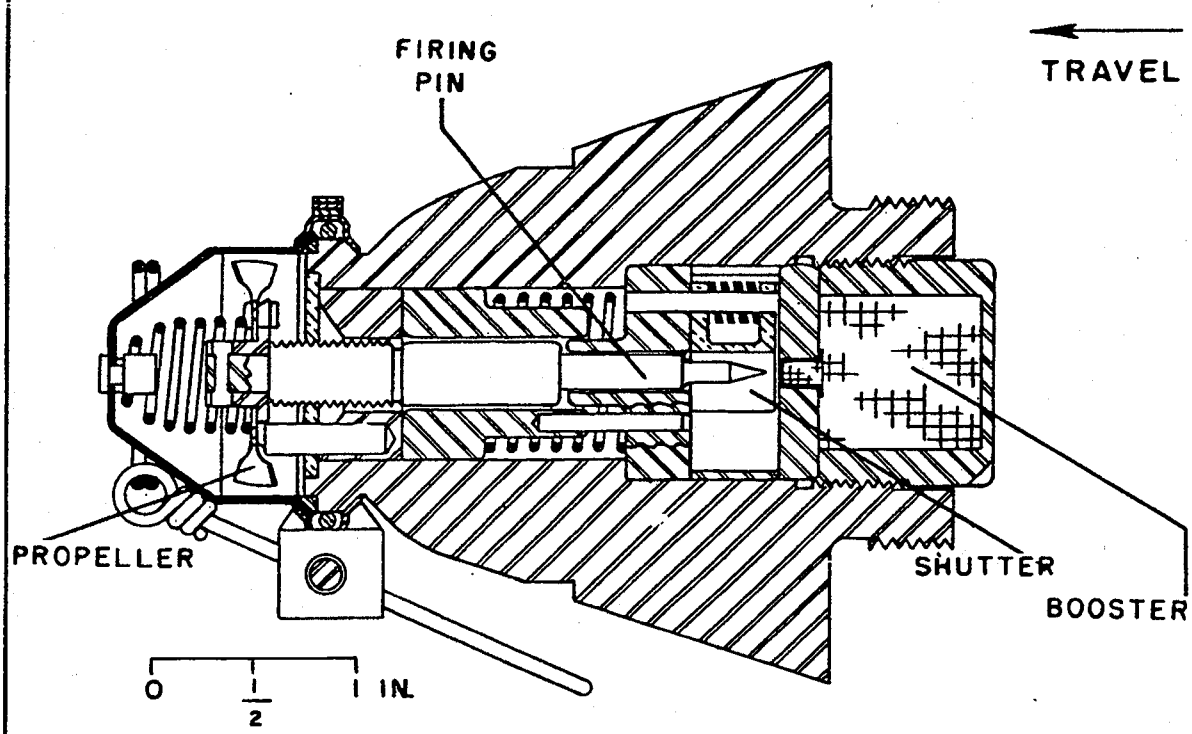

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell, AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 393783 (MOD 0) GA 978604 (MOD 1)
Parts List	LD 109204, LD 284796
Specification	MIL-F018702
Previous Number	AIR -8

GENERAL

Carriers	Rocket
Cal. — Size	3"/5 AR, 5"/0 HVAR
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Sensitive to firing on water impact

SERIES: N CHAPTER: 5
DESIGNATION: Mk149 MOD 0,1
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 149 MOD 0, 1, FUZE, ROCKET

ARMING DATA

Method	Vane
Delay	275-600 ft (AR), 650-1100 ft (HVAR)
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.6 lb
Total Length (in.)	4.22
Body Diam. (in.)	
Intrusion	0.825 in.
Thread Size	1.7-14NS-2

FUNCTIONING DATA

Action	PD, SQ, Select
Type	Mechanical
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.187
Max Obliq. (°)	75
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 1
Booster	Tetryl
Lead	Tetryl

REMARKS

Replaces Fuze MK 148

It may be fired as a dud against light targets

SERIES: N CHAPTER: 5
DESIGNATION: Mk149 MOD 0, 1
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 152, FUZE, ROCKET

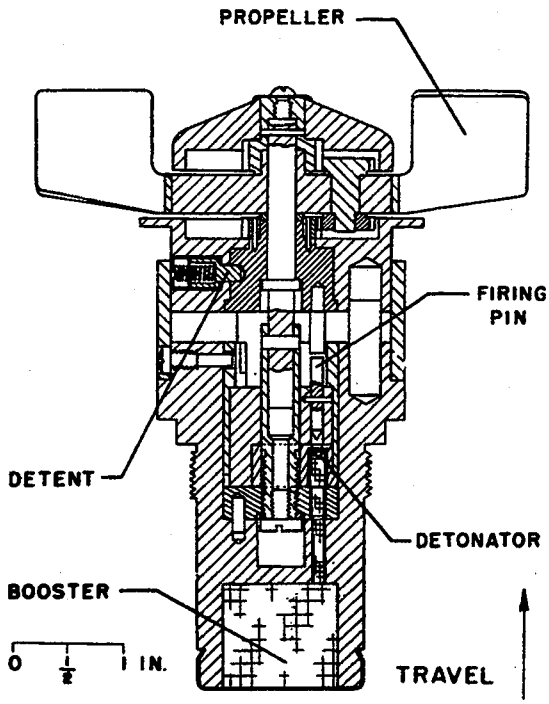

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 423659
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	7!2
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 152, FUZE, ROCKET

ARMING DATA

Method	Vane
Delay	50 turns of vane
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	4.10 lb
Total Length (in.)	5.5
Body Diam. (in.)	
Intrusion	
Thread Size	1.75-14NS-3

FUNCTIONING DATA

Action	PD, SQ, Select, Graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Water
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 21 MOD 0
Booster	Tetryl 25 gm

REMARKS

Identical to bomb Fuze AN-MK219 but partially armed by 50 turns of vane, and with metal body between vane carrier and fuze body

Replaced by Fuze MK 141 MOD 0

It may be fired as a dud

SERIES: N CHAPTER: 5
DESIGNATION: MK 152
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 154 MOD 0, 2, 3, FUZE, ROCKET

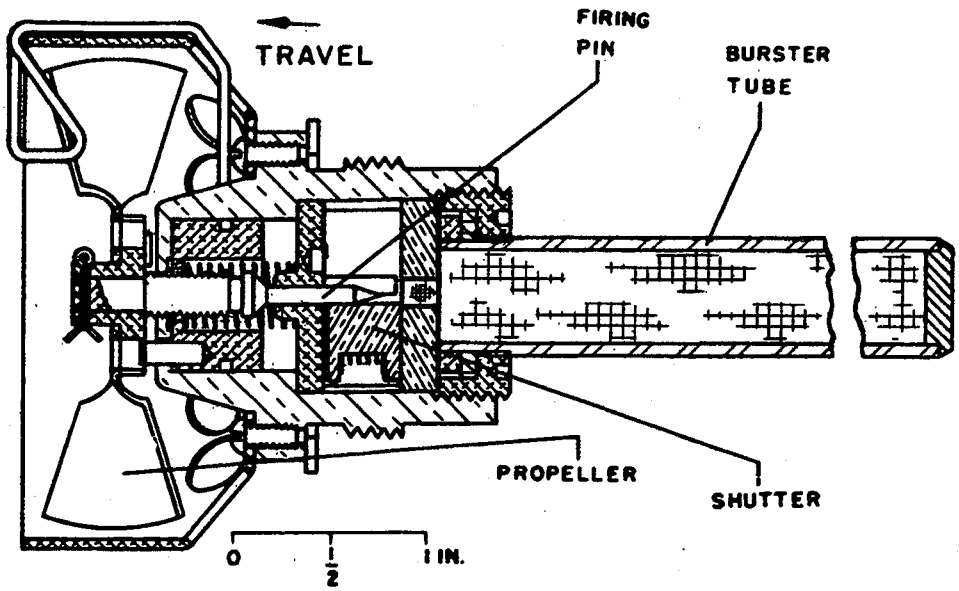

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 423844 (MOD 0) GA 423847 (MOD 1) GA 423848 (MOD 2)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	4.5
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 154 MOD 0, 2, 3, FUZE, ROCKET

ARMING DATA

Method	Vane
Delay	125 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	1.40 lb
Total Length (in.)	16.25
Body Diam. (in.)	
Intrusion	14.90 in.
Thread Size	1.5-12NF-2

FUNCTIONING DATA

Action	PD, SQ, Select
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 1
Booster	Tetryl

REMARKS

MOD 2 same as MK 154 MOD 2, 3

MOD 1 became MK 133

Same as Fuze MK 137 except tetryl filled burster tube replaces booster

It may be fired as a dud

Fuze consists of MK 173 MOD 2 fuze plus a tetryl burster tube

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 155 MOD 0, FUZE, ROCKET

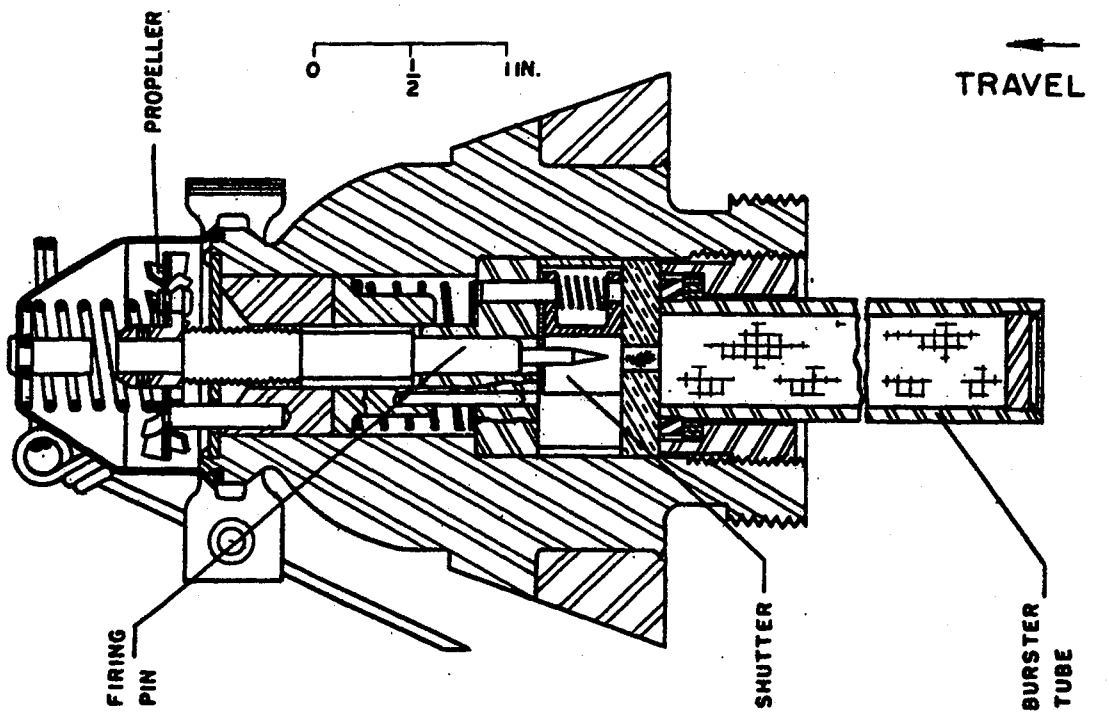

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 423845
Parts List	LD 109406
Specification	MIL-F-18660
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	3.5, 5.0
Location	Nose
Use	
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	56
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 155 MOD 0, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	425-900 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 10
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	3.2 lb
Total Length (in.)	17.44
Body Diam. (in.)	
Intrusion	14.0 in.
Thread Size	1.70-14NS-1

FUNCTIONING DATA

Action	PD, SQ, Select
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 1
Booster	Tetryl 65 gm
Lead	Tetryl

REMARKS

Differs from Fuze MK 149 by having burster tube instead of magazine

SERIES: N CHAPTER: 5
DESIGNATION: MK 155 MOD 0
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 156, FUZE, ROCKET

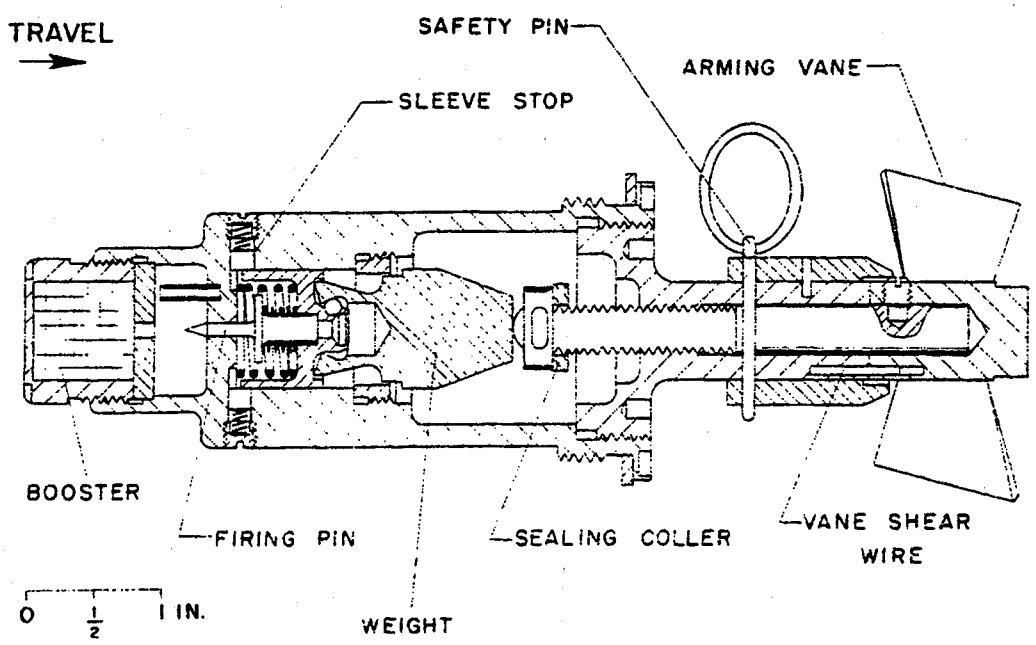

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 438552
Parts List	LD 109482
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	7.2
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 156, FUZE, ROCKET

ARMING DATA

Method	Water travel (Vane)
Delay	15-25 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 5 / Arm 35	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.80 lb
Total Length (in.)	7.385
Body Diam. (in.)	
Intrusion	4.515 in.
Thread Size	2.0-12NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 1
Booster	Tetryl 9 gm
Lead	Tetryl

REMARKS

Similar to Fuze MK 158

Supersedes Fuzes MK 131, MK 136, MK 140

SERIES: N CHAPTER: 5
DESIGNATION: MK 156
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 157 MOD 0-2, FUZE, ROCKET

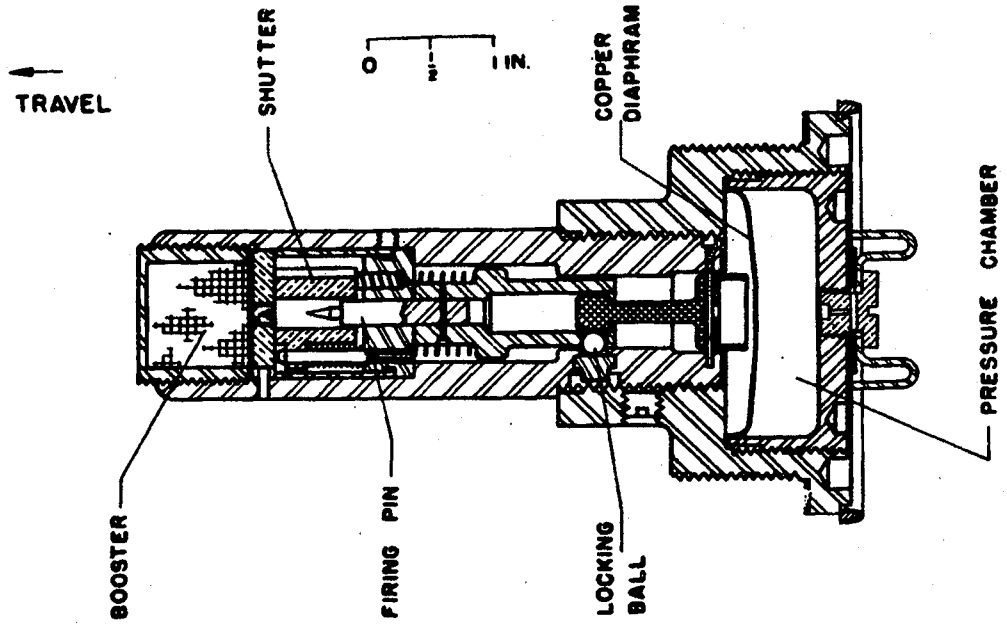

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	438015 (MOD 0) 439629 (MOD 1) 439630 (MOD 2)
Parts List	
Specification	
Previous Number	PIR-2

GENERAL

Carriers	Rocket
Cal. — Size	5 in., 11.75 in. HVAR
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 157 MOD 0-2, FUZE, ROCKET

ARMING DATA

Method	Motor gas pressure setback
Delay	250-670 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

Arms 0.1 sec after acceleration ceases

PHYSICAL DATA

Weight	3.4 lb
Total Length (in.)	6.17
Body Diam. (in.)	
Intrusion	6.17 in.
Thread Size	2.75-14NS-2

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.02 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.5
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 106 MOD 0
Detonator	MK 31 MOD 0
Booster	Tetryl
Delay	Blk. powder

REMARKS

Used in 5 in. AR with 3.5 in. motor and 11.75 in. AR with 11.75 in. motor

SERIES: N CHAPTER: 5
DESIGNATION: MK 157 MOD 0-2
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 158, FUZE, ROCKET

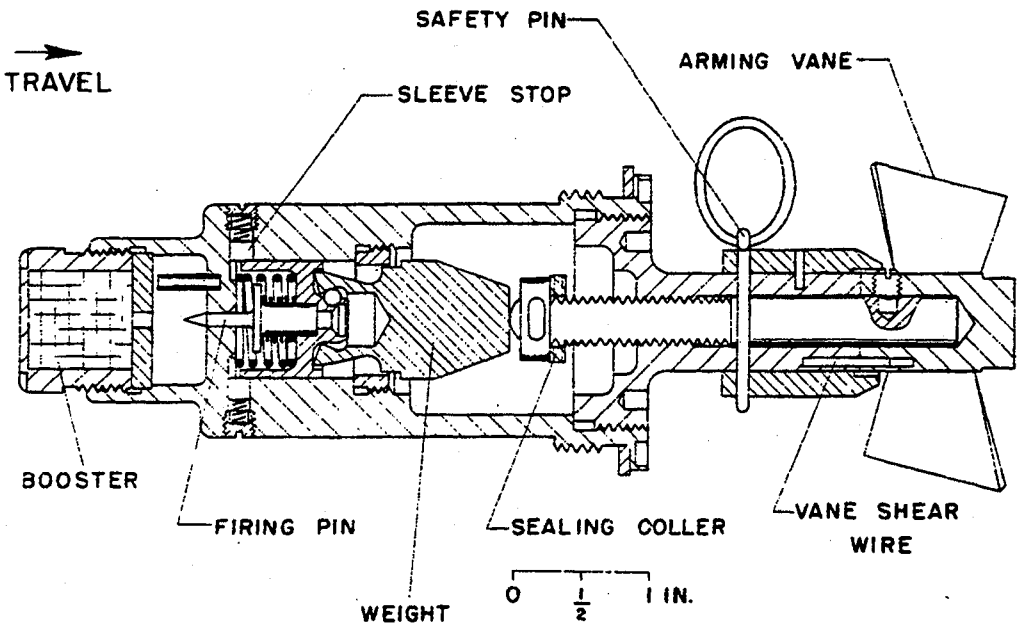

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 438552
Parts List	LD 109483
Specification	OS 3418
Previous Number	

GENERAL

Carriers	Projector
Cal. — Size	7"2
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 158, FUZE, ROCKET

ARMING DATA

Method	Setback, water travel
Delay	15-25 ft (water)
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	5 / 35
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.80 lb
Total Length (in.)	7.385
Body Diam. (in.)	2.25
Intrusion	4.515 in.
Thread Size	2.0-12NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 1
Booster	Tetryl 9 gm
Lead	Tetryl

REMARKS

Modification of Fuze MK 136 MOD 5

SERIES: N CHAPTER: 5
DESIGNATION: MK 158
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 159 MOD 0, 1, FUZE, ROCKET

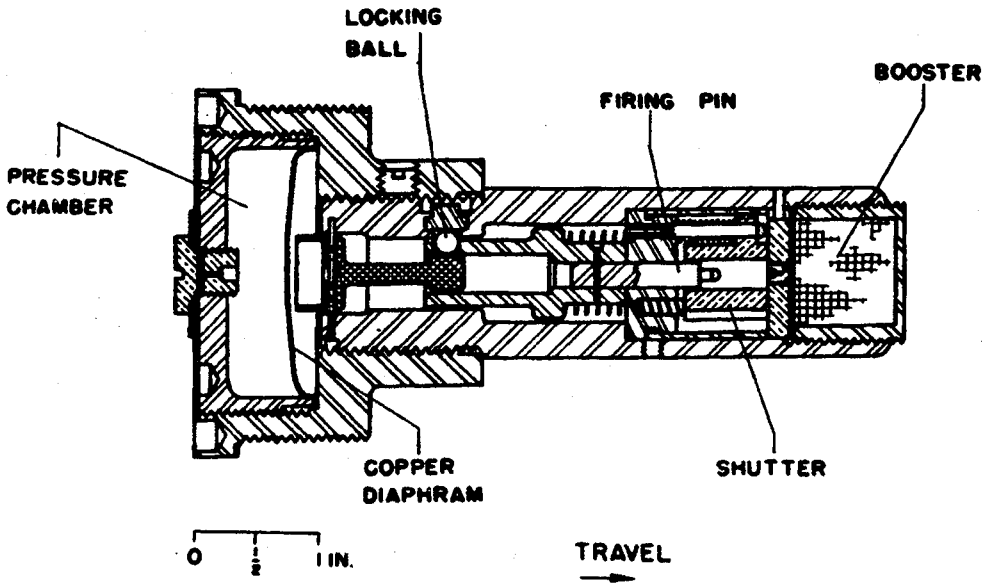

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 422550 (MOD 0) GA 439631 (MOD 1)
Parts List	
Specification	
Previous Number	PIR-3

GENERAL

Carriers	Rocket
Cal. — Size	5"0 HVAR
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 159 MOD 0, 1, FUZE, ROCKET

ARMING DATA

Method	Motor gas pressure
Delay	250-670
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3.4 lb
Total Length (in.)	5.812
Body Diam. (in.)	
Intrusion	0.890 in.
Thread Size	2.75-14NS-2

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.015 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 106 MOD 0
Detonator	MK 31 MOD 0
Booster	Tetryl 12 gm
Delay	Blk. powder

REMARKS

SERIES: N CHAPTER: 5
DESIGNATION: MK 159 MOD 0,1
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 160, FUZE, ROCKET

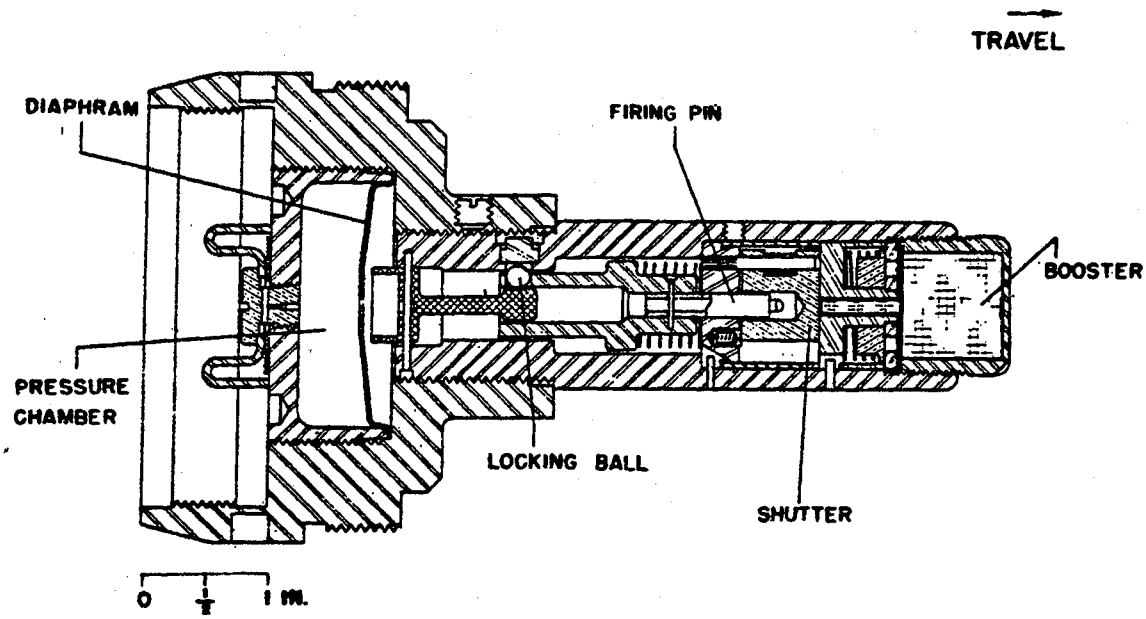

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 439632
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5.0, 11.75
Location	Base
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 160, FUZE, ROCKET

ARMING DATA

Method	Motor gas pressure
Delay	250-675 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3.45 lb
Total Length (in.)	6.17
Body Diam. (in.)	
Intrusion	6.17 in.
Thread Size	2.75-14NS-2

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.020 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Steel plate
Thickness (in.)	0.5
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 106 MOD 0
Detonator	MK 31 MOD 0
Booster	Tetryl 12 gm
Delay	Blk. powder

REMARKS

Identical to Fuze MK 157 MOD 0 except fuze head and rocket motor adapter are in one piece

This fuze was never produced for service use

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 161 MOD 0, FUZE, ROCKET

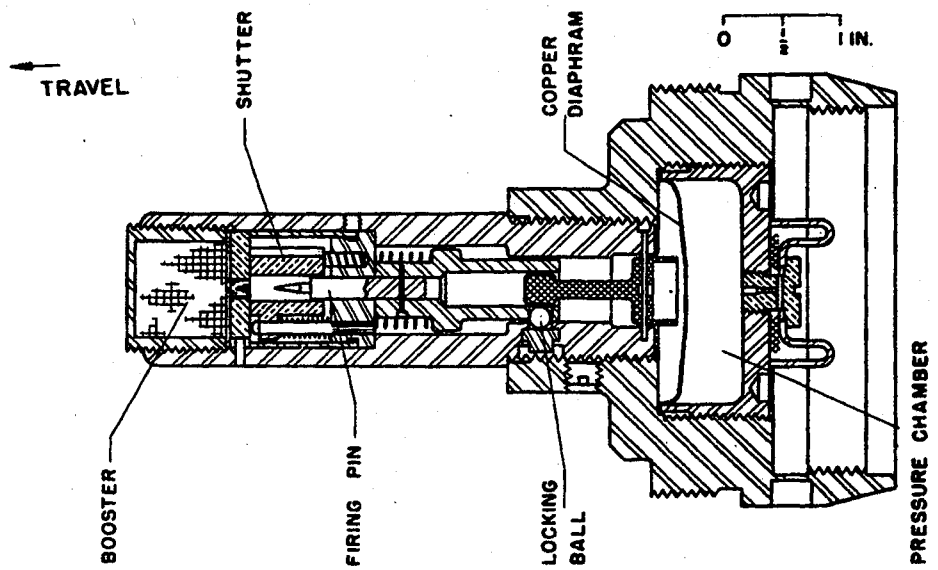

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 440295
Parts List	LD 165126
Specification	
Previous Number	

GENERAL

Carriers	Rocket (demolition)
Cal. — Size	7"2
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 161 MOD 0, FUZE, ROCKET

ARMING DATA

Method	Gas pressure from motor
Delay	35-65 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	above 9 Arm 9
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	5.2 lb
Total Length (in.)	6.661
Body Diam. (in.)	
Intrusion	6.661 in.
Thread Size	3.625-12NS-2

FUNCTIONING DATA

Action	BD
Type	Mechanical
Delay	0.003 sec inherent
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Earth
Thickness (in.)	
Max Obliq. (°)	75
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 102 MOD 0
Detonator	MK 23 MOD 1
Booster	Tetryl 12 gm

REMARKS

Adapted from Fuze MK 146 MOD 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 162 MOD 0, FUZE, ROCKET

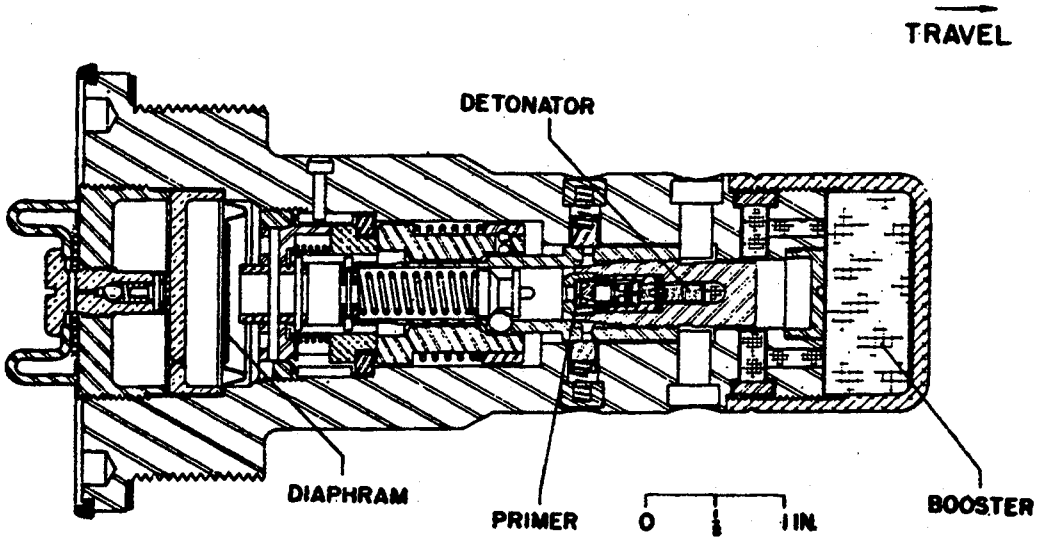

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 561465
Parts List	
Specification	
Previous Number	DDR-3A

GENERAL

Carriers	Rocket
Cal. — Size	11.75, 5.0 HVAR
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Water discriminating

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 162 MOD 0, FUZE, ROCKET

ARMING DATA

Method	Setback, Gas pressure
Delay	450-950 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	4.9 lb
Total Length (in.)	6.798
Body Diam. (in.)	
Intrusion	6.187 in.
Thread Size	2.75-14NS-2

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.01 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.375
Max Obliq. (°)	60
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 101 MOD 0
Detonator	MK 33 MOD 1
Booster	Tetryl 25 gm
Delay	Blk. powder

REMARKS

SERIES: N CHAPTER: 5
DESIGNATION: MK 162 MOD 0
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 163 MOD 0, 1, FUZE, ROCKET

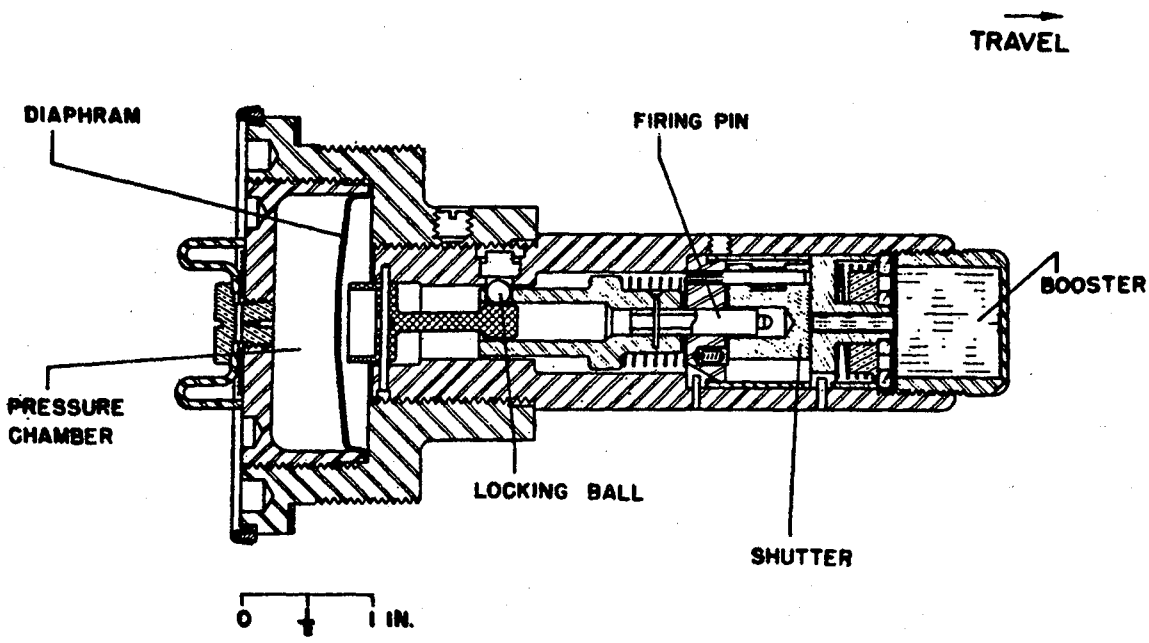

IDENTIFICATION

Agency	NSWC, Code G44
	J. Abell
Status	AV 290-1545
	Obsolete
Ass'y Dwg. No.	GA 561459
Parts List	
Specification	
Previous Number	PIR-19

GENERAL

Carriers	Rocket
Cal. — Size	11.75
Location	Base
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 163 MOD 0, 1, FUZE, ROCKET

ARMING DATA

Method	Motor gas pressure
Delay	250-670 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3.4 lb
Total Length (in.)	6.49
Body Diam. (in.)	
Intrusion	3.4 in.
Thread Size	2.75-14MS-2

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.02 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.5
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl 12 gm

Detonator was adapted from delay-detonator assembly of Fuze MK 145 with 0.020 sec delay

REMARKS

Redesigned MK 157 MOD 2 fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 164, FUZE, ROCKET

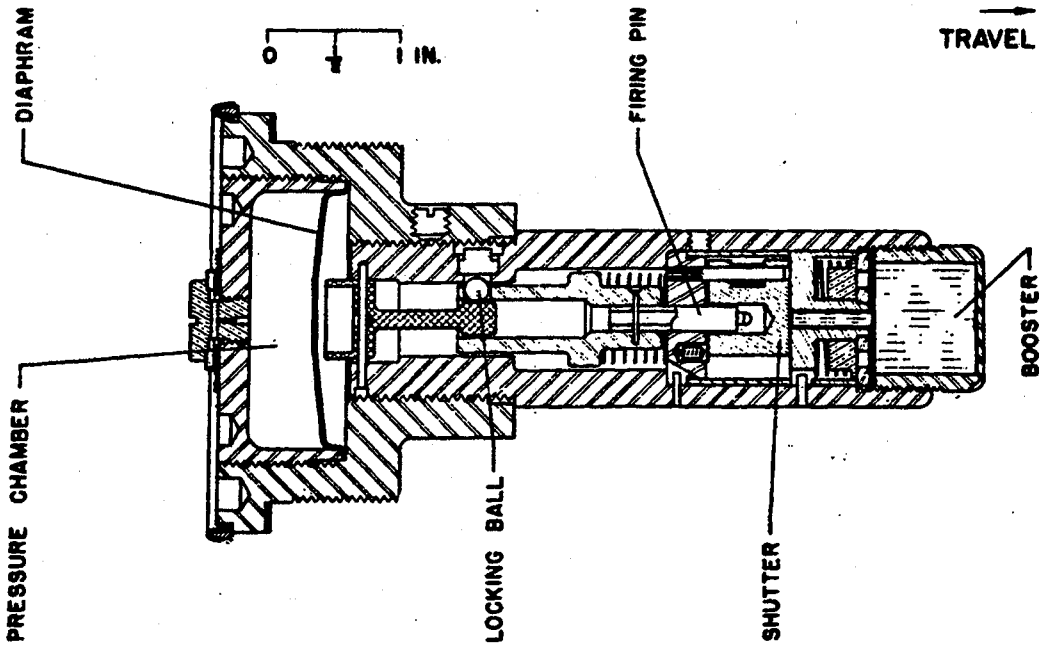

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 561460
Parts List	LD 165239
Specification	OS 3675
Previous Number	PIR-20

GENERAL

Carriers	Rocket
Cal. — Size	5"0 HVAR
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Sensitive to firing on water impact

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 164, FUZE, ROCKET

ARMING DATA

Method	Motor gas pressure
Delay	250-670 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3.2 lb
Total Length (in.)	6.18
Body Diam. (in.)	
Intrusion	6.18 in.
Thread Size	2.75-14NS-2

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.020 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Plate
Thickness (in.)	0.5
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl 12 gm

Detonator is adapted from delay det assemb. of Fuze MK 145 (0.02 sec delay)

REMARKS

An improved version of Fuzes MK 157 and PIR-14

SERIES: N CHAPTER: 5
DESIGNATION: MK 164
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 165 MOD 0, FUZE, ROCKET

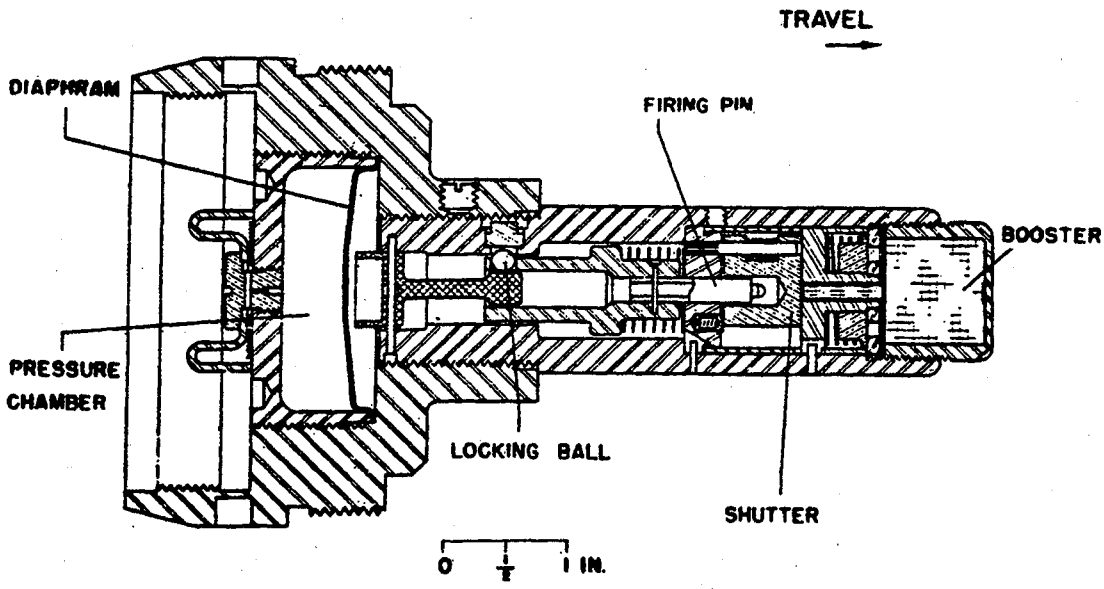

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell
Status	AV 290-1545 Obsolete
Ass'y Dwg. No.	GA 561458
Parts List	
Specification	
Previous Number	PIR-21

GENERAL

Carriers	Rocket
Cal. — Size	5"0 HVAR
Location	Base
Use	HE [illegible] SP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 165 MOD 0, FUZE, ROCKET

ARMING DATA

Method	Gas pressure
Delay	250-570 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	5.7 lb
Total Length (in.)	6.97
Body Diam. (in.)	
Intrusion	6.97
Thread Size	3.625-12NS-2

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0.020 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	0.5
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	Tetryl 12 gm

Detonator was adapted from delay detonator assembly of Fuze MK 145 (0.020 sec delay)

REMARKS

An improved version of Fuze MK 157

SERIES: N CHAPTER: 5
DESIGNATION: MK 165 MOD 0
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 166 MOD 0-2, FUZE, ROCKET

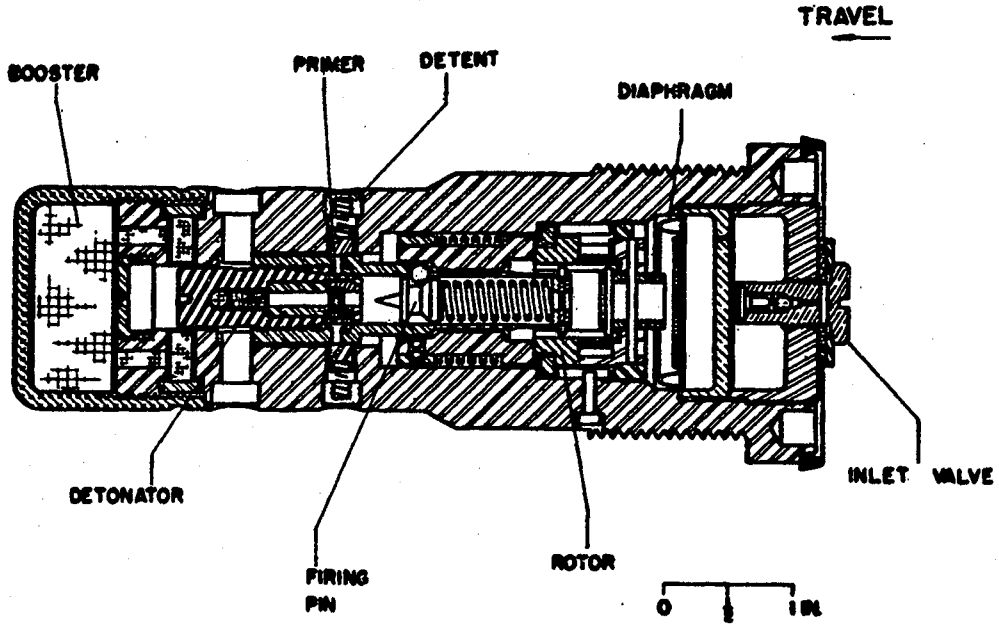

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	GA 562011, GA 978505
Parts List	
Specification	OS 3806
Previous Number	DDR-4A

GENERAL

Carriers	Rocket
Cal. — Size	5"0 HVAR
Location	Base
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Water Discriminating

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 166 MOD 0-2, FUZE, ROCKET

ARMING DATA

Method	Decel, Gas pressure
Delay	450-580 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3.94 lb
Total Length (in.)	6.492
Body Diam. (in.)	
Intrusion	5.672 in.
Thread Size	2.125-12NS-2

FUNCTIONING DATA

Action	BD, SD, Delay
Type	Mechanical
Delay	0.01 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Steel
Thickness (in.)	0.25
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	TDF MK 20
Detonator	
Booster	Tetryl 25 gm
Lead	Tetryl

REMARKS

MOD 1 was never developed

Similar to MK 162 MOD 0

SERIES: N CHAPTER: 5
DESIGNATION: MK 166 MOD 0-2
Rocket BD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 170, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	B-680766
Parts List	
Specification	
Previous Number	T31A, T31E1A

GENERAL

Carriers	Rocket
Cal. — Size	4.5
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 170, FUZE, ROCKET

ARMING DATA

Method	
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.35 lb
Total Length (in.)	8.5
Body Diam. (in.)	
Intrusion	4.8 in.
Thread Size	2.0-12NS-2

FUNCTIONING DATA

Action	Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft, ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Energizer MK 4 MOD 2

EXPLOSIVE TRAIN

S&A Device	MK 10 MOD 3 (MOD 2) MK 6 MOD 11 (MOD 1)
Primer	
Detonator	
Booster	

Uses mercury switch type rear fitting

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 172 MOD 0, 1, 2, FUZE, ROCKET

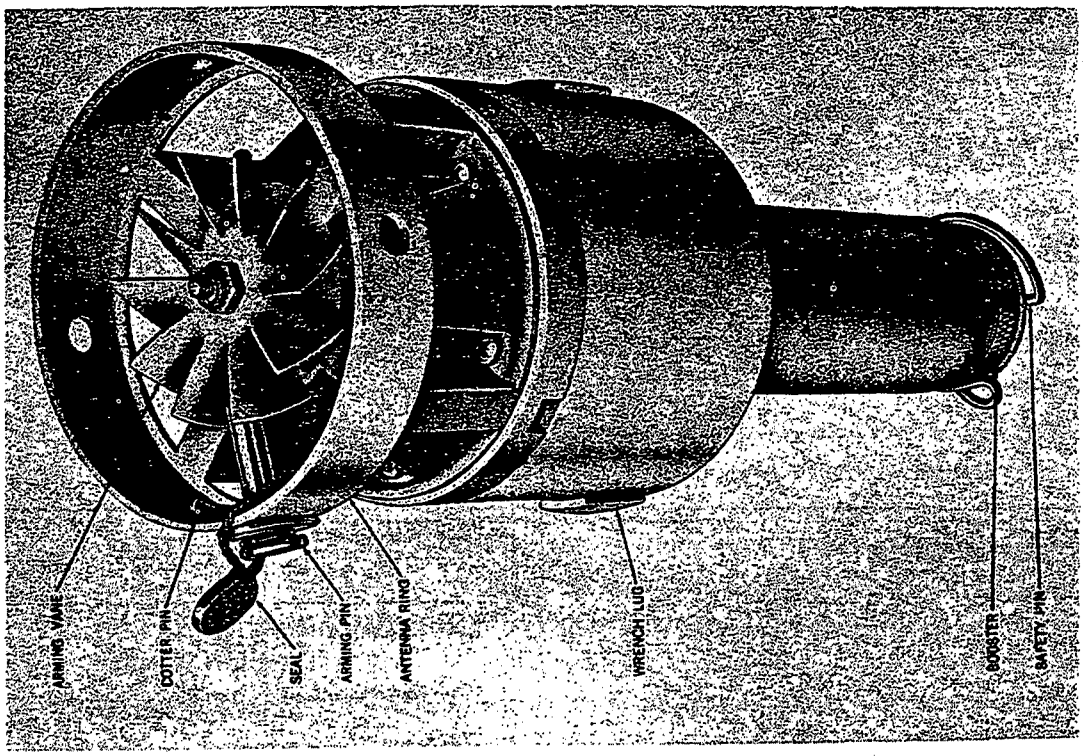

IDENTIFICATION

Agency	NSWC, Code G44
	J. Abell
Status	AV 290-1545
	Obsolete
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5"0 HVAR
Location	
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 172 MOD 0, 1, 2, FUZE, ROCKET

ARMING DATA

Method	
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	4.5 lb
Total Length (in.)	10.4
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Proximity
Type	
Delay	
Time Type	
Time Setting (sec)	
Target	Personnel and light equip.
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Burst height is 15-60 ft above land, 30-120 ft above water

MODS 0, 1, 2 are identical to Fuzes M403, M403E1, M403E2 respectively

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 173 MOD 0-4, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, Code G44 J. Abell AV 290-1545
Status	Obsolete
Ass'y Dwg. No.	B 680674
Parts List	LD 267111 (MOD 4)
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5.0 HCSR
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	130
Setback (g)	30
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 173 MOD 0-4, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	2500
Rotation (rps)	
Non-arm / Arm	80
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.52 lb
Total Length (in.)	8.5
Body Diam. (in.)	
Intrusion	4.8 in.
Thread Size	2.00-12

FUNCTIONING DATA

Action	Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Energizer	MK 12 MOD 1 (MOD 4)

EXPLOSIVE TRAIN

S&A Device	Rear fitting MK 13 MOD 16 (MOD 4)
Primer	
Detonator	
Booster	
Aux. det.	MK 44 MOD 1

REMARKS

Rear fitting: MK 10 MOD 3 (MOD 1), MK 6 MOD 11 (MOD 2), MK 10 MOD 3 (MOD 3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 174 MODS 0-3, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, G44, Klamm
Status	Obsolete
Ass'y Dwg. No.	GA 795175 (MOD 0)
Parts List	PL 550066 (MOD 1) 550067 (MOD 2)
Specification	550068 (MOD 3)
Previous Number	WS 8697

GENERAL

Carriers	Rocket
Cal. — Size	5".0 HCSR, BOMROC
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	130
Setback (g)	30
Velocity (fps)	

KEY FEATURES

SERIES: N CHAPTER: 5
DESIGNATION: MK 174 MOD 0-3
Rocket Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 174 MODS 0-3, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	3.4-6.3 sec (1000 yd)
Rotation (rps)	
Non-arm 50 Arm 80	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.95 lb
Total Length (in.)	8.5
Body Diam. (in.)	
Intrusion	4.8 in.
Thread Size	2.0-12NS

FUNCTIONING DATA

Action	PD, proximity
Type	Electrical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Reserve energizer MK 12 MOD 1

EXPLOSIVE TRAIN (U)

S&A Device	*
Primer	MK 121 MOD 0
Detonator	MK 54 MOD 0
Booster	MK 39 MOD 0(MOD 1,2,3)
Aux Det	MK 44 MOD 1 (MOD 0)

*R.F. MK 17 MOD 1 (MOD 1,2,3)
R.F. MK 13 (MOD 0)

REMARKS

Similar to Fuze MK 173.

Ass'y dwg no: GA 2494368 (MOD 1); GA 2494369 (MOD 2); GA 2494370 (MOD 3).

SERIES: N CHAPTER: 5
DESIGNATION: MK 174 MOD 0-3
Rocket Proximity Fuze

Source: https://assist.dla.mil downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the MK 176 Mods 0 & 1 Rocket PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 5-111 and 5-112 of MIL-HDBK 146.

Source: https://assist.dla.mil/ Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 177 MOD 0, 1, FUZE, ROCKET

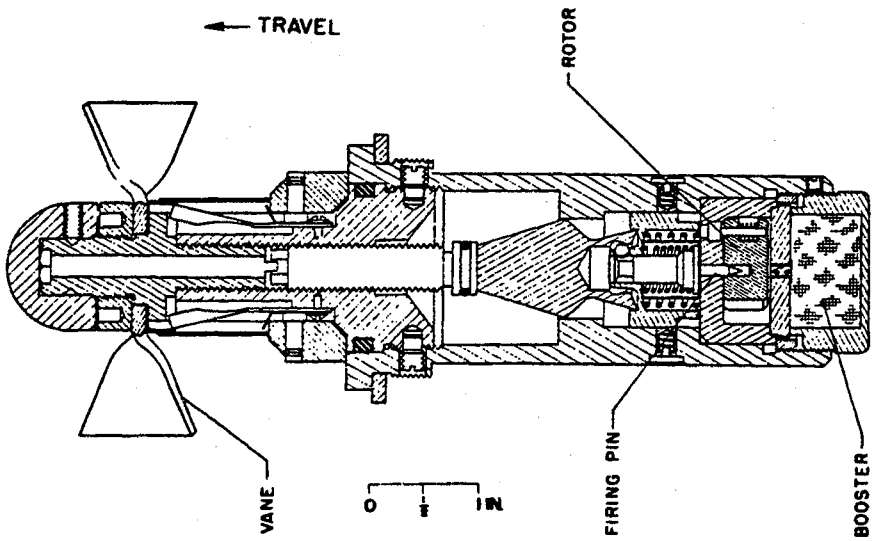

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 399141 (MOD 0) GA 1362454 (MOD 1)
Parts List	LD 284495 (MOD 0) LD 290804 (MOD 1)
Specification	OS 5980 (MOD 0) OS 7117 (MOD 1)
Previous Number	EX-102

GENERAL

Carriers	Rocket
Cal. — Size	7.2
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	550
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 177 MOD 0, 1, FUZE, ROCKET

ARMING DATA

Method	Decel., vane
Delay	11-25 ft (water)
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	3.75 lb
Total Length (in.)	7.38
Body Diam. (in.)	3.125
Intrusion	4.8 in.
Thread Size	2-12NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	Underwater
Sensitivity	
Material	Mild steel
Thickness (in.)	0.25
Max Obliq. (°)	70
Velocity (fps)	24
Carrier	7.2

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 23 MOD 1
Booster	Tetryl
Lead	Tetryl

REMARKS

Can replace Fuzes MKS 156 & 158

SERIES: N CHAPTER: 5
DESIGNATION: MK 177 MOD 0,1
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the MK 178 Mod 2 Rocket PD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 5-115 and 5-116 of MIL-HDBK 146.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 179 MOD 0, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 1370272
Parts List	LD 290944
Specification	
Previous Number	XR-8

GENERAL

Carriers	Rocket
Cal. — Size	5"0 HVAR, HPAG
Location	Base
Use	GP, AP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	1300

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 179 MOD 0, FUZE, ROCKET

ARMING DATA

Method	Motor gas pressure
Delay	375-950 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2 lb
Total Length (in.)	5.382
Body Diam. (in.)	2.447
Intrusion	5.250 in.
Thread Size	2.375-12N-2

FUNCTIONING DATA

Action	BD, SQ, Delay, Select
Type	Electric
Delay Time Type	0.0003, 0.005, 0.050 sec
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.125
Max Obliq. (°)	75
Velocity (fps)	1300
Carrier	5!!0

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 127a, 128 & 129
Detonator	MK 62 MOD 0
Booster	Tetryl 20 gm

REMARKS

Primer is actuated on impact by reed switch closure

SERIES: N CHAPTER: 5
DESIGNATION: MK 179 MOD 0
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 180 MOD 0, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 1370275
Parts List	LD SK185974
Specification	
Previous Number	XR-49

GENERAL

Carriers	Rocket
Cal. — Size	5"0
Location	Base
Use	HE or GP, AP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	1800

KEY FEATURES

SERIES: N CHAPTER: 5
DESIGNATION: MK 180 MOD 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 180 MOD 0, FUZE, ROCKET

ARMING DATA

Method	Motor gas pressure
Delay	375-950 ft
Rotation (rps)	No
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2 lb
Total Length (in.)	5.375
Body Diam. (in.)	
Intrusion	5.250 in.
Thread Size	2.375-12N-2

FUNCTIONING DATA

Action	BD, Delay
Type	Electric
Delay	0.005 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.375
Max Obliq. (°)	
Velocity (fps)	1800
Carrier	5 in.

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 128
Detonator	MK 62 MOD 0
Booster	Booster 20 gm

REMARKS

Modification of Fuze XR-8

Primer is actuated on impact by reed switch closure

SERIES: N CHAPTER: 5
DESIGNATION: MK 180 MOD 0
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 184, FUZE, ROCKET

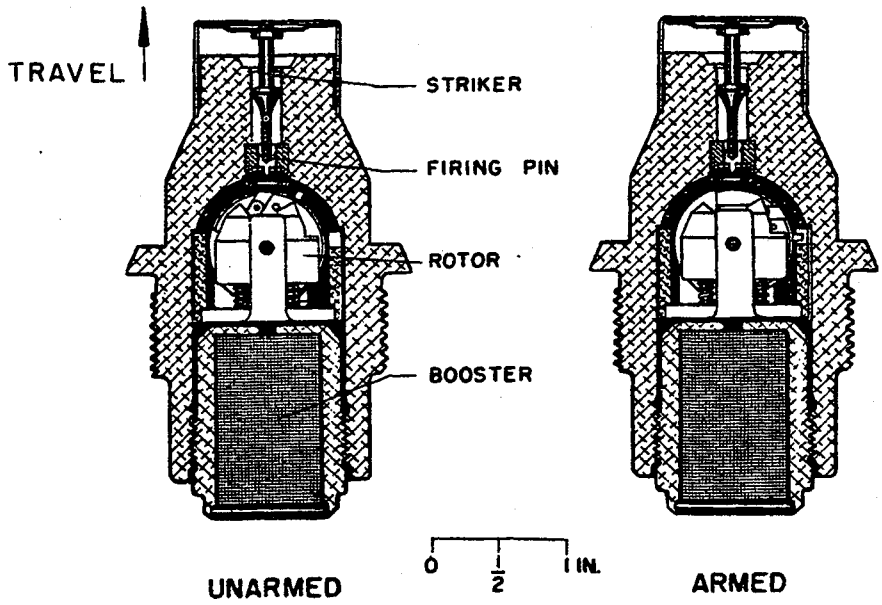

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 656789
Parts List	
Specification	
Previous Number	EX-109

GENERAL

Carriers	Rocket
Cal. — Size	5"0 HVAR
Location	Nose
Use	HE or GP, HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	70
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 184, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	400-700 ft
Rotation (rps)	No
Non-arm / Arm	
Setback (g)	
Non-arm 13 / Arm 20	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.920 lb
Total Length (in.)	3.695
Body Diam. (in.)	
Intrusion	1.80 in.
Thread Size	

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	Mild steel
Thickness (in.)	0.032
Max Obliq. (°)	70
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	M
Primer	MK 125 MOD 0
Detonator	MK 59 MOD 0
Booster	

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 185, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 656817
Parts List	
Specification	
Previous Number	NOTS MOD 123

GENERAL

Carriers	Rocket
Cal. — Size	2.0 in., 2.75 in.
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	500
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2024-06-13 13:02Z
Check the source to verify that this is the current version before use.

MK 185, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	400-1000 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 13 / Arm 20	
Arming Wire	No
External Indicat.	No

NOTS model 507 arming system

PHYSICAL DATA

Weight	0.75 lb
Total Length (in.)	2.71
Body Diam. (in.)	
Intrusion	0.917 in.
Thread Size	1.4375-16N-2

FUNCTIONING DATA

Action	PD, Delay
Type	Mechanical
Delay	0.0004 sec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 125 MOD 0
Detonator	MK 59 MOD 0
Booster	
Delay	MK 10

REMARKS

Similar to Fuze MK 176

SERIES: N CHAPTER: 5
DESIGNATION: MK 185
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 189 MOD 0, 1, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 656943
Parts List	
Specification	
Previous Number	NOTS MOD 128

GENERAL

Carriers	Rocket
Cal. — Size	2.0 in. FFAR (Gimlet)
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	1500

KEY FEATURES

SERIES: N CHAPTER: 5
DESIGNATION: MK 189 MOD 0,1

Source: https://assist.dla.mil - Downloaded: 2021-12-13 12:12
Check the source to verify that this is the current version before use.

MK 189 MOD 0, 1, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	300-900 ft
Rotation (rps)	No
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1/2 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PI, PD, Delay
Type	Mechanical
Delay	1.5 ft
Time Type	
Time Setting (sec)	
Target	Air to air
Sensitivity	
Material	Aluminum
Thickness (in.)	0.032
Max Obliq. (°)	75
Velocity (fps)	1500
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 133
Detonator	MK 68
Booster	CH-6
Delay element	MK 17

REMARKS

SERIES: N CHAPTER: 5
DESIGNATION: MK 189 MOD 0,1
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 190 MOD 0, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 657013
Parts List	
Specification	
Previous Number	NOTS MOD 142B

GENERAL

Carriers	Rocket
Cal. — Size	3.25 in.
Location	Nose
Use	Practice
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	1200

KEY FEATURES

SERIES: N CHAPTER: 5
DESIGNATION: MK 190 MOD 0
Rocket PI BD Fuze

Source: https://assist.dla.mil - Downloaded: 2024-07-31T13:37:21
Check the source to verify that this is the current version before use.

MK 190 MOD 0, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	670 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	7 / 10
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PI, PD, SQ
Type	Mechanical
Delay	Less than 200 micro-sec
Time Type	
Time Setting (sec)	
Target	(Practice)
Sensitivity	
Material	Ground
Thickness (in.)	
Max Obliq. (°)	75
Velocity (fps)	1200
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 125 MOD 1
Detonator	MK 59 MOD 0
Booster	
Lead	Tetryl

REMARKS

SERIES: N CHAPTER: 5
DESIGNATION: MK 190 MOD 0
Rocket PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 192 MOD 0-2, FUZE, MECH. TIME

IDENTIFICATION

Agency	NSWC, G43, J. deSabla
Status	Obsolete
Ass'y Dwg. No.	GA 1518637 (MOD 0) GA 2282399 (MOD 1)
Parts List	GA 2266932 (MOD 2)
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	1".375 HASP
Location	Nose
Use	HASP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

SERIES: N CHAPTER: 5
DESIGNATION: MK 192 MOD 0-2
Rocket MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-04-22T10:37Z
Check the source to verify that this is the current version before use.

MK 192 MOD 0-2, FUZE, MECH. TIME

ARMING DATA

Method	Acceleration
Delay	400 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	175
Non-arm	13 Arm 30
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.00 lb
Total Length (in.)	11.0
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech., Junghans Esc
Time Setting (sec)	12-126
Target	Meteorological data
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M125 MOD 1
Detonator	M59 MOD 0
Booster	0.230 in. long
Lead	Tetryl, 1.60 diam.

Expelling charge 10 gm Blk. pdr.

REMARKS

This round is a modified Loki rocket in which the HE load is replaced by a radar target package of X-band radar Chaff. The round has also been modified by addition of bore riders to permit use of a standard 5"/38 or 5"/54 gun as a tube launcher. The chaff is expelled at the preset time and the expelled cloud of chaff is tracked by means of "fire control radar".

Superseded by Mk196 MOD #0 Pyrotechnic Time Fuze.

SERIES: N CHAPTER: 5
DESIGNATION: MK 192 MOD 0-2
Rocket MT Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 198, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 2287985 GA 2280148
Parts List	LD 516099 LD 516098
Specification	WS 2092
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5.0 in. (ZUNI)
Location	Nose
Use	Smoke
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	100
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 198, FUZE, ROCKET

ARMING DATA

Method	Setback & Sustained acceleration
Delay	1 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm	13
Arm	20
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2 lb
Total Length (in.)	3.150
Body Diam. (in.)	
Intrusion	1.935 in.
Thread Size	3.125-12UN-2A

FUNCTIONING DATA

Action	Flash to expel & ignite smoke
Type	Air burst
Delay	
Time Type	Mechanical
Time Setting (sec)	4 sec (fixed)
Target	Target marker
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 125 MOD 1
Detonator	MK 66 MOD 0
Booster	Black powder

REMARKS

SERIES: N CHAPTER: 5
DESIGNATION: MK 198
Rocket MT Fuze

Source: https://assist.dla.mil Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T214, FUZE, MTSQ

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	FF 4282
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	90 mm
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	17,500
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T214, FUZE, MTSQ

ARMING DATA

Method	Setback
Delay	25-100 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 4000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.14 lb*
Total Length (in.)	5.97*
Body Diam. (in.)	
Intrusion	2.21*
Thread Size	2-12NS-1

*Includes booster

FUNCTIONING DATA

Action	PD, SQ, Time, Select
Type	Mechanical
Delay	
Time Type	Mech. two center tuned
Time Setting (sec)	to 45
Target	
Sensitivity	
Material	Chipboard
Thickness (in.)	0.125
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: T214
Rocket MT SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T274, FUZE, MTSQ

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-M
L. Horowitz
AV 880-5581

Status Terminated

Ass'y Dwg. No.

Parts List

Specification

Previous Number

GENERAL

Carriers	Rocket
Cal. — Size	90 mm
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	17,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T274, FUZE, MTSQ

ARMING DATA

Method

Delay 40-80 ft

Rotation (rps)

Non-arm Arm 133

Setback (g)

Non-arm Arm

Arming Wire No

External Indicat. No

PHYSICAL DATA

Weight

Total Length (in.)

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action Delay

Type Mechanical

Delay 0.001 sec

Time Type

Time Setting (sec)

Target

Sensitivity

Material Chipboard

Thickness (in.) 0.14

Max Obliq. (°) 70

Velocity (fps)

Carrier

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: T274
Rocket MT SQ Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T332, FUZE, MT

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	FF 7624
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	Honest John
	760 mm
Location	Internal
Use	GP
MIL-STD's	331, Test 104
Max Values	
Rotat. (rps)	2
Setback (g)	100
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T332, FUZE, MT

ARMING DATA

Method	Setback, Deceleration
Delay	*
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm	7
Arm	9
Arming Wire	No
External Indicat.	No

*Arms 2.5 sec prior to set time

PHYSICAL DATA

Weight	2.57 lb
Total Length (in.)	5.36
Body Diam. (in.)	
Intrusion	Internal
Thread Size	

FUNCTIONING DATA

Action	Time, Select
Type	Mechanical
Delay	
Time Type	Mech. two center tuned
Time Setting (sec)	7-115
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	

REMARKS

Similar to Timer T3

SERIES: A CHAPTER: 5
DESIGNATION: T332
Rocket MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-335 MOD 0, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5" Bombroc
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-335 MOD 0, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	20 sec (nominal)
Rotation (rps)	
Non-arm	Arm 40
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	

PHYSICAL DATA

Weight	4 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	CVT, Impact
Type	Electro mechanical
Delay	
Time Type	
Time Setting (sec)	10-95
Target	Shore bombardment
Sensitivity	Antipers./Antimateriel
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 378 MOD 0, 1, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, G43, Kluge
Status	Terminated
Ass'y Dwg. No.	67A99F580
Parts List	PL 67A99F580
Specification	AS 1689
Previous Number	EX-378

GENERAL

Carriers	Rocket
Cal. — Size	6 in. (ZAP)
Location	Nose
Use	
MIL-STD's	
Max Values	
Rotat. (rps)	20
Setback (g)	250
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 378 MOD 0, 1, FUZE, ROCKET

ARMING DATA

Method	Mechanical
Delay	0.9 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	10 / 250
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	10 lb
Total Length (in.)	13.125
Body Diam. (in.)	6
Intrusion	None
Thread Size	5-1/4-12UN-2B (Internal)

FUNCTIONING DATA

Action	Proximity
Type	Electric (radar altimeter)
Delay	None
Time Type	
Time Setting (sec)	None
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Thermal battery MXU-568/B

EXPLOSIVE TRAIN

S&A Device	FZU-6/B
Primer	
Detonator	BBU-8/B (formerly KM 70)
Booster	MK 9, FZU-7/B

Stab primer for thermal battery initiation is BBU-9/B, formerly XM113

REMARKS

SERIES: N CHAPTER: 5
DESIGNATION: MK 378 MOD 0,1
Rocket Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

IDENTIFICATION

AGENCY: NSWC, Code G44

CONTACT: G. Klamm
AV 290-1970

STATUS: Obsolescent

USER: Navy

ASSY DWG: 2500607 (Mod 0)

PARTS LIST: DL 2500607 (Mod 0)

SPEC: WS 13078

NSN: Never procured

PRIOR NOMENCLATURE: Mk 174

REPLACES: Mk 174 Mods 0-2

GENERAL

MUNITION: 5-in Rocket, Mk 50 (Bomroc)

USE: HE

LOCATION: Nose

BALLISTIC LEVELS:

ROTATION: 262 rps

SETBACK: 30 g

VELOCITY: 1700 fps

CREEP:

SERIES: N CHAPTER: 5
DESIGNATION: MK 387 Mods 0-2
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Spin; 50 rps no arm

SECOND SAFETY:

OTHER SAFETY:

Arming time 3.4 to 6.3 sec

DELAY:

SAFE/ARM CONDITION:

PHYSICAL DATA

WEIGHT: 2.3 lb (1044 gm)

TOTAL LENGTH: 8.77 in (22.28 cm)

CROSS SECTION: 2.39 in (6.07 cm)

INTRUSION: 4.9 in (12.45 cm)

THREAD SIZE: 2-12UN-2A

OTHER:

POWER SUPPLY:

Mk 37 Mod 0 Reserve Energizer
Spin Breaker Mk 6-0

FUNCTIONING DATA

MODE(S): Proximity, Impact

TYPE: Electric

CHARACTERISTICS:

TARGET: Surface

SENSITIVITY:

EXPLOSIVE TRAIN

S&A DEVICE: Mk 38 Mod 0

PRIMER:

DETONATORS:

LEAD:

BOOSTER: Mk 39 Mod 0

OTHER:

REMARKS

Mk 387 Mods similar to Mk 174 fuze of identical mods.

CHAPTER: 5 SERIES: N
DESIGNATION: MK 387 Mods 0-2
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M400, FUZE

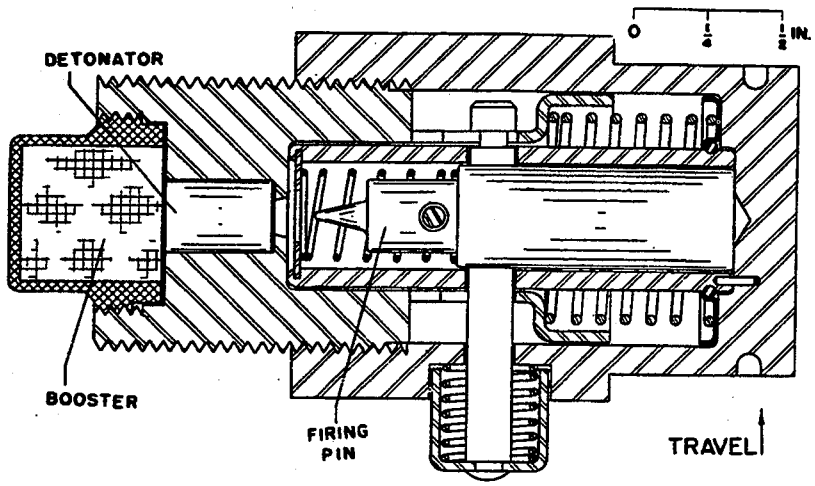

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-M
L. Horowitz, AV 880-5581

Status Obsolete

Ass'y Dwg. No. 73-10-13

Parts List

Specification

Previous Number

GENERAL

Carriers Rocket

Cal. — Size 2.36 in.

Location Base

Use GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M400, FUZE

ARMING DATA

Method	Setback
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	2.4875
Body Diam. (in.)	
Intrusion	0.9 in.
Thread Size	0.9375-14NS-1

FUNCTIONING DATA

Action	BD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M18
Booster	Tetryl pellet

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M401, FUZE, ROCKET, BD

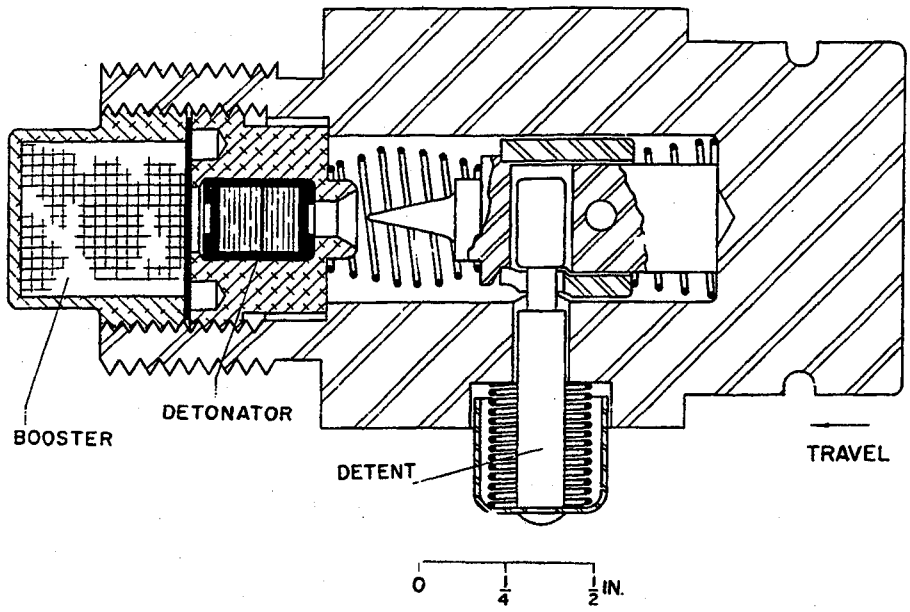

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCN-M
Status	L. Horowitz, AV 880-5581 Obsolete
Ass'y Dwg. No.	73-10-29
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2.36 in.
Location	Base, middle
Use	HEAT, chemical
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	410
Velocity (fps)	320

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M401, FUZE, ROCKET, BD

ARMING DATA

Method	Setback
Delay	10 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.57 lb
Total Length (in.)	2.605
Body Diam. (in.)	
Intrusion	0.9 in.
Thread Size	0.9375-14NS-1A

FUNCTIONING DATA

Action	BD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Armour, ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M18
Booster	Tetryl

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: M401
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M402A2, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, G44, Kluge
Status	Obsolete
Ass'y Dwg. No.	GA 795176
Parts List	LD 29226 (A2)
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	4, 5 in.
Location	Nose
Use	GP
MIL-STD's	331, Tests 101-104
Max Values	
Rotat. (rps)	180
Setback (g)	300
Velocity (fps)	

KEY FEATURES

SERIES: N CHAPTER: 5
DESIGNATION: M402A2
Rocket Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M402A2, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	3.5-7.0 ft
Rotation (rps)	
Non-arm	50 Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.36 lb
Total Length (in.)	8.5
Body Diam. (in.)	
Intrusion	4.8 in.
Thread Size	2.0-12NS

FUNCTIONING DATA

Action	PD, proximity
Type	Electrical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

RE MK 12 MOD 1 (A2)

EXPLOSIVE TRAIN

S&A Device	Rear fitting MK 13 MODS 5 & 6
Primer	MK 121 MOD 0
Detonator	MK 54 MOD 0
Booster	
Aux. Det.	MK 44 MOD 1

REMARKS

SERIES: N CHAPTER: 5
DESIGNATION: M402A2
Rocket Proximity Fuze

Source: https://assist.dla.mil downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M403E2, FUZE, ROCKET, PROXIMITY

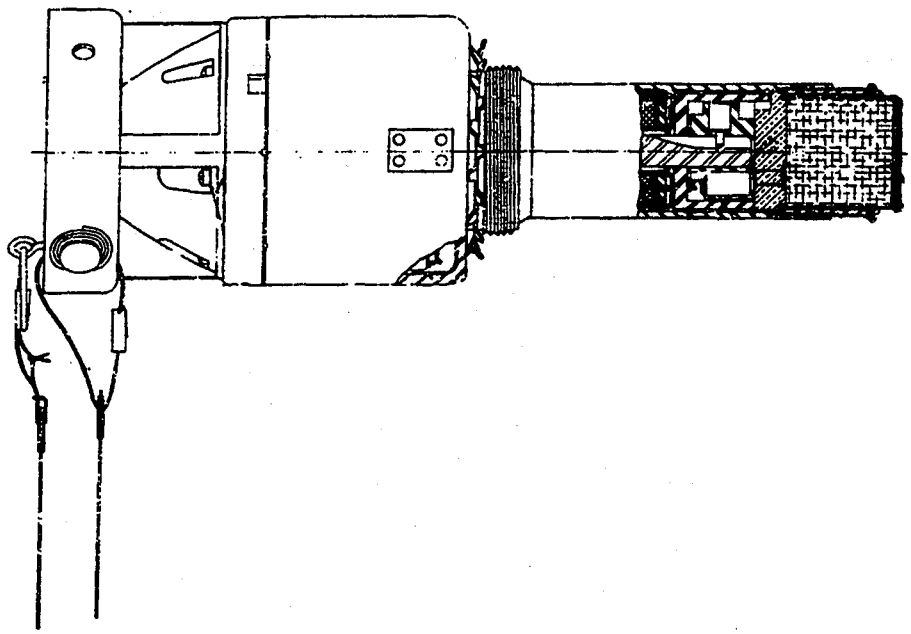

IDENTIFICATION

Agency	ERADCOM, DELHD-IT-OE R. Wyckoff AV 290-2677
Status	Obsolete
Ass'y Dwg. No.	FF4026 (FA)
Parts List	
Specification	VE-PD-140
Previous Number	T2004

GENERAL

Carriers	Rocket
Cal. — Size	5.0 in.
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	100
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 5
DESIGNATION: M403A2
Rocket Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M403E2, FUZE, ROCKET, PROXIMITY

ARMING DATA

Method	Setback, Deceleration, Mech. time, Elect. time
Delay	0.8 to 1.2 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 20
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	4.5 lb
Total Length (in.)	10.02
Body Diam. (in.)	
Intrusion	5.09 in.
Thread Size	2-12NS-1A

FUNCTIONING DATA

Action	Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M36A1
Booster	Tetryl
Lead	Tetryl

REMARKS

As a major safety feature complete mechanical arming takes place at the end of rocket acceleration and then electrical arming begins.

Uses printed circuit amplifier in El design

SERIES: A CHAPTER: 5
DESIGNATION: M403A2
Rocket Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M404A2 Rocket BD Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 5-153 and 5-154 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M406, FUZE, ROCKET, PD

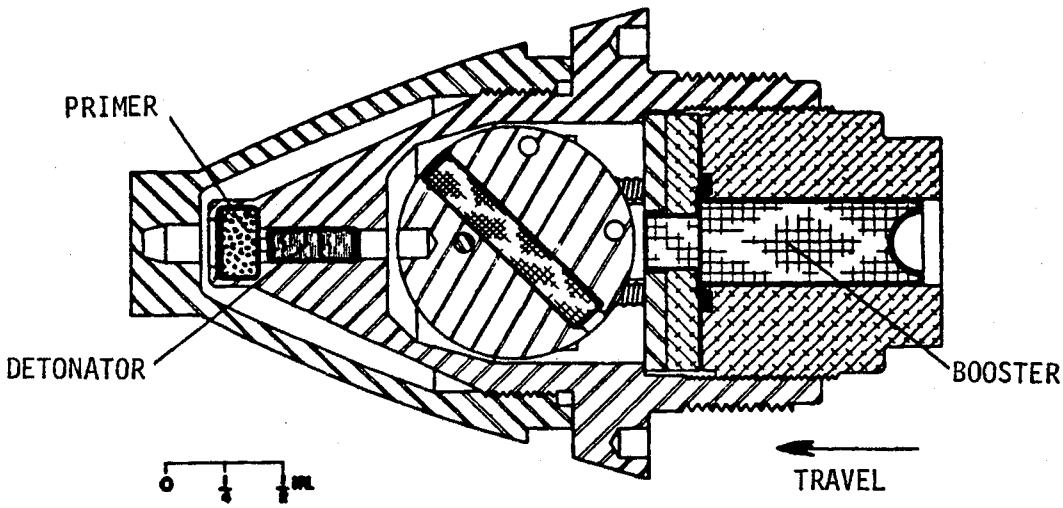

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCN-T A. Zacharin, AV 880-6477
Status	obsolete
Ass'y Dwg. No.	73-10-39
Parts List	9239431
Specification	
Previous Number	T2033E1

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Nose
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	81
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M406, FUZE, ROCKET, PD

ARMING DATA

Method	Setback
Delay	200 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 40.0
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.82 lb
Total Length (in.)	3.365
Body Diam. (in.)	
Intrusion	1.23 in.
Thread Size	1.4375-16NS-2

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antivehicles
Sensitivity	
Material	Steel plate
Thickness (in.)	3
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M56
Detonator	M29
Booster	Aux. M122
Lead	RDX

REMARKS

Fuze, M406 Technical Data Package is being updated and modified.
Same as Fuze MK 181.

SERIES: A CHAPTER: 5
DESIGNATION: M406
Rocket PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M408E1, FUZE, ROCKET, PIBD

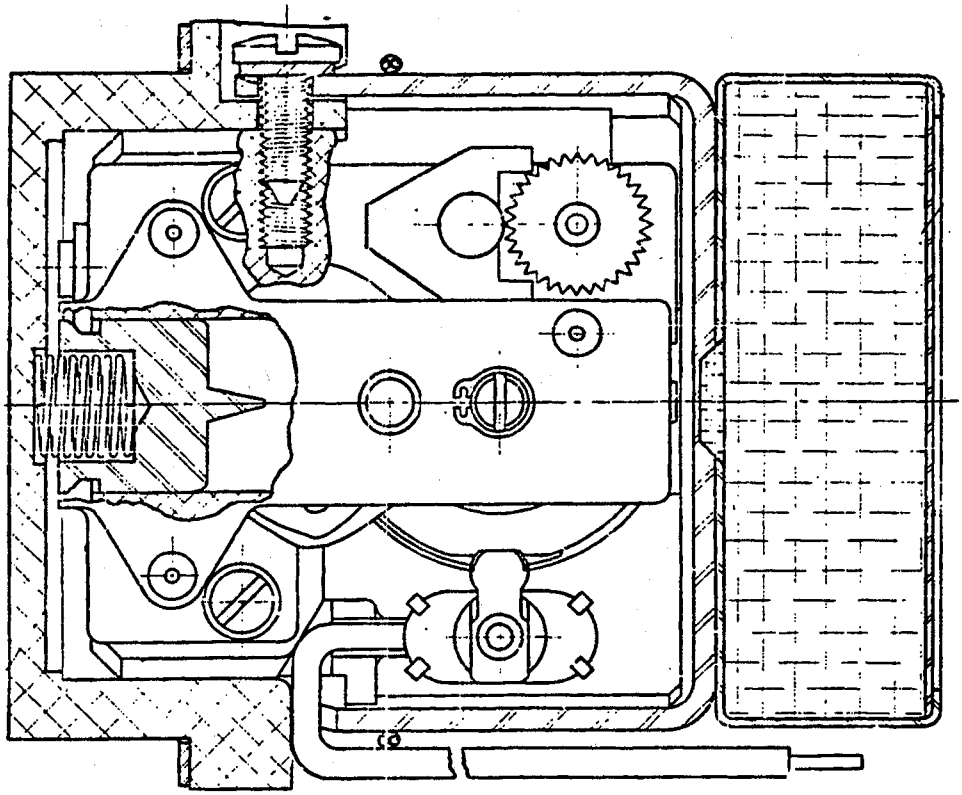

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCN-M L. Horowitz, AV 880-5581
Status	Obsolete
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	T2030E4

GENERAL

Carriers	Rocket
Cal. — Size	3.5 in.
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	2000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M408E1, FUZE, ROCKET, PIBD

ARMING DATA

Method	Setback, pull pin
Delay	20-35 ft (delay escpt.)
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	250 / 450
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	0.4 lb
Total Length (in.)	2.009
Body Diam. (in.)	
Intrusion	Encased in rocket
Thread Size	

FUNCTIONING DATA

Action	Impact, graze, SQ
Type	Electromechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	Plywood
Thickness (in.)	0.5
Max Obliq. (°)	60
Velocity (fps)	500
Carrier	

POWER SUPPLY

Piezoelectric

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	M48
Booster	Tetryl
Lead	Tetryl

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: M408E1
Rocket PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M409, FUZE, ROCKET

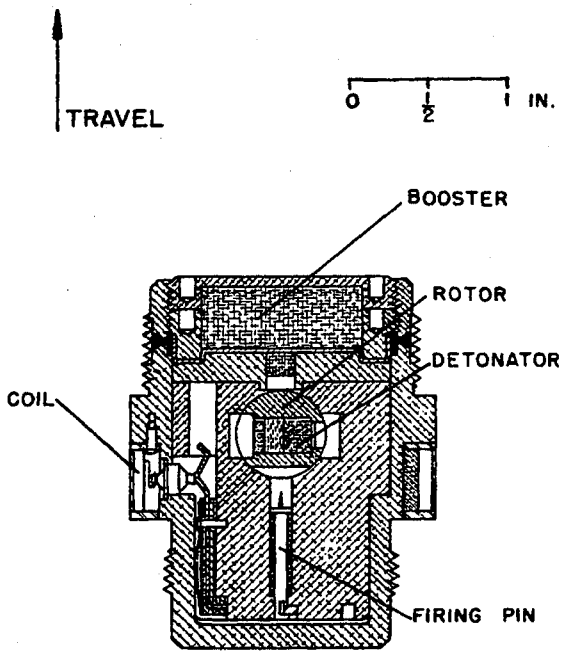

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCN-M L. Horowitz, AV 880-5581
Status	Terminated
Ass'y Dwg. No.	P-86907
Parts List	
Specification	
Previous Number	T2033E2

GENERAL

Carriers	Rocket
Cal. — Size	2 in.
Location	Base
Use	HE
MIL-STD's	331, Tests 101, 103
Max Values	
Rotat. (rps)	
Setback (g)	350
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M409, FUZE, ROCKET

ARMING DATA

Method	Mech., glass beads
Delay	300-1000 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.75 lb
Total Length (in.)	2.44
Body Diam. (in.)	
Intrusion	
Thread Size	1.5-16N-2A 1.8125-16N-2A

FUNCTIONING DATA

Action	PI, BD, graze, SD
Type	Electrical
Delay	0.5-0.9 msec
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	24 ST Aluminum
Thickness (in.)	0.04
Max Obliq. (°)	80
Velocity (fps)	2400
Carrier	

SD delay 3-10 sec depending on altitude

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T22E1, M46
Booster	Tetryl
Lead	Tetryl

REMARKS

Dummy fuze is the M410 (previous number T2062, dwg. P-87109).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M411, FUZE, ROCKET, M.T.

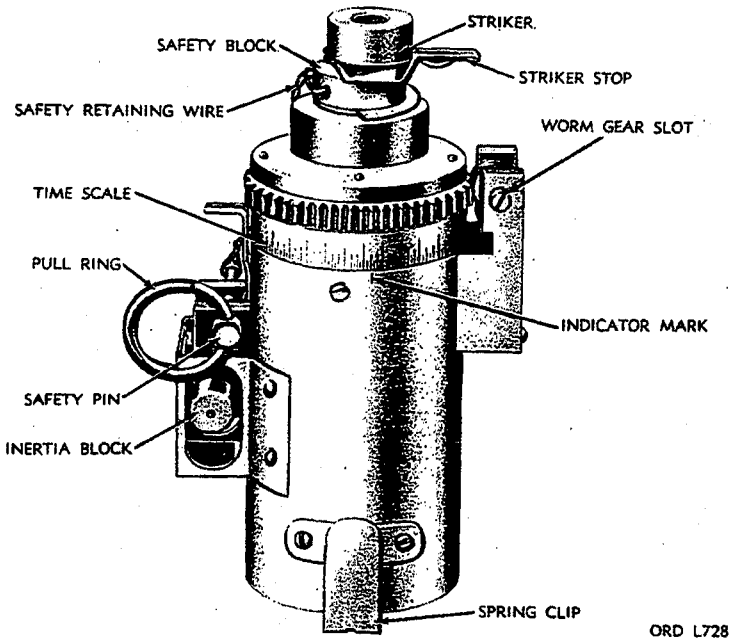

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCN-M L Horowitz, AV 880-5581
Status	Obsolete
Ass'y Dwg. No.	F8798172
Parts List	8798172
Specification	PA-PD661, 1407
Previous Number	T2065

GENERAL

Carriers	Warhead section
Cal. — Size	762 mm
Location	Front
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M411, FUZE, ROCKET, M.T.

ARMING DATA

Method	Linear acceleration		
Delay	6 sec		
Rotation (rps)			
Non-arm		Arm	
Setback (g)			
Non-arm	10	Arm	Over 10 for more than 6 sec
Arming Wire			
External Indicat.			

PHYSICAL DATA

Weight	1.5 lb
Total Length (in.)	5.1
Body Diam. (in.)	1.95
Intrusion	22.5 in.
Thread Size	

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	None
Time Type	Mechanical
Time Setting (sec)	5 - 90 sec x 0.1 sec
Target	Antipersonnel, light vehicles
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Movement assembly T3, 8798213 (spring actuated)

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19
Booster	

REMARKS

Dummy fuze is the XM424.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM413, FUZE, PI, PROXIMITY

IDENTIFICATION

Agency ERADCOM, DELHD-DE-OE
L. Tozzi, AV 290-2400
Status Terminated
Ass'y Dwg. No.
Parts List
Specification
Previous Number

GENERAL

Carriers	Projectile, Rocket
Cal. — Size	115 mm
Location	Nose
Use	HE or GP
MIL-STD's	331, Tests 101-107,115
Max Values	
Rotat. (rps)	500
Setback (g)	3800
Velocity (fps)	250

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM413, FUZE, PI, PROXIMITY

ARMING DATA

Method	Spin
Delay	3 sec (impact)
Rotation (rps)	
Non-arm	30
Arm	65
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.43 lb
Total Length (in.)	5
Body Diam. (in.)	
Intrusion	5 in.
Thread Size	2-12UNS

FUNCTIONING DATA

Action	PI, Proximity
Type	Electric
Delay	About 1 millisec
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 124
Detonator	
Booster	

REMARKS

Used in XM70 weapon system Gun Boosted Rocket (T273)

Modification of Fuze M514A1

XM413 fuze was to be replaced by the T365 fuze.

SERIES: A CHAPTER: 5
DESIGNATION: XM413
Rocket Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M414A1 Rocket Proximity Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 5-165 and 5-166 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M415, FUZE, ROCKET

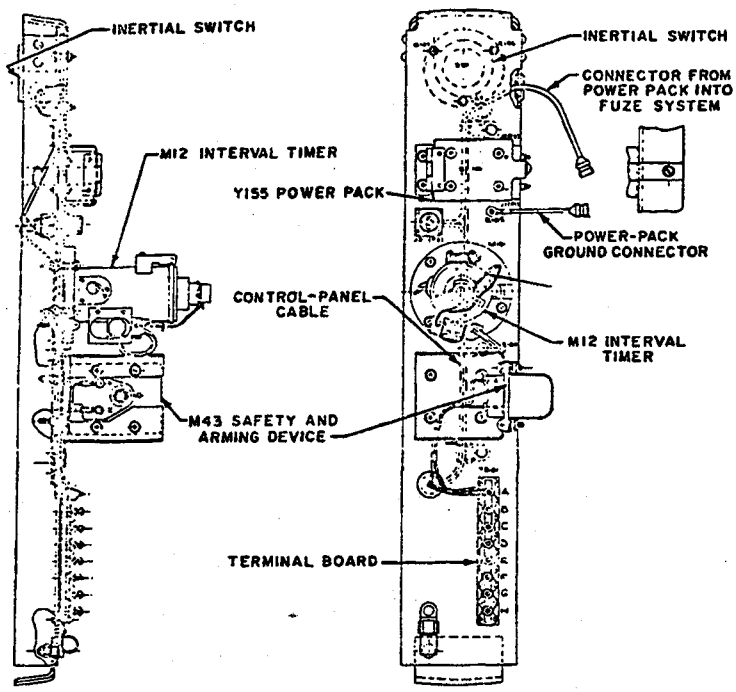

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-M L. Horowitz, AV 880-5581
Status	Obsolete
Ass'y Dwg. No.	TIR 8-2-2A4
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	Honest John (conventional)
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 5
DESIGNATION: M415
Rocket PD Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M415, FUZE, ROCKET

ARMING DATA

Method	Setback and timer
Delay	4.5 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 11
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Impact
Type	Electromechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Bldgs, structures
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Y155

EXPLOSIVE TRAIN

S&A Device	M43
Primer	
Detonator	M51
Booster	
Lead	Tetryl

REMARKS

Consists of nose crush switch, contact assembly, inertial switch, S&A device, timer, power pack, and control panel.

SERIES: A CHAPTER: 5
DESIGNATION: M415
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM416, FUZE, ROCKET, MT

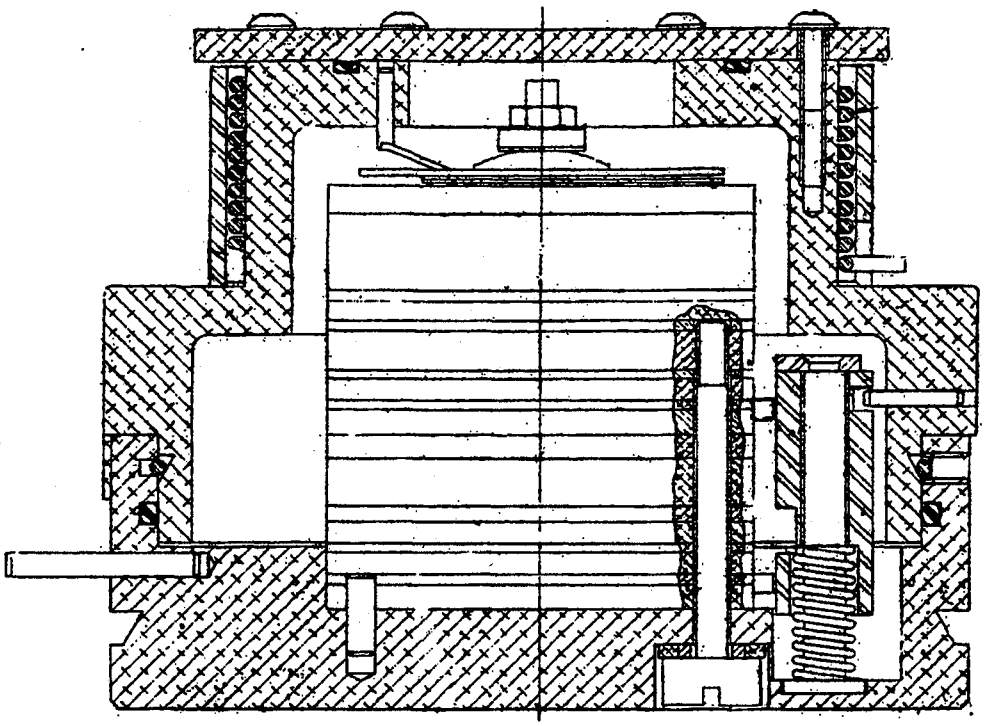

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz
Status	AV 880-5581 Terminated
Ass'y Dwg. No.	FF 9076
Parts List	PL 9076
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	4.5 in.
Location	Internal
Use	Illuminating
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	50
Velocity (fps)	2500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM416, FUZE, ROCKET, MT

ARMING DATA

Method	Setback
Delay	0.5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	2.0 lb
Total Length (in.)	3.7
Body Diam. (in.)	3.3
Intrusion	Internal
Thread Size	

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech. two center tuned
Time Setting (sec)	2-50
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Main spring and torsion spring

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Hand settable with tool

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

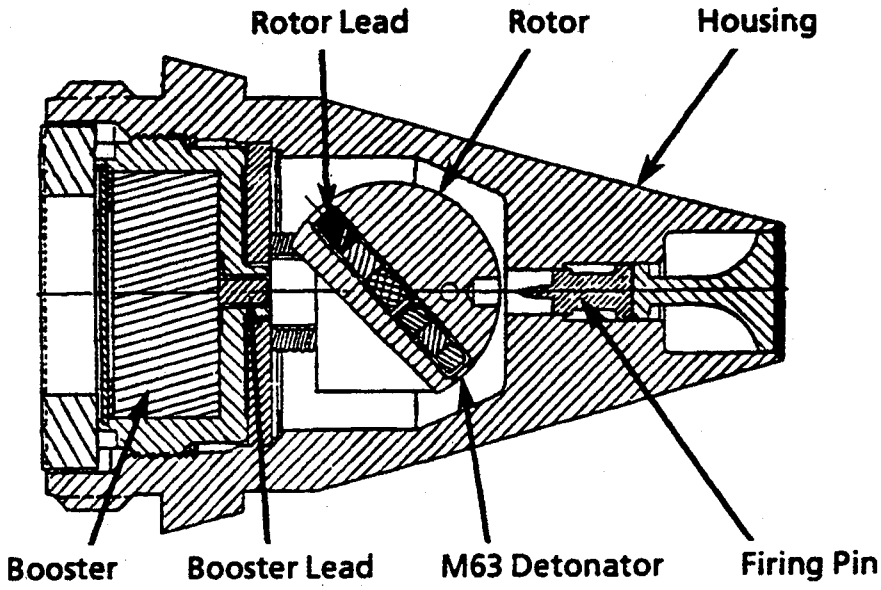

- OVERALL SIZE -	- INTRUSION -	WT: 0.6 lb (272 g)
LG: 3 in (76.2 mm)	DP: 0.92 in (23.4 mm)	THD: 1.4315-16NS-2
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-C
- CONTACT: Chevalaz, R
- PHONE: DSN 880-5697
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 86 903 (T2058)
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:
  1340-00-716-1450, 1340-00-724-3567
- DODIC: H520, H521
- PRIOR MODEL NO: T2058
- SIMILAR TO: T2044E3

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Rocket

- AMMUNITION:
  M55, Chemical

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION:
- SETBACK: 45 g
- VELOCITY: 2,400 ft/s (732 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't Meet MIL-STD-1316
SETTERS: None

Supersedes page 5-171 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 13 g, no arm; 20 g all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
300 ft (91 m)

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: M63, plus 0.180 g RDX rotor lead, Dwg B90-4-85

LEAD: 0.074 g RDX

BOOSTER: 12 g of RDX, Dwg C90-4-33

OTHER: None

FUNCTIONING DATA

MODES: PDSQ
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Personnel
SENSITIVITY:
All terrain,
Maximum obliquity 75 deg

FUNCTION TEMP:

MODE ON DELIVERY:
Safe

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT: 12.468 g
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
The rotor is restrained in the unarmed position by a setback weight and a gear sector engaged with a gear train of a runaway escapement. On firing acceleration moves setback weight rearward releasing the unbalanced rotor which rotates to the armed position delayed by the runaway escapement. If sufficient acceleration-time boost is not obtained, the setback weight drives the rotor back to the unarmed position. At arming, a spring-loaded pin locks the rotor in the armed position. On impact the windshield striker drives the firing pin directly rearward functioning the M63 Detonator which initiates the rotor detonator and in turn the lead and booster. Housing, Dwg. D90-4-27; S&A, Dwg. C90-4-83. Mechanical, Junghans escapement.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M421, FUZE, ROCKET, M.T.

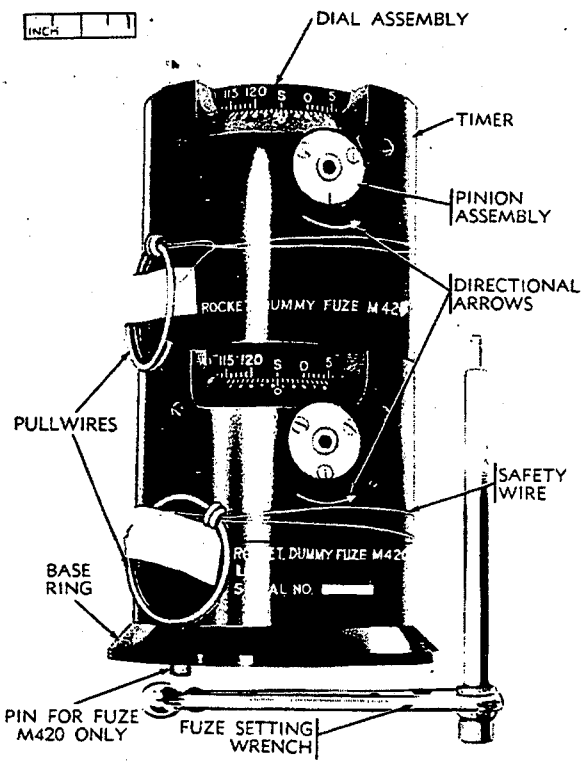

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	F8595903
Parts List	8595903
Specification	FA-PD-MI-2403
Previous Number	T2075

GENERAL

Carriers	Warhead sections
Cal. — Size	318, 762 mm
Location	Front
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	75
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M421, FUZE, ROCKET, M.T.

ARMING DATA

Method		Linear acceleration	
Delay		6 sec	
Rotation (rps)			
Non-arm		Arm	
Setback (g)			
Non-arm	10	Arm	Over 10 g for more than 6 sec
Arming Wire			
External Indicat.		Yes	

PHYSICAL DATA

Weight	3 lb
Total Length (in.)	5.99
Body Diam. (in.)	2.80 housing
Intrusion	15 in. on 318 mm whds.
Thread Size	22 1/2 in. on 762 mm whds.

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	1.5 sec. prior to set time
Time Type	Mechanical
Time Setting (sec)	4 to 120 sec. by 1 sec.
Target	Antipersonnel, light vehicles
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Movement assy. F8595808 (spring actuated)

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19 (2)
Booster	
Lead	1850 mg RDX

REMARKS

Dummy fuze is M420 (assembly drawing D8863367).

SERIES: A CHAPTER: 5
DESIGNATION: M421
Rocket MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M423 Rocket Impact Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 5-175 and 5-176 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM425, FUZE, ROCKET, PROXIMITY

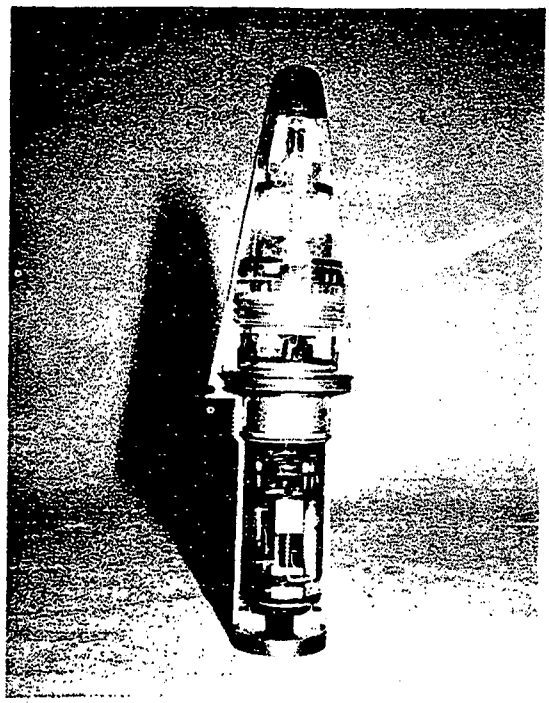

IDENTIFICATION

Agency ERADCOM, DELHD-IT-EA
R. Wyckoff, AV 290-2677

Status Development Terminated

Ass'y Dwg. No. 10992402

Parts List EPL 10992402

Specification XTL-PD-173

Previous Number T2061E1

GENERAL

Carriers Rocket

Cal. — Size 5 in. (Zuni)

Location Nose

Use Chemical

MIL-STD's

Max Values

Rotat. (rps)

Setback (g) 100

Velocity (fps)

KEY FEATURES

SERIES: A CHAPTER: 5
DESIGNATION: XM425
Rocket Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM425, FUZE, ROCKET, PROXIMITY

ARMING DATA

Method	Setback, Deceleration, Mech. time, Elect. time
Delay	400 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm	13
Arm	19
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight

Total Length (in.)

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action	Proximity and impact
Type	Electronic
Delay	
Time Type	
Time Setting (sec)	
Target	Air burst
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

PS-204

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

Electronic circuits similar to those of Fuze M414A1

SERIES: A CHAPTER: 5
DESIGNATION: XM425
Rocket Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM426E4, FUZE, ROCKET

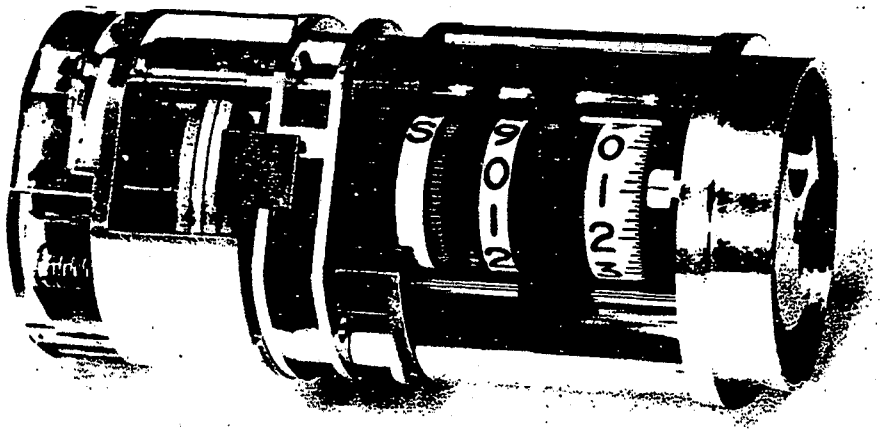

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	Honest John, Lance
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 5
DESIGNATION: XM426E4
Rocket MT Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM426E4, FUZE, ROCKET

ARMING DATA

Method	Setback, acceleration
Delay	0.6 sec (min.)
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	20
Arming Wire	No
External Indicat.	No
Accel.	0.6 - 2.0 sec

PHYSICAL DATA

Weight	1.1 lb
Total Length (in.)	4.0
Body Diam. (in.)	2.25
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mech. escapement
Time Setting (sec)	3 - 199
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

To replace Fuze MT T2075.

Fuze is hermetically sealed.

Fuze time setting contains digital indicators.

SERIES: A CHAPTER: 5
DESIGNATION: XM426E4
Rocket MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

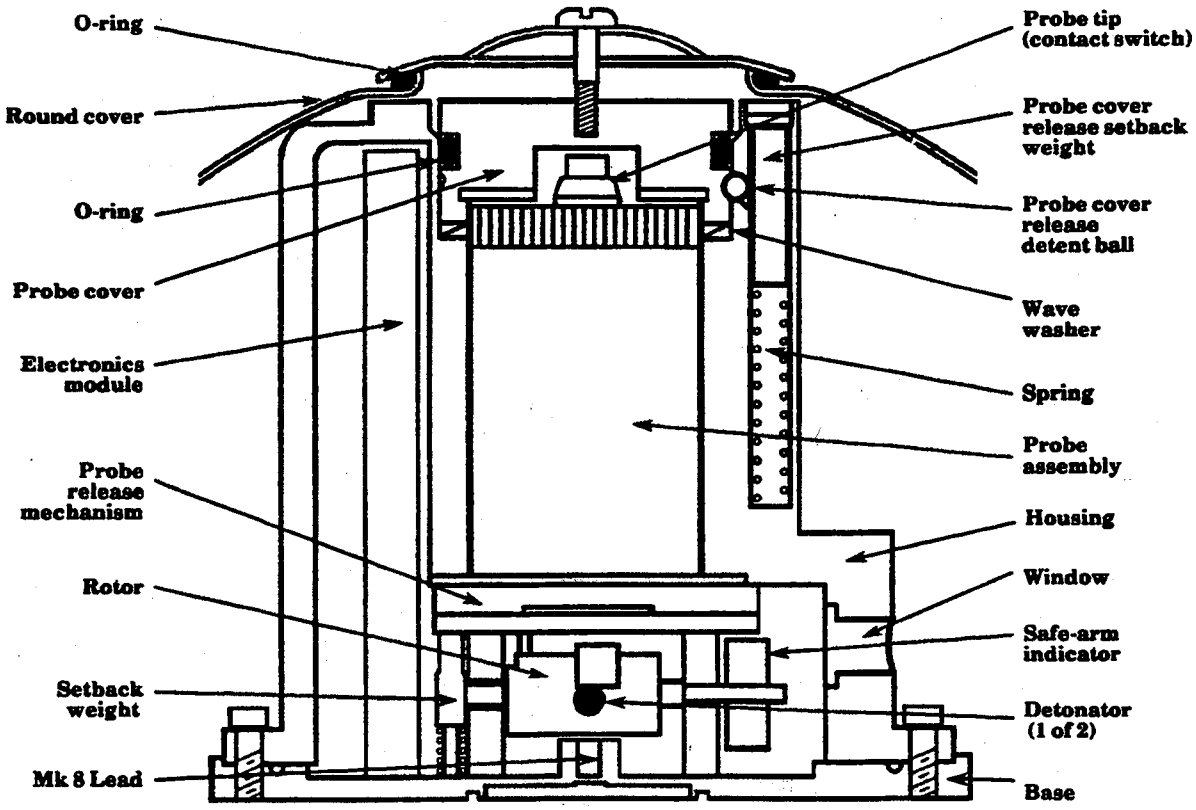

- OVERALL SIZE -	- INTRUSION -	WT: 8 lb (3630 g)
LG: 6 in (152 mm)	DP: 6 in (152 mm)	THD: None
XSECT: 6.5 in (165 mm)	DIA: 6.5 in (165 mm)	THD DP: NA

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G411
- CONTACT: Munach, A
- PHONE: DSN 290-1970
- STATUS: Terminated
- USER: Marine Corps
- ASSY DWG: KD04500 (Bulova)
- PARTS LIST: Not yet determined
- SPEC: Not yet determined
- PUB: None

- NATIONAL STOCK NO:
  - Issued with round
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: XM750 SLUFAE Fuze

- REPLACES: Nothing
- REPLACED BY: None

GENERAL
- WEAPON: Amphibious Assault, Mine Countermeasure System

- AMMUNITION:
  - Catapult-Launched Fuel-Air Explosive (CATFAE)

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME: 25 seconds

SAFETY STD: Meets MIL-STD-1316C
SETTERS: Launch vehicle fire control

Supersedes page 5-181 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Launch sensing switch starts two electronic timers

SECOND SAFETY:
Acceleration of setback weight unlocks rotor

OTHER SAFETY:
Cessation of acceleration causes setback weight to drive rotor to fully armed position

SAFE/ARM INDICATION:
"S" or "A" indicator; anti-malassembly feature

ARMING TIME OR DISTANCE:
246 ft (75 m) from launcher

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Dwg KD04776 (Bulova) (2ea) (self-shorting contacts)

LEAD: Dwg KD04503 (Bulova)(Cloud det) Mk 8 (warhead burster)

BOOSTER: None

OTHER: BBU-24/B Actuator repositions piston which unlocks rotor and releases probe

FUNCTIONING DATA

MODES: Proximity, 8 ft from ground
TYPE: Electronic
CHARACTERISTICS:
Helical spring probe with contact switch initiates round 8 ft from ground. Switch in electronic module provides backup on round impact.
TARGET: Land and shallow water mines
SENSITIVITY:
1.5 lb closes probe switch (70 to 105 ft/s velocity on impact)

FUNCTION TEMP:

MODE ON DELIVERY:
NA

POWER SUPPLY:

Eight electrolytic capacitors are charged by fire control and used to power electronics and fire dets.

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT:
NET PROP WT:
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:

The fire control charges fuze capacitors and transmits the retarding paracute deployment time to the fuze prior to launch. On launch, the fuze g-switch closes starting two electronic timers. Setback repositions detent balls unlocking the probe cover and drives the S&A setback weight aft allowing the unbalanced rotor to turn to the first-stage armed position. At the programmed time, a fire signal is sent to the parachute S&A and 1.5 s later an explosive actuator repositions a piston allowing the rotor to continue turning. The piston also releases the 8-ft contact probe. After acceleration, springs drive the setback weight forward, turning the rotor toward the fully armed position. The rotor is governed part way by a 0.5 s escapement. In the armed position, the two detonators are unshorted and aligned with their respective leads. An electronic delay enables the firing circuits 50 ms later. Probe contact or round impact will initiate the cloud detonator firing circuit and deploy the detonators. After an additional 12 ms another fire pulse initiates the main burster charge rupturing the warhead and disseminating the fuel. The fuel air cloud quickly overtakes the cloud deonators, and is initiated.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

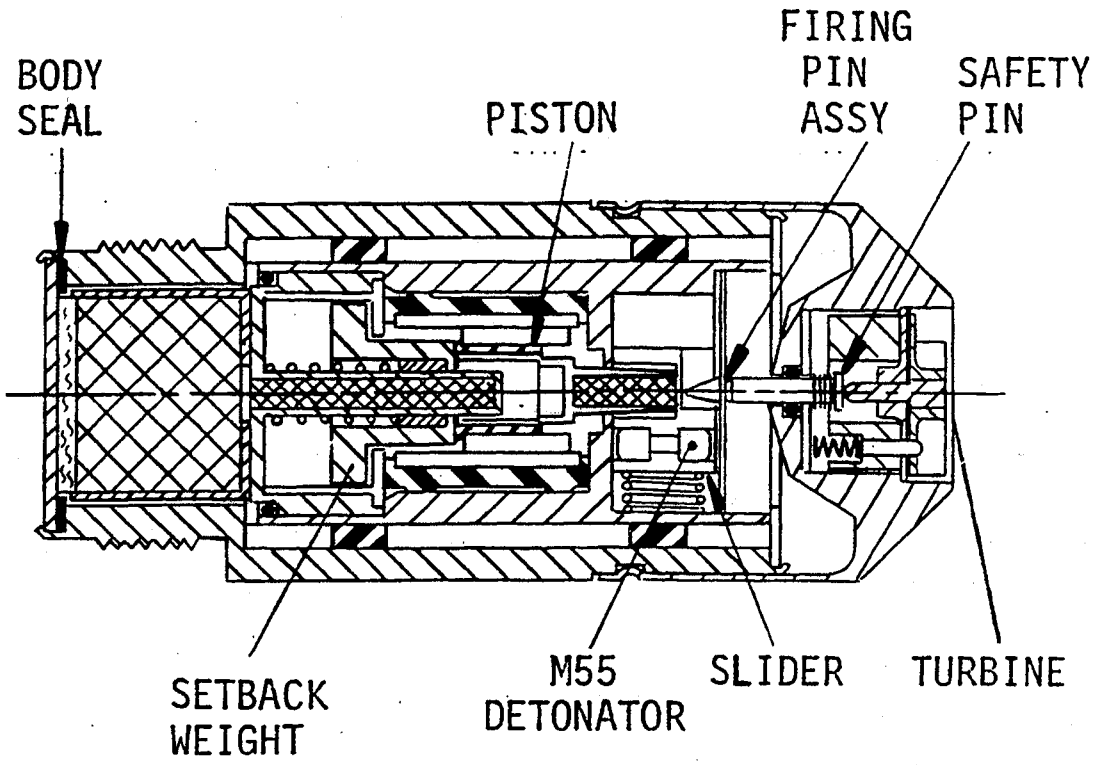

- OVERALL SIZE -	- INTRUSION -	WT: 9.73 oz (275.8 g)
LG: 4.617 in (117.3 mm)	DP: 1.032 in (26.2 mm)	THD: 1 7/16-16UNS-2A
XSECT: 1.755 in (44.6 mm)	DIA: Threads	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-C
- CONTACT: Sitara, R
- PHONE: DSN 880-3618
- STATUS: Terminated
- USER: Army
- ASSY DWG: 9 224 063
- PARTS LIST: 9224063
- SPEC: MIL-F-50253
- PUB:

- NATIONAL STOCK NO:
  None assigned
- DODIC:
- PRIOR MODEL NO: XM431
- SIMILAR TO:

- REPLACES: M423
- REPLACED BY:

GENERAL
- WEAPON: 2.75-in Rocket for Helicopters

- AMMUNITION:
  Warhead HE M151

LOCATION: Nose of Warhead
BALLISTIC LEVELS:
- ROTATION: 10 rps
- SETBACK: 25 g
- VELOCITY: 1950 ft/s (594 m/s) rocket; 2149 ft/s (655 m/s) w/heli
- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316B
SETTERS: None

Supersedes page 5-182A of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 11.25 g no arm,
20.5 all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
43 to 92 m
Boost: 0.63 to .82 s at 27 g

EXPLOSIVE COMPONENTS

S&A DEVICE: Air Dash Pot

PRIMER: None

DETONATOR: M55 Stab

LEAD: 640 mg RDX

BOOSTER: 14.9 g RDX

OTHER: None

FUNCTIONING DATA

MODES: SQ
TYPE: Mechanical, pneumatic
CHARACTERISTICS:
SQ

TARGET: Grd - Personnel, Lt Mat
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:
SQ

POWER SUPPLY:

Compressed slider spring

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL: A
NET EXPL WT: 15.625 g
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
The fuze is made safe by restraining the slider by means of the firing pin and a detent attached to a pneumatic integrating device. On launch, acceleration moves a setback weight to the rear releasing the piston of the pneumatic annular orifice device (PAOD). The piston moves rearward during acceleration delayed by the flow of air through the small annular orifice between piston and cylinder. Setback also removes a detent from an air turbine at the nose. Air flow rotates the turbine and it unscrews moving forward allowing the firing pin spring to remove the pin from the slider. If an insufficient rocket boost is obtained, the setback weight forces the piston back to the detenting position. When the PAOD piston releases the slider, its spring moves it to the armed position. On direct or graze impact, the nose ogive moves rearward and the firing pin functions the M55 Det, and, in turn, the lead in the piston, the second lead in the fuze body and the booster. Fuze has never been produced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM432, FUZE, ROCKET, ELECTRONIC TIME

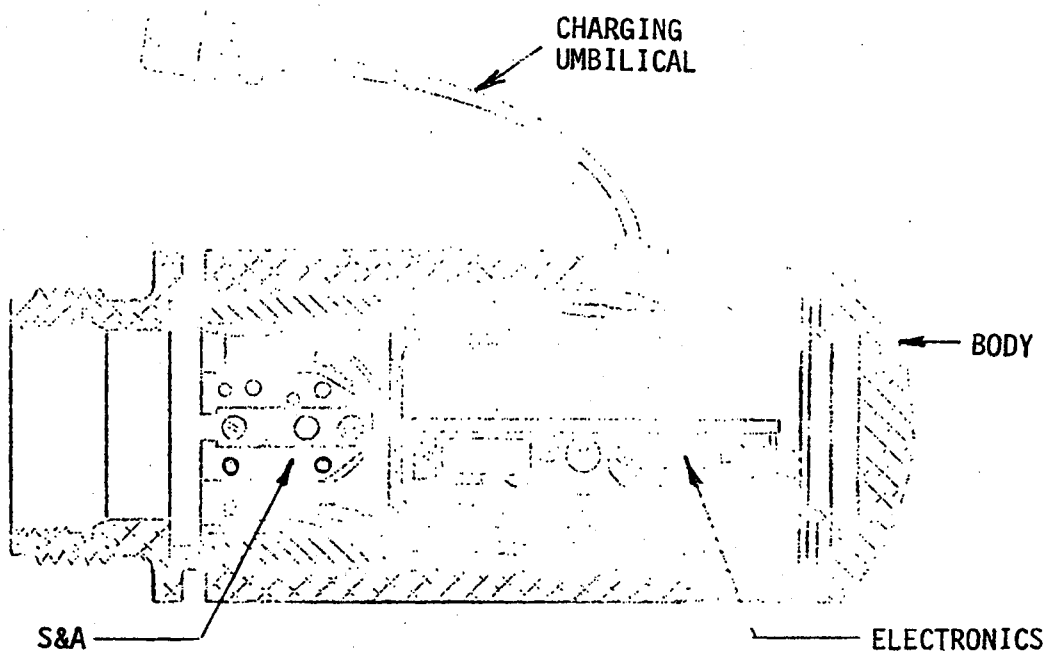

IDENTIFICATION

Agency ARRADCOM DRDAR-LCN-M
A. Janusheyich, AV 880-4909
Status Terminated
Ass'y Dwg. No.
Parts List
Specification
Previous Number

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	16
Setback (g)	60
Velocity (fps)	2100

KEY FEATURES

Remote settable time fuze having ±.75% accuracy.

SERIES: A CHAPTER: 5
DESIGNATION: XM432
Rocket ET Fuze

Source: https://assist.dla.mil downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM432, FUZE, ROCKET, ELECTRONIC TIME

ARMING DATA

Method	Setback and accel. via runaway escap.
Delay	500 - 1080 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm 12	Arm 27
Arming Wire	Firing energy supplied at launch
External Indicat.	No

PHYSICAL DATA

Weight	0.8 lb
Total Length (in.)	5.23
Body Diam. (in.)	1.875
Intrusion	0.72 in.
Thread Size	1-7/16-16UN-2A

FUNCTIONING DATA

Action	PI and time
Type	Electronic
Delay	1.5 - 10.0 sec
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	Modified M429
Primer	
Detonator	T77
Booster	None

REMARKS

Requires setting device to compensate for aging and temperature effects on fuze components.

SERIES: A CHAPTER: 5
DESIGNATION: XM432
Rocket ET Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

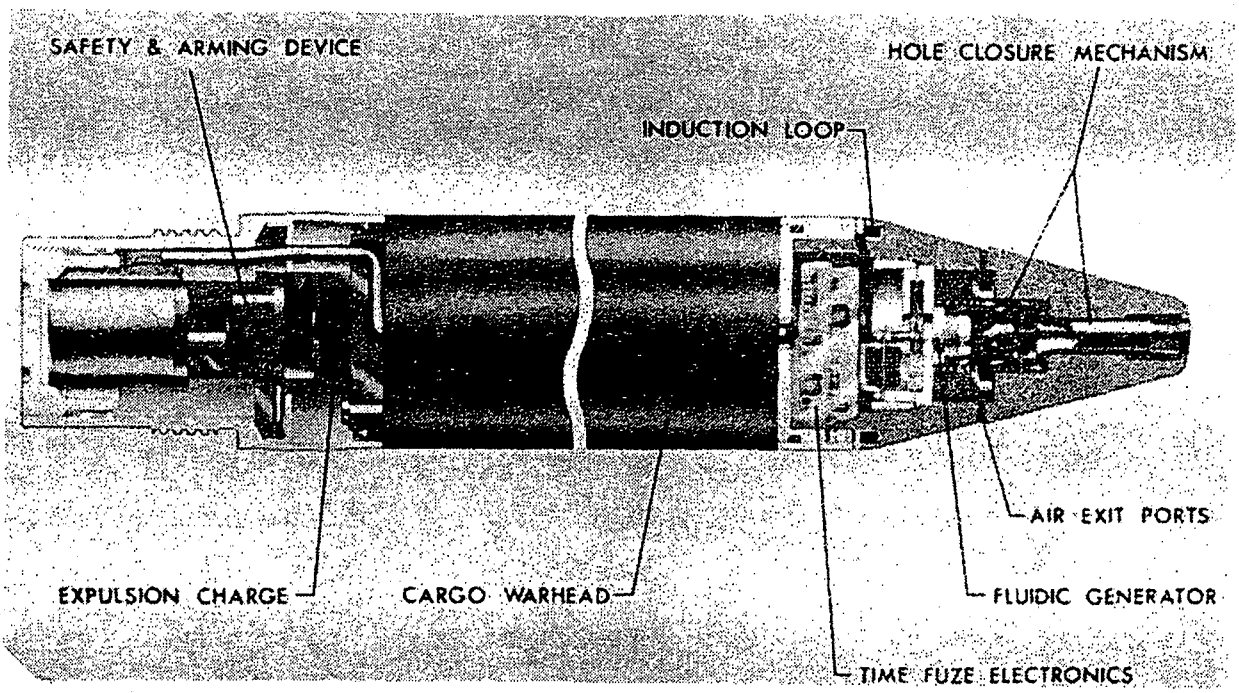

- OVERALL SIZE -	- INTRUSION -	WT: Unknown
LG: 4.70 in (119.4 mm)	DP: 0.85 in (21.6 mm)	THD: 2.55 in (6.48 cm)
XSECT: 2.75 in (69.9 mm)	DIA:	THD DP:

IDENTIFICATION
AGENCY: ARDEC, SMCAR-AEF-M
CONTACT: Goodman, R
PHONE: DSN 290-2440
STATUS: Canceled
USER: Army
ASSY DWG: Unknown
PARTS LIST:
SPEC: Not assigned
PUB:

NATIONAL STOCK NO:
Not assigned
DODIC:
PRIOR MODEL NO: None
SIMILAR TO:

REPLACES: M436, 442, 446, XM439
REPLACED BY:

GENERAL
WEAPON: 2.75 in Rocket for Helicopters and High Speed Aircraft
AMMUNITION:
Cargo Warheads - WDU-4A/A, -13A, M255 Flechette, M257/262 Flare, M259 Smoke, XM261 Submun.
LOCATION: Nose and Base of warhead
BALLISTIC LEVELS:
ROTATION: 10 rps
SETBACK: 25 g
VELOCITY: 1950 ft/s (549 m/s) rocket; 20000 ft/s (610 m/s) helicopter
CREEP:
FLIGHT TIME:
SAFETY STD:
SETTERS:

Supersedes page 5-185 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 12 g no arm,
27 g all arm

SECOND SAFETY:
Sustained air flow, 70 m/s
for 0.7 s

OTHER SAFETY:

SAFE/ARM INDICATION:
No
Meets MIL-STD-1316B

ARMING TIME OR DISTANCE:
0.7 s (250 m)

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: ATLAS IMT 172 Piston act

DETONATOR: M84 Elec

LEAD: None

BOOSTER: None

OTHER: Expellent in warhead

FUNCTIONING DATA

MODES: Time, settable

TYPE: Electronic, Digital

CHARACTERISTICS:
1.2 to 51.1 s x 0.1 s
increments

TARGET: Ground-various

SENSITIVITY:
NA

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Fluidic Air Generator

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

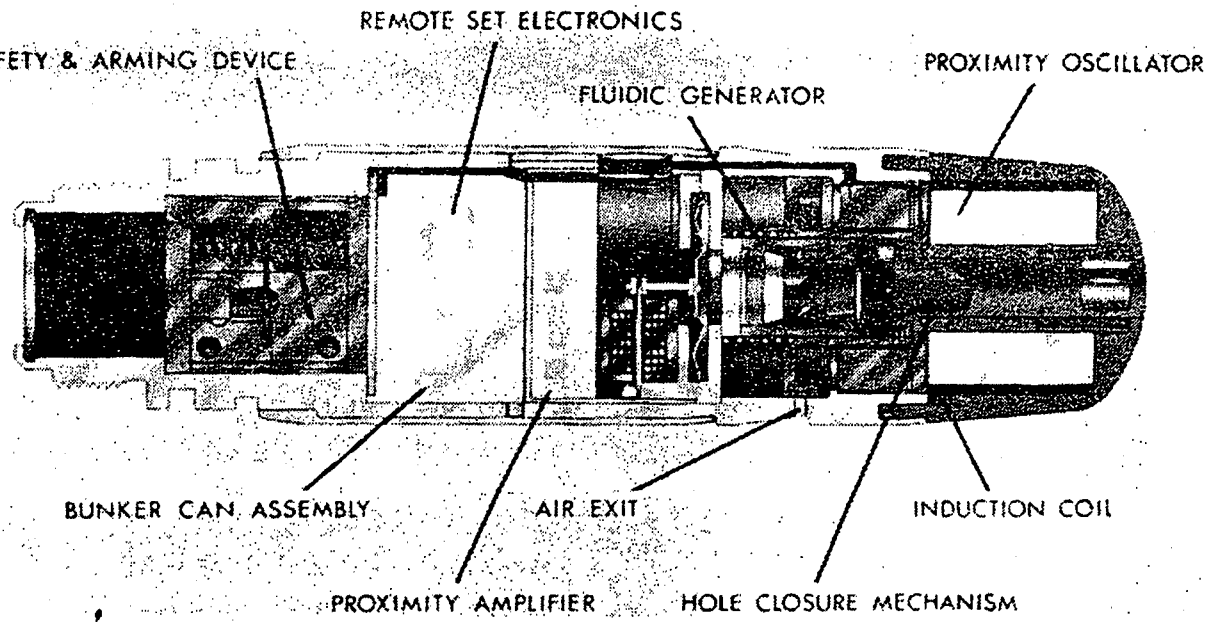

- OVERALL SIZE -	- INTRUSION -	WT: Unknown
LG: 8.0 in (203.2 mm)	DP: 0.74 in (18.8 mm)	THD: 1 7/16-16UNS-2A
XSECT: 1.59 in (40.4 mm)	DIA:	THD DP:

IDENTIFICATION
AGENCY: ARDEC, SMCAR-AEF-M
CONTACT: Goodman, R
PHONE: DSN 290-2440
STATUS: Terminated
USER: Army, Navy
ASSY DWG: Unknown
PARTS LIST:
SPEC: Not assigned
PUB:

NATIONAL STOCK NO:
Not assigned
DODIC:
PRIOR MODEL NO: None
SIMILAR TO:

REPLACES: See Remarks
REPLACED BY:

GENERAL
WEAPON: 2.75 and 5 in Aircraft Rockets

AMMUNITION:
2.75 in, HE M151
5 in Zuni, HE Frag Mk 63
HE GP Mk 24, and AT/APERS Mk 32
LOCATION: Nose of warhead
BALLISTIC LEVELS:
ROTATION: 40 rps
SETBACK: 65 g
VELOCITY: 2769 ft/s (844 m/s) rocket; 3660 ft/s (1116 m/s) HS A/C
CREEP:
FLIGHT TIME:
SAFETY STD:
SETTERS:

Supersedes page 5-187 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 11 g no arm,
27 all arm

SECOND SAFETY:
Sustained Air Flow
70 m/s for 0.7 s

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No
Meets MIL-STD-1316B
ARMING TIME OR DISTANCE:
0.7 s (250 m)

EXPLOSIVE COMPONENTS

S&A DEVICE: Same as XM443

PRIMER: ATLAS IMT 172 Piston act

DETONATOR: Mk 84 Elec

LEAD: 250 mg PBXN-5

BOOSTER: 9 g comp A-5

OTHER:

FUNCTIONING DATA
MODES: Prox, PD, Dly, Selectable
TYPE: Electronic, RF CW
CHARACTERISTICS:
Settable for prox, PD or choice
of delay times from 6 to 720 ms

TARGET: Gnd-Personnel, Light Materiel
SENSITIVITY:
Unknown

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Fluidic Air Generator

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
AGENCY: ARDEC, SMCAR-AEF-M
CONTACT: Croakin, J; Morrow, D
PHONE: DSN 290-3720, -3710
STATUS: Terminated
USER:
ASSY DWG:
PARTS LIST:
SPEC:
PUB:

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY:

GENERAL
WEAPON:

AMMUNITION:

LOCATION:
BALLISTIC LEVELS:
ROTATION:
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD:
SETTERS:

Supersedes page 5-188A of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

POWER SUPPLY:

FUNCTIONING DATA
MODES:
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:



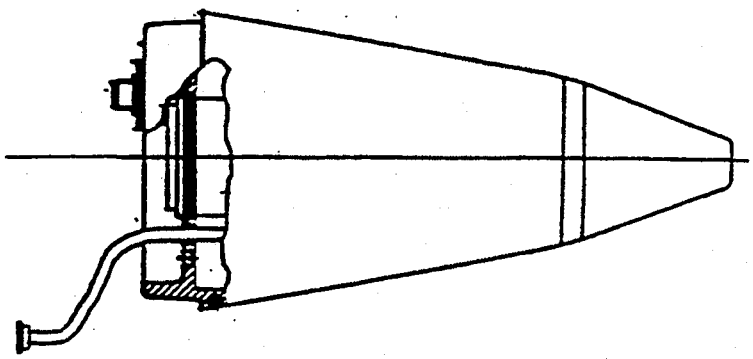

- OVERALL SIZE -	- INTRUSION -	WT: 3.5 lb (1600 g)
LG: 9.5 in (242.2 mm)	DP: 0.9 in (23.0 mm)	THD: None
XSECT: 4.8 in (122.5 mm)	DIA: 4.5 in (113.8 mm)	THD DP: NA

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-A
- CONTACT: McNally, G
- PHONE: DSN 290-3710
- STATUS: Terminated
- USER: Army, NATO
- ASSY DWG: 11 743 500
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO: M445, M447

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: 228 mm rocket

- AMMUNITION:
  Multiple Launch Rocket System (MLRS); Submunition Dispensing Warhead

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 12 rps
- SETBACK: 40 to 100 g
- VELOCITY: 3300 ft/s (1000 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316

SETTERS: MLRS Fire Control System

Supersedes page 5-188C of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 10 g no arm,
24 g all arm
Boost: 1.25 s at 31 g min
SECOND SAFETY:
Umbilical disconnect

OTHER SAFETY:
Input time setting

SAFE/ARM INDICATION:
Electrical but no visual;
Has antimalassembly feature
ARMING TIME OR DISTANCE:
Mechanical: 800 ms
Electrical: set time

EXPLOSIVE COMPONENTS

S&A DEVICE: Acc-driv rotor locked by zig-zag & elec-exp act.
PRIMER: None

DETONATOR: M84 Elec

LEAD: 740 mg CH-6
Dwg 11 733 886

BOOSTER: None

OTHER: Electro-explosive Actuator
5 mg 50/50 BS/KDNBF

FUNCTIONING DATA
MODES: Proximity, time
TYPE: Electronic, Digital
CHARACTERISTICS:
Prox: 300, 190, & 75 m; Time: 5.0 to 199.9 s in 0.1 s increments.
Accuracy: larger of 0.2 s or 0.5% of set time.
TARGET: To be determined
SENSITIVITY:
NA

FUNCTION TEMP:
-40 to +71 deg C
MODE ON DELIVERY:
Safe

POWER SUPPLY:

Thermal battery, dwg 11 743 760

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL: C
NET EXPL WT: 0.880 g
NET PROP WT: None
STORAGE TEMP: -40 to +71 deg C

REMARKS/DESCRIPTION:
On firing, a setback sensor moves rearward oscillating in a zig-zag path if a proper rocket motor boost is obtained. This partially releases the rotor, and closes a switch to an electronic timer. In flight, ram air passes through an annular orifice into a resonating cavity and the acoustic vibrations oscillate a diaphragm connected to a reed in a magnetic field generating an emf. After 1024 cycles of the diaphragm, a capacitor is charged, and after 1536 cycles, discharged into the piston actuator. The piston rotates the second lock, completely releasing the rotor. Persisting rocket acceleration rotates the unbalanced rotor to the armed position, unshorting the detonator and closing the firing circuit. Timing is accomplished with a twin-t oscillator, a divider circuit, and a counter. At 3.4 s before set time, the firing capacitor is charged, and, at set time, functions the Mk 84 Det which initiates the lead.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM540, FUZE, MT

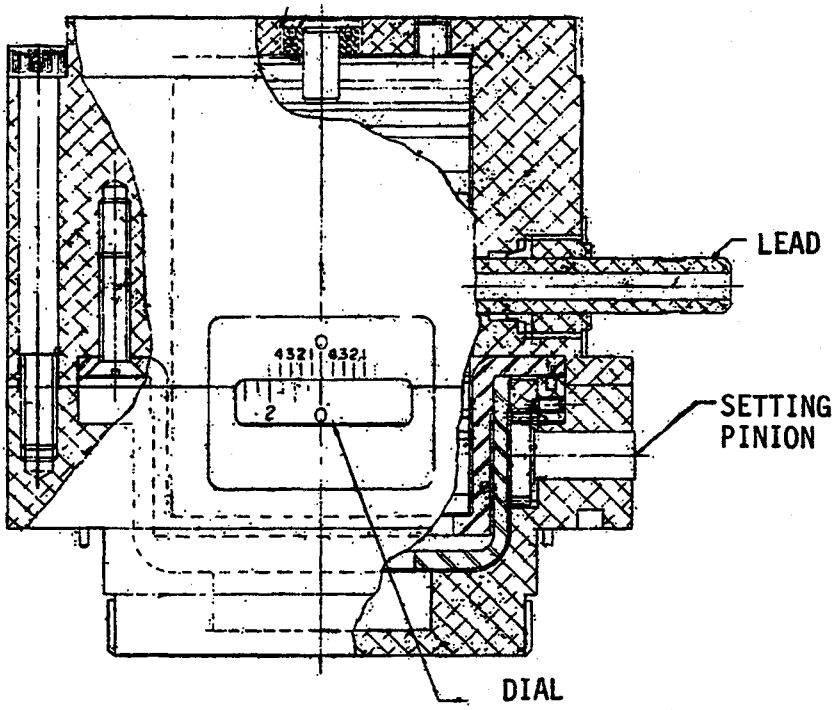

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-M
L. Horowitz AV 880-5581
Status Terminated
Ass'y Dwg. No. FF 8944
Parts List PL 8944
Specification
Previous Number

GENERAL

Carriers Projectile
Cal. — Size 279 mm
Non-nuclear Davy Crockett
Location Nose
Use HE
MIL-STD's 331 Tests 101 - 108
Max Values
Rotat. (rps) 0
Setback (g) 1000
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM540, FUZE, MT

ARMING DATA

Method	Setback
Delay	1 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 1000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3 lb
Total Length (in.)	3.7
Body Diam. (in.)	3.3
Intrusion	Internal
Thread Size	16-UNA3

FUNCTIONING DATA

Action	Superquick, time
Type	Mechanical
Delay	SQ, 100 millisec
Time Type	Mechanical, two center tuned
Time Setting (sec)	0 - 50
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Mainspring

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	XM59
Booster	

REMARKS

This device turnes on the proximity feature and does not initiate the high explosive.

Key settable (one direction only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

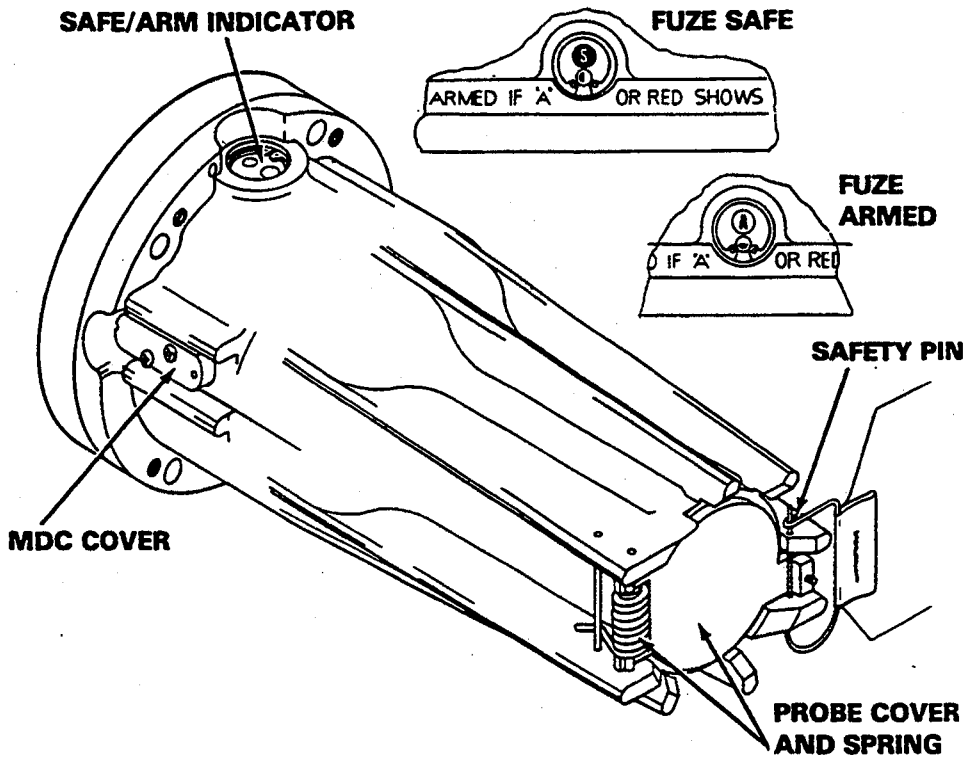

- OVERALL SIZE -	- INTRUSION -	WT: 7.0 lb (3.175 kg)
LG: 8.42 in (213.9 mm)	DP: None	THD: None
XSECT: 5.125 in (130.3 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: BRDC, DRDME-NEZ
- CONTACT: Millman, W
- PHONE: DSN 354-4272
- STATUS: Terminated
- USER: Army
- ASSY DWG: 13220E9836
- PARTS LIST:
- SPEC: MIL-F-53005
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO:

- REPLACES: None
- REPLACED BY:

GENERAL
- WEAPON: Surface Launched Unit Fuel Air Expl Mine Neutralization Sys, M134 (SLUFAE)
- AMMUNITION:
  - Rocket, HE, 345 mm, M130

LOCATION: Nose of Warhead
BALLISTIC LEVELS:
- ROTATION: None
- SETBACK: 44.5 g f/0.3 s nominal
- VELOCITY: 413 ft/s (126 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316B
SETTERS: Selec Checkout Assy (SCA)

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Electrical charging during launch cycle provides energy for BBU-24/B Actuator

SECOND SAFETY:
Setback: 18 g no arm, 25 g all arm
Boost for 0.3 s nominal

OTHER SAFETY:
In-bore arming precluded by setback weight runaway notch. Armed fuze cannot be charged.

SAFE/ARM INDICATION:
Yes

ARMING TIME OR DISTANCE:
0.58 to 0.73 s

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: None

DETONATOR: Mk 96-0 Elec, 3 ea

LEAD: Mk 8-0 (1 ea); Transfer (142 mg PBXN-301) (2 ea)

BOOSTER: None

OTHER: BBU-24/B Actuator

FUNCTIONING DATA

MODES: Time, PD and Delay
TYPE: Electronic, Mechanical
CHARACTERISTICS:
1 to 12 s x 0.1 s time
PD/standoff dispersion w/.010 s funct delay, back up inertia for dispension & function
TARGET: Ground-Mine clearance
SENSITIVITY:
All surfaces except light snow

FUNCTION TEMP:
-32 to +52 deg C
MODE ON DELIVERY:
Time, 12 s

POWER SUPPLY:

External 24.5 Vdc

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0247
US HCSDS:
UN CL/DIV SCG: 1.3 J
US DOT SHIP CL: A
NET EXPL WT: 0.939 g
NET PROP WT: None
STORAGE TEMP: -35 to +71 deg C

REMARKS/DESCRIPTION:
The fuze rotor contains 3 Mk 96 Detonators and is locked by the spring-biased setback weight. An explosive-actuator operated piston also blocks the rotor. Fuze setting for round chute deployment is made at the Selection Check-out Assembly (SCA) which sequentially charges all fuzes and initiates all rocket motor ignitors. Chute time is a fixed 12 s time in every fuze. Variable time is obtained by changing fuze from 0 to 11 s before launch. At launch, rotor is unlocked by setback weight and rotates partially towards armed position, being delayed by an escapement. Switch closure during rotation causes actuator to fire and unblock rotor. At motor burnout, weight drives rotor balance of travel to armed position and closes detonator firing contacts. At set time, first det. functions, initiating first transfer lead leading to chute deployment. At same time, extendible target probe delay timer is released. At 2.3 sec. probe extends approx. 2 meters. At impact, probe nose switch closes, or one of two inertia backup switches closes to function the second det. and transfer lead, leading to expulsion of warhead fuel detonation devices. Ten ms later, last det. fires, initiating Mk 8 Lead and burster charge.

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM1133, FUZE

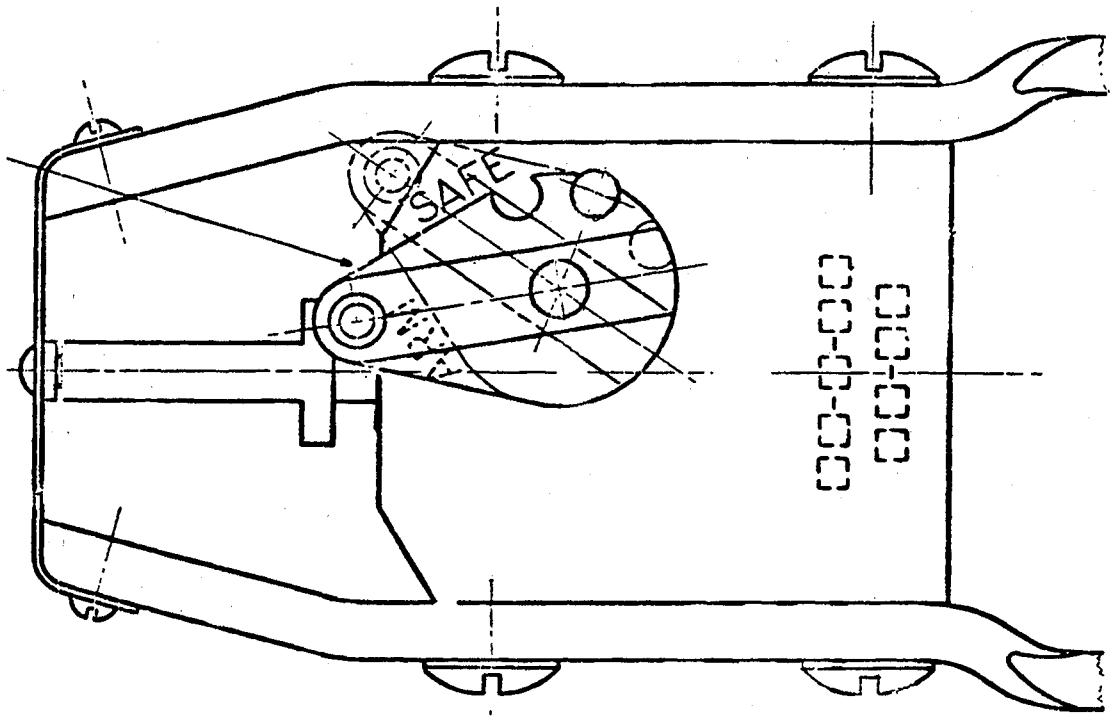

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCU-S
Status	Stone AV 880-2575 Obsolete
Ass'y Dwg. No.	8863838
Parts List	8863838
Specification	XPA-PD-2693
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	
Location	Rear of line charge
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	None
Setback (g)	
Velocity (fps)	130

KEY FEATURES

3 safeties - manual pre-arm (1),set-back slide to allow alignment of plug detonator in firing train (2),shear pin allowing the driving of the firing pin into the detonator which a 10 sec min. delay (3)

SERIES: A CHAPTER: 5
DESIGNATION: XM1133
Rocket Time Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM1133, FUZE

ARMING DATA

Method	Manual pre-arm
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	0.3 lb
Total Length (in.)	5.4 x 2.92 x .63 in.
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	
Type	
Delay	10 sec + 5 sec flight time
Time Type	Pyrotechnic
Time Setting (sec)	
Target	Destroy land mine field
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	130
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	RDX
Booster	RDX, 50 gr

REMARKS

Used with Demolition Kit XM-127 (projected line charge)

Rocket flight time is approximately 5 sec

Dummy fuze is XM1146

SERIES: A CHAPTER: 5
DESIGNATION: XM1133
Rocket Time Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2000E3, FUZE, ROCKET

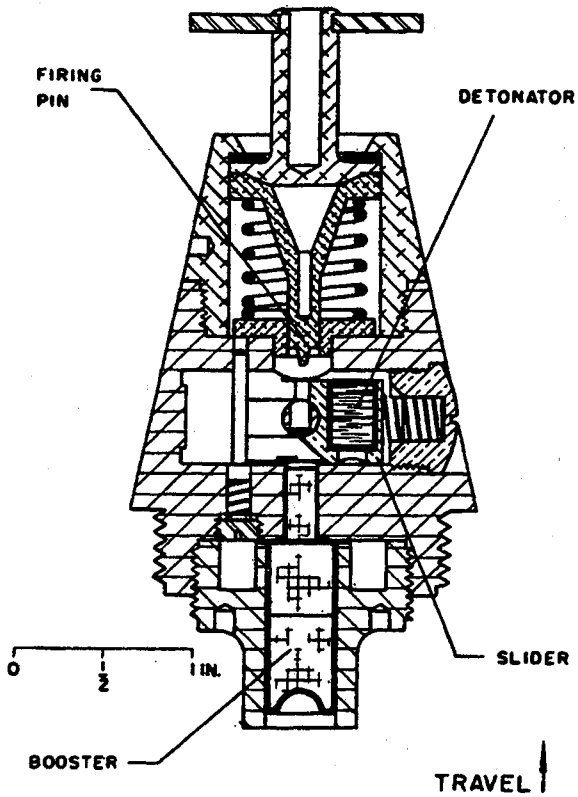

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	P-81817
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	3.5 in.
Location	Nose
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	858
Velocity (fps)	350

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2000E3, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 500 / Arm 900	
Arming Wire	No
External Indicat.	Yes

Delay by boreriding pin, armed at exit from launcher.

PHYSICAL DATA

Weight	0.75 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	1.22 in.
Thread Size	1.15-12NF

FUNCTIONING DATA

Action	PI, BD, SQ
Type	Mechanical
Delay	Less than 0.15 msec
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	Plyboard
Thickness (in.)	0.25
Max Obliq. (°)	80
Velocity (fps)	350
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Simulated by Fuze T2018 Mod A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2019, FUZE, ROCKET

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	114710
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	5 in.
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	34
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2019, FUZE, ROCKET

ARMING DATA

Method	Hydraulic
Delay	400-1800 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1.5 lb
Total Length (in.)	6.19
Body Diam. (in.)	
Intrusion	2.19 in.
Thread Size	2-12NS-1

FUNCTIONING DATA

Action	PD, SQ, graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Ground, antipersonnel
Sensitivity	
Material	Steel
Thickness (in.)	0.125
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	M29
Booster	Tetryl
Lead	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2021E6, FUZE, ROCKET

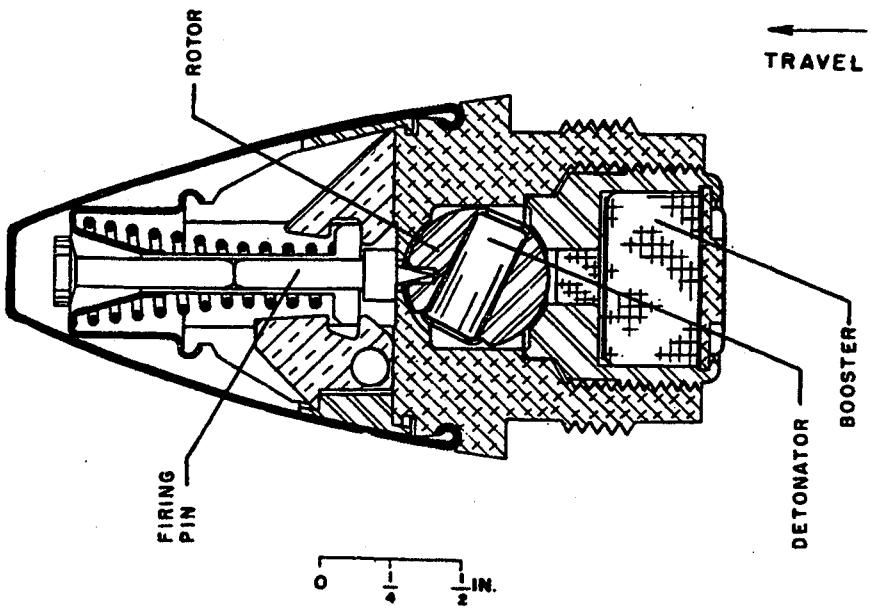

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	P86648
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Nose
Use	HE
MIL-STD's	331, Tests 101, 102, 104
Max Values	
Rotat. (rps)	830
Setback (g)	4000
Velocity (fps)	2800

KEY FEATURES

SERIES: A CHAPTER: 5
DESIGNATION: T2021E6
Rocket PD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2021E6, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	35-135 ft
Rotation (rps)	
Non-arm / Arm	500
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.19 lb
Total Length (in.)	1.95
Body Diam. (in.)	
Intrusion	0.476 in.
Thread Size	1.125-20NS-1

FUNCTIONING DATA

Action	PD, SD, delay, gun assisted
Type	Mechanical
Delay	0.0008 sec
Time Type	Mechanical, Junghans esc.
Time Setting (sec)	5
Target	Antiaircraft
Sensitivity	
Material	24ST aluminum
Thickness (in.)	0.2
Max Obliq. (°)	70
Velocity (fps)	2800
Carrier	

Self destruct 5 to 7 sec.

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T51
Booster	Tetryl
Lead	Tetryl

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: T2021E6
Rocket PD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2022E8, FUZE, ROCKET

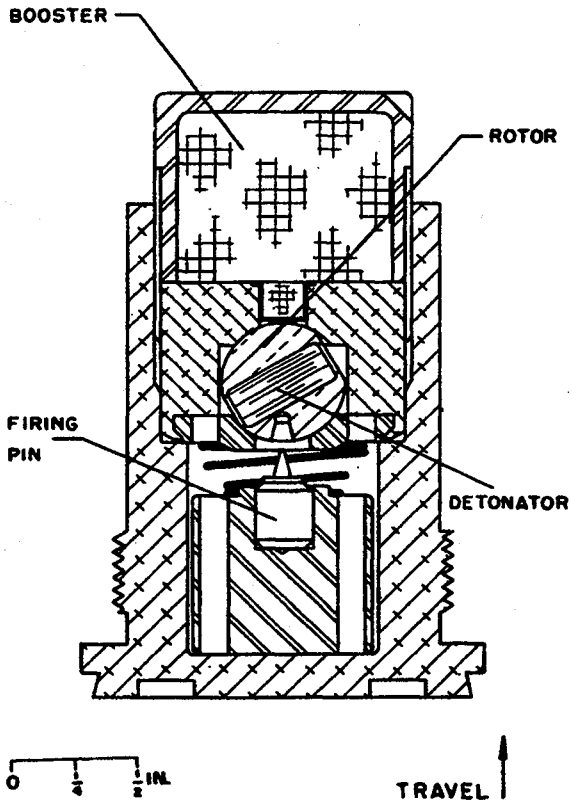

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	P-83088
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile, rocket
Cal. — Size	90 mm
Location	Base
Use	HEP
MIL-STD's	
Max Values	
Rotat. (rps)	400
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2022E8, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	31-100 ft
Rotation (rps)	
Non-arm 25	Arm 33
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.45
Total Length (in.)	2.717
Body Diam. (in.)	
Intrusion	2.45 in.
Thread Size	1.375-12NSL

FUNCTIONING DATA

Action	BD, delay, graze
Type	Mechanical
Delay	0.0003-0.0006 sec
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	Armour plate
Thickness (in.)	5
Max Obliq. (°)	65
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device
Primer
Detonator
Booster

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: T2022E8
Rocket BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2024, FUZE, ROCKET, PDSD

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Obsolete
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	Loki
Location	Nose
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2024, FUZE, ROCKET, PDSD

ARMING DATA

Method	Mechanical Delay
Delay	300-3000 ft.
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 150
Arming Wire	no
External Indicat.	no

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Impact
Type	Electrical
Delay	SD Delay 30-35 sec.
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Piezoelectric

EXPLOSIVE TRAIN

S&A Device	
Primer	ND-24
Detonator	
Booster	

REMARKS

Fuze was at one time monitoried by Restone Arsenal

SERIES: A CHAPTER: 5
DESIGNATION: T2024
Rocket PD SD Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2025E2, FUZE, ROCKET

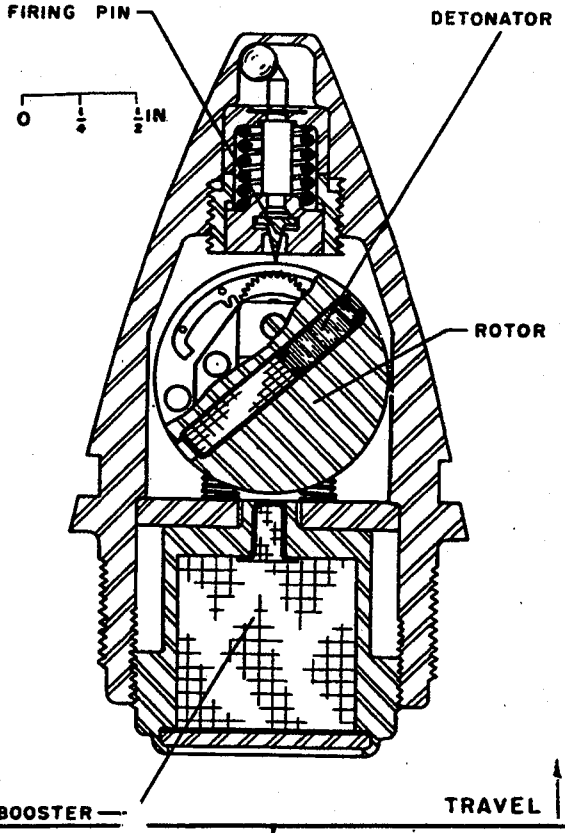

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	P-84608
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	2400

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2025E2, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	400-800 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 15 / Arm 25	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.75 lb
Total Length (in.)	2.59
Body Diam. (in.)	
Intrusion	0.91 in.
Thread Size	1.475-16NS-2

FUNCTIONING DATA

Action	PD, delay, graze
Type	Mechanical
Delay	0.0005-0.0007 sec
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	24ST aluminum
Thickness (in.)	0.032
Max Obliq. (°)	80
Velocity (fps)	2400
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	M19A2
Booster	Tetryl
Lead	M503

REMARKS

Fuzes T2025 and T2025E1 are discontinued; Fuze MK 176 met essential requirements.

SERIES: A CHAPTER: 5
DESIGNATION: T2025E2
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2027, FUZE, ROCKET

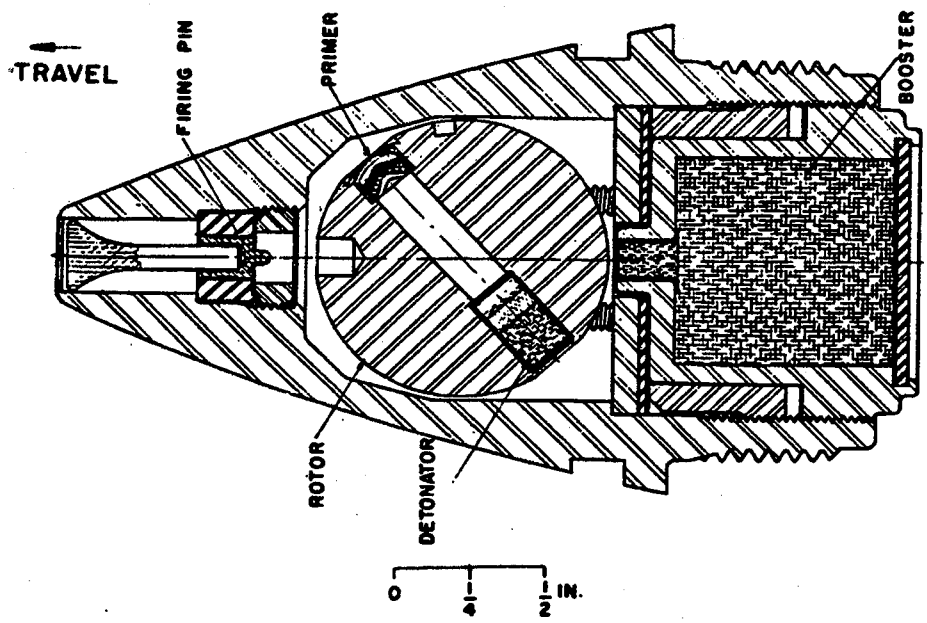

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	BU Ord 65-6269
Parts List	P-85902
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	40
Velocity (fps)	2300

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2027, FUZE, ROCKET

ARMING DATA

Method	Setback, mech. time
Delay	598-1376 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	13 / 20
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.75 lb
Total Length (in.)	3
Body Diam. (in.)	
Intrusion	0.917 in.
Thread Size	1.4375-16N-2

FUNCTIONING DATA

Action	PD, delay
Type	Mechanical
Delay	0.0006 sec
Time Type	Mech., Junghaus esc.
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	T47
Booster	Tetryl
Lead	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2028, FUZE, ROCKET, PIBD

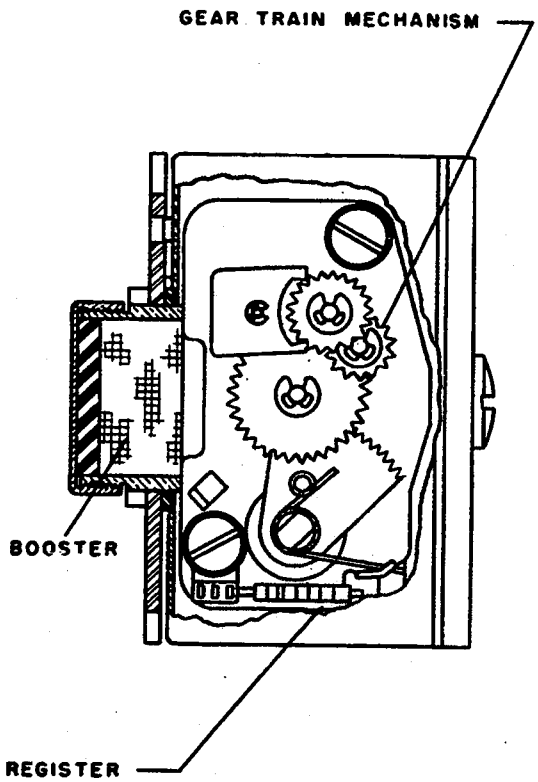

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	402033 (Eastman Kodak)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	2200

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2028, FUZE, ROCKET, PIBD

ARMING DATA

Method	Setback
Delay	170-400 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 35 / Arm 70	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PI, BD, delay, graze
Type	Electric
Delay	SQ
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

This fuze was to replace Fuze M101.

SERIES: A CHAPTER: 5
DESIGNATION: T2028
Rocket PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2029, FUZE, ROCKET

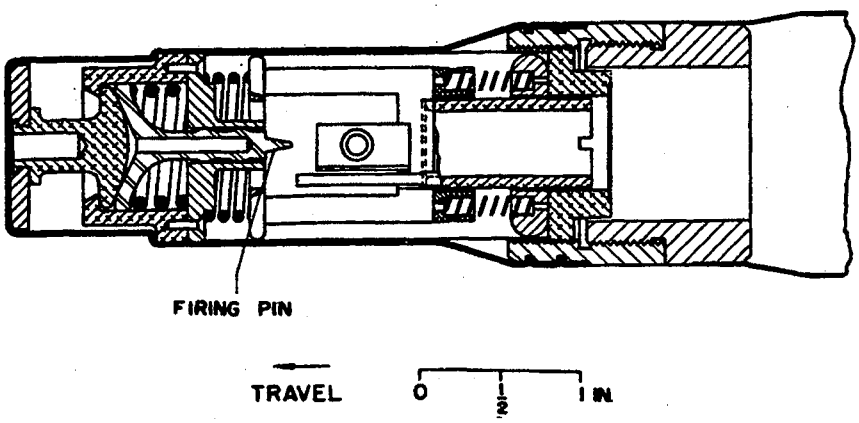

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	85-8000-G
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	3.5 in.
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	4000
Velocity (fps)	350

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2029, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	20-35 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 150 / Arm 575	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.15 lb
Total Length (in.)	4.2
Body Diam. (in.)	
Intrusion	0.75 in.
Thread Size	1.375-24NS-2

FUNCTIONING DATA

Action	PI, BD, SQ, graze
Type	Mechanical
Delay	0.00015 sec
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	Plywood
Thickness (in.)	0.25
Max Obliq. (°)	75
Velocity (fps)	350
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: T2029
Rocket PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2034, FUZE, ROCKET

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2 in.
Location	
Use	GP
MIL-STD's	331, Test 103
Max Values	
Rotat. (rps)	
Setback (g)	350
Velocity (fps)	2400

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2034, FUZE, ROCKET

ARMING DATA

Method	Mechanical train
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 40 / Arm 100	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PI, BD, SD, delay graze
Type	Electrical
Delay	0.0005-0.0009 sec
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	24ST aluminum
Thickness (in.)	0.2
Max Obliq. (°)	80
Velocity (fps)	2400
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2036, FUZE, ROCKET

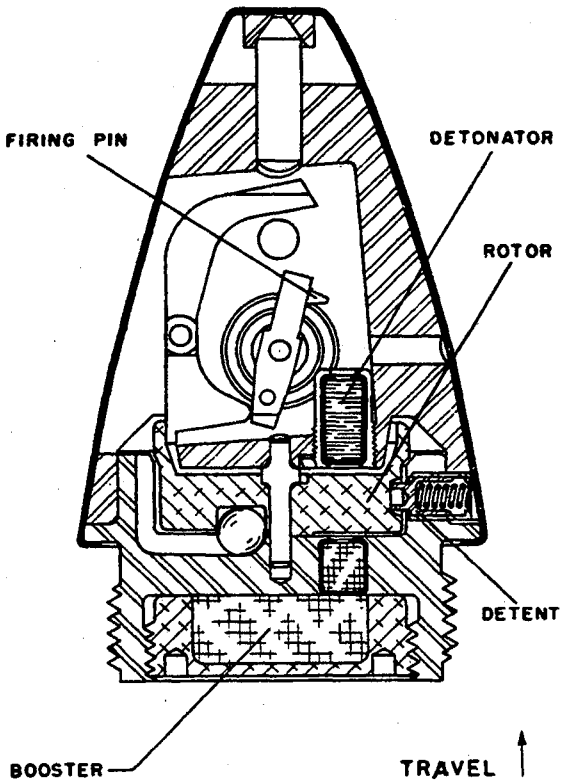

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz
Status	AV 880-5581 Terminated
Ass'y Dwg. No.	XD-19083 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	830
Setback (g)	4000
Velocity (fps)	2400

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2036, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	35-135 ft
Rotation (rps)	
Non-arm 400 Arm 700	
Setback (g)	
Non-arm Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.17 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	0.476 in.
Thread Size	1.125-20NS-1

FUNCTIONING DATA

Action	PD, SD, delay
Type	Mechanical
Delay	0.0007 sec
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	24ST aluminum
Thickness (in.)	0.037
Max Obliq. (°)	70
Velocity (fps)	2400
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T32E1
Booster	Tetryl
Lead	Tetryl

REMARKS

Used in Navy version of T131 gun assisted rocket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2037, FUZE, ROCKET

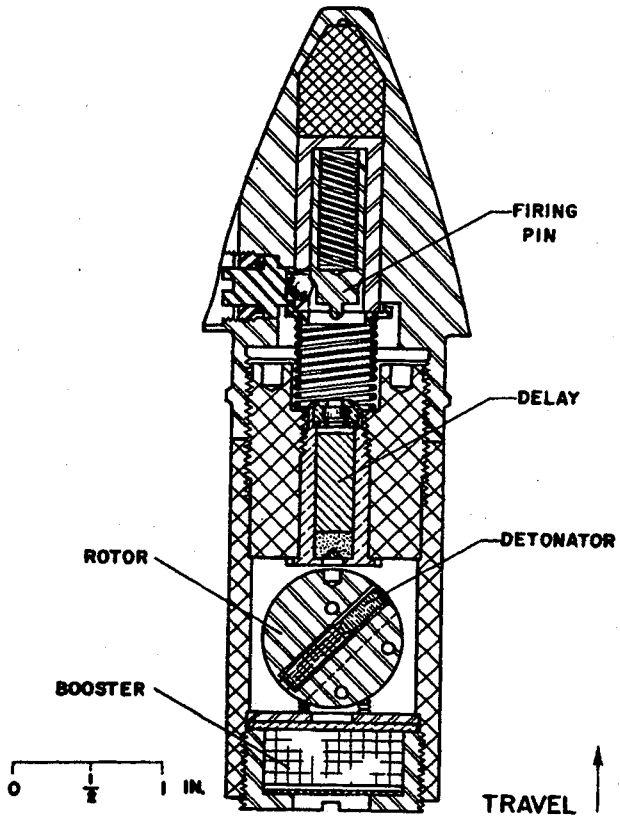

IDENTIFICATION

ARRADCOM, DRDAR-LCN-M

Agency	L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	P-83796
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Nose
Use	Flash
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	40
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2037, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	1.2 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm 13	Arm 20
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.19 lb
Total Length (in.)	5.581
Body Diam. (in.)	
Intrusion	3.472 in.
Thread Size	1.4375-16NS-2

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	2
Target	Rocket ballistic tests
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M42
Detonator	M29
Booster	Black powder
Lead	RDX
Relay	Lead azide

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2039, FUZE, ROCKET, PROXIMITY

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi
Status	AV 290-2400 Terminated
Ass'y Dwg. No.	FF4963
Parts List	
Specification	VE-PD-145
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	76.2 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2039, FUZE, ROCKET, PROXIMITY

ARMING DATA

Method	Vane
Delay	3 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	4.5 lb
Total Length (in.)	10.065
Body Diam. (in.)	
Intrusion	5.09 in.
Thread Size	2-12-NS-1A

FUNCTIONING DATA

Action	Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M36A1
Booster	Tetryl

REMARKS

This fuze is used with a T-3 timer modified M166 type for use with large caliber rocket

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2040, FUZE, ROCKET

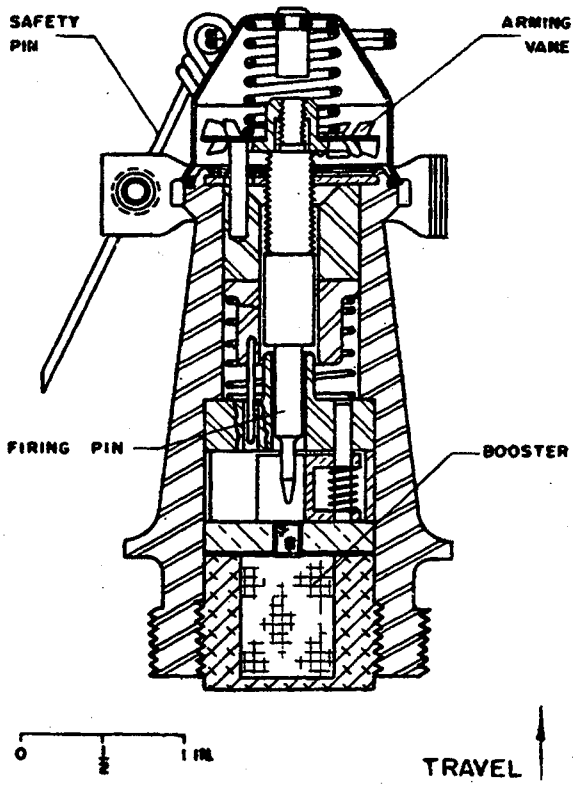

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	P-82820
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	3 in.
Location	Nose
Use	Smoke
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	980

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2040, FUZE, ROCKET

ARMING DATA

Method	Setback, aerodynamic
Delay	0.53 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	30
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	1.13 lb
Total Length (in.)	4.22
Body Diam. (in.)	
Intrusion	0.8 in.
Thread Size	1.70-14NS-1

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Marking, screening
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK23 MOD 0
Booster	Tetryl
Lead	Tetryl

REMARKS

Used with rocket (Navy) 2.25 in SCAR with head 3 in. WP T2018.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2041, FUZE, ROCKET

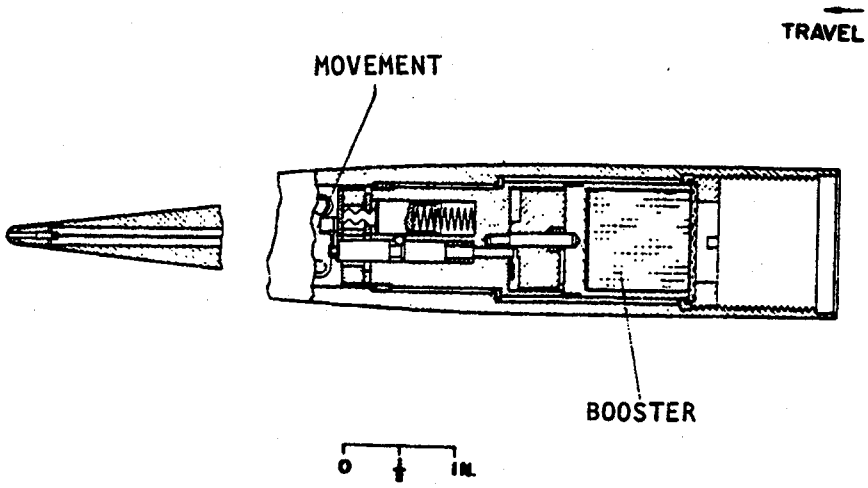

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz
Status	AV 880-5581 Terminated
Ass'y Dwg. No.	EK 8488
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	76 mm Loki
Location	Nose
Use	GP
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	
Setback (g)	175
Velocity (fps)	4750

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2041, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	3000 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	100 Arm 200
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.38 lb
Total Length (in.)	11.50
Body Diam. (in.)	
Intrusion	
Thread Size	1.25-12UNF-2B

FUNCTIONING DATA

Action	PD, SD, delay
Type	Mechanical
Delay	2-4 ft
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	24ST aluminum
Thickness (in.)	0.020
Max Obliq. (°)	70
Velocity (fps)	4750
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M47
Booster	RDX
Lead	RDX

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: T2041
Rocket PD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2043, FUZE, ROCKET

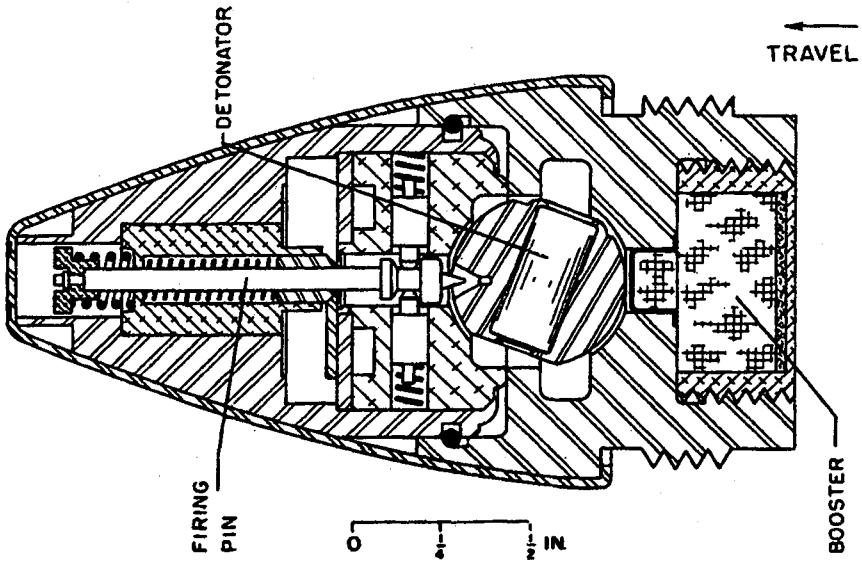

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	P-86136
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Nose
Use	GP
MIL-STD's	331, Tests 101-105, 108
Max Values	
Rotat. (rps)	915
Setback (g)	6000
Velocity (fps)	2800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2043, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	25-135 ft
Rotation (rps)	
Non-arm 83	Arm 200
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	43 lb
Total Length (in.)	2.287
Body Diam. (in.)	
Intrusion	0.55 in.
Thread Size	1.125-20UNS-1A

FUNCTIONING DATA

Action	PD, SD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	24ST aluminum
Thickness (in.)	0.04
Max Obliq. (°)	70
Velocity (fps)	2800
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T51
Booster	Tetryl
Lead	Tetryl

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: T2043
Rocket PD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2044E5, FUZE, ROCKET

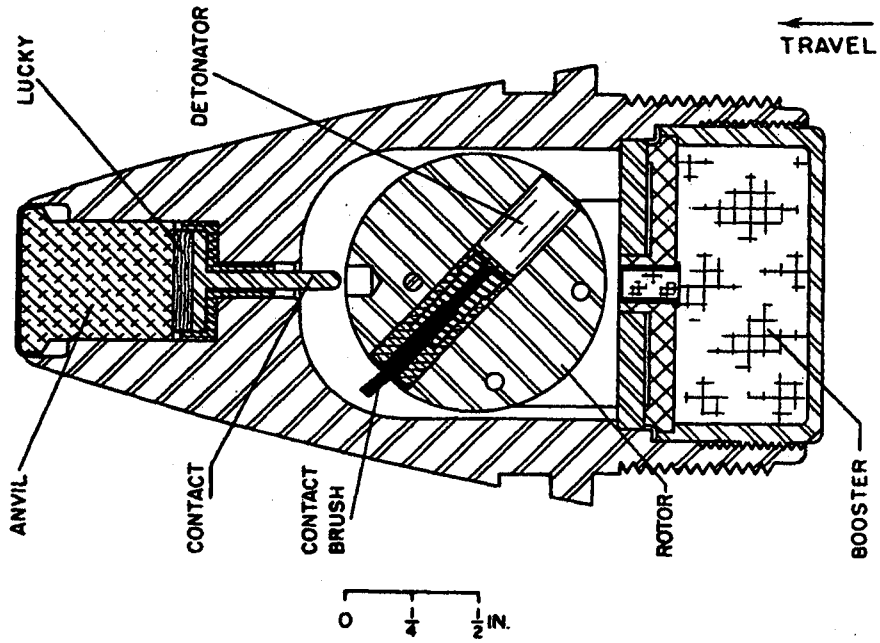

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	P-85584
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Nose
Use	Smoke
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	
Setback (g)	40
Velocity (fps)	2400

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2044E5, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	70-400 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	13 / 20
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	3.0
Body Diam. (in.)	
Intrusion	0.882 in.
Thread Size	1.4375-16NS-2

FUNCTIONING DATA

Action	PD, SQ
Type	Electrical
Delay	
Time Type	
Time Setting (sec)	
Target	Target marking
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T21E1
Booster	RDX
Lead	RDX

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: T2044E5
Rocket PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2046, FUZE, ROCKET

IDENTIFICATION

Agency	NSWC, Code G43 G. Briggs
Status	AV 290-1529 Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	4.5
Location	Nose
Use	Chemical
MIL-STD's	
Max Values	
Rotat. (rps)	250
Setback (g)	150
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2046, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	Variable
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	8.5
Body Diam. (in.)	
Intrusion	4.8 in.
Thread Size	2.0-12NS

FUNCTIONING DATA

Action	PD, SD, Proximity
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Ground
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	
Rear fitting	MK 15 modified

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2047, FUZE, ROCKET

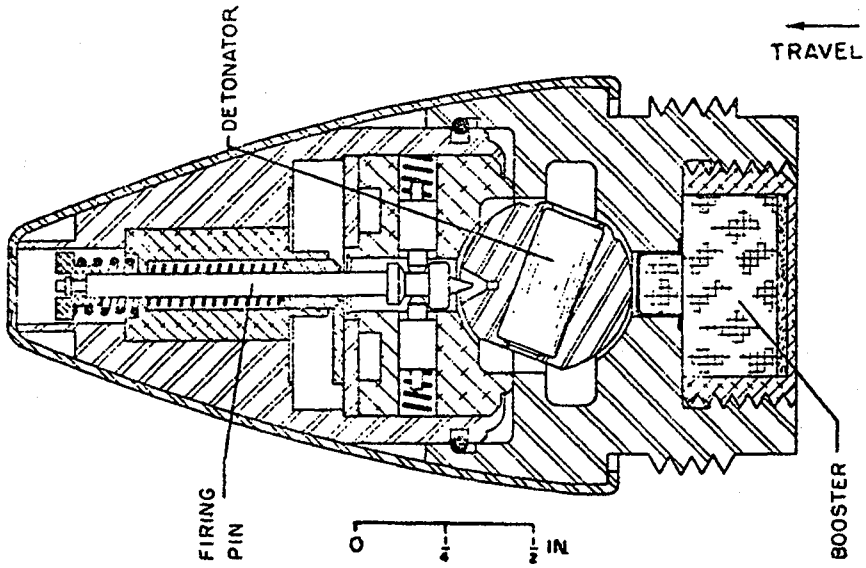

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	70 mm
Location	Nose
Use	GP
MIL-STD's	331, Tests 101, 102, 104, 108
Max Values	
Rotat. (rps)	1100
Setback (g)	6000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2047, FUZE, ROCKET

ARMING DATA

Method	
Delay	25-135 ft
Rotation (rps)	
Non-arm	53
Arm	200
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.45 lb
Total Length (in.)	2.287
Body Diam. (in.)	
Intrusion	0.55 in.
Thread Size	1.125-20UNS-1A

FUNCTIONING DATA

Action	PD, SD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: T2047
Rocket PD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2048, FUZE, ROCKET, PD

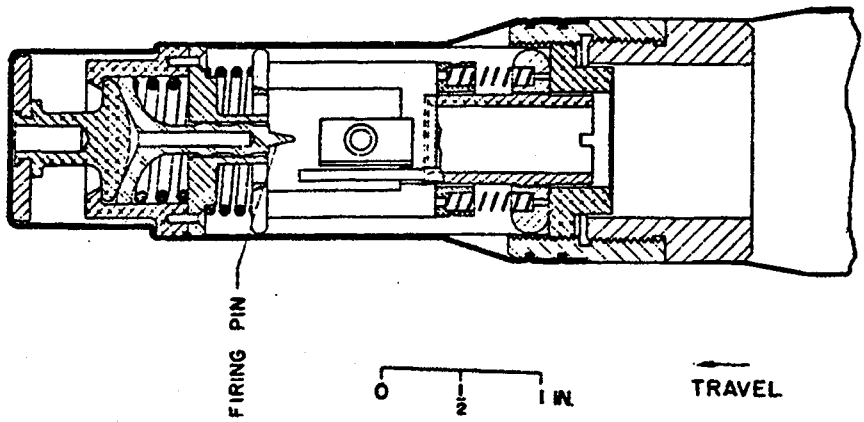

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	3.5 in.
Location	Nose
Use	WP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2048, FUZE, ROCKET, PD

ARMING DATA

Method	
Delay	20 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.40 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PD, SQ, graze
Type	
Delay	
Time Type	
Time Setting (sec)	
Target	Smoke, antipersonnel
Sensitivity	
Material	Plywood
Thickness (in.)	0.25
Max Obliq. (°)	
Velocity (fps)	500
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2049, FUZE, ROCKET

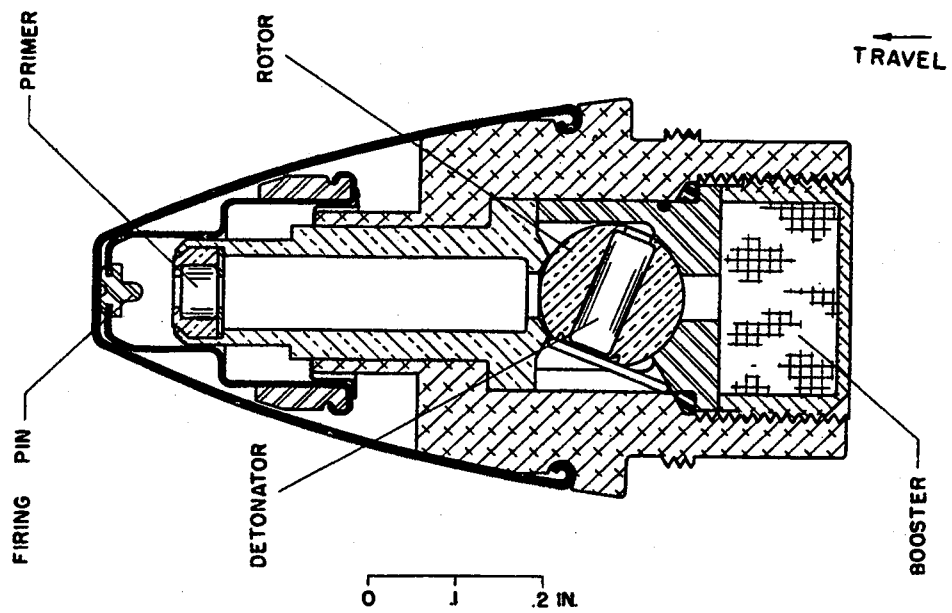

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M
	L. Horowitz
Status	AV 880-5581
	Terminated
Ass'y Dwg. No.	PX-8-1125
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Nose
Use	HE
MIL-STD's	331, Tests 101, 104
Max Values	
Rotat. (rps)	920
Setback (g)	4000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2049, FUZE, ROCKET

ARMING DATA

Method	
Delay	
Rotation (rps)	
Non-arm	430
Arm	540
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.2116 lb
Total Length (in.)	2.45
Body Diam. (in.)	
Intrusion	0.715 in.
Thread Size	1.25-20NS-2

FUNCTIONING DATA

Action	DS, delay
Type	Pyrotechnic
Delay	2 sec
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M42
Detonator	M30A
Booster	Black powder

REMARKS

Also referred to as an MT Fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2051, FUZE, ROCKET

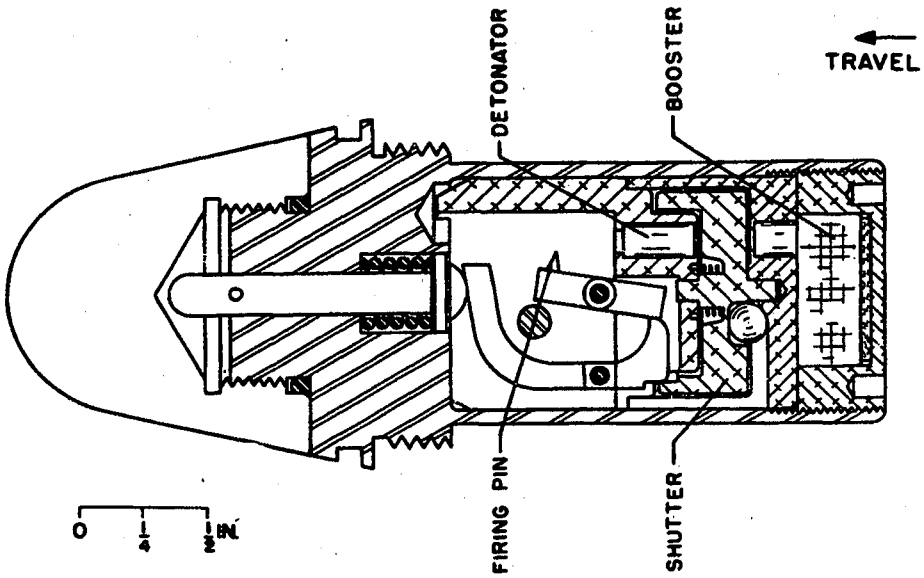

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M
	L. Horowitz
Status	AV 880-5581
	Terminated
Ass'y Dwg. No.	KR 57342 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Nose
Use	GP
MIL-STD's	331, Tests 101, 103, 107, 108, 115
Max Values	
Rotat. (rps)	920
Setback (g)	4000
Velocity (fps)	2800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2051, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	200-600 ft
Rotation (rps)	
Non-arm	500 Arm 650
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	
Total Length (in.)	3.99
Body Diam. (in.)	
Intrusion	2.08 in.
Thread Size	1.125-20NS-1

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	1/2-2 ft
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M47
Booster	Tetryl
Lead	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2052, FUZE, ROCKET

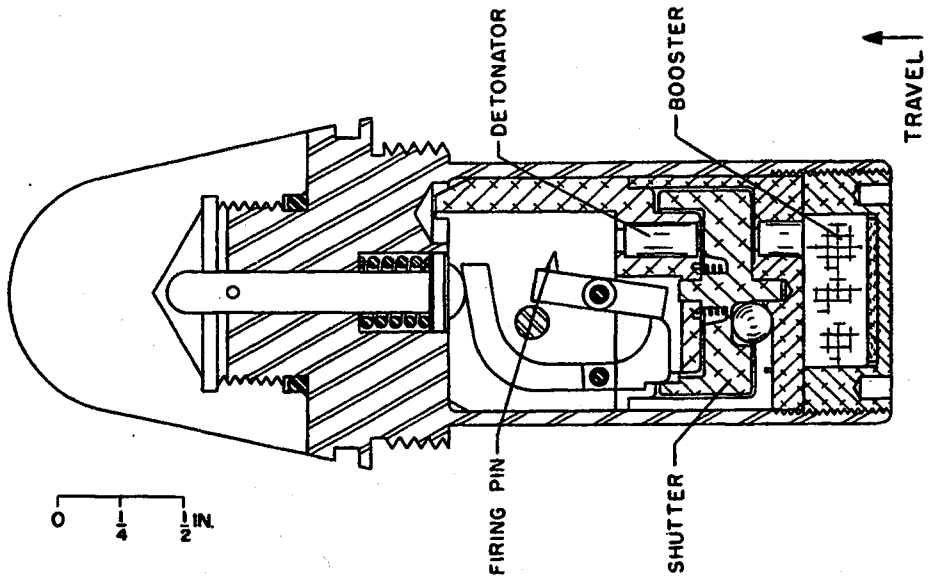

IDENTIFICATION

Agency ERADCOM, DELHD-IT-EA
R. Wyckoff, AV 290-2677
Status Terminated
Ass'y Dwg. No. 73-2-320
Parts List
Specification
Previous Number

GENERAL

Carriers Rocket
Cal. — Size 2.75 in.
Location Base
Use GP
MIL-STD's
Max Values
Rotat. (rps) 630
Setback (g) 4000
Velocity (fps) 2800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2052, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	100-300 ft
Rotation (rps)	
Non-arm / Arm	423
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	BD, SD
Type	Mechanical
Delay	0.0007 sec
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	24ST aluminum
Thickness (in.)	0.5
Max Obliq. (°)	70
Velocity (fps)	2800
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M26
Detonator	
Booster	RDX
Lead	RDX

REMARKS

Same design principles as in Fuze T2057

SERIES: A CHAPTER: 5
DESIGNATION: T2052
Rocket BD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2053, FUZE, ROCKET

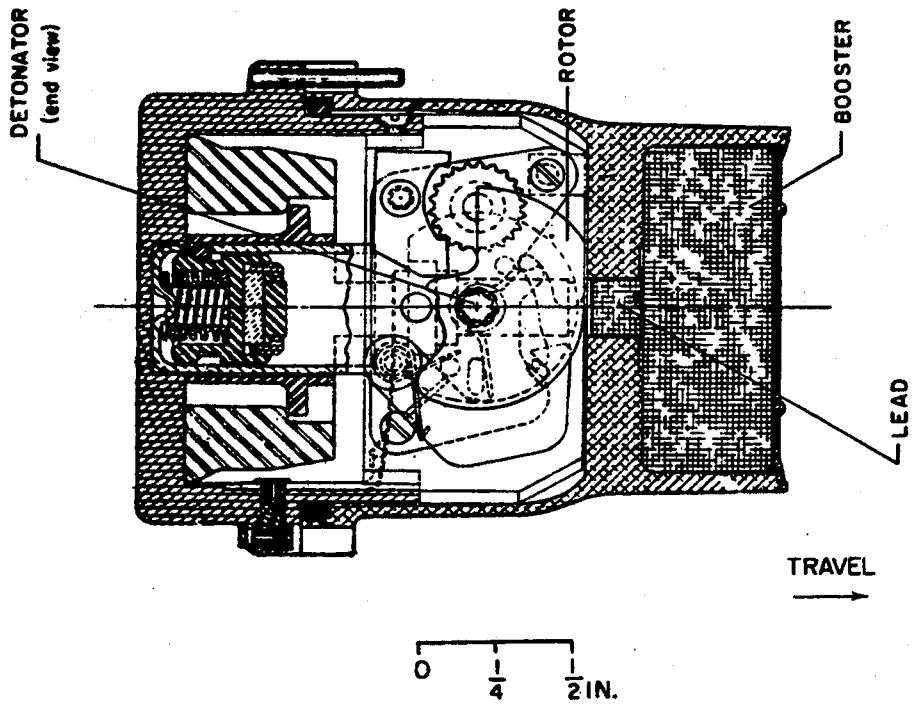

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz
Status	AV 880-5581 Terminated
Ass'y Dwg. No.	P83127
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	3.5 in.
Location	Base
Use	HEAT
MIL-STD's	331, Tests 101-107
Max Values	
Rotat. (rps)	
Setback (g)	2000
Velocity (fps)	500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2053, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	20-35 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.28 lb
Total Length (in.)	2.13
Body Diam. (in.)	
Intrusion	1.44 in.
Thread Size	

FUNCTIONING DATA

Action	PI, BD, SQ, graze
Type	Electrical
Delay	0.00005 sec
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	Plywood
Thickness (in.)	0.25
Max Obliq. (°)	75
Velocity (fps)	500
Carrier	T205

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T21E1
Booster	Tetryl
Lead	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2054, FUZE, ROCKET

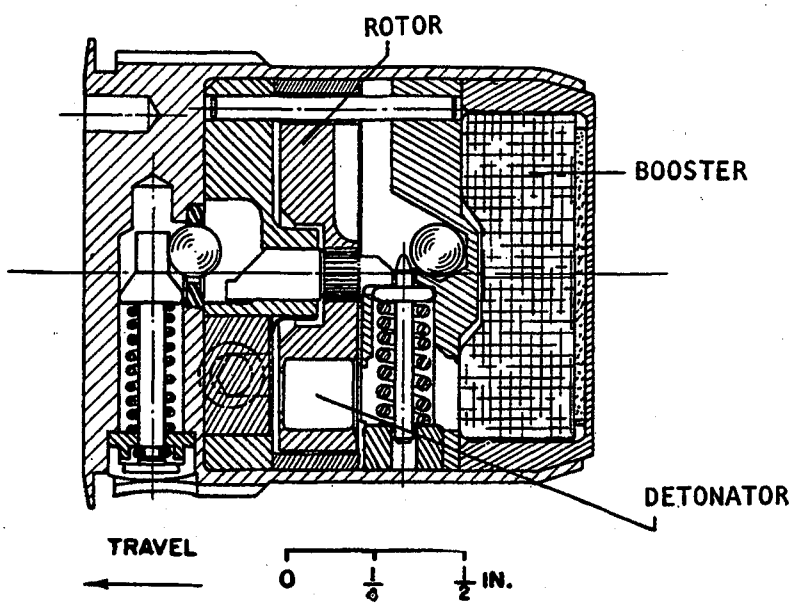

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880- 5581
Status	Terminated
Ass'y Dwg. No.	KR 54621 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	38mm
Location	Base
Use	GP
MIL-STD's	331, Tests 101, 103, 105, 108, 115
Max Values	
Rotat. (rps)	1200
Setback (g)	4000
Velocity (fps)	3000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2054, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	100-300 ft
Rotation (rps)	
Non-arm	950 Arm 1000
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.17 lb
Total Length (in.)	1.405
Body Diam. (in.)	
Intrusion	1.405 in.
Thread Size	1.2152-20UNS-2A

FUNCTIONING DATA

Action	BD, SD, delay
Type	Mechanical
Delay	1/2 - 1 1/2 ft
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	85
Velocity (fps)	3000
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	T98
Detonator	T56
Booster	Tetryl
Lead	Tetryl

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: T2054
Rocket BD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2055, FUZE, ROCKET, BDSD

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	TL3F-2427 (HDL)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	38 mm
Location	Base
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	1200
Setback (g)	4000
Velocity (fps)	1000-3000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2055, FUZE, ROCKET, BDSD

ARMING DATA

Method	Spin
Delay	50-250 ft
Rotation (rps)	
Non-arm	950 Arm 1000
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	0.17 lb
Total Length (in.)	1.0
Body Diam. (in.)	
Intrusion	1.303 in.
Thread Size	15/16-20 UNEF

FUNCTIONING DATA

Action	BD, SD, delay
Type	Electrical
Delay	6-18 in.
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T78
Booster	Tetryl
Lead	Tetryl

REMARKS

Self destruct 5 - 7 sec.
Delay functioning on impact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2056, FUZE, ROCKET, BD

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	P-84929
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	3.5 in.
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2056, FUZE, ROCKET, BD

ARMING DATA

Method

Delay

Rotation (rps)

Non-arm **Arm**

Setback (g)

Non-arm **Arm**

Arming Wire No

External Indicat. No

PHYSICAL DATA

Weight

Total Length (in.)

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action BD, SQ

Type Electrical

Delay

Time Type

Time Setting (sec)

Target Antitank

Sensitivity

Material

Thickness (in.)

Max Obliq. (°)

Velocity (fps)

Carrier

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

This was a feasibility study of a piezoelectric element activated by heat (temperature) supplied by rocket motor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2057, FUZE, ROCKET, BD

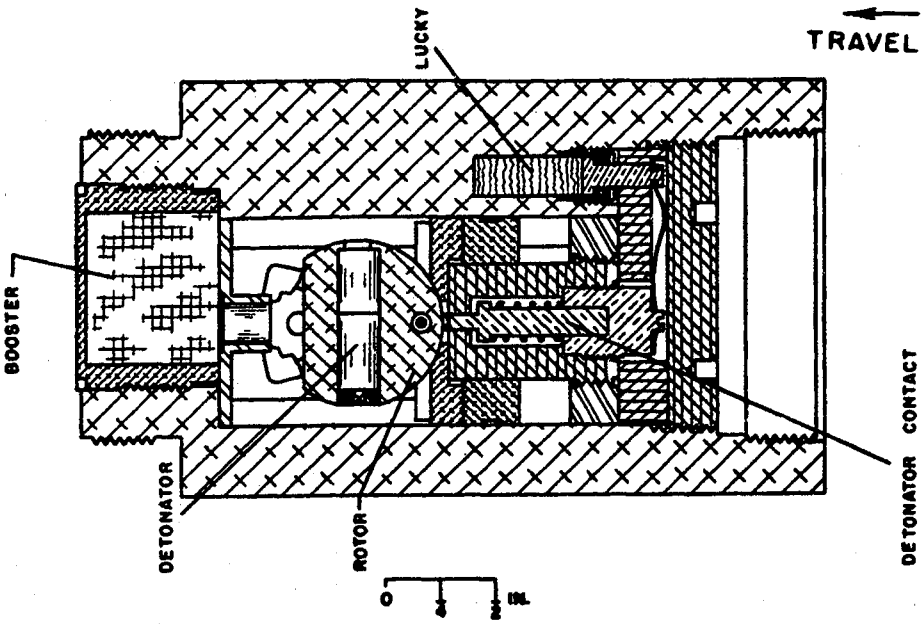

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M
	L. Horowitz
Status	AV 880-5581
	Terminated
Ass'y Dwg. No.	P-84449
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	3.5 in.
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2057, FUZE, ROCKET, BD

ARMING DATA

Method

Delay

Rotation (rps)

Non-arm **Arm**

Setback (g)

Non-arm **Arm**

Arming Wire No

External Indicat. No

PHYSICAL DATA

Weight

Total Length (in.)

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action PD, SQ

Type Electrical

Delay

Time Type

Time Setting (sec)

Target Antitank

Sensitivity

Material

Thickness (in.)

Max Obliq. (°)

Velocity (fps)

Carrier

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

This was a feasibility study of a piezoelectric element activated by a shock wave resulting from target impact.

Same design principle as in Fuze T2052.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2063, FUZE, ROCKET

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz
Status	AV 880-5581
Ass'y Dwg. No.	Terminated
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	3.5 in.
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	270
Velocity (fps)	800

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2063, FUZE, ROCKET

ARMING DATA

Method	Setback
Delay	20 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.40 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PI, BD, SQ, graze
Type	Electric mechanical
Delay	0.00005 sec
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	Plywood
Thickness (in.)	0.25
Max Obliq. (°)	65
Velocity (fps)	800
Carrier	T230

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	T96
Detonator	M48
Booster	1.050 D x 0.500 L

REMARKS

A modification of Fuze M211.

SERIES: A CHAPTER: 5
DESIGNATION: T2063
Rocket PI BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2066, FUZE, ROCKET

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	2.75 in.
Location	Nose
Use	GP
MIL-STD's	331, Tests 101-104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2066, FUZE, ROCKET

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm	430
Arm	540
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.21 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Delay
Type	Pyrotechnic
Delay	3, 6, 10 sec
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M42
Detonator	M30A1
Booster	Tetryl
Relay	Lead azide
Lead	M503

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2069, FUZE, ROCKET, TIME

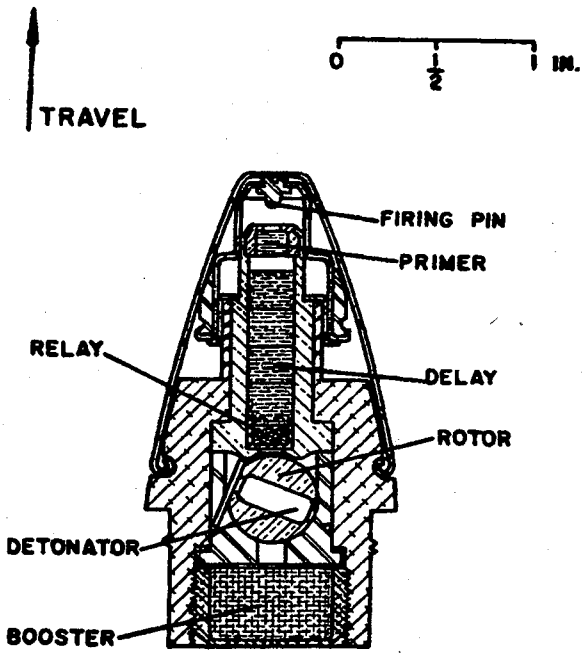

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz
Status	AV 880-5581 Terminated
Ass'y Dwg. No.	FXP 89784
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	1.37 in.
Location	
Use	Chemical - flash
MIL-STD's	331, Tests 101, 105
Max Values	
Rotat. (rps)	920
Setback (g)	50 - 100
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T2069, FUZE, ROCKET, TIME

ARMING DATA

Method	Setback
Delay	1 and 2 sec
Rotation (rps)	
Non-arm 580	Arm 920
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	100 gm
Total Length (in.)	2.46
Body Diam. (in.)	
Intrusion	1.720 in.
Thread Size	1.125-20NS-2

FUNCTIONING DATA

Action	PI, time
Type	Pyrotechnic
Delay	1 and 2 sec
Time Type	Pyrotechnic
Time Setting (sec)	1 and 2
Target	Spotting
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M42
Detonator	M30A1
Booster	Black powder
Relay	Lead azide

REMARKS

SERIES: A CHAPTER: 5
DESIGNATION: T2069
Rocket Time Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM-, FUZE (for MARS)

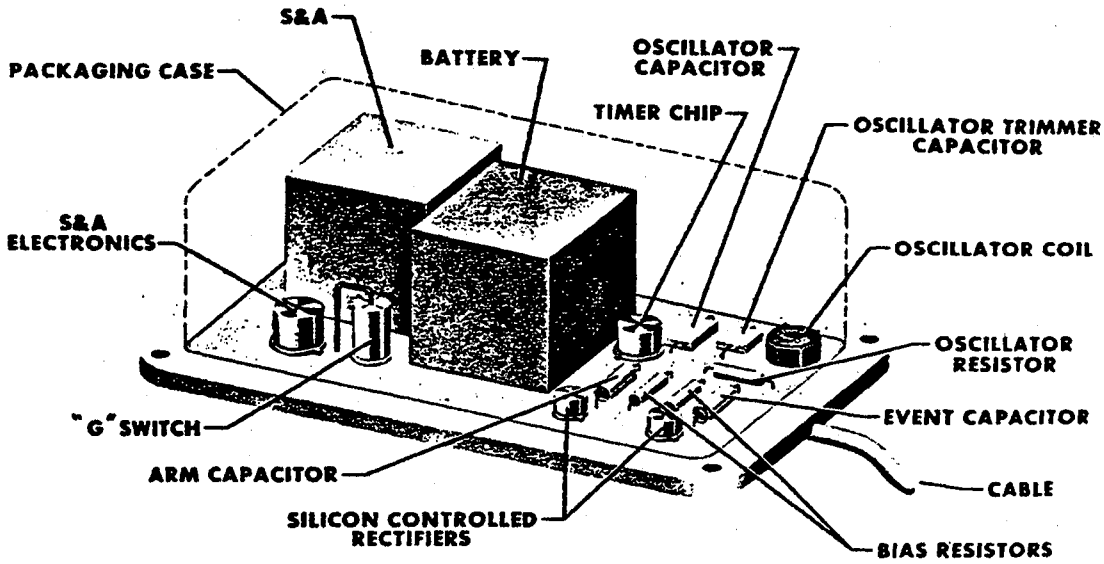

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M
Status	L. Horowitz
Ass'y Dwg. No.	AV 880-5581
Parts List	Terminated
Specification	
Previous Number	

GENERAL

Carriers	Rocket
Cal. — Size	
Location	Nose
Use	
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Remote set electronic fuze using MOS integrated circuitry. Time base is 20,480 HZ LC oscillator. Self contained checking electronic S&A in accordance with MUCOM Regulation 705-11.

SERIES: A CHAPTER: 5
DESIGNATION: F/MARS
Timer

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM-, FUZE (for MARS)

ARMING DATA

Method	Acceleration-time & flight environment
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Variable time (set-back initiated)
Type	Electronic
Delay	
Time Type	Digital electronics
Time Setting (sec)	125
Target	Antitank, APC
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Umbilical cord connects fuze to launcher.

SERIES: A CHAPTER: 5
DESIGNATION: F/MARS
Timer

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 0.20 lb (90.7 g)
LG: 2.10 (53.3 mm)	DP: 2.10 (53.3 mm)	THD: None
XSECT: 1.250 (31.75 mm)	DIA: 1.25 (31.75 mm)	THD DP:

IDENTIFICATION
- AGENCY: MICOM, DRSMI-OT
- CONTACT: Zecher, W
- PHONE: DSN 746-1245
- STATUS: Terminated
- USER: Army
- ASSY DWG: KD 88884 mod.
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:
  Not assigned
- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO:

- REPLACES: None
- REPLACED BY:

GENERAL
- WEAPON: 70mm Assault Rocket

- AMMUNITION:
  Special Hard Target Assault Weapon, LAW (SHAWL); Forward HEAT penetrating warhead

LOCATION: Base of Fwd Warhead

BALLISTIC LEVELS:
- ROTATION: 10 rps
- SETBACK: 4000 g
- VELOCITY: 700 ft/s (213 m/s)

- CREEP: 3 g
- FLIGHT TIME:

SAFETY STD:

SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Launch signal, piston actuated rotor lock

SECOND SAFETY:
Setback: 2500 g no arm, 3400 g all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No, but can't assemble armed

ARMING TIME OR DISTANCE:
.030 to .060 s

EXPLOSIVE COMPONENTS

S&A DEVICE: M530 setback type

PRIMER: None

DETONATOR: M84 Elec

LEAD: Precision Initiator Coupler (PIC)

BOOSTER: 8 g Comp A-5

OTHER:

FUNCTIONING DATA

MODES: PIBD, Graze
TYPE: Electric, Mechanical
CHARACTERISTICS:
SQ crush switch less than 50 u s
Graze-electric inertial

TARGET: Gnd-Fortification, Vehicles
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Capacitor charged at launch signal from thermal battery
Wound rotor spring

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	
LG: 1.53 in (38.9 mm)	DP: 1.53 (38.9 mm)	WT: 0.18 lb (81.6 g)
XSECT: 1.25 (31.8 mm)	DIA: 1.25 (31.8 mm)	THD: None
		THD DP:

IDENTIFICATION
- AGENCY: MICOM, DRSMI-OT
- CONTACT: Zecher, W
- PHONE: DSN 746-1245
- STATUS: Terminated
- USER: Army
- ASSY DWG: 11 733 501 mod
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:
  Not assigned
- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO:

- REPLACES: None
- REPLACED BY:

GENERAL
- WEAPON: 70mm Assault Rocket

- AMMUNITION:
  Special Hard Target Assault Weapon, LAW (SHAWL); Follow thru Bursting Charge Warhead

LOCATION: Base of Rear Warhead

BALLISTIC LEVELS:
- ROTATION: 10 rps
- SETBACK: 4000 g
- VELOCITY: 700 ft/s (213 m/s)

- CREEP: 3 g
- FLIGHT TIME:

SAFETY STD:

SETTERS:

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Launch signal on rotor lock

SECOND SAFETY:
Setback: 2500 g no arm,
3400 g all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No, but can't be assembled armed

ARMING TIME OR DISTANCE:
.030 to .060 s

EXPLOSIVE COMPONENTS

S&A DEVICE: M530 type

PRIMER: M97 & Stab Dly 11730630

DETONATOR: M55 Stab

LEAD: 85 mg PBXN-5

BOOSTER: 8 g Comp A-5

OTHER:

FUNCTIONING DATA
MODES: BD Delay, Graze
TYPE: Mechanical
CHARACTERISTICS:
Delay - .010 s nominal
Graze - 85 degrees obliq.

TARGET: Ground-Fort. and Lt Targets
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Wound rotor spring

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CHAPTER 6

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 10.4 lb (4717 g)
LG: 24 in g (609.6 mm)	DP:	THD:
XSECT: 1.8 in (45.7 mm	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NWC, Code 335
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Navy
- ASSY DWG:
- PARTS LIST: LD 477 334
- SPEC: OS 7126
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Guided Missile

- AMMUNITION:
  - Terrier BW
  - HE, Mk 5 Mod 0 W/H

LOCATION: Forward
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Acceleration: 13.5 s no arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Viewing window

ARMING TIME OR DISTANCE:
7.75 s

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: T79 (two)

LEAD: Mk 1-0 (four)

BOOSTER: Mk 33-0

OTHER: The commit-to-arm function mus

FUNCTIONING DATA
MODES: Prox, SD
TYPE: Electric
CHARACTERISTICS:
Instantaneous

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

28.0 Vdc from missile

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 2 MOD 0, SAFETY - ARMING DEVICE

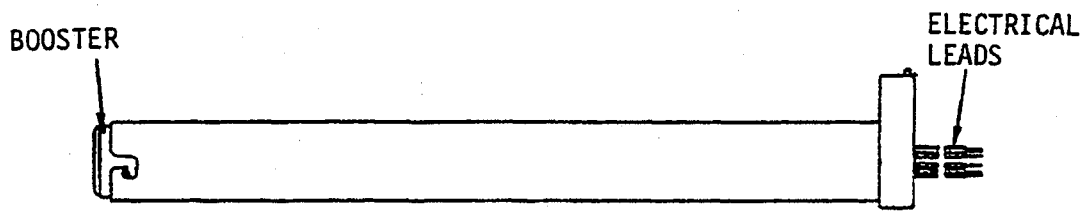

IDENTIFICATION

Agency NWC/CL, Code 3351
R. L. Higuera, AV 437-7541

Status Obsolete

Ass'y Dwg. No. LD 495692

Parts List

Specification OS 7713

Previous Number

GENERAL

Carriers Guided missile

Cal. — Size Sparrow I

Location Forward

Use HE

MIL-STD's 331, Tests 101-104

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

SERIES: N CHAPTER: 6
DESIGNATION: MK 2 MOD 0
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 2 MOD 0, SAFETY - ARMING DEVICE

ARMING DATA

Method	Acceleration
Delay	4.5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	18.0*
Arming Wire	
External Indicat.	Viewing window

PHYSICAL DATA

Weight	4.33 lb
Total Length (in.)	14.863
Body Diam. (in.)	1.475
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Proximity
Type	Electric
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

28vdc from missile

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T79 (2)
Booster	MK 31 MOD 0
Lead	MK 1 MOD 0 (4)

REMARKS

*Requires 47.6 g-seconds impulse to commit-to-arm, arming then occurs at 4.5 seconds after launch.

SERIES: N CHAPTER: 6
DESIGNATION: MK 2 MOD 0
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 0.81 lb (368 g)
LG: 2.4 in (60.96 mm)	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NWC, Code 3355
- CONTACT: Janson, J
- PHONE: DSN 437-7414
- STATUS: Obsolete
- USER: Navy
- ASSY DWG:
- PARTS LIST: LD 521 892
- SPEC: WS 1638
- PUB: Fuzing Sys for Air Launched Weapons
- NATIONAL STOCK NO: None
- DODIC: None
- PRIOR MODEL NO: Nothing
- SIMILAR TO: Nothing
- REPLACES: Mk 3 Mod 4
- REPLACED BY:

GENERAL
- WEAPON: Air-air missile
- AMMUNITION: AIM-9, Sidewinder 1A Missile HE
- LOCATION: Base of Warhead

BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK:
- VELOCITY:
- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Clevis Latch Activated by Electric Solenoid

SECOND SAFETY:
Acceleration: 18.0 g all arm

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
480 to 840 ft (146 to 256 m)

FUNCTIONING DATA

MODES: Proximity, Impact
TYPE: Mechancal/electric
CHARACTERISTICS:
Instantaneous
Uses Mk 303 Proximity fuze

TARGET: Air
SENSITIVITY:
200 g to 350 g (Impact Sensor)

FUNCTION TEMP:

MODE ON DELIVERY:

EXPLOSIVE COMPONENTS

S&A DEVICE: Out-of-Line Expl Train

PRIMER: Mk 140-0

DETONATOR: M30A1

LEAD: Mk 7-0

BOOSTER: Mk 34-0 (supplied separately)

OTHER: Mk 5-0 Expl Driver

POWER SUPPLY:

25-32 VDC Thermal Battery, from proximity fuze

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
The Mk 3-3 is an aceleration discrimination electro/mechanical S-A device. Minimum acceleration of 18 g for approximately 1.4 s causes the setback weight to move eliminating a short which allows an explosive driver to fire and lock the setback weight in the aft position. This starts a self-destruct clock. The arming rotor, released by the movement of the setback weight, turns under the influence of missile acceleration at a rate governed by an escapement. The armed position of the rotor (alignment of the explosive train) occurs at 480-840 ft of missile travel. Just before arming, the electric primer shorting wire is broken by a pin on the rotor. The acceleration switch, which is closed during missile boost, maintains a short across the primer until the end of boost. The S-A is not electrically armed until deceleration occurs at rocket motor burnout or 2500-3000 ft separation. When the missile passes within lethal proximity of the target, the influence fuze develops a firing pulse initiating the S-A primer. If the missile fails to intercept the target within 30 s, the warhead will be initiated by switch closure in the self- destruct clock. S-A fits into Mk 303 Proximity Fuze.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 4 MOD 1, SAFETY - ARMING DEVICE

(U)

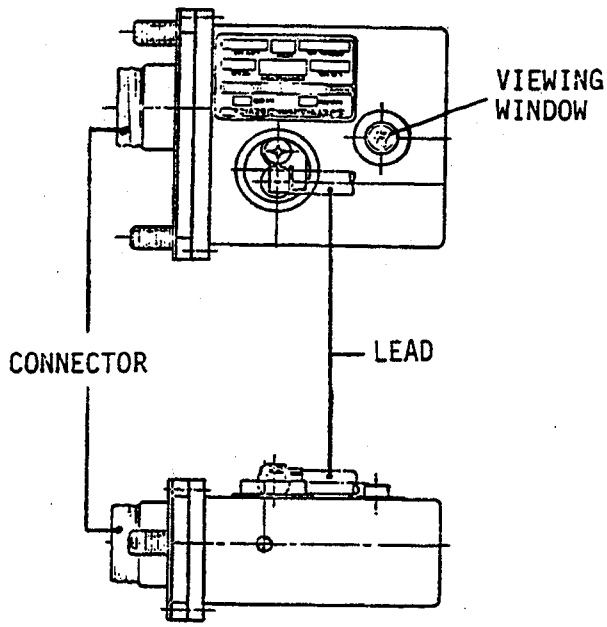

IDENTIFICATION (U)

Agency NWC/CL, Code 3351
R. L. Higuera, AV 437-7541

Status Obsolete

Ass'y Dwg. No. LD 995766

Parts List

Specification OS 9622

Previous Number

GENERAL (U)

Carriers Guided missile

Cal. — Size Talos (RIM-8D), LAST

Location Forward

Use HE

MIL-STD's 331, Tests 101-105

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

Group 4

KEY FEATURES

SERIES: N CHAPTER: 6
DESIGNATION: MK 4 MOD 1
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 4 MOD 1, SAFETY - ARMING DEVICE

ARMING DATA (C)

Method	Acceleration
Delay	2.0 - 4.0 sec*
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	12.0
Arming Wire	
External Indicat.	Viewing window

PHYSICAL DATA (U)

Weight	2.87 lb
Total Length (in.)	4.368
Body Diam. (in.)	1.755 x 3.595
Intrusion	
Thread Size	

FUNCTIONING DATA (U)

Action	Proximity, SD
Type	Electric
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY (U)

28 vdc from missile

EXPLOSIVE TRAIN (U)

S&A Device	
Primer	
Detonator	MK 70 MOD 0 (2)
Booster	MK 36 MOD 1
Explosive Lead	MK 2 MOD 0

REMARKS (C)

*Max commit-to-arm time at 13.5g acceleration is 4.45 seconds, arming delayed 2.0 to 4.0 sec. after missile booster separation.

SERIES: N CHAPTER: 6
DESIGNATION: MK 4 MOD 1
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

IDENTIFICATION

AGENCY: NWC/CL, CODE 3351

CONTACT: R. L. Higuera
AV 437-7541

STATUS: Obsolete

USER: Navy

ASSY DWG:

PARTS LIST: LD521538

SPEC: OS 10055

NSN:

PRIOR NOMENCLATURE:

REPLACES:

GENERAL

MUNITION: Sparrow III MIssile

USE: HE

LOCATION: Forward end of warhead

BALLISTIC LEVELS:

ROTATION:

SETBACK:

VELOCITY:

CREEP:

SERIES: N CHAPTER: 6
DESIGNATION: MK 5 Mod 2
Safety Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Launch Latch Activated by electrical solenoid

SECOND SAFETY:

Acceleration

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

Visual Indicator

FUNCTIONING DATA

MODE(S): Impact

TYPE: Electric

CHARACTERISTICS:

Instantaneous

TARGET:

SENSITIVITY:

PHYSICAL DATA

WEIGHT: 1.61 lb.

TOTAL LENGTH: 7.872 in. (12.123 cm.)

CROSS SECTION:

INTRUSION:

THREAD SIZE:

OTHER:

POWER SUPPLY:

28 VDC from missile power

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line explosive train

PRIMER:

DETONATORS: MK 71 Mod 0 (2)

LEAD: MK 8 Mod 0, MK 16 Mod 0

BOOSTER: MK 38 Mod 1

OTHER:

REMARKS

Commit-to -arm 600 to 1000 feet separation distance, arming occurs at rocket motor burnout. Designed for warheads MK 11 Mod 0, MK 18 Mod 0 and MK 38 Mod 0.

CHAPTER: 6 SERIES: N
DESIGNATION: MK 5 Mod 2
Safety Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

IDENTIFICATION

AGENCY: NWC/CL, CODE 3351

CONTACT: R. L. Higuera
AV 437-7541

STATUS: Obsolete

USER: Navy

ASSY DWG:

PARTS LIST: LD521536

SPEC: OS10056

NSN:

PRIOR NOMENCLATURE:

REPLACES:

GENERAL

MUNITION: Terrier Guided Missile

USE: HE

LOCATION: Forward end of warhead

BALLISTIC LEVELS:

ROTATION:

SETBACK:

VELOCITY:

CREEP:

SERIES: N CHAPTER: 6
DESIGNATION: MK 6 Mod 1
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Launch latch activated by electrical solenoid

SECOND SAFETY:

acceleration

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

Visual Indicator

FUNCTIONING DATA

MODE(S):

TYPE: Electric

CHARACTERISTICS:

Instantaneous

TARGET: Air

SENSITIVITY:

PHYSICAL DATA

WEIGHT: 3.25 lb.

TOTAL LENGTH: 12.2 in. (18.788 cm.)

CROSS SECTION:

INTRUSION:

THREAD SIZE:

OTHER:

POWER SUPPLY:

135 VDC from missile

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line explosive train

PRIMER:

DETONATORS: MK 71 Mod 0 (2)

LEAD: MK 8 Mod 0, MK 9 Mod 0

BOOSTER: MK 43 Mod 0

OTHER:

REMARKS

Commit-to-arm at 1650 to 2550 foot missile travel, arms at missile booster burnout.
Designed for warhead MK 5 Mod 7.

CHAPTER: 6 SERIES: N
DESIGNATION: MK 6 Mod 1
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

IDENTIFICATION

AGENCY: NWC/CL, Code 3351

CONTACT: R. L. Higuera
AV 437-7541

STATUS: Obsolete

USER: Navy

ASSY DWG:

PARTS LIST: LD521528

SPEC: OS10057

NSN:

PRIOR NOMENCLATURE:

REPLACES:

GENERAL

MUNITION: Tartar guided missile

USE: HE

LOCATION: Forward

BALLISTIC LEVELS:

ROTATION:

SETBACK:

VELOCITY:

CREEP:

SERIES: N CHAPTER: 6
DESIGNATION: MK 7 Mod 1
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Launch latch activated by electrical solenoid

SECOND SAFETY:

A

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

Visual Indicator

FUNCTIONING DATA

MODE(S): Proximity

TYPE: Electric

CHARACTERISTICS:

Instantaneous

TARGET: Air

SENSITIVITY:

PHYSICAL DATA

WEIGHT: 1.98 lb.

TOTAL LENGTH: 7.63 in. (11.75 cm.)

CROSS SECTION:

INTRUSION:

THREAD SIZE: 1 7/8- 16 UN - 2A

OTHER:

POWER SUPPLY:

135 VDC from missile power

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line explosive train

PRIMER:

DETONATORS: MK 71 Mod 0

LEAD: MK 8 Mod 0, MK 9 Mod 0

BOOSTER: MK 42 Mod 0

OTHER:

REMARKS

Commit-to-arm 1000 to 2000 ft., Arming at rocket motor burnout
Designed for warhead MK 10 Mod 0 self-destruct circuits.

CHAPTER: 6 SERIES: N
DESIGNATION: MK 7 Mod 1
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 10 MOD 0, SAFETY - ARMING DEVICE

(U)

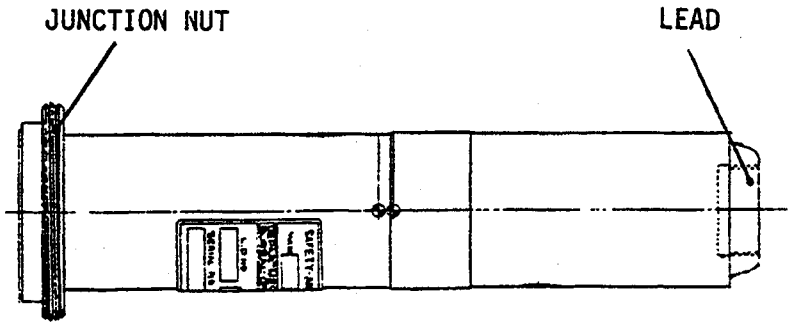

IDENTIFICATION (U)

Agency	NWC/CL, Code 3351 R. L. Higuera, AV 437-7541
Status	Obsolete
Ass'y Dwg. No.	LD 521526
Parts List	
Specification	OS 10054
Previous Number	EX-23 MOD 1

GENERAL (U)

Carriers	Guided missile
Cal. — Size	Sidewinder IC
Location	Forward
Use	HE
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

Group 4

KEY FEATURES

SERIES: N CHAPTER: 6
DESIGNATION: Mk 10 Mod 0
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 10 MOD 0, SAFETY - ARMING DEVICE

ARMING DATA (C)

Method	Acceleration
Delay	400 to 750 ft*
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm 6.0	Arm 15.0
Arming Wire	No
External Indicat.	Viewing window

PHYSICAL DATA (U)

Weight	1.40 lb
Total Length (in.)	7.20
Body Diam. (in.)	1.505
Intrusion	
Thread Size	2 1/8-16-UN-2A

FUNCTIONING DATA (U)

Action	Proximity, impact, SD
Type	Electric
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	Air targets
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY (U)

28 vdc from missile

EXPLOSIVE TRAIN (U)

S&A Device	
Primer	
Detonator	MK 71 MOD 0 (2)
Booster	
Lead	MK 8 MOD 0 MK 9 MOD 0 MK 14 MOD 0

REMARKS (C)

*Commit-to-arm 400 to 750 ft of missile travel, arming occurs at rocket motor out.

Designed for Warhead MK 48 MOD 0. Designed for two stage motor; replaced by S-A device MK 13 MOD 0.

SERIES: N CHAPTER: 6
DESIGNATION: Mk 10 Mod 0
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

IDENTIFICATION

AGENCY: NWC/CL, Code 3351

CONTACT: R. L. Higuera
AV 437-7541

STATUS: Obsolete

USER: Navy

ASSY DWG:

PARTS LIST: LD521492

SPEC: WS4886

NSN:

PRIOR NOMENCLATURE:

REPLACES: MK 4 Mod 0 S-A

GENERAL

MUNITION: Talos Guided Missile

USE: HE

LOCATION: Aft

BALLISTIC LEVELS:

ROTATION:

SETBACK:

VELOCITY:

CREEP:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Launch latch activated by an explosive dimple motor

SECOND SAFETY:

Acceleration

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

Visual Indicator

FUNCTIONING DATA

MODE(S): Impact

TYPE: Electric

CHARACTERISTICS:

Instantaneous

TARGET: Surface

SENSITIVITY:

PHYSICAL DATA

WEIGHT: 2.85 lb.

TOTAL LENGTH: 6.00 in. (9.24 cm.)

CROSS SECTION:

INTRUSION:

THREAD SIZE:

OTHER:

POWER SUPPLY:

28 VDC from missile power

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line explosive train

PRIMER:

DETONATORS: MK 70 Mod 0 (2)

LEAD: MK 6 Mod 0

BOOSTER: MK 45 Mod 0

OTHER:

REMARKS

Maximum commit-to-arm time at 17.0 g, acceleration is 3.50 sec, arming delayed 2.0 to 4.0 sec after missile booster separation. Designed for warhead MK 46 Mod 0/1. Used with MK 5 Mod 0 charge for missile destruct.

CHAPTER: 6 SERIES: N
DESIGNATION: MK 12 Mod 0
Safety Arming Device

Document: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

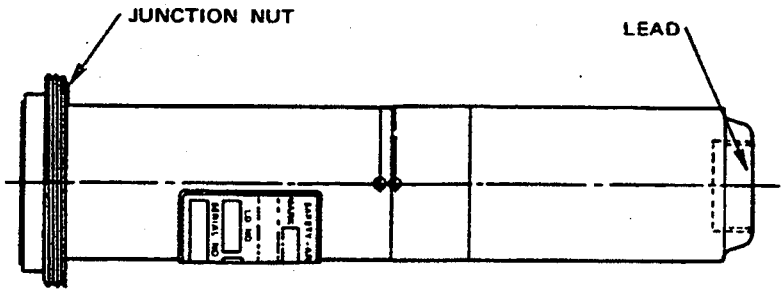

- OVERALL SIZE -	- INTRUSION -	
LG: 7.109 in (182 mm)	DP:	WT: 1.40 lb (635 g)
XSECT: 1.500 in (41.3 mm)	DIA:	THD: 2 1/8-16UN-2A
		THD DP:

IDENTIFICATION
- AGENCY: NWC, Code 3351
- CONTACT: Leach, R
- PHONE: DSN 437-7611
- STATUS: Obsolete
- USER: Navy, AF, Marines
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB: Fuzing Sys for Air Launched Weapons
- NATIONAL STOCK NO:
- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:
- REPLACES: Nothing
- REPLACED BY: Mk 13 Mod 2

GENERAL
- WEAPON: Air-air missile
- AMMUNITION:
  - AIM-9, Sidewinder (early Version; Chaparral
  - HE, WDU-17/B Warhead

LOCATION: Forward end of warhead
BALLISTIC LEVELS:
- ROTATION: Not applicable
- SETBACK:
- VELOCITY:
- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Launch latch activated by electric solenoid

SECOND SAFETY:
Acceleration 4 g no arm

OTHER SAFETY:
Parallel Electronic Timer (mounted in the target detector)

SAFE/ARM INDICATION:
Visual Indicator

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: Out-of-Line Expl Train

PRIMER:

DETONATOR: Mk 71 Mod 0 (2)

LEAD: Mk 8 Mod 0, Mk 16 Mod 0, Mk 14 Mod 0

BOOSTER:

OTHER:

FUNCTIONING DATA

MODES: Proximity, Contact
TYPE: Mechanical/electric
CHARACTERISTICS:
Instantaneous

TARGET: Air
SENSITIVITY:
100 - 200 g (Impact Sensor, mounted elsewhere in the missile)

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

28 VDC from missile
(G and C thermal battery)

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0349
US HCSDS: None
UN CL/DIV SCG: 1.4 S
US DOT SHIP CL: C
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
The Mk 13-0 is an arm-during-boost S-A. Before launch, a solenoid is energized retracting the launch latch from the setback weight. After launch, acceleration in excess of 8 g drives the setback weight aft freeing the control rotor and allowing the eccentrically weighted control and lead rotors to turn and arm at a rate governed by an escapement. During acceleration, an activating pin contacts the stopface of the setback weight, a rotary switch closes electrical circuits to the two Mk 71-0 Detonators, the rotor lead is aligned with the block lead and detonators, and the steel barrier in the rotor between the two leads is removed. Commit-to-arm occurs at 400 ft of missile travel. Lack of sustained acceleration before this point will return the rotors to the safe position. Full rotation to arm is at 600-1100 ft of missile travel depending on missile acceleration. Acceleration decay causes the setback weight to move forward capturing the activating pin in the arm pocket, locking the S-A in the armed position. The Mk 71-0 Detonators are initiated with a signal from the impact or proximity fuze, and, in turn initiate the rotor and block leads.

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

IDENTIFICATION

AGENCY: MWC/CL, Code 3351

CONTACT: R. L. Higuera
AV 437-7541

STATUS: Obsolete

USER: Navy

ASSY DWG:

PARTS LIST: LD 521883

SPEC: WS 1658

NSN:

PRIOR NOMENCLATURE:

REPLACES:

GENERAL

MUNITION: Terrier Missile

USE: HE

LOCATION: Forward end of warhead

BALLISTIC LEVELS:

ROTATION:

SETBACK:

VELOCITY:

CREEP:

SERIES: N CHAPTER: 6
DESIGNATION: MK 14 Mod 0
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Launch Latch activated by Electrical Solenoid

SECOND SAFETY:

Acceleration

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

Visual Indicator

FUNCTIONING DATA

MODE(S): Proximity

TYPE: Electric

CHARACTERISTICS:

Instantaneous

TARGET: Air

SENSITIVITY:

PHYSICAL DATA

WEIGHT: 2.61 lb.

TOTAL LENGTH: 14.698 in. (22.635 cm.)

CROSS SECTION:

INTRUSION:

THREAD SIZE:

OTHER:

POWER SUPPLY:

135 VDC from missile power

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line explosive train

PRIMER:

DETONATORS: MK 71 Mod 0 (2)

LEAD: MK 8 Mod 0, MK 16 Mod 0

BOOSTER: MK 53 Mod 0

OTHER:

REMARKS

*Mechanism commit-to-arm occurs at 1000 to 2000 ft. separation, arming occurs at booster motor burnout. Fits into warhead MK 51 Mod 0.
Note: NWSC/Crane has converted some MK 7 S-A's to MK 14 S-A's.

CHAPTER: 6 SERIES: N
DESIGNATION: MK 14 Mod 0
Safety-Arming Device

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM26, MECHANICAL TIMING MOVEMENT

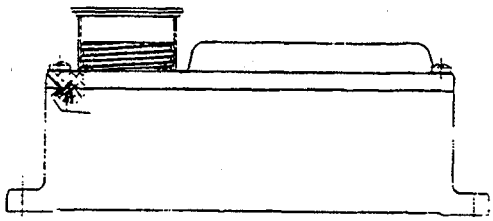

IDENTIFICATION

Agency	ERRADCOM-DELHD-IT S. Blades AV 290-2704
Status	Obsolete
Ass'y Dwg. No.	F10992201
Parts List	EPL 10992201
Specification	TL-PD-74
Previous Number	T3

GENERAL

Carriers	T3019 arming programmer
Cal. — Size	Bomarc missile
Location	Arming programmer
Use	Program timer
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	100
Velocity (fps)	

KEY FEATURES

Self starting; useful output torque of 5 in.-oz

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM26, MECHANICAL TIMING MOVEMENT

ARMING DATA

Method

Delay

Rotation (rps)

Non-arm Arm

Setback (g)

Non-arm Arm

Arming Wire

External Indicat.

PHYSICAL DATA

Weight

Total Length (in.)

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action

Type

Delay

Time Type

Time Setting (sec)

Target

Sensitivity

Material

Thickness (in.)

Max Obliq. (°)

Velocity (fps)

Carrier

POWER SUPPLY

Elgiloy clock spring

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

SERIES: A CHAPTER: 6
DESIGNATION: XM 26
Movement

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M30A1, SAFETY AND ARMING DEVICE

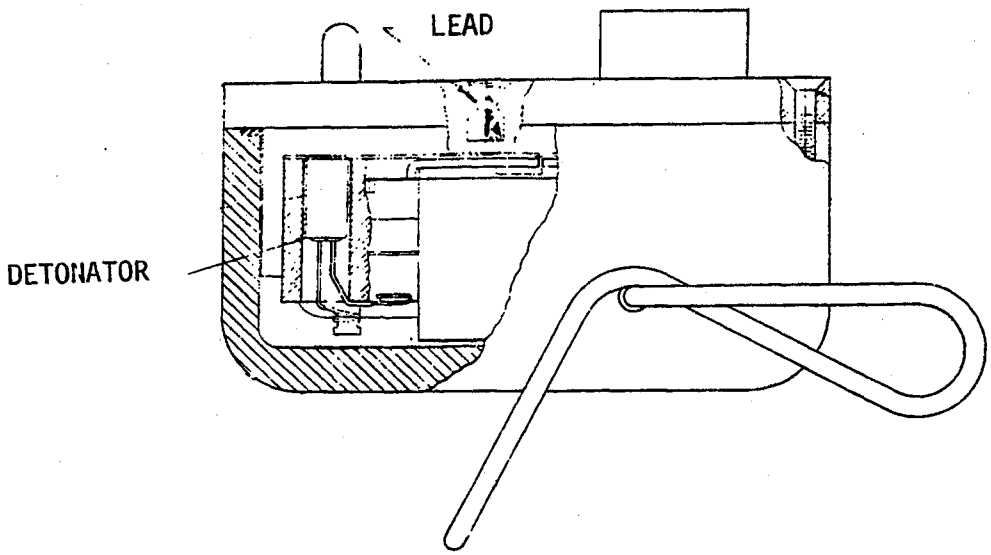

IDENTIFICATION

Agency	ERADCOM, DELHD-IT-EA
Status	R. Wyckoff AV 290-2677 Obsolete
Ass'y Dwg. No.	F7542841
Parts List	EP1 7542841
Specification	MIL-D060495
Previous Number	T-90

GENERAL

Carriers	Rocket
Cal. — Size	Nike
Location	Warhead
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	30
Velocity (fps)	

KEY FEATURES

Broken gear or runaway delay train protection

SERIES: A CHAPTER: 6
DESIGNATION: M 30A1
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M30A1, SAFETY AND ARMING DEVICE

ARMING DATA

Method	Acceleration
Delay	4 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	9.5 / 12
Arming Wire	None
External Indicat.	Yes

PHYSICAL DATA

Weight	0.57 lb
Total Length (in.)	2.75
Body Diam. (in.)	
Intrusion	None
Thread Size	None

FUNCTIONING DATA

Action	Arming device only
Type	Electric
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel, materiel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	M30A1
Primer	
Detonator	M51
Booster	
Lead	Tetryl

REMARKS

SERIES: A CHAPTER: 6
DESIGNATION: M 30A1
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM32, S&A

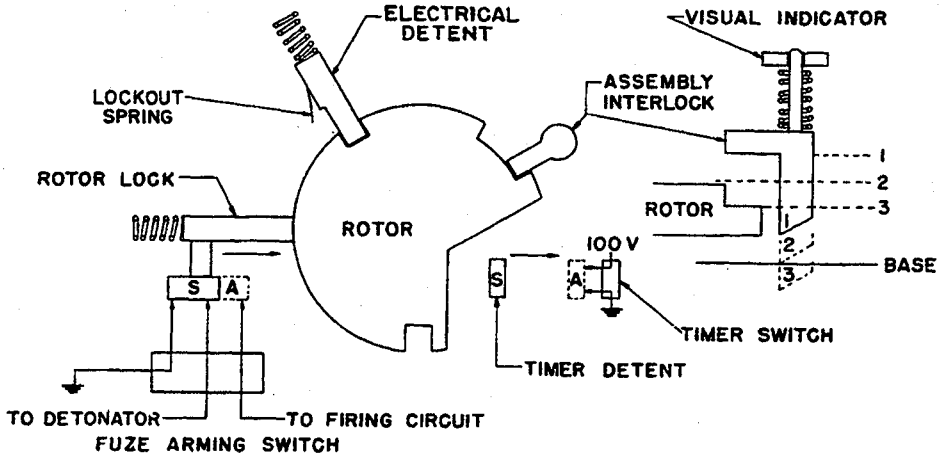

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-M
L. Horowitz AV 880-5581

Status Terminated

Ass'y Dwg. No. FG1845 (Eastman Kodak)

Parts List

Specification

Previous Number

GENERAL

Carriers Hawk missile

Cal. — Size

Location Side

Use S&A

MIL-STD's 331, Tests 103, 104

Max Values

Rotat. (rps)

Setback (g) 15

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM32, S&A

ARMING DATA

Method	Setback, mech. time
Delay	
Rotation (rps)	
Non-arm.	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	2 lb
Total Length (in.)	6 3/8
Body Diam. (in.)	2 1/2 x 2 1/16
Intrusion	2.37 in.
Thread Size	

FUNCTIONING DATA

Action	PI
Type	Mechanical, electric
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T20E1
Booster	

REMARKS

XM32 S&A obsolete and has been replaced by S&A XM32E6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM32E6, S&A,
(U)

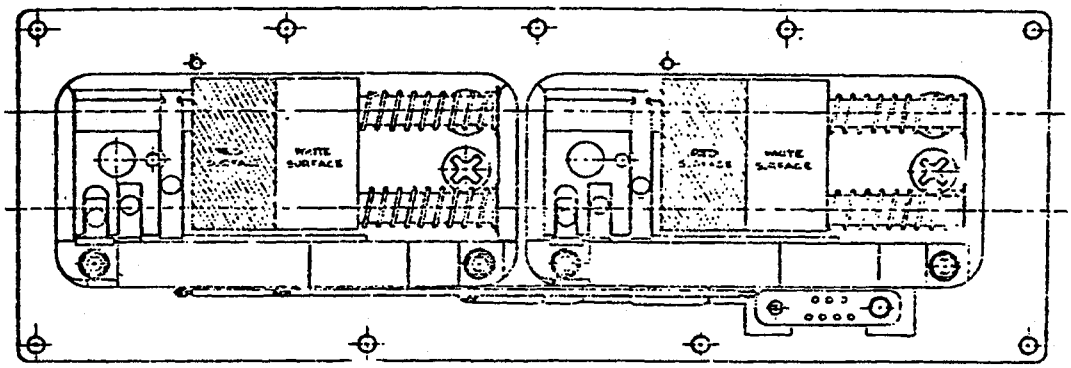

IDENTIFICATION (U)

Agency	ARRADCOM, DRDAR-LCN-M L. Horwitz, AV 880-5581
Status	Obsolete
Ass'y Dwg. No.	8859048
Parts List	8859048
Specification	MIL-S-45462A
Previous Number	

GENERAL (U)

Carriers	Hawk missile
Cal. — Size	
Location	Side
Use	S&A
MIL-STD's	331 Tests 101, 102, 104 11, 105, 108, 111
Max Values	
Rotat. (rps)	
Setback (g)	20
Velocity (fps)	

KEY FEATURES (U)

Self destruct upon loss of electrical power.

SERIES: A CHAPTER: 6
DESIGNATION: XM32E6
Safety-Arming Device

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM32E6, S&A, CONTACT FUZE

ARMING DATA

Method	Setback & mech. delay
Delay	900 - 1200 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA (U)

Weight	5 lb
Total Length (in.)	6 3/8
Body Diam. (in.)	2 1/2 x 2 1/16
Intrusion	2.37 in.
Thread Size	

FUNCTIONING DATA (U)

Action	Command
Type	Electrical
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN (U)

S&A Device	
Primer	
Detonator	M51
Booster	RDX 820 mg

REMARKS (U)

Contains redundant accelerometers, electric circuits, and explosive trains. See also S&A XM32.

SERIES: A CHAPTER: 6
DESIGNATION: XM32E6
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M51, FUZE, BASE ELEMENT

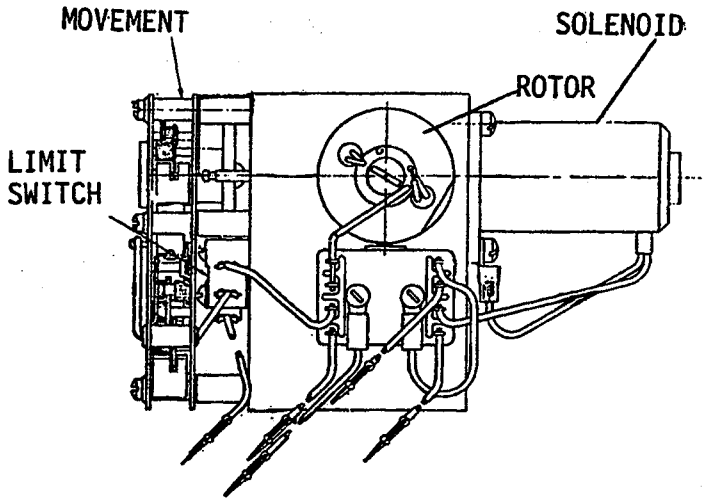

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M R. McKissick AV 880-5484
Status	Terminated
Ass'y Dwg. No.	FF 7011 (FA)
Parts List	
Specification	
Previous Number	T1405

GENERAL

Carriers	Guided missile
Cal. — Size	20.5 in. La Crosse
Location	Nose, Base
Use	GP, Concrete piercing
MIL-STD's	331, Tests 101 & 105
Max Values	
Rotat. (rps)	
Setback (g)	100
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M51, FUZE, BASE ELEMENT

ARMING DATA

Method	Setback, electric impulse
Delay	6 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm 8	Arm 11
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	7 lb
Total Length (in.)	3-3/8
Body Diam. (in.)	7-3/4
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PI, BD
Type	Electric, Mechanical
Delay	Under 10 microsec
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T20E1, M18
Booster	
Lead	Tetryl

REMARKS

Fuze consists of base element and a nose switch

The nose crushed on impact to close the electric circuit that ignites the explosive train

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-71/B, FUZE, PROXIMITY

IDENTIFICATION

Agency	Eglin AFB, Arm Div Van Stryland
Status	Terminated
Ass'y Dwg. No.	X68D10520
Parts List	DL67010473
Specification	CP 67D10473
Previous Number	

GENERAL

Carriers	Guided missile
Cal: — Size	1000 lb
Location	Warhead
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

SERIES: AF CHAPTER: 6
DESIGNATION: FMU- 71/B
GM Proximity Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-71/B, FUZE, PROXIMITY

ARMING DATA

Method	Electrical
Delay	5 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	No

PHYSICAL DATA

Weight	4.0 lb
Total Length (in.)	9.48
Body Diam. (in.)	3.16
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Proximity
Type	Doppler radar
Delay	
Time Type	Electrical
Time Setting (sec)	5 sec
Target	Area
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

Drop height 0-3000 ft

POWER SUPPLY

Thermal battery

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	D74B1
Booster	

REMARKS

The FMU-71/B fuze is an adaptation of the FMU-56/B for the AGM-79/A missile. The modification consists of removing the antenna and velocity sensor incorporating a different burst height and providing a fixed 5-sec safe separation and arming time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T90E3, S&A

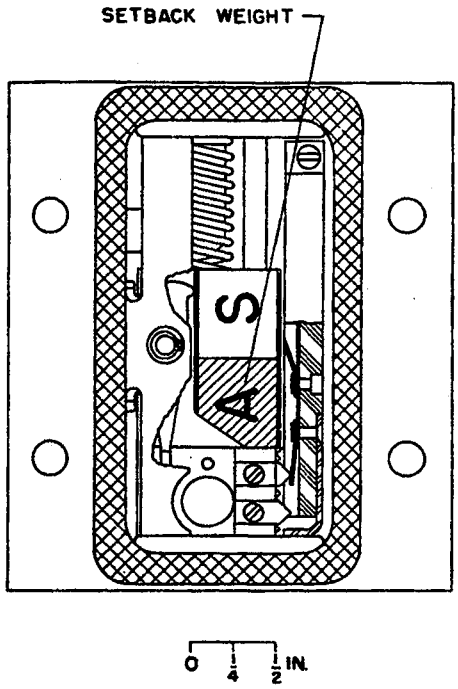

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M R. McKissick AV 880-5484
Status	Terminated
Ass'y Dwg. No.	TL3F-232
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Guided missile
Cal. — Size	NIKE I
Location	Center
Use	HE or GP
MIL-STD's	331, Tests 101, 103, 107
Max Values	
Rotat. (rps)	
Setback (g)	19
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T90E3, S&A

ARMING DATA

Method	Setback
Delay	4 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	9 / 9-11
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	9 oz
Total Length (in.)	2.817
Body Diam. (in.)	
Intrusion	
Thread Size	

Plug-in assembly

FUNCTIONING DATA

Action	Command from ground control
Type	Electromechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M52
Booster	
Relay	PETN
Lead	Tetryl

REMARKS

After 1.5 sec acceleration, S&A is committed and completes arming cycle (2 1/2 sec, later) even if acceleration ceases.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM90, S&A MECHANISM

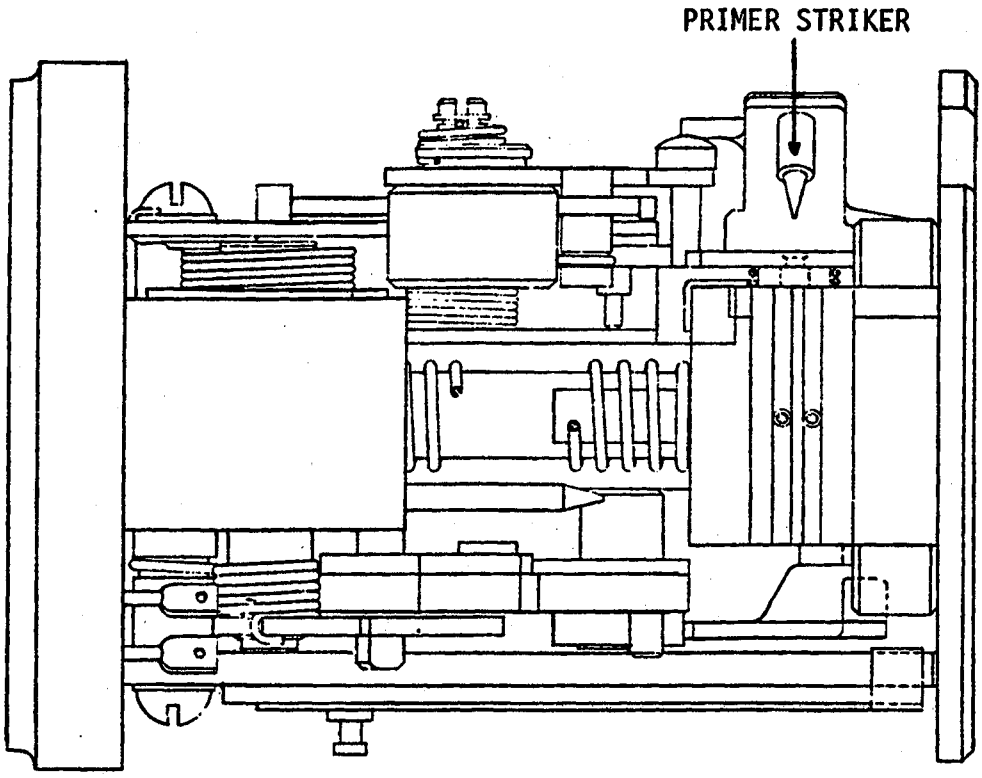

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi
Status	AV 290-2400 Terminated
Ass'y Dwg. No.	10996399
Parts List	10996400
Specification	XTL-PD-143, XTL-PD-183
Previous Number	XM62

GENERAL

Carriers	Mauler warhead
Cal. — Size	
Location	
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM90,S&A MECHANISM

ARMING DATA

Method	Setback
Delay	Gear train
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	40
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	1 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action Type	Proximity, impact, self destruct
Delay	
Time Type	Mechanical
Time Setting (sec)	
Target	Aircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

None

EXPLOSIVE TRAIN

S&A Device	XM90-XM62
Primer	
Detonator	
Booster	

REMARKS

SERIES: A CHAPTER: 6
DESIGNATION: XM 90
Safety-Arming Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T93E8, S&A

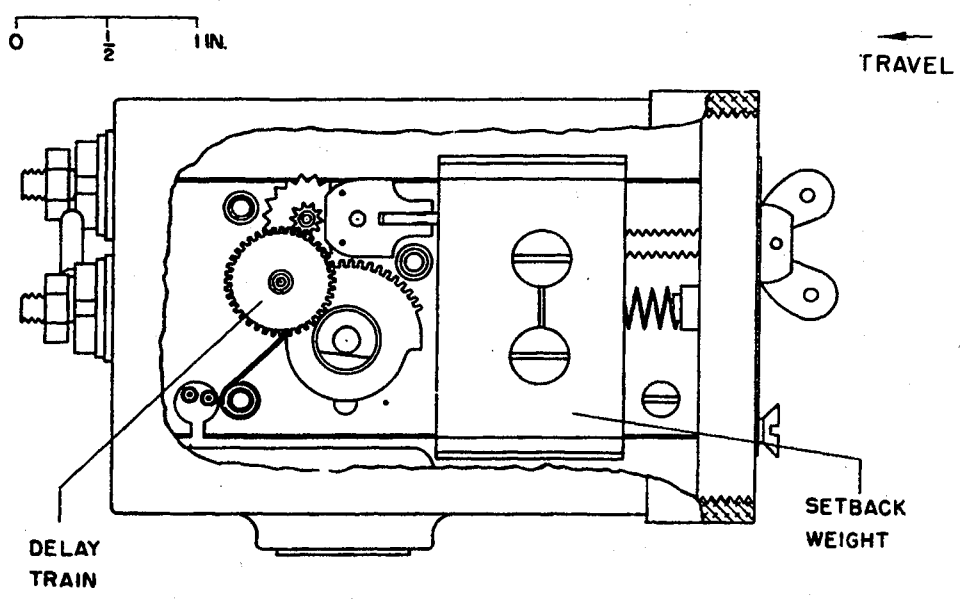

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-M R. Mckissick AV 880-5484
Status	Terminated
Ass'y Dwg. No.	97-1-1 (T93E7)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Guided missile
Cal. — Size	Nike missile
Location	Internal
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	19
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T93E8, FUZE, S&A

ARMING DATA

Method	Setback
Delay	3.3-4.1 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 7 / Arm 11	
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	1.4 lb
Total Length (in.)	3.59
Body Diam. (in.)	
Intrusion	
Thread Size	.75-20 NEF-3*

*Prima-cord attachment

FUNCTIONING DATA

Action	Radar Signal (burst command)
Type	Electric, Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M51
Booster	
Relay	PETN

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T104, S&A

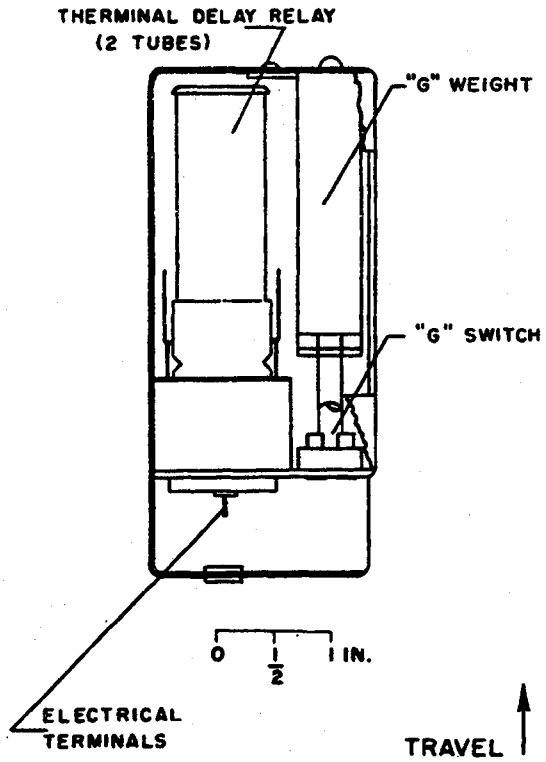

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCN-M R. McKissick AV 880-5484

Status Terminated

Ass'y Dwg. No. 16D53-2329

Parts List

Specification

Previous Number

GENERAL

Carriers Guided missile

Cal. — Size Corporal

Location

Use GP, Training

MIL-STD's 331, Tests 101, 104, 105

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Thermal delay relay tubes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T104, S&A

ARMING DATA

Method	Setback, electrical
Delay	30 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
	under / over
Non-arm	0.5 Arm 0.5
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.5 lb
Total Length (in.)	4.75
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Command
Type	Electromechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antimateriel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

T104 S&A is used only as an interlock for the Fuze T1400E4. In the Corporal fuzing system, it closes the electrical circuit to the fuzes, after a delay of 30 sec. if it is subjected to 1/2 g or more.

Explosive train is not interrupted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

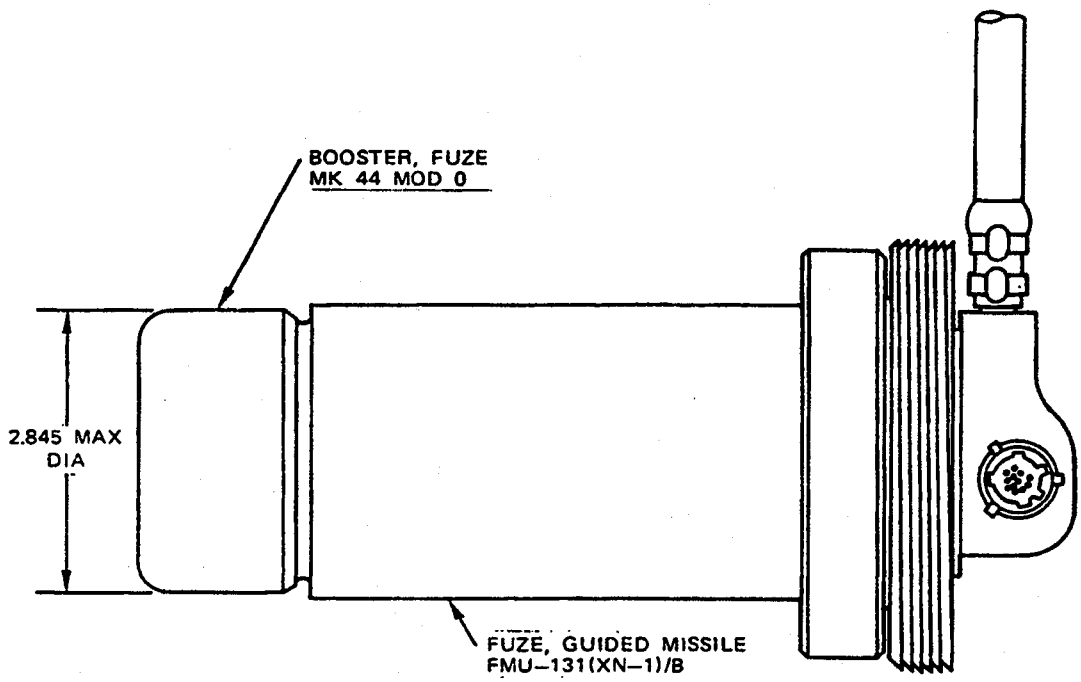

- OVERALL SIZE -	- INTRUSION -	
LG: 7.9 in (200.7 mm)	DP: 5.2 in (132.1 mm)	WT: 6.8 lb (3087 g)
XSECT: 2.91 in (73.9 mm)	DIA:	THD: 4.25-10 Buttress
		THD DP:

IDENTIFICATION
- AGENCY: NWC, Code 3354
- CONTACT: Dean, C
- PHONE: DSN 437-7232
- STATUS: Terminated
- USER: Navy, AF
- ASSY DWG: 1186-AS-200
- PARTS LIST: DL SK1186AS200
- SPEC: AS-2361
- PUB:

- NATIONAL STOCK NO:
  Not assigned
- DODIC: Not assigned
- PRIOR MODEL NO: None
- SIMILAR TO: FMU-109/B

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: Surface-surface missile

- AMMUNITION:
  - BGM-109B Tomahawk
  - HE

LOCATION: Base of Warhead
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Weapon power

SECOND SAFETY:
Air pressure

OTHER SAFETY:
Rotor Lever Lock

SAFE/ARM INDICATION:
Viewing window

ARMING TIME OR DISTANCE:
Classified

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: Mk 85-0 (2)
Mk 71-0 (2)

LEAD: Mk 9-0 (4)

BOOSTER: Mk 44 Mod 0

OTHER:

FUNCTIONING DATA

MODES: Impact
TYPE: Electric
CHARACTERISTICS:
14-ms pyrotechnic delay

TARGET: Surface
SENSITIVITY:
350 to 450 g

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

28 VDC from missile

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT: 7.5 lb (3400 g)
LG: 6.13 in (156 mm)	DP:	THD:
XSECT: 3.35 in (85 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NWC, Code 3351
- CONTACT: Peterson, B
- PHONE: DSN 437-7444
- STATUS: Terminated
- USER: Air Force, Navy
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO: FMU-135/B

- REPLACES: Nothing
- REPLACED BY: FMU-135/B

GENERAL
- WEAPON: Air-surface missile

- AMMUNITION:
  - AGM-65E Maverick Missile,
  - WDU-24/B Penetrator Warhead

LOCATION: Aft end of warhead
BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Launch signal applied to setback mass and rotor latch solenoids

SECOND SAFETY:
Setback: sustained 8g accelleration

OTHER SAFETY:
Missile guidance or battery failure will dud fuze

SAFE/ARM INDICATION:
Viewing window

ARMING TIME OR DISTANCE:
2.5 to 4.7 s

EXPLOSIVE COMPONENTS

S&A DEVICE: Out-of-line expl. train

PRIMER: None

DETONATOR: Electric delay (4 ea)

LEAD: Mk 9-0 (2 ea in rotor)
425 mg CH-6 (2 ea)

BOOSTER: BBU-40/B

OTHER: None

FUNCTIONING DATA

MODES: Impact
TYPE: Mechanical, electronic
CHARACTERISTICS:
Contact sensor in Guidance & Control Section and Mk 4-0 Impact Switch in Fuze. Selectable long, medium, or short impact delays.
TARGET: Ground - tanks
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

30 Vdc thermal battery between missile warhead and rocket motor.

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: 1.4 S
US DOT SHIP CL: C
NET EXPL WT: 2.02 g
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
At launch the missile battery supplies an enable signal to the FMU-133/B Fuze activating the setback mass lock solenoid, unlocking the setback mass. On 8 g constant acceleration, setback mass movement stores energy in timer and rotor springs and unlocks the rotor and two timers. Both spring-driven timers are governed by escapements. One timer is influenced by acceleration through setback mass motion. Commit-to-arm occurs 0.4 s after setback mass displacement. The firing circuit is completed and rotor solenoid partially powered 2.5 s after mass displacement. Arming occurs after 4.7 s for the fixed timer or sooner if the acceleration-influenced timer times out first. A ground signal on the rotor solenoid is applied removing the rotor lock allowing it to turn to the armed position where it is again locked. The fuze electronics control all electrical arming and firing functions, sensing various switch settings and operating the mass and rotor solenoid locks at appropriate times. On impact, the electronics senses impact sensor closure and fires one of the preselected delays. In case of a guidance or battery malfunction, the electronics will discharge the firing capacitors irreversibly dudding the fuze.

NEW PAGE.

Source: https://assist.dla.mil Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY:
- CONTACT:
- PHONE:
- STATUS:
- USER:
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:
- NATIONAL STOCK NO:
- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:
- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON:
- AMMUNITION:

LOCATION:
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:
- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

POWER SUPPLY:

FUNCTIONING DATA
MODES:
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 304 MOD 2, FUZE, GUIDED MISSILE

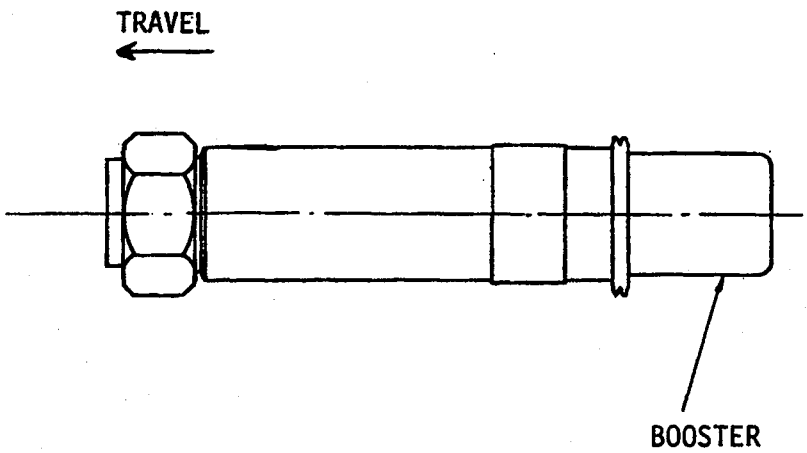

IDENTIFICATION

Agency	NWC/CL Code 3351 R.L Higuera, AV 437-7541
Status	Terminated
Ass'y Dwg. No.	GA1817698
Parts List	RD495616
Specification	OS8479
Previous Number	

GENERAL

Carriers	Guided missile
Cal. — Size	Sidewinder
Location	Forward
Use	HE
MIL-STD's	331, Tests 101-105
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Contact fuze for sidewinder 1A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 304 MOD 2, FUZE, GUIDED MISSILE

ARMING DATA

Method	Acceleration
Delay	480 - 840 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	18.0 g acceleration
Non-arm 13.0 Arm 18.0	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.4 lb
Total Length (in.)	6.992
Body Diam. (in.)	1.442
Intrusion	
Thread Size	1 1/4-18NEF-2B

FUNCTIONING DATA

Action	Impact
Type	Electromechanical
Delay	Instantaneous
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

49 - 52 vdc at 6 kc from missile

EXPLOSIVE TRAIN

S&A Device	
Primer	MK 114 MOD 0
Detonator	MK 59 MOD 0
Booster	MK 35 MOD 0

REMARKS

Explosive train is initiated by signal from piezoelectric element mounted in guidance canard of missile. A thyratron and firing capacitor are contained in the fuze.

SERIES: N CHAPTER: 6
DESIGNATION: MK 304 MOD 2
GM Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

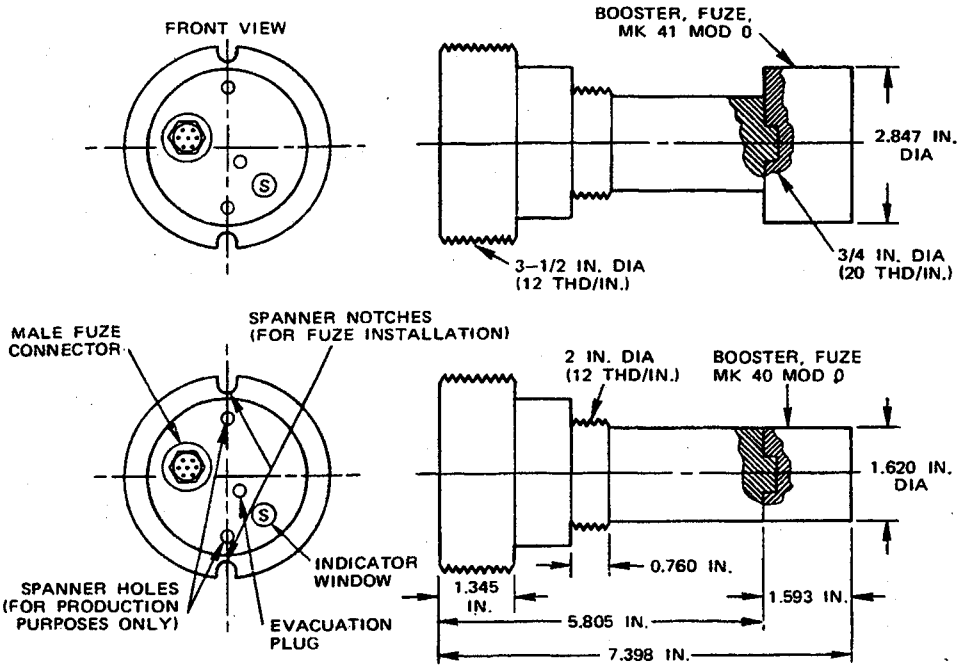

IDENTIFICATION

AGENCY: NWC, Code 3351

CONTACT: H. Berry
AV 245-7332

STATUS: Obsolete

USER: Navy

ASSY DWG: 1479066

PARTS LIST: LD 475841

SPEC: 058178

NSN:

PRIOR NOMENCLATURE:

REPLACES:

GENERAL

MUNITION: Bullpup Missile

USE: HE

LOCATION: Forward end of warhead

BALLISTIC LEVELS:

ROTATION: Not applicable

SETBACK:

VELOCITY:

CREEP:

SERIES: N CHAPTER: 6
DESIGNATION: MK 310 Mod 0
GM Impact Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Launch latch activated by pyrotechnic device (explosive driver)

SECOND SAFETY:

Acceleration

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

Visual indicator

FUNCTIONING DATA

MODE(S): Impact

TYPE: Pyrotechnic

CHARACTERISTICS:

Instantaneous

TARGET: Ground

SENSITIVITY:

9 to 11.5 g****

PHYSICAL DATA

WEIGHT: 3.0 lb (1361 gm)

TOTAL LENGTH: 7.398 in (18.8 cm)

CROSS SECTION:

INTRUSION: 6.053** and 4.054***

THREAD SIZE: See Remarks

OTHER:

POWER SUPPLY:

Missile therm. battery

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line expl train

PRIMER:

DETONATORS: Mk 63 Mod 0

LEAD: Mk 3 Mod 0, Mk 10 Mod 0

BOOSTER: Mk 40-0*** or Mk 41-0** (Also uses T4 dimple motor for launch latch actuation)

OTHER:

REMARKS

*Commit-to-arm between 325 and 625 feet; full arm between 1,000 and 1,600 feet.
**When used in Mk 81 Mod 1 bomb (thread size 3.5-12UN-2A).
***When used in AN-M81 bomb (thread size 2.0-12UN-2A).
****Expl train initiated by fuze triggering device (deformation switch) in missile nose or by acceleration switch internal to Fuze.

CHAPTER: 6 SERIES: N
DESIGNATION: MK 310 Mod 0
GM Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

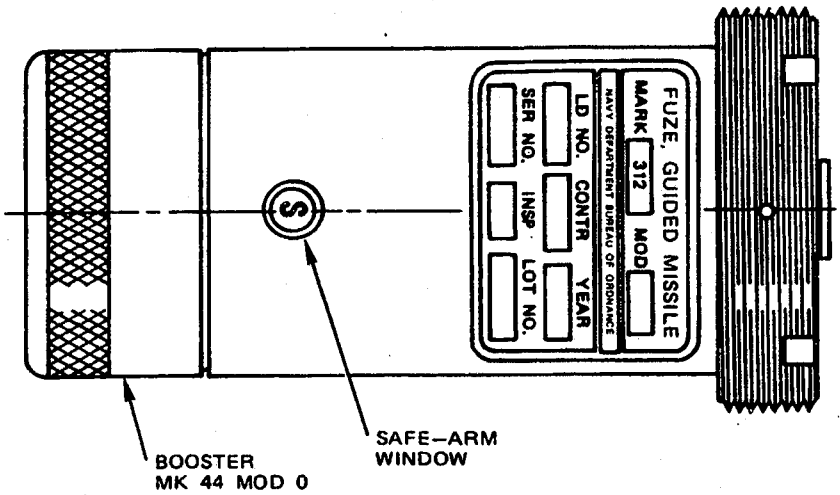

IDENTIFICATION

AGENCY: NWC, Code 3351

CONTACT: H. Berry
AV 245-7332

STATUS: Obsolete

USER: Navy

ASSY DWG: 1584138 and 1886115

PARTS LIST: LD 495642 and 521586

SPEC: OS 9626 and WS 1631

NSN:

PRIOR NOMENCLATURE:

REPLACES: Serv(Bullpup) NTE(Bulldog)

GENERAL

MUNITION: Bullpup Missile

USE: HE

LOCATION: Base of Warhead

BALLISTIC LEVELS:

ROTATION: Not applicable

SETBACK:

VELOCITY:

CREEP:

SERIES: N CHAPTER: 6
DESIGNATION: MK 312 Mod 0,1
GM Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Launch latch activated by pyrotechnic device (explosive drivers)

SECOND SAFETY:

Acceleration

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

Visual Indicator

PHYSICAL DATA

WEIGHT: 5.5 lb (2495 gm)

TOTAL LENGTH: 6.852 in (17.4 cm)

CROSS SECTION:

INTRUSION: 6.043 in (15.35 cm)

THREAD SIZE:

OTHER:

3.5-12UN-2A

POWER SUPPLY:

28 VDC Aircraft and 122 VDC Missile Power

FUNCTIONING DATA

MODE(S): Impact

TYPE: Pyrotechnic

CHARACTERISTICS:

Instantaneous and Delay

TARGET: Ground

SENSITIVITY:

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line expl train

PRIMER: Mk 71 Mod 0; Mk 74 Mod 0

DETONATORS: Mk 73 Mod 0 (1 each)

LEAD: Mk 12 Mod 0 (2)
Mk 13 Mod 0 (2)

BOOSTER: Mk 44-0. 3 Mk 65-0 Squib Sw in select circuit. 2 Mk 7-0 Expl Driver for launch latch

OTHER:

REMARKS

Commit-to-arm between 550 and 850 feet, full arm between 1,000 and 1,670 feet. Explosive train delay (or proximity fuzing) selected by pilot prior to launch (Navy) or prior to aircraft take-off (Air Force) - short delay (Mk 74 Detonator) or long delay (Mk 73 Detonator).

CHAPTER: 6 SERIES: N
DESIGNATION: MK 312 Mod 0,1
GM Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

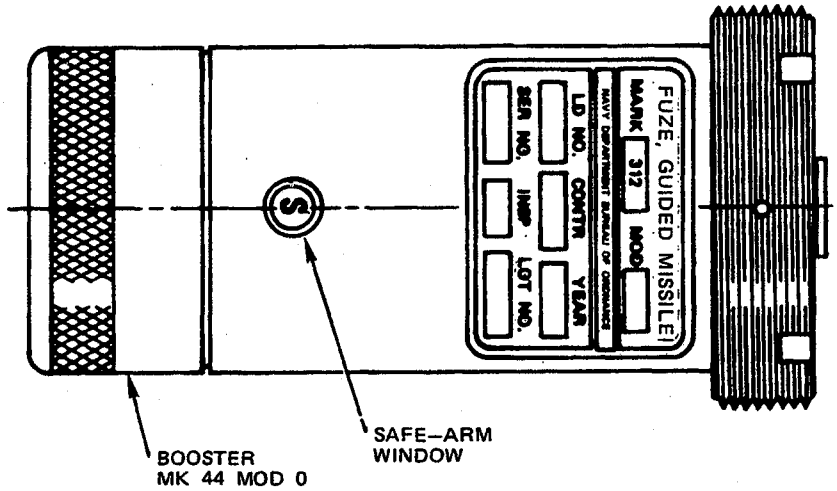

IDENTIFICATION

AGENCY: NWC, Code 3351

CONTACT: H. Berry
AV 245-7332

STATUS: Obsolete

USER: Navy

ASSY DWG: 2186301

PARTS LIST: LD 521592

SPEC: WS 1631

NSN:

PRIOR NOMENCLATURE:

REPLACES: Serv NTE (Bulldog, Bullpup)

GENERAL

MUNITION: Bullpup Missile

USE: HE

LOCATION: Base of Warhead

BALLISTIC LEVELS:

ROTATION: Not applicable

SETBACK:

VELOCITY:

CREEP:

SERIES: N CHAPTER: 6
DESIGNATION: MK 312 Mod 2
GM Impact Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T19:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Launch latch activated by pyrotechnic device (explosive drivers)

SECOND SAFETY:

Acceleration

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

Visual Indicator

FUNCTIONING DATA

MODE(S): Proximity

TYPE: Pyrotechnic

CHARACTERISTICS:

Instantaneous and Delay

TARGET: Ground

SENSITIVITY:

PHYSICAL DATA

WEIGHT: 5.5 lb (2495 gm)

TOTAL LENGTH: 6.852 in (17.4 cm)

CROSS SECTION:

INTRUSION: 6.043 in (15.35 cm)

THREAD SIZE: 3.5-12UN-2A

OTHER:

POWER SUPPLY:

28 VDC Aircraft and 122 VDC Missile Power

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line expl train

PRIMER:

DETONATORS: Mk 71 Mod 0, Mk 84 Mod 0, Mk 85 Mod 0 (1 each)

LEAD: Mk 12 Mod 0 or 1
Mk 13 Mod 0 or 1

BOOSTER: Mk 44 Mod 0

OTHER:

REMARKS

Commit-to-arm between 550 and 850 feet, full arm between 1,000 and 1,670 feet. Explosive train delay (or proximity fuzing) selected by pilot prior to launch (Air Force) - short delay (Mk 84 Detonator) or long delay (Mk 85 Detonator).

CHAPTER: 6 SERIES: N
DESIGNATION: MK 312 Mod 2
GM Impact Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

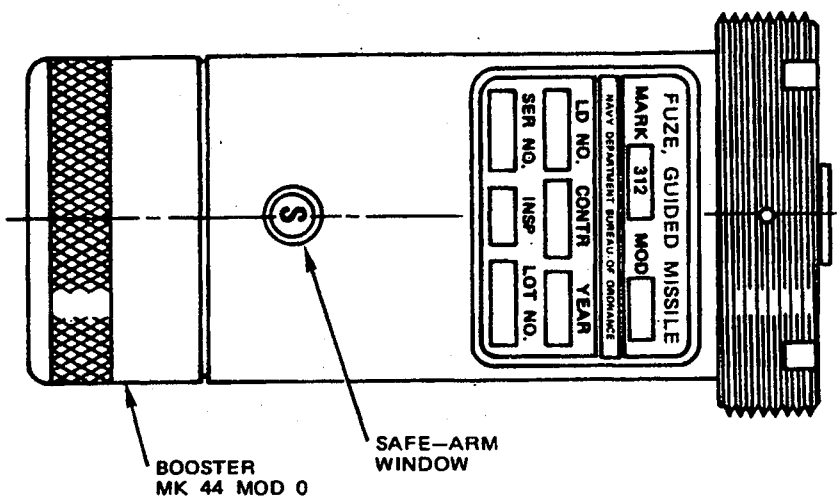

IDENTIFICATION

AGENCY: NWC, Code 3351

CONTACT: H. Berry
AV 245-7332

STATUS: Obsolete

USER: Navy

ASSY DWG: GS2186301

PARTS LIST: LD 533594

SPEC: WS 3804

NSN:

PRIOR NOMENCLATURE:

REPLACES:

GENERAL

MUNITION: BULLPUP C
MISSILE

USE: HE

LOCATION: Base of Warhead

BALLISTIC LEVELS:

ROTATION:

SETBACK:

VELOCITY:

CREEP:

SERIES: N CHAPTER: 6
DESIGNATION: MK 312 Mod 3
GM Impact Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Launch latch activated by pyrotechnic device (explosive driver)

SECOND SAFETY:

Acceleration

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

Visual Indicator

FUNCTIONING DATA

MODE(S): Proximity, Impact

TYPE: Pyrotechnic

CHARACTERISTICS:

Instantaneous and Delay

TARGET: Ground

SENSITIVITY:

PHYSICAL DATA

WEIGHT: 5.5 lb (2495 gm)

TOTAL LENGTH: 6.8 in (17.27 cm)

CROSS SECTION:

INTRUSION: 6.0 in (15.24 cm)

THREAD SIZE: 3.5-12UN-2A

OTHER:

POWER SUPPLY:

28 VDC and 122 VDC from missile power

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line expl train

PRIMER:

DETONATORS: Mk 71 Mod 0, Mk 84 Mod 0
Mk 85 Mod 0

LEAD: Mk 12 Mod 1 (2)
Mk 13 Mod 1 (2)

BOOSTER: Mk 44 Mod 0
Squib Mk 65 Mod 0 (3) switch
Driver Mk 17 Mod 0 (2)

OTHER:

REMARKS

Instantaneous Detonators are fired by missile proximity fuze or fuze triggering device. Long or short delay detonators are fired by either fuze triggering devices in missile or in fuze.

CHAPTER: 6 SERIES: N
DESIGNATION: MK 312 Mod 3
GM Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the Mk 328 Mod 0 GM Impact Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 6-49 and 6-50 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

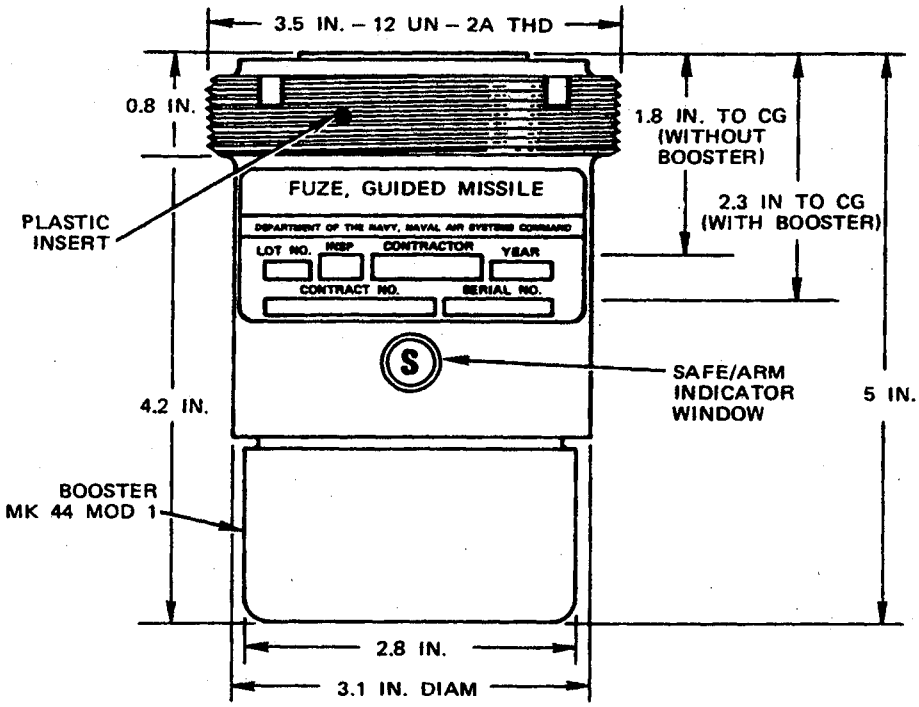

IDENTIFICATION

AGENCY: NWC, Code 3351

CONTACT: H. Berry
AV 245-7332

STATUS: Obsolete

USER: Navy

ASSY DWG: 2226966

PARTS LIST: DL 2226966

SPEC: WS 2137

NSN:

PRIOR NOMENCLATURE:

REPLACES:

GENERAL

MUNITION: Shrike Missile

USE: HE

LOCATION: Base of Warhead

BALLISTIC LEVELS:

ROTATION: Not applicable

SETBACK:

VELOCITY:

CREEP:

SERIES: N CHAPTER: 6
DESIGNATION: MK 330 Mod 0
GM Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Launch latch initiated by missile poser

SECOND SAFETY:

Missile Acceleration

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

Visual Indicator

FUNCTIONING DATA

MODE(S): Proximity, Impact

TYPE: Electric

CHARACTERISTICS:

Instantaneous

TARGET: Ground

SENSITIVITY:

100-200 g fuze triggering

PHYSICAL DATA

WEIGHT: 3.6 lb (1633 gm)

TOTAL LENGTH: 4.90 in (12.45 cm)

CROSS SECTION:

INTRUSION: 4.2 in (10.67 cm)

THREAD SIZE: 3.5-12UN-2A

OTHER:

POWER SUPPLY:

28 VDC from missile power

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line explosive

PRIMER:

DETONATORS: Mk 71 Mod 0 (4)

LEAD: Mk 12 Mod 1 (2),
Mk 13 Mod 1 (2)

BOOSTER: Mk 44 Mod 0

OTHER:

REMARKS

*850 to 1,000 ft separation (commit-to-arm), arms 4,600 to 5,800 ft.
**Missile Proximity Fuze initiates 2 detonators. Internal Fuze Triggering Device initiates 2 more detonators. One detonator in each pair can propagate expl train. Fuze cannot be used with Mk 53-3 or Mk 78-0 rocket motors.

CHAPTER: 6 SERIES: N
DESIGNATION: MK 330 Mod 0
GM Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

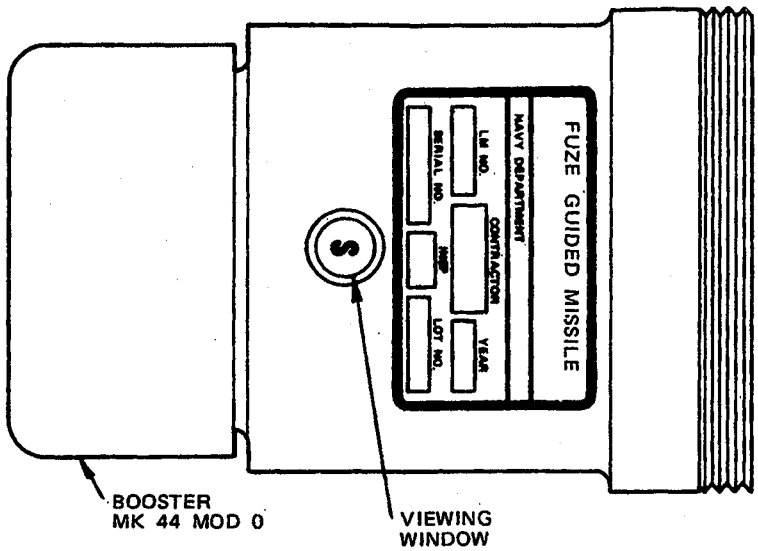

IDENTIFICATION

AGENCY: NWC, Code 3351

CONTACT: H. Berry
AV 245-7332

STATUS: Obsolete

USER: Navy

ASSY DWG: 2186355

PARTS LIST: LM 2186355

SPEC:

NSN:

PRIOR NOMENCLATURE:

REPLACES:

GENERAL

MUNITION: Shrike Guided Missile

USE: HE

LOCATION: Base of Warhead

BALLISTIC LEVELS:

ROTATION: Not applicable

SETBACK:

VELOCITY:

CREEP:

SERIES: N CHAPTER: 6
DESIGNATION: MK 330 Mod 1
GM Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Launch latch initiated by missile power

SECOND SAFETY:

Acceleration

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

Visual Indicator

FUNCTIONING DATA

MODE(S): Proximity, Delay

TYPE: Electric

CHARACTERISTICS:

Instantaneous

TARGET: Ground

SENSITIVITY:

100-200 g fuze triggering device

PHYSICAL DATA

WEIGHT: 3.6 lb (1633 gm)

TOTAL LENGTH: 4.90 in (12.45 cm)

CROSS SECTION:

INTRUSION: 4.2 in (10.67 cm)

THREAD SIZE: 3.5-12UN-2A

OTHER:

POWER SUPPLY:

28 VDC from missile power

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line expl train

PRIMER:

DETONATORS: Mk 71 Mod 0 (4)

LEAD: Mk 12 Mod 1 (2),
Mk 13 Mod 1 (2)

BOOSTER: Mk 44 Mod 1 (2)

OTHER:

REMARKS

*Commit-to-arm 850-1,000 ft, separation, arming from 4,600-5,800 ft.
**Missile Proximity Fuze initiates 2 detonators. Internal Fuze Triggering Device initiates 2 more detonators. One detonator in each pair can propagate expl train. Fuze cannot be used with Mk 53-3 or Mk 78-0 rocket motor.

CHAPTER: 6 SERIES: N
DESIGNATION: MK 330 Mod 1
GM Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

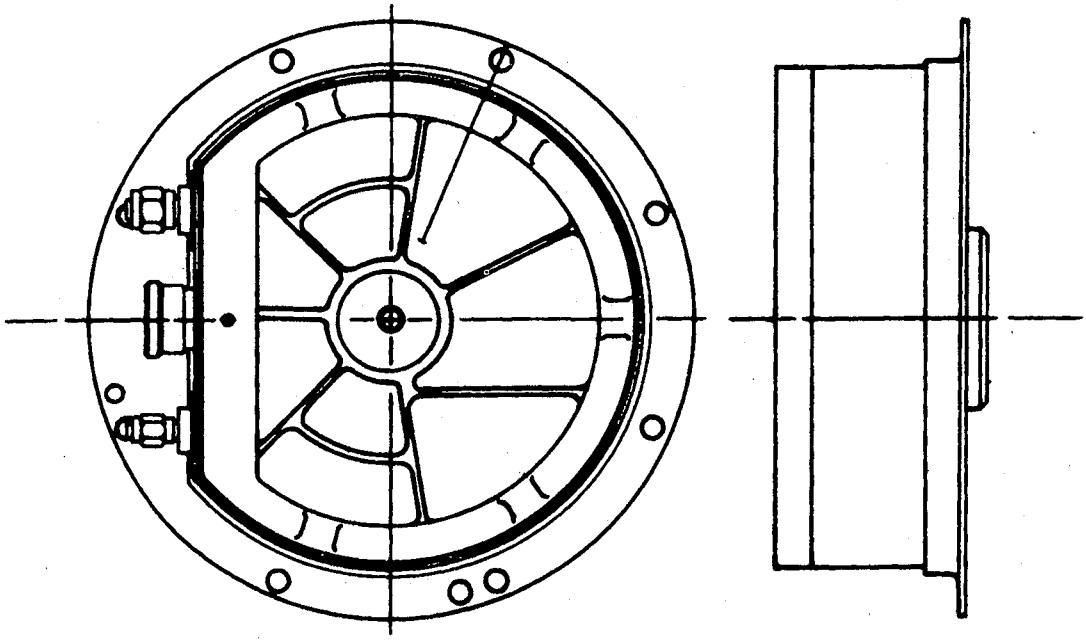

IDENTIFICATION

AGENCY: NWC, Code 3351

CONTACT: H. Berry
AV 245-7332

STATUS: Obsolete

USER: Navy

ASSY DWG:

PARTS LIST: DL 67A87F101

SPEC: AS 1636

NSN:

PRIOR NOMENCLATURE:

REPLACES:

GENERAL

MUNITION: Condor Guided Missile

USE: HE

LOCATION: Base of Warhead

BALLISTIC LEVELS:

ROTATION:

SETBACK:

VELOCITY:

CREEP:

SERIES: N CHAPTER: 6
DESIGNATION: MK 383 Mod 0
GM Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

Tear strip activated by launch lanyard

SECOND SAFETY:

Solenoid activiated by electrical power

OTHER SAFETY:

Differential air pressure derived from pressure probe

DELAY:

SAFE/ARM CONDITION:

Visual Indicator

FUNCTIONING DATA

MODE(S): Proximity, Impact

TYPE: Electric

CHARACTERISTICS:

Instantaneous and Delay

TARGET: Surface

SENSITIVITY:

100-200 g Fuze Trigger

PHYSICAL DATA

WEIGHT: 7.0 lb (3175 gm)

TOTAL LENGTH: 3.1 in (7.87 cm)

CROSS SECTION:

INTRUSION:

THREAD SIZE:

OTHER:

POWER SUPPLY:

28 VDC from missile

EXPLOSIVE TRAIN

S&A DEVICE: Out-of-line expl train

PRIMER:

DETONATORS: Mk 71 Mod 0 (2), Mk 85 Mod 0 (2)

LEAD: Mk 19 Mod 0 (2)

BOOSTER: BBU-14/B

OTHER:

REMARKS

Pressure Probe Mk 2 Mod 0 is part of the system. Fuze Triggering Device Mk 4 Mod 0 initiates explosive train. Delay or instantaneous selection made prior to launch of weapon. The Mk 11 Mod 0 FTD provides instantaneous override of delay if warhead starts to deform excessively.

CHAPTER: 6 SERIES: N
DESIGNATION: MK 383 Mod 0
GM Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M800, FUZE, BD

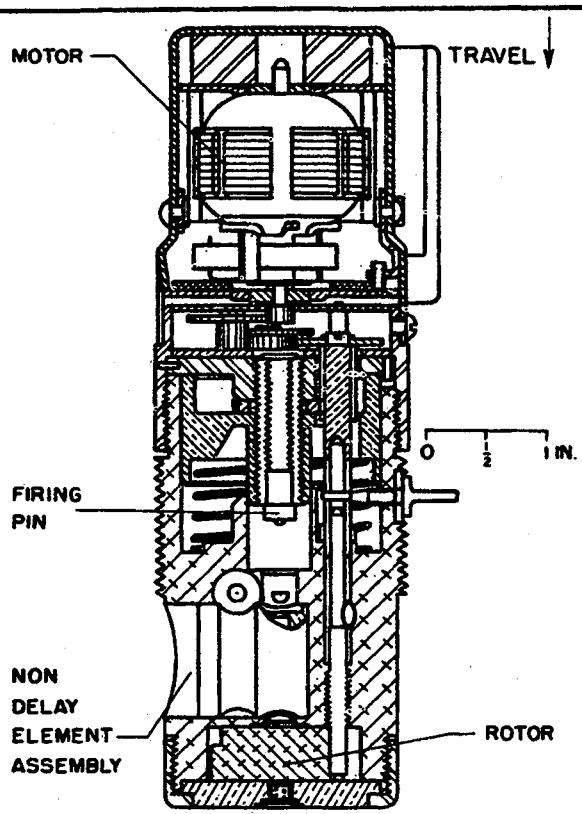

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M R. McKissick
Status	AV 880-5484 Terminated
Ass'y Dwg. No.	P-82915, P-86486
Parts List	
Specification	
Previous Number	T1400E5

GENERAL

Carriers	Rocket
Cal. — Size	Honest John Rocket Corporal & Matador Missiles
Location	Base
Use	Blast
MIL-STD's	331, tests 101, 103, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M800, FUZE, BD

ARMING DATA

Method	Electric time
Delay	5 sec
Rotation (rps)	No
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.5 lb
Total Length (in.)	6.6
Body Diam. (in.)	
Intrusion	
Thread Size	2-12UNS-1A

FUNCTIONING DATA

Action	BD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Surface to surface antipersonnel, anti-ground equip.
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T53
Booster	Adapter T41
Lead	Tetryl (MOD)
Delay element	T2E1

REMARKS

Primary fuze for Matador, used with S & A T104 for troop training purposes in Corporal

Has restraining plate to prevent arming due to vibration

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM802, FUZE, GUIDED MISSILE

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880- 5581
Status	Terminated
Ass'y Dwg. No.	E 14679
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Guided missile
Cal. — Size	2 in.
Location	Submissile
Use	GP
MIL-STD's	331, Tests 103, 104
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM802, FUZE, GUIDED MISSILE

ARMING DATA

Method	Extension boom, fin
Delay	0.8 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

primary arming is by missile acceleration

PHYSICAL DATA

Weight	
Total Length (in.)	10
Body Diam. (in.)	
Intrusion	
Thread Size	1.812-16N-2A

FUNCTIONING DATA

Action	BD, SD
Type	Electro mechanical
Delay	500 µsec
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	
Lead	Tetryl

REMARKS

SERIES: A CHAPTER: 6
DESIGNATION: XM802
GM BD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM804E1, FUZE

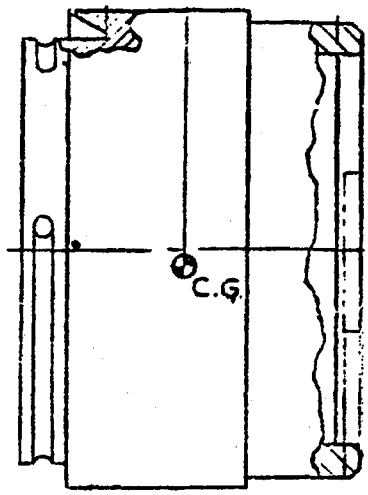

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-M B. A. Kadish AV 880-6473
Status	Terminated
Ass'y Dwg. No.	XP 113279
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Guided missile
Cal. — Size	Redeye
Location	
Use	HE
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	32
Velocity (fps)	

KEY FEATURES

1. Penetration impulse generator
2. Mech. impact switch delay

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM804E1, FUZE

ARMING DATA

Method	Setback, time
Delay	1.5-1.9 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 23 / Arm 33	
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	.075 lb
Total Length (in.)	1.907
Body Diam. (in.)	2.75
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Impact & penetration impulse
Type	
Delay	.006 sec
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	Aluminum
Thickness (in.)	.250
Max Obliq. (°)	80
Velocity (fps)	500-2000
Carrier	Shoulder

POWER SUPPLY

Missile Battery

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T22
Booster	RDX
Lead	RDX

REMARKS

Replaced by Fuze XM814

SERIES: A CHAPTER: 6
DESIGNATION: XM804E1
GM Impact Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M805 Safety-Arming Device
may be found in MIL-HDBK-145B.

Supersedes pages 6-63 and 6-64 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M812 GM Impact Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 6-65 and 6-66 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

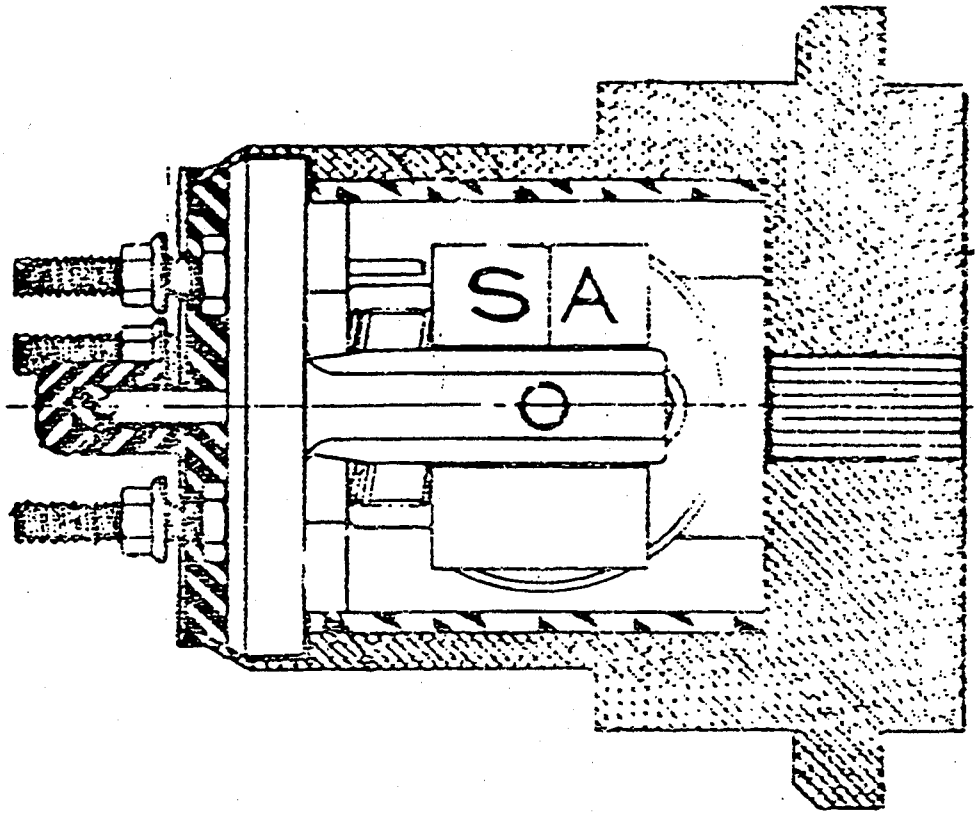

- OVERALL SIZE -	- INTRUSION -	WT: 0.38 lb (172.4 g)
LG: 2 in (50.8 mm)	DP:	THD:
XSECT: 1.75 in (44.5 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-C
- CONTACT:
- PHONE: DSN 880-
- STATUS: Terminated
- USER: Army
- ASSY DWG: 9 206 960
- PARTS LIST: PL 9 206 960
- SPEC: MIL-S-18702
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Surface-surface missile
  MGM-51C Shillelagh Missile

- AMMUNITION:
  - HEAT

LOCATION: Warhead boattail
BALLISTIC LEVELS:
- ROTATION:
- SETBACK: 280 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 6-67 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: M78

LEAD: RDX

BOOSTER:

OTHER:

FUNCTIONING DATA
MODES: PI
TYPE: Electrical
CHARACTERISTICS:
Impact crush switch

TARGET: Tanks
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

BA-621 30 Vdc Thermal Battery

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
The M813 was an improved but smaller version of the M805 Fuze. It used the 2.75 inch rocket fuze escapement (M423) but with extra latches, and so forth. It was never produced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M814 GM Impact Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 6-69 and 6-70 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM815, FUZE, GUIDED MISSILE

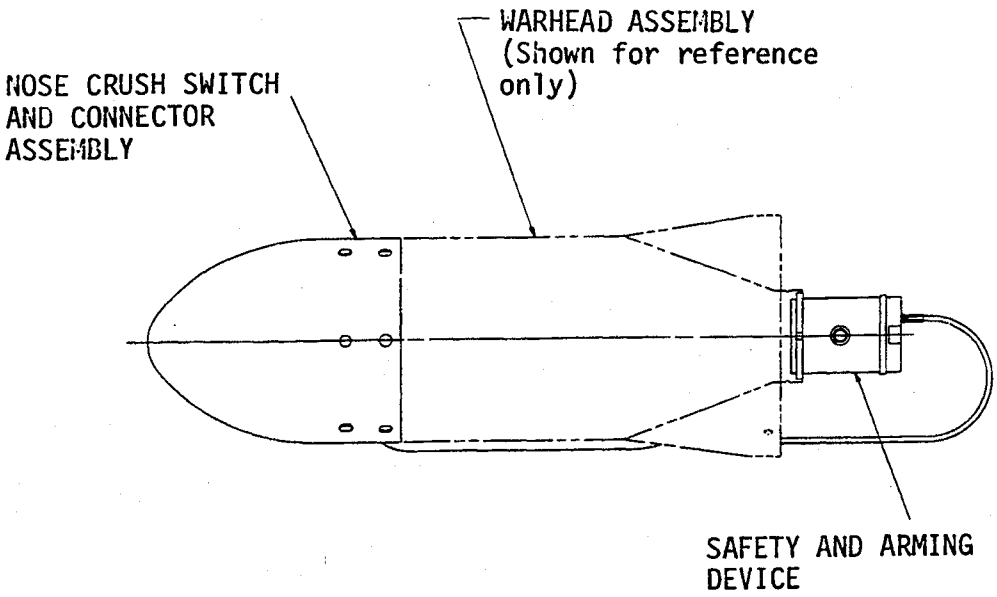

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M McKissick, AV 880-5484
Status	
Ass'y Dwg. No.	9220960
Parts List	9220960
Specification	
Previous Number	

GENERAL

Carriers	Dragon missile (shoulder fired)
Cal. — Size	5 in.
Location	Nose
Use	Armor piercing
MIL-STD's	
Max Values	
Rotat. (rps)	8
Setback (g)	550
Velocity (fps)	350

KEY FEATURES

XM815 designation for fuze has been cancelled. The M118 S&A is called out separately. The nose crush switch is included as a part of the weapon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM815, FUZE, GUIDED MISSILE

ARMING DATA

Method	Setback & explosive piston actuator
Delay	0.5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 100 / Arm 200	
Arming Wire	No
External Indicat.	Window with red or green flag

PHYSICAL DATA

Weight	0.2 lb
Total Length (in.)	2.332
Body Diam. (in.)	1.57
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Impact, graze
Type	Electro-mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Missile power supply

EXPLOSIVE TRAIN (U)

S&A Device	XM118
Primer	98.5% RDX, 1.5% cal. stearate, 90 mg
Detonator	T20E1
Booster	

REMARKS

The fuze consists of the nose crush switch assembly Dwg. 9220940 and S&A Device XM118, Dwg. 9220960, spec. MIL-S-14992.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

LAST UPDATE: 12/19/92

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY:
- CONTACT:
- PHONE:
- STATUS:
- USER:
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:
- NATIONAL STOCK NO:
- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:
- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON:
- AMMUNITION:

LOCATION:
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:
- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

FUNCTIONING DATA
MODES:
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
The M819 Fuze is the same precision electronic timing device as the M811, except there are no explosives. Only one switch closure is used which is for the missile guidance section and effects sustainer engine cutoff at any one of 10 fixed times allowing the missile to impact the ground at the predetermined time.

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1402E5, FUZE, PD

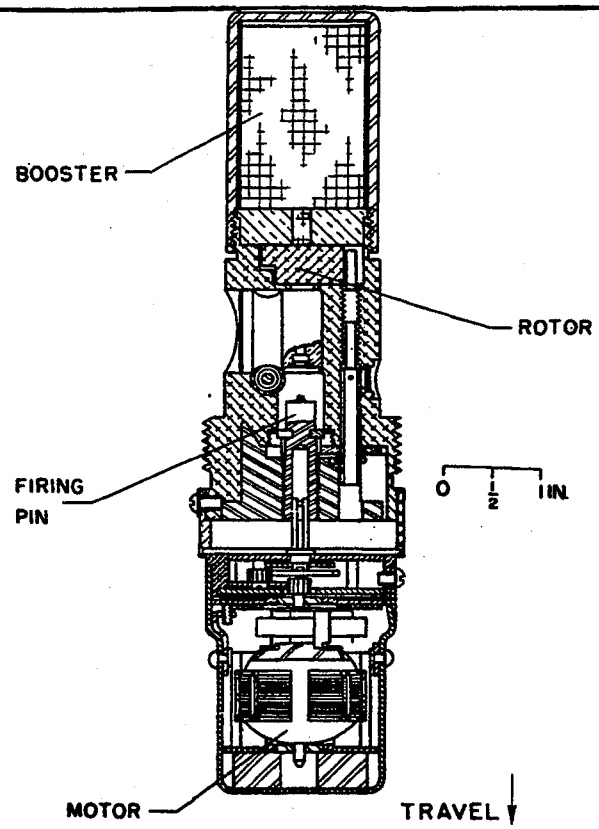

IDENTIFICATION

Agency ARRADCOM DRDAR-LCN-M
R. Mckissick
AV 880-5484

Status Terminated

Ass'y Dwg. No. P-86892

Parts List

Specification

Previous Number

GENERAL

Carriers Guided missile

Cal. — Size Matador

Location Nose & Warhead

Use Blast

MIL-STD's 331, tests 101, 103, 104

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1402E5, FUZE, PD

ARMING DATA

Method	Electric time
Delay	5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2.5 lb
Total Length (in.)	8.8
Body Diam. (in.)	
Intrusion	
Thread Size	2-12UNS-1A

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Surface to surface antipersonnel, anti-ground equip.
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M35
Booster	Tetryl
Lead	Tetryl

None delay element T2E1 (MOD)

REMARKS

The T2E1 Non Delay Element (MOD) has a M42 primer and a M6 relay, in that order

Has restraining plate to prevent arming due to vibration

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1403E2, FUZE, GM

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi AV 290-2400
Status	Terminated
Ass'y Dwg. No.	D1100
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Guided missile
Cal. — Size	3 in. (Falcon)
Location	Center
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1403E2, FUZE, GM

ARMING DATA

Method	Setback, mech. time
Delay	2.5 sec
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	18 / 20
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1.0 lb
Total Length (in.)	2.750
Body Diam. (in.)	
Intrusion	2.625 in.
Thread Size	

FUNCTIONING DATA

Action	SD
Type	Mech. - magnetic
Delay	22 sec
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	Aluminum
Thickness (in.)	0.031
Max Obliq. (°)	90
Velocity (fps)	
Carrier	GAR-1

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M52
Booster	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1404, FUZE, WARHEAD, MT

IDENTIFICATION

Agency	ARRADCOM, ~~DRDAR~~-LCN-M L. Horowitz AV 880-5581
Status	Terminated
Ass'y Dwg. No.	1004 & 1004B (Raymond)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Guided missile
Cal. — Size	
Location	Internal
Use	Opens chem. cluster
MIL-STD's	331, Tests 101, 103-105
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1404, FUZE, WARHEAD, MT

ARMING DATA

Method	
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	12 x 7 x 9 in.
Body Diam. (in.)	
Intrusion	
Thread Size	No thread

FUNCTIONING DATA

Action	Time
Type	Electrical
Delay	
Time Type	Mech. Junghans esc.
Time Setting (sec)	5 - 90 X 1/2
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	BS-27A
Booster	

REMARKS

Electrical signal from missile separates warhead in 5 - 90 seconds and opens cluster 4 1/2 seconds after separation.

SERIES: A CHAPTER: 6
DESIGNATION: T1404
GM MT Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
AGENCY: ARDEC, SMCAR-
CONTACT:
PHONE: DSN 880-
STATUS: Terminated
USER: Army
ASSY DWG: D-1100 (T1403)
PARTS LIST:
SPEC:
PUB:

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO:
SIMILAR TO:

REPLACES: T1403, FMU-5/B
REPLACED BY:

GENERAL
WEAPON: Air-air missile

AMMUNITION:
AIM-4E Falcon Guided Missile

LOCATION:
BALLISTIC LEVELS:
ROTATION:
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

FUNCTIONING DATA
MODES:
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1409, FUZE

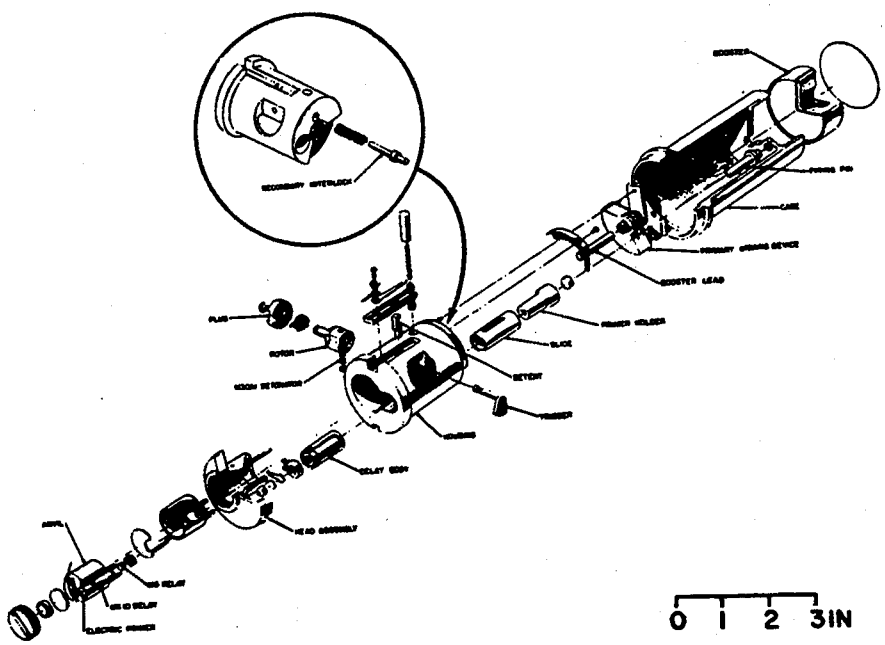

IDENTIFICATION

Agency	ARRADCOM DRDAR-LCN-M R. Mckissick AV 880-5484
Status	Terminated
Ass'y Dwg. No.	26B922
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Guided missile
Cal. — Size	Cluster type warhead
Location	
Use	HE
MIL-STD's	331, tests 101-105, 107
Max Values	
Rotat. (rps)	
Setback (g)	200,000
Velocity (fps)	80-400

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1409, FUZE

ARMING DATA

Method	Setback
Delay	2-6 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.4 lb
Total Length (in.)	2.80
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Omni directional impact
Type	Electrical
Delay	250-600 micro sec
Time Type	
Time Setting (sec)	
Target	Aircraft
Sensitivity	
Material	24ST Aluminum
Thickness (in.)	0.05
Max Obliq. (°)	
Velocity (fps)	
Carrier	GM

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	T112 (modified T21E1)
Detonator	M30A1
Booster	RDX

REMARKS

Two stage arming commits missile on takeoff 11 to 26 g's

Completes arming on submissile ejection with velocity change of 80 to 400 fps

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1410, FUZE, WARHEAD

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M R. Mckissick AV 880-5484
Status	Terminated
Ass'y Dwg. No.	KR 53168, 43510 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Guided missile
Cal. — Size	"Dart" (7.0 in. diam.)
Location	Base
Use	HEAT
MIL-STD's	331, Tests 101-107, 201
Max Values	
Rotat. (rps)	
Setback (g)	8
Velocity (fps)	350

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1410, FUZE, WARHEAD

ARMING DATA

Method	Setback; command sig.
Delay	Command
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm 4	Arm 5
Arming Wire	No
External Indicat.	Yes

Arming Prerequisite
1. Battery power (28v)
2. Acceleration (5 to 7G for 1.4 sec)
3. Command sign. (7ma for 40 μsec)

PHYSICAL DATA

Weight	1.25 lb approx.
Total Length (in.)	2.25 approx.
Body Diam. (in.)	
Intrusion	0.370 in.
Thread Size	

FUNCTIONING DATA

Action	PI, BD, SQ, graze
Type	Electrical
Delay	
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	Armor
Thickness (in.)	6
Max Obliq. (°)	64
Velocity (fps)	350
Carrier	Dart

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T75
Booster	0.750 D x 0.347 L

REMARKS

This fuze also consists of a nose switch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1411, FUZE, WARHEAD

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M L. Horowitz AV 880- 5581
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Guided missile
Cal. — Size	
Location	
Use	HE or GP
MIL-STD's	331, Tests 101-105, 107, 115 MIL-E-527A,
Max Values	Para. 4-7-1
Rotat. (rps)	
Setback (g)	
Velocity (fps)	1000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1411, FUZE, WARHEAD

ARMING DATA

Method	Electrical train
Delay	75 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	7 lb
Total Length (in.)	6.0
Body Diam. (in.)	
Intrusion	6.0 in.
Thread Size	

FUNCTIONING DATA

Action	PD, SQ
Type	Electromechanical
Delay	0.001 sec
Time Type	Electrical
Time Setting (sec)	1200
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M52
Booster	Tetryl

REMARKS

The T1411 fuzing system consists of two fuzes, each similar to Fuze T905 plus missile circuitry necessary to charge and initiate the two fuzes.

Arming and functioning circuits charged upon missile release.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1412, FUZE, WARHEAD

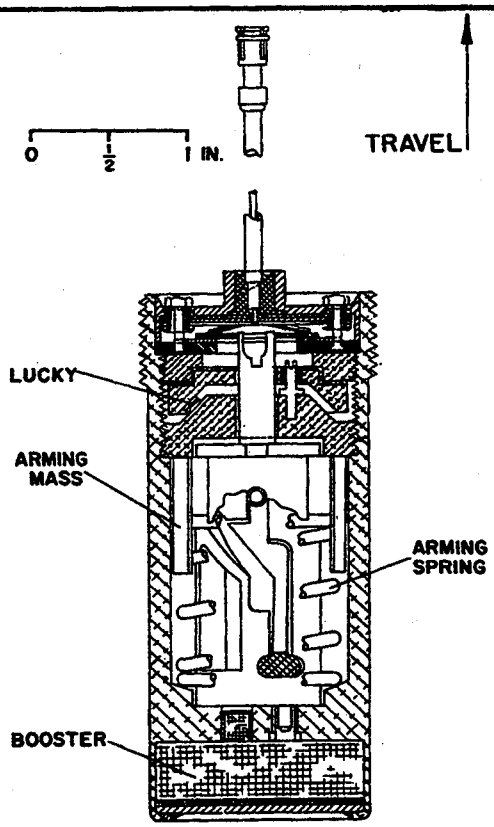

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCN-M
	L. Horowitz
	AV 880- 5581
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Guided missile
Cal. — Size	
Location	Nose
Use	Cluster
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1412, FUZE, WARHEAD

ARMING DATA

Method	Setback, electrical train
Delay	10-20 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	3.906
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Omni-directional impact
Type	Electric
Delay	50 - 250 usec
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	24ST aluminum
Thickness (in.)	0.05
Max Obliq. (°)	65
Velocity (fps)	
Carrier	GM

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T21E1
Booster	Tetryl

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MINIRAD, FUZE

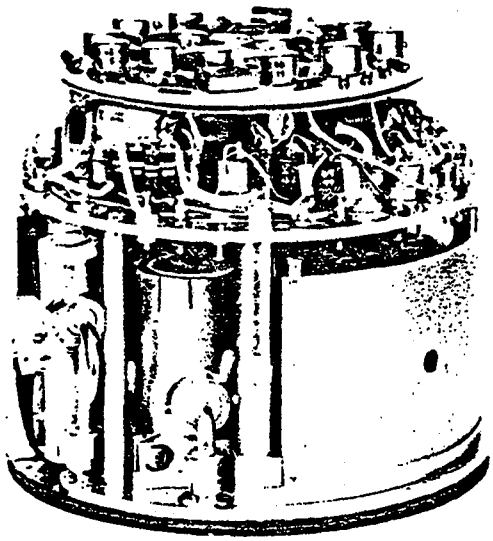

IDENTIFICATION (U)

Agency	ERADCOM, DELHD-DE-OE Dr. L. Tozzi AV 290-2400
Status	Terminated
Ass'y Dwg. No.	HDL 941-67
Parts List	
Specification	
Previous Number	

GENERAL (U)

Carriers	Sml. re-entry vehs.
Cal. — Size	Small, 2 lbs 60 in^3
Location	Foreward
Use	Re-entry vehicles
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	15,000

KEY FEATURES

Light weight, small volume, nuclear hardened.

SERIES: A CHAPTER: 6
DESIGNATION: MINIRAD
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MINIRAD, FUZE

ARMING DATA (U)

Method	Depend on application
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	As required

PHYSICAL DATA (U)

Weight	2.5 lb
Total Length (in.)	4
Body Diam. (in.)	4
Intrusion	4 in.
Thread Size	

FUNCTIONING DATA (U)

Action	Proximity
Type	Electrical
Delay	
Time Type	Part of S&A
Time Setting (sec)	
Target	Earth surface
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY (U)

Battery (thermal or liquid reserve)

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Highly sophisticated fuze.

Detailed information is available at a higher classification.

SERIES: A CHAPTER: 6
DESIGNATION: MINIRAD
Proximity Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CHAPTER 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

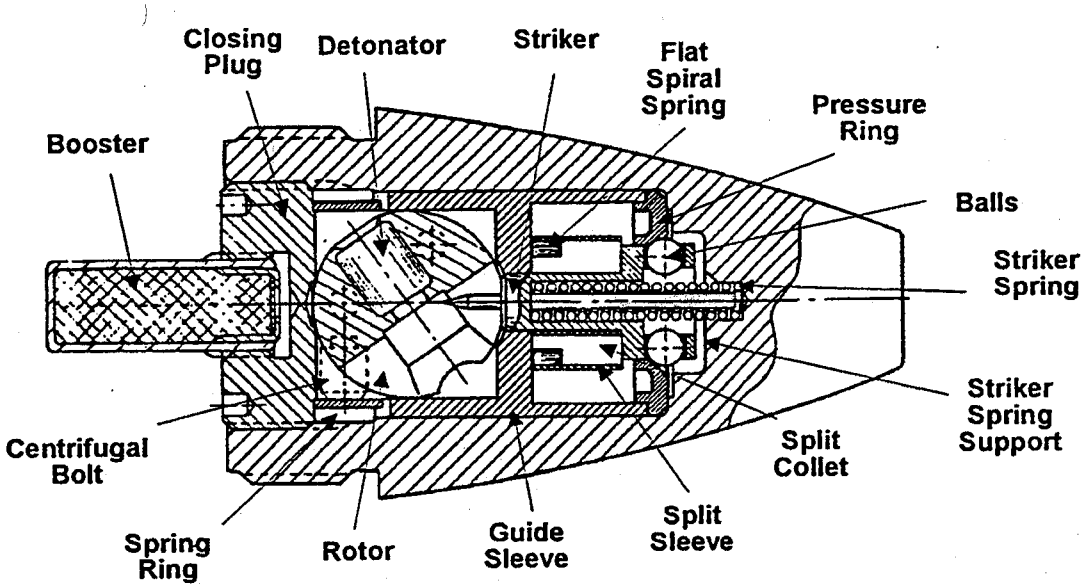

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY:
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Marine Corps
- ASSY DWG: 122-025-159 (Oerlikon)
- PARTS LIST: 0002-018 (Amron Div.)
- SPEC:
- PUB:

- NATIONAL STOCK NO:
  1305-00-255-6313, -757-4480 (round)
- DODIC: B112, B114 (round)
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 30-mm ADEN Gun for AV-8A/C Harrier Aircraft

- AMMUNITION:
  HEI, Mk 3Z, -1 Incendiary

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback

SECOND SAFETY:
Spin

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
42.6 ft (13 m)

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR:

LEAD: None

BOOSTER:

OTHER: None

FUNCTIONING DATA

MODES: PD
TYPE: Mechanical
CHARACTERISTICS:

TARGET:
SENSITIVITY:
Functions at impact angles down to 10 degees

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
On firing, setback holds the rotor safe until the projectile leaves the gun. After setback, spin causes the spring ring to open, allowing the centrifugal bolt to move sideways freeing the rotor. The rotor is aligned with the striker about 3 ft from the muzzle; however, the striker is still restrained. After setback the split sleeve opens into an annular recess in the fuze body, allowing the flat coiled spring to unwind until it no longer supports the split collet which opens and moves out against the wall of the recess. Five balls move outward due to spin and up the inclined face at the top of the pressure ring raising the striker and compressing the striker spring. On impact, shock imparted on the fuze body overcomes centrifugal force on the balls which slide down and free the striker which is forced into the detonator under the force of its compressed spring. There is a base detonating version of this fuze which operates similarly.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

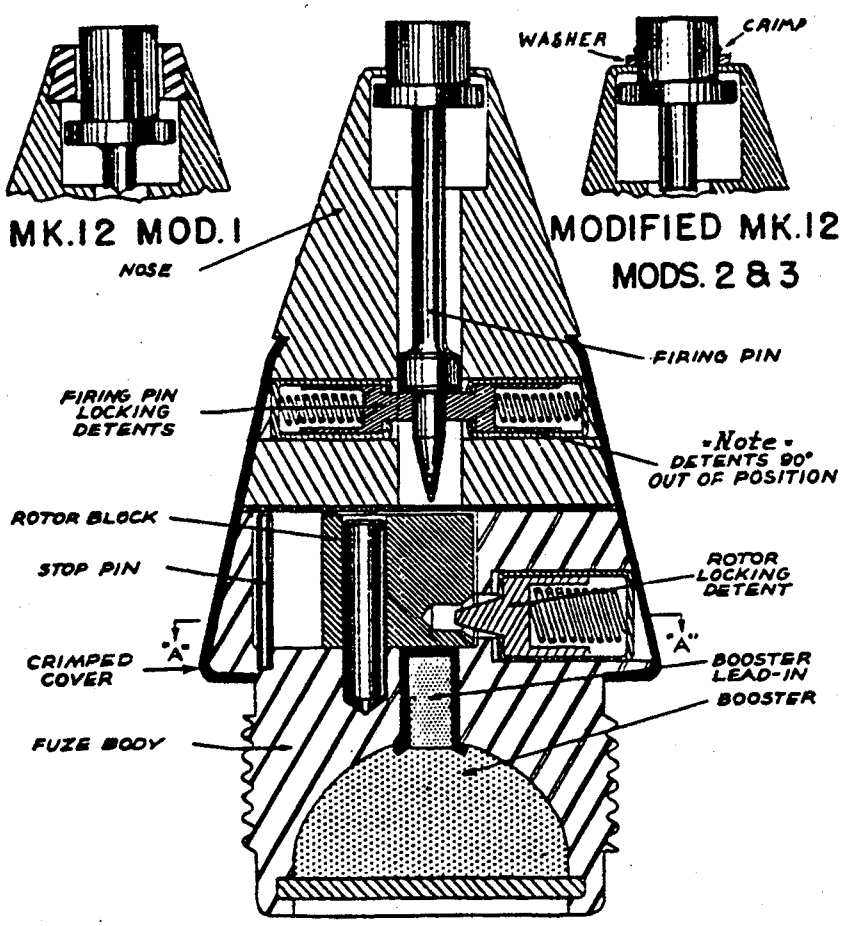

- OVERALL SIZE -	- INTRUSION -	WT: 0.188 lb (85.3 g)
LG: 2.125 in (54.0 mm)	DP: 0.505 in (12.8 mm)	THD: 0.875-20NS-3RH
XSECT: 1.08 in (27.4 mm)	DIA:	THD DP: 0.62 in (15.7 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 141 660
- PARTS LIST: LD 54 899
- SPEC: OS 510
- PUB: None

NATIONAL STOCK NO:
None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO:

- REPLACES:
- REPLACED BY: Mk 34

GENERAL
- WEAPON: 37 mm guns

AMMUNITION:
HE

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 980 rps
- SETBACK: 42,000 g
- VELOCITY: Unknown

- CREEP: Unknown
- FLIGHT TIME: Unknown

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 7-3 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 80 rps, no arm;
200 rps, all arm. Two detents for firing pin; one for rotor.

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Unknown

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Yes, composition unknown

LEAD: Tetryl

BOOSTER: Tetryl

OTHER: None

FUNCTIONING DATA

MODES: PD
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Ground
SENSITIVITY:
0.032 in (0.81 mm) aluminum

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
PD

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
In the unarmed position, the striker is held in place by a pair of detents and the detnoator rotor is held out of alignment with a separate detent. On firing, centrifugal force moves the detents outward against their springs, unlocking the firing pin and rotor. Centrifugal force turns the rotor to its armed position aligning the detonator with the firing pin and lead charge. On impact, the exposed firing pin is driven into the detonator which initiates the lead and booster. Mods differ in method of firing pin support. A washer and crimp in the firing pin were added to Mods 2 and 3 to decrease sensitivity. Mod 0 was never produced.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

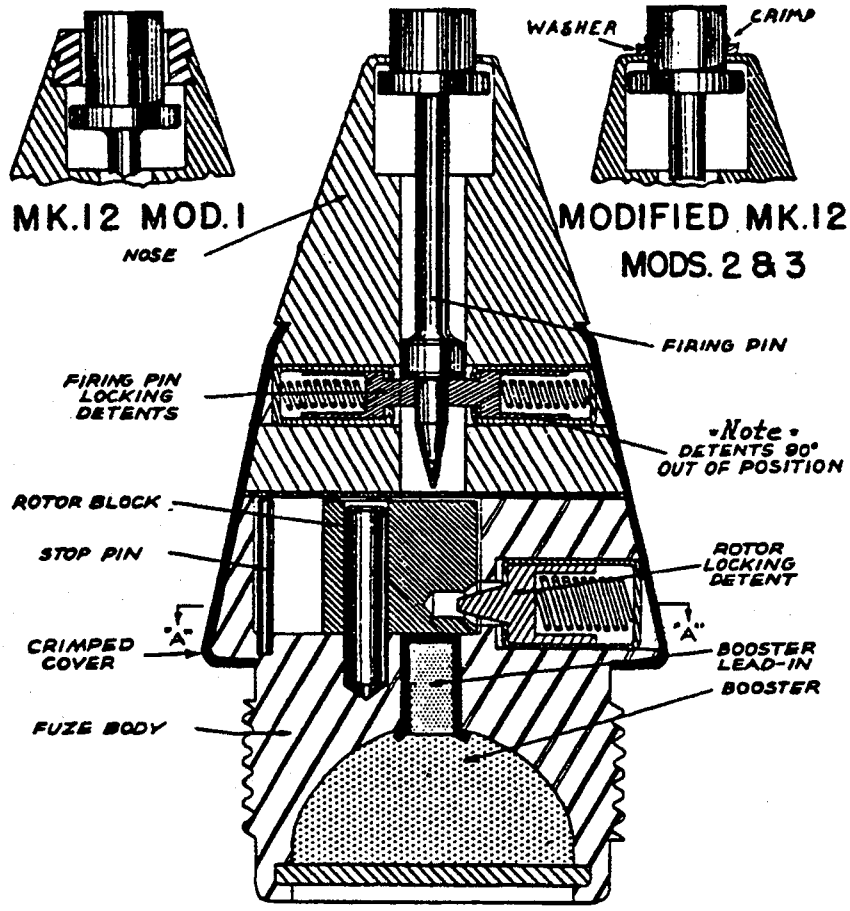

- OVERALL SIZE -	- INTRUSION -	
LG: 2.125 in (54.0 mm)	DP: 0.505 in (12.8 mm)	WT: 0.188 lb (85.3 g)
XSECT: 1.08 in (27.4 mm)	DIA:	THD: 0.875-20NS-3RH
		THD DP: 0.62 in (15.7 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 181 759
- PARTS LIST: LD 59 153
- SPEC: Unknown
- PUB: None

NATIONAL STOCK NO:
None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO:

- REPLACES:
- REPLACED BY: Mk 34

GENERAL
- WEAPON: 1.1-inch AA

AMMUNITION:
HE

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 980 rps
- SETBACK: 42,000 g
- VELOCITY: Unknown

- CREEP: Unknown
- FLIGHT TIME: Unknown

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 80 rps, no arm;
200 rps, all arm. Two detents for firing pin; one for rotor.

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Unknown

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Yes, composition unknown

LEAD: Tetryl

BOOSTER: Tetryl

OTHER: None

FUNCTIONING DATA

MODES: PD
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Ground
SENSITIVITY:
0.032 in (0.81 mm) aluminum

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
PD

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
In the unarmed position, the striker is held in place by a pair of detents and the detnoator rotor is held out of alignment with a separate detent. On firing, centrifugal force moves the detents outward against their springs, unlocking the firing pin and rotor. Centrifugal force turns the rotor to its armed position aligning the detonator with the firing pin and lead charge. On impact, the exposed firing pin is driven into the detonator which initiates the lead and booster. Mods differ in method of firing pin support. A washer and crimp in the firing pin were added to Mods 2 and 3 to decrease sensitivity.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

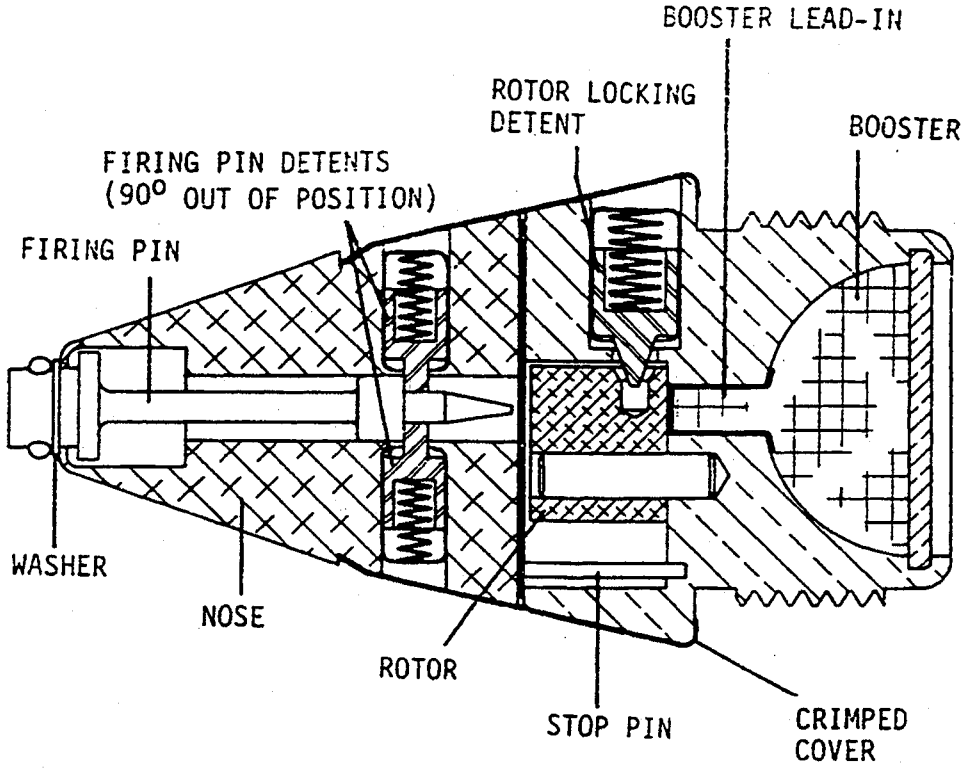

- OVERALL SIZE -	- INTRUSION -	
LG: 2.125 in (54.0 mm)	DP: 0.505 in (12.8 mm)	WT: 0.188 lb (85.3 g)
XSECT: 1.08 in (27.4 mm)	DIA:	THD: 0.875-20NS-3RH
		THD DP: 0.62 in (15.7 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 181 781
- PARTS LIST: LD 59 161
- SPEC: OS 1001
- PUB: None

NATIONAL STOCK NO:
None

- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO:

REPLACES:
REPLACED BY: Mk 34

GENERAL
- WEAPON: 1.1-inch AA

AMMUNITION:
HE

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 980 rps
- SETBACK: 42,000 g
- VELOCITY: Unknown

- CREEP: Unknown
- FLIGHT TIME: Unknown

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 80 rps, no arm;
200 rps, all arm. Two detents for firing pin; one for rotor.

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Unknown

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Yes, composition unknown

LEAD: Tetryl

BOOSTER: Tetryl

OTHER: None

FUNCTIONING DATA

MODES: PD
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Ground
SENSITIVITY:
0.032 in (0.81 mm) aluminum

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
PD

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
In the unarmed position, the striker is held in place by a pair of detents and the detnoator rotor is held out of alignment with a separate detent. On firing, centrifugal force moves the detents outward against their springs, unlocking the firing pin and rotor. Centrifugal force turns the rotor to its armed position aligning the detonator with the firing pin and lead charge. On impact, the exposed firing pin is driven into the detonator which initiates the lead and booster. Mods differ in method of firing pin support. A washer and crimp in the firing pin were added to Mods 2 and 3 to decrease sensitivity.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

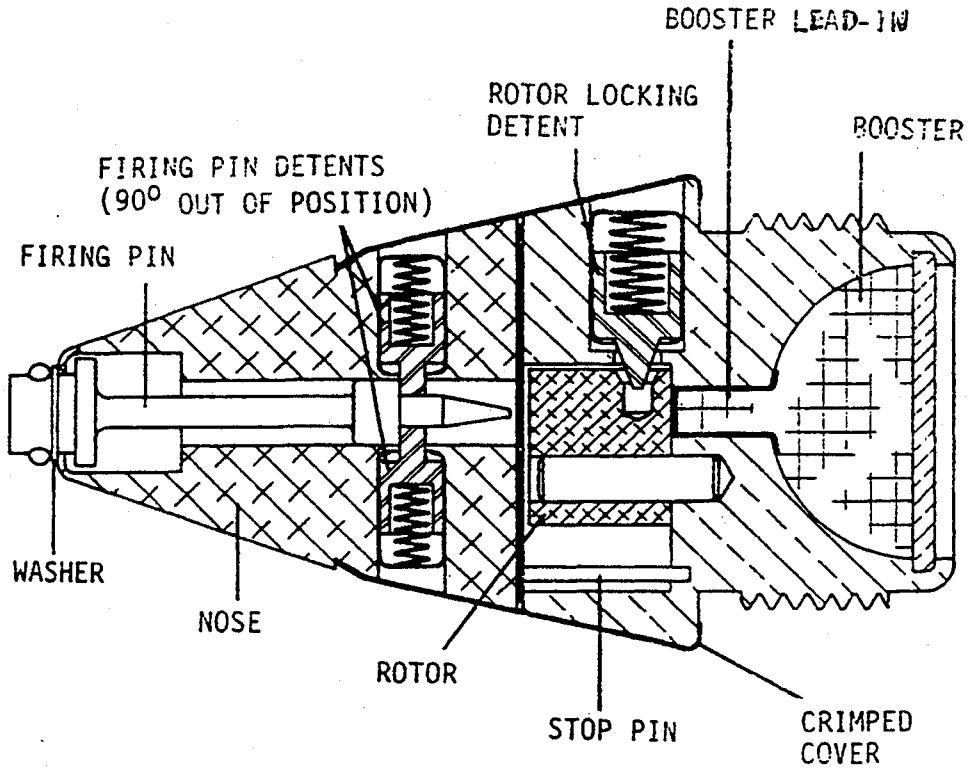

- OVERALL SIZE -	- INTRUSION -	
LG: 2.125 in (54.0 mm)	DP: 0.505 in (12.8 mm)	WT: 0.188 lb (85.3 g)
XSECT: 1.08 in (27.4 mm)	DIA:	THD: 0.875-20NS-3RH
		THD DP: 0.62 in (15.7 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: Unknown
- PARTS LIST: LD 70 490
- SPEC: Unknown
- PUB: None

NATIONAL STOCK NO:
None
DODIC: None
PRIOR MODEL NO: None
SIMILAR TO:

REPLACES:
REPLACED BY: Mk 34

GENERAL
WEAPON: 1.1-inch AA

AMMUNITION:
HE

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 980 rps
- SETBACK: 42,000 g
- VELOCITY: Unknown

CREEP: Unknown
FLIGHT TIME: Unknown
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: 80 rps, no arm;
200 rps, all arm. Two detents for firing pin; one for rotor.
SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Unknown

FUNCTIONING DATA
MODES: PD
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Ground
SENSITIVITY:
0.032 in (0.81 mm) aluminum

FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
PD

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Yes, composition unknown

LEAD: Tetryl

BOOSTER: Tetryl

OTHER: None

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
In the unarmed position, the striker is held in place by a pair of detents and the detnoator rotor is held out of alignment with a separate detent. On firing, centrifugal force moves the detents outward against their springs, unlocking the firing pin and rotor. Centrifugal force turns the rotor to its armed position aligning the detonator with the firing pin and lead charge. On impact, the exposed firing pin is driven into the detonator which initiates the lead and booster. Mods differ in method of firing pin support. A washer and crimp in the firing pin were added to Mods 2 and 3 to decrease sensitivity.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

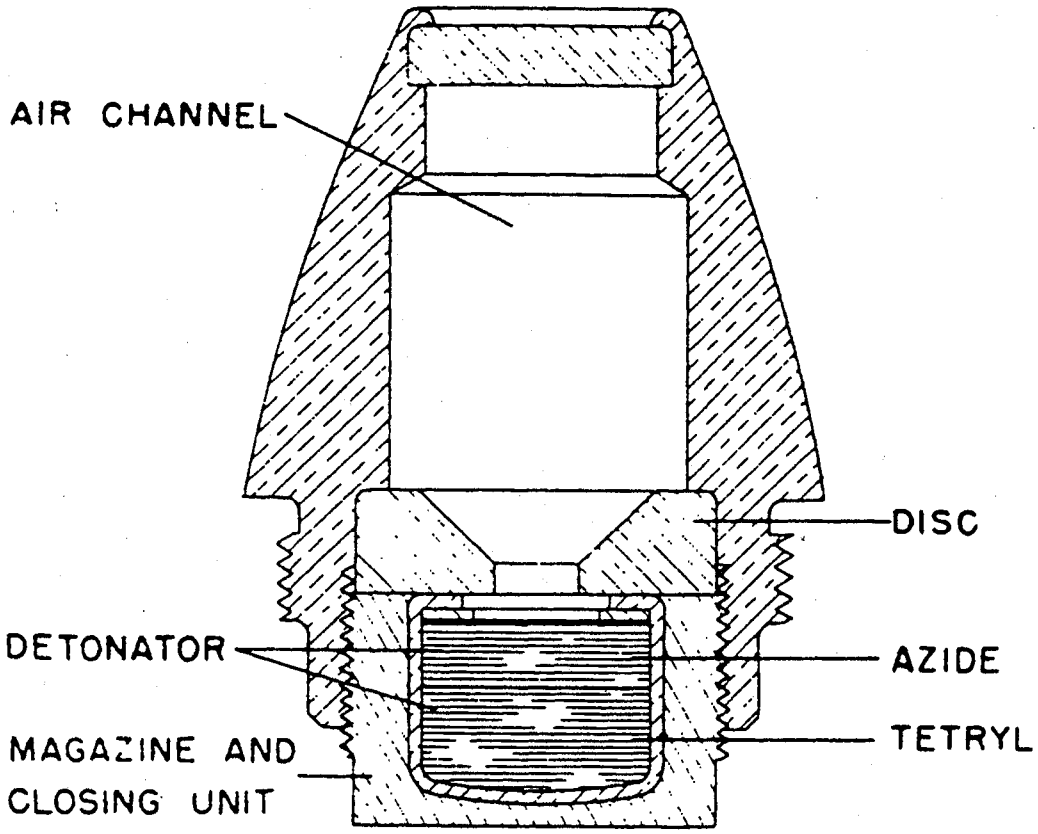

- OVERALL SIZE -	- INTRUSION -	WT: 0.054 lb (24.7 g)
LG: 1.016 in (25.8 mm)	DP: 0.406 in (10.3 mm)	THD: 0.635-36NS-2
XSECT: 0.8 in (20.3) mm	DIA: Unknown	THD DP: 0.18 in (4.6 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 294 296
- PARTS LIST: LD 90 707
- SPEC: OS 2347
- PUB: None

- NATIONAL STOCK NO:
  - None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Nothing

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 20 mm guns

- AMMUNITION:
  - HE, HEI, HET

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 1,150 rps
- SETBACK: 96,600 g
- VELOCITY: 1,350 fps (411 m/s)

- CREEP: Unknown
- FLIGHT TIME: Unknown

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
None, in-line explosvie train

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Mk 36 Mod 0

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: PD, SQ
TYPE: Mechanical
CHARACTERISTICS:
Instantaneous

TARGET: Ground
SENSITIVITY:
0.125 in (3.2 mm) aluminum at 1,350 ft/s (411 m/s); will not fire on water impact.
FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
PD

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
The fuze has an in-line explosive train and, therefore, is always armed. On impact the nose cap is crushed causing air in the channel to be compressed and forced through the hole in the concave disc. This generates sufficient pressure and heat to set off the detonator. Mods 1 and 2 are initiate by shock of impact and have a booster. Mods 0 and 2 are all brass; Mod 1 is zinc.

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

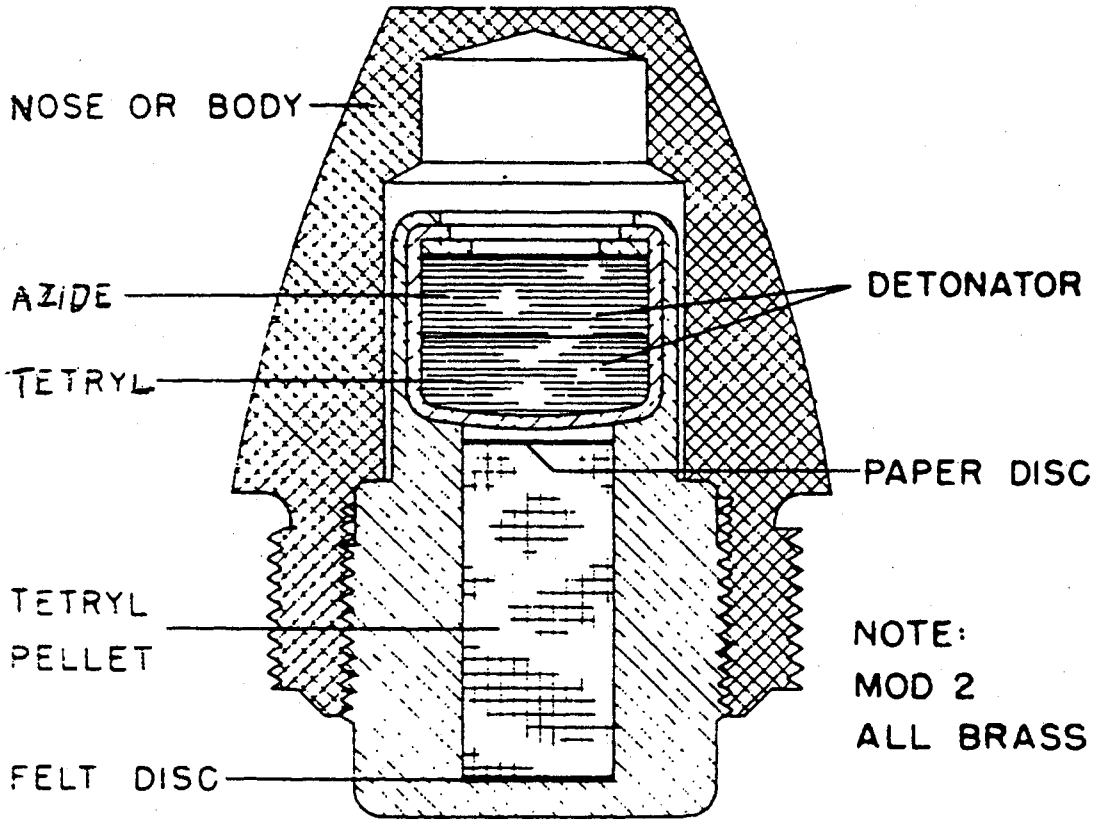

- OVERALL SIZE -	- INTRUSION -	WT: 0.051 lb (23.4 g)
LG: 1.016 in (25.8 mm)	DP: 0.406 in (10.3 mm)	THD: 0.635-36NS-2
XSECT: 0.8 in (20.3) mm	DIA: Unknown	THD DP: 0.26 in (6.5 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 329 208
- PARTS LIST: LD 101 343
- SPEC: MIL-F-18662
- PUB: None

- NATIONAL STOCK NO:
  - None
- DODIC: None
- PRIOR MODEL NO: None
- SIMILAR TO: Nothing

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 20 mm guns

- AMMUNITION:
  - HE, HEI, HET

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 1,150 rps
- SETBACK: 96,600 g
- VELOCITY: 1,350 fps (411 m/s)

- CREEP: Unknown
- FLIGHT TIME: Unknown

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
None, in-line explosvie train

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Mk 36 Mod 0

LEAD: None

BOOSTER: Tetryl

OTHER: None

FUNCTIONING DATA

MODES: PD, SQ
TYPE: Mechanical
CHARACTERISTICS:
Instantaneous

TARGET: Ground
SENSITIVITY:
0.125 in (3.2 mm) aluminum at 1,350 ft/s (411 m/s); will not fire on water impact.
FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
PD

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
The fuze has an in-line explosive train and, therefore, is always armed. Mods 1 and 2 are initiate by shock of impact. On Mod 0, the force of impact curshes the nose cap compressing air in the channel which is forced through the hole in the concave disc. This generates sufficient pressure and heat to set off the detonator. Mods 0 and 2 are all brass; Mod 1 is zinc.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

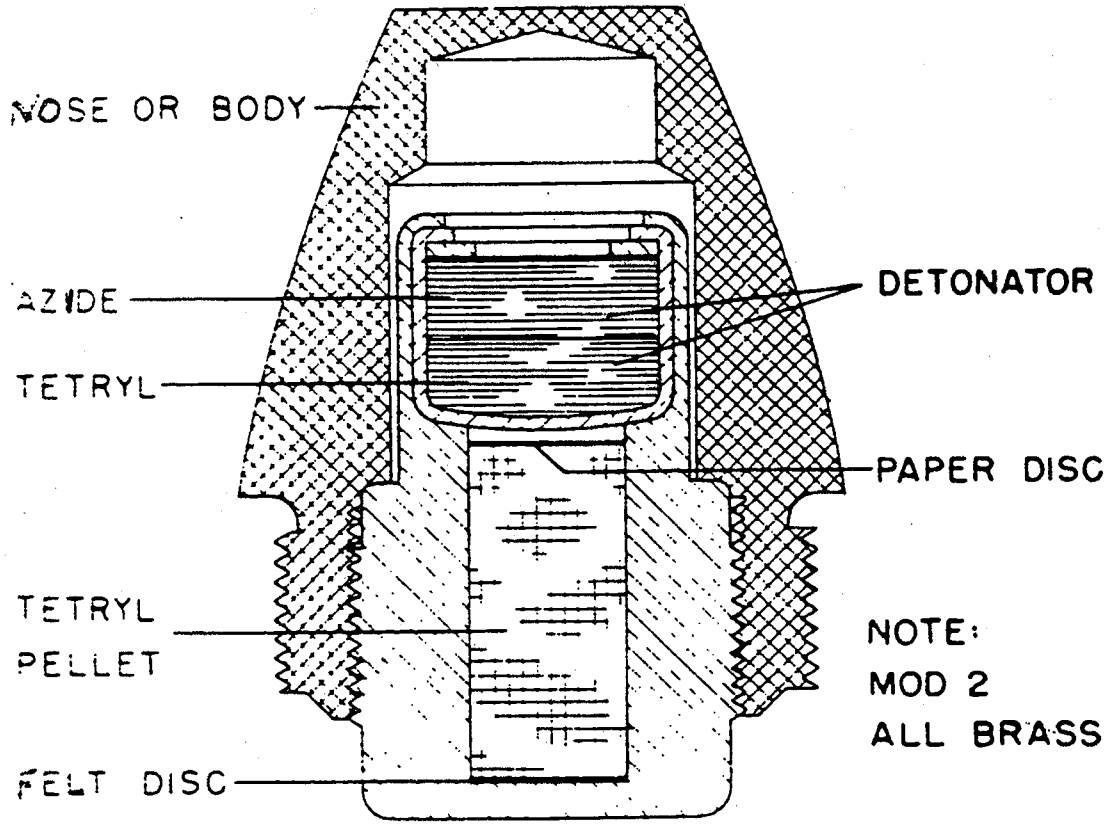

- OVERALL SIZE -	- INTRUSION -	WT: 0.063 lb (28.7 g)
LG: 1.016 in (25.8 mm)	DP: 0.406 in (10.3 mm)	THD: 0.635-36NS-2
XSECT: 0.8 in (20.3) mm	DIA: Unknown	THD DP: 0.26 in (6.5 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 329 208
- PARTS LIST: Unknown
- SPEC: OS 2347
- PUB: None

NATIONAL STOCK NO:
None
DODIC: None
PRIOR MODEL NO: None
SIMILAR TO: Nothing

REPLACES:
REPLACED BY:

GENERAL
- WEAPON: 20 mm guns

AMMUNITION:
HE, HEI, HET

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 1,150 rps
- SETBACK: 96,600 g
- VELOCITY: 1,350 fps (411 m/s)

CREEP: Unknown
FLIGHT TIME: Unknown
SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
None, in-line explosvie train

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Mk 36 Mod 0

LEAD: None

BOOSTER: Tetryl

OTHER: None

FUNCTIONING DATA

MODES: PD, SQ
TYPE: Mechanical
CHARACTERISTICS:
Instantaneous

TARGET: Ground
SENSITIVITY:
0.125 in (3.2 mm) aluminum at 1,350 ft/s (411 m/s); will not fire on water impact.
FUNCTION TEMP:
Unknown
MODE ON DELIVERY:
PD

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: None
US HCSDS: None
UN CL/DIV SCG: None
US DOT SHIP CL: None
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP: Unknown

REMARKS/DESCRIPTION:
The fuze has an in-line explosive train and, therefore, is always armed. Mods 1 and 2 are initiate by shock of impact. On Mod 0, the force of impact curshes the nose cap compressing air in the channel which is forced through the hole in the concave disc. This generates sufficient pressure and heat to set off the detonator. Mods 0 and 2 are all brass; Mod 1 is zinc.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

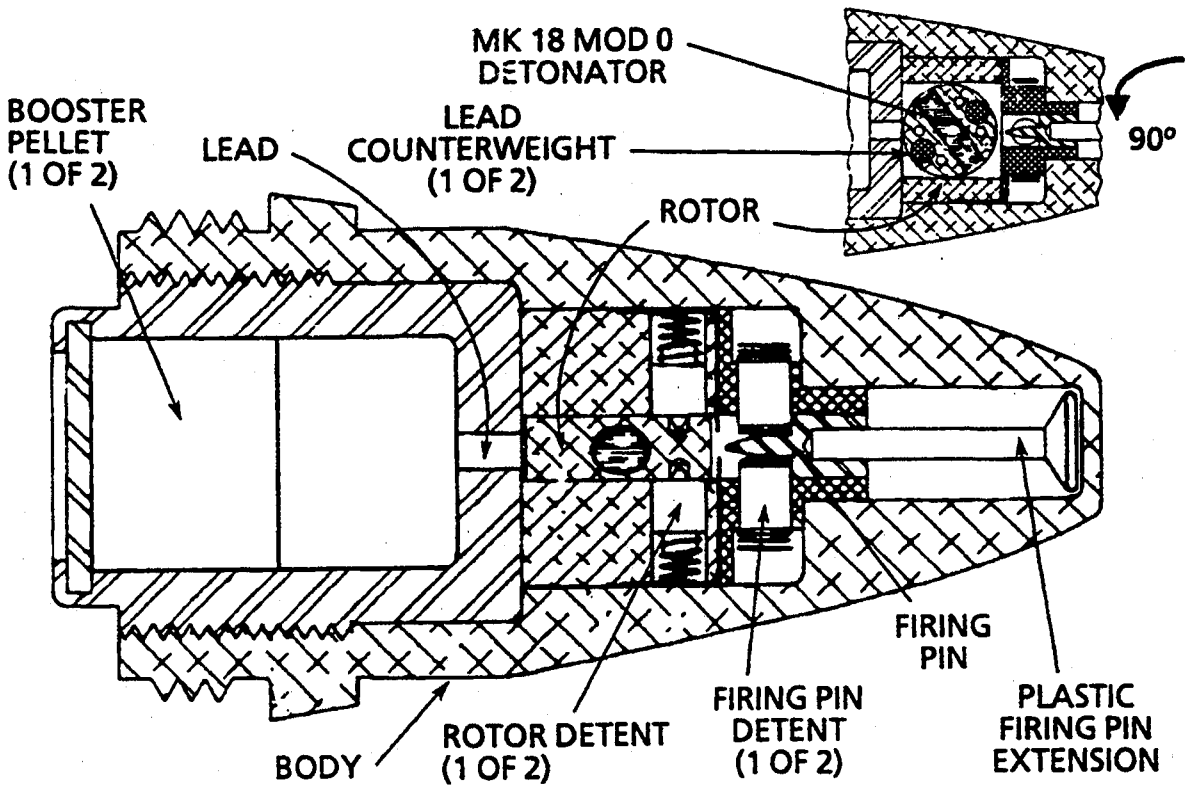

- OVERALL SIZE -	- INTRUSION -	WT: 0.23 lb (106 g)
LG: 2.45 in (62.2 mm)	DP: 0.55 in (13.8 mm)	THD: 1.18-14NS-2A
XSECT: 1.29 in (32.8 mm)	DIA: 1.18 in (30.0 mm)	THD DP: 0.545 in (13.8 mm)

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G402
- CONTACT: Bagnall, J
- PHONE: DSN 290-2791
- STATUS: Obsolete
- USER: Army, Navy, Air Force
- ASSY DWG: 300 423
- PARTS LIST:
- SPEC: MIL-F-18698
- PUB: SW030-AA-MMO-010, TM 43-0001-28

- NATIONAL STOCK NO:
  None
- DODIC: None
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 40 mm, Mk 2 & 3 all mods; Navy guns, Mk 2A1 AF

- AMMUNITION:
  HE, HEI, HEIT, HE-SD, HEI-SD, HEIT-SD

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 730 rps
- SETBACK: 43,200 g
- VELOCITY: 2870 ft/s (875 m/s)

- CREEP: NA
- FLIGHT TIME: 8 to 10 s

SAFETY STD: Doesn't meet MIL-STD-1316B
SETTERS: None

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: 115 rps no arm,
333 all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
0.6 to 0.9 m

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: None

DETONATOR: Mk 18 Mod 0 Stab

LEAD: 70 mg Tetryl

BOOSTER: 5.4 g Tetryl

OTHER: None

FUNCTIONING DATA

MODES: SQ
TYPE: Mechanical
CHARACTERISTICS:
SQ
SD in 8-10 s by shell
destroying tracer

TARGET: Aircraft
SENSITIVITY:
0.138 in (3.5 mm) chipboard,
2870 ft/s (875 m/s), 40 mm

FUNCTION TEMP:
-29 to +54 deg C
MODE ON DELIVERY:
SQ

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0409
US HCSDS:
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: A
NET EXPL WT: 5.601 g
NET PROP WT: None
STORAGE TEMP: -62 deg C 3 days max
+71 deg C 4 hr/day max

REMARKS/DESCRIPTION:

Fuze safety is maintained by pairs of detents which restrict the firing pin and rotor. Centrifugal force moves the firing pin and rotor detents outward. Lead counterweights in the rotor turn it to the armed position where the detonator is aligned with the firing pin and booster. The rotor is retained in this position of equilibrium by centrifugal force. On impact, the plastic hammer and firing pin are driven aft into the detonator causing it to fire, thereby initiating the lead and booster. Mod 0 is obsolete; its cylindrically shaped firing pin detents move outward as soon as the round is fired arming the fuze while it is still in the bore.

Source: https://assist.dla.mil Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 34 MOD 0, 1, FUZE, PD

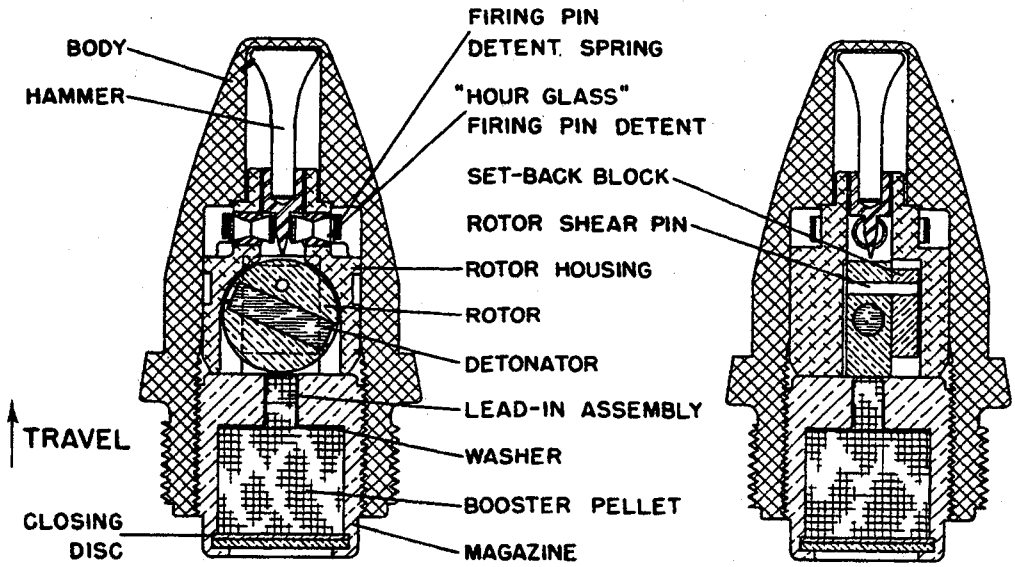

IDENTIFICATION

Agency	NSWC, Code G44 A. Munach AV 290-2795
Status	Obsolete
Ass'y Dwg. No.	GA 375643
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	1!!1
Location	Nose
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	980
Setback (g)	42,000
Velocity (fps)	2700

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 34 MOD 0, 1, FUZE, PD

ARMING DATA

Method	Spin, Setback
Delay	
Rotation (rps)	
Non-arm	250 Arm 434
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	2
Body Diam. (in.)	1.0
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	Binders board
Thickness (in.)	0.187
Max Obliq. (°)	
Velocity (fps)	2700
Carrier	1"1

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 19 MOD 0
Booster	Tetryl

REMARKS

MK 34 superseded MK 12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M38A1, FUZE, BD

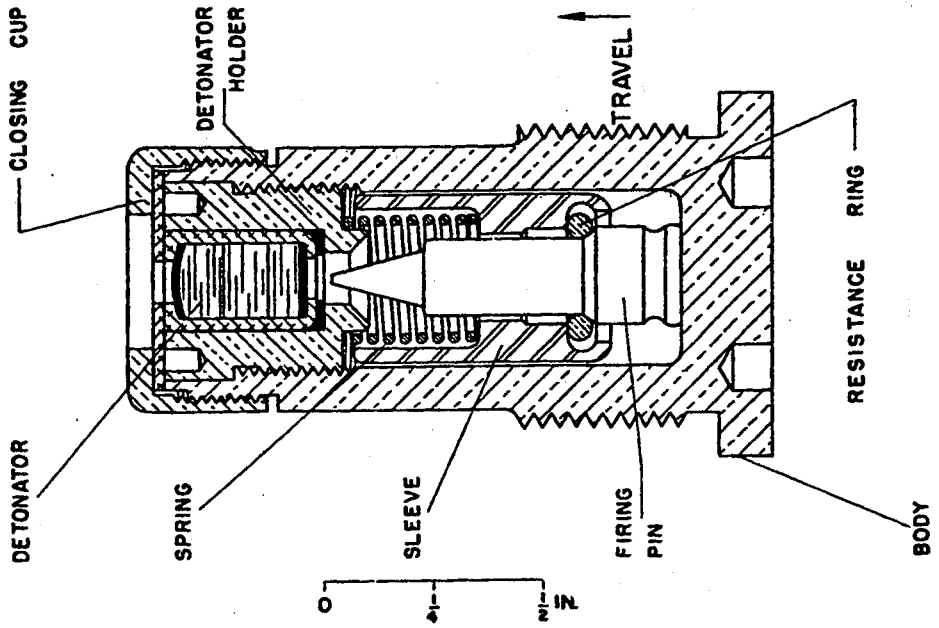

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti-AV 880-6984
Status	Obsolete
Ass'y Dwg. No.	73-1-133
Parts List	
Specification	
Previous Number	T6

GENERAL

Carriers	Projectile
Cal. — Size	37 mm
Location	Base
Use	GP
MIL-STD's	331, Tests 101, 102
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M38A1, FUZE, BD

ARMING DATA

Method	Setback		
Delay			
Rotation (rps)			
Non-arm		Arm	
Setback (g)			
Non-arm	8000	Arm	13,000
Arming Wire	No		
External Indicat.	No		

PHYSICAL DATA

Weight	0.15 lb	(0.14)
Total Length (in.)	1.9	(1.6)
Body Diam. (in.)		
Intrusion	1.68 in.	(1.38 in.)
Thread Size	0.72-18NS-1	

Dimensions in parent's. are for Fuze M38.

FUNCTIONING DATA

Action	BD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Hard, structures
Sensitivity	
Material	Wood screen
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M18
Booster	Tetryl 0.32 diam. by 0.33 L

REMARKS

Explosive train is not interrupted.

Same as Practice Fuze M38 (Dwg. 73-1-16) except Fuze M38A1 has a booster charge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG: 2.18 in (55.4 mm)	DP: 0.44 in (11.2 mm)	THD: 1.125-20NS-1
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 72-5-4
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 37-mm guns, M1A2 and AN-M9

- AMMUNITION:
  - M21 Dummy Cartridge,
  - M55A1 TP Cartridge

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK: NA
- VELOCITY: NA

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: NA
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
NA

SECOND SAFETY:
NA

OTHER SAFETY:
NA

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: NA

PRIMER: NA

DETONATOR: NA

LEAD: NA

BOOSTER: NA

OTHER: NA

FUNCTIONING DATA

MODES: Dummy
TYPE: NA
CHARACTERISTICS:
NA

TARGET: Target practice
SENSITIVITY:
NA

FUNCTION TEMP:
NA
MODE ON DELIVERY:
NA

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: NA
US HCSDS: NA
UN CL/DIV SCG: NA
US DOT SHIP CL: NA
NET EXPL WT: None
NET PROP WT: None
STORAGE TEMP: NA

REMARKS/DESCRIPTION:
The M50 is a dummy fuze for the M56 PD Fuze.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

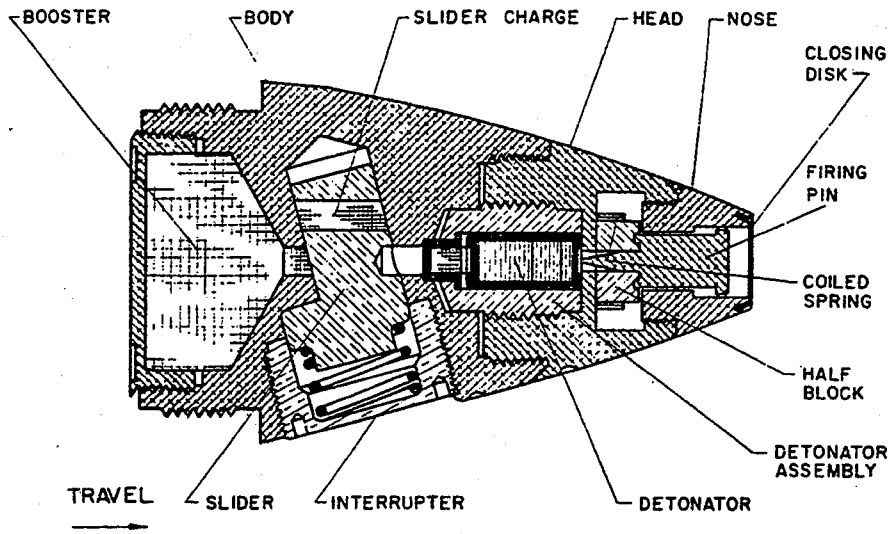

- OVERALL SIZE -	- INTRUSION -	WT: 0.17 lb (77 g)
LG: 2.21 in (56 mm)	DP: 0.43 in (11 mm)	THD: 1.125-20NS-1A
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-
- CONTACT:
- PHONE: DSN 880-
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 73-2-158
- PARTS LIST:
- SPEC:
- PUB: TM 9-1300-203

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: T27, T30
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 37-mm gun

- AMMUNITION:
  - HE

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 900 rps
- SETBACK: 30,000 g
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 7-11 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Spin: 66 rps, no arm
133 rps, all arm

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: M23

LEAD: Slider charge

BOOSTER: Tetryl

OTHER: None

FUNCTIONING DATA
MODES: PD
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Aircraft
SENSITIVITY:
0.012 in aluminum

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
When sufficient rotational speed has been established to offset the resistance of springs, setback, and friction, the slider of the interrupter moves outward bringing the slider charge into alignment with the detonator and booster. While in the bore, setback causes the firing pin to seat firmly in the half-blocks, preventing them from flying outward. On leaving the bore, the firing pin creeps forward, the half-blocks holding the firing pin in the unarmed position against the coiled flat steel spring then move outward under centrifugal force, leaving the firing pin in a floating position with an unobstructed passage to the detonator. In this position, the fuze is fully armed. On impact, the thin closing disk is perforated or the head is crushed, depending on the force of impact. In either case, the firing pin is driven against the detonator. Action of the detonator is transmitted through the slider charge to the booster, which then causes the projectile to explode. Dummy fuze is M50, drawing 72-5-4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

LAST UPDATE: 02/11/92

ILLUSTRATION:

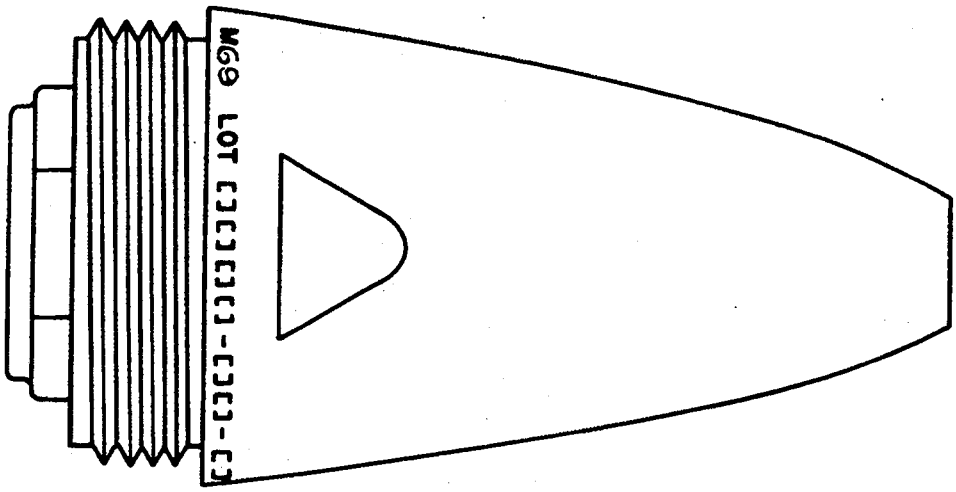

- OVERALL SIZE -	- INTRUSION -	WT: 0.225 lb (102 g)
LG: 2.375 in (60.3 mm)	DP: 0.55 in (13.8 mm)	THD: 1.18-14NS-1
XSECT: 1.29 in (32.8 mm)	DIA: 1.18 in (30.0 mm)	THD DP: 0.545 in (13.8 mm)

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-CCL-C
- CONTACT: Maile, C
- PHONE: DSN 880-6437
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 75-5-9
- PARTS LIST:
- SPEC:
- PUB: TM 43-0001-28

- NATIONAL STOCK NO:
  1390-00-517-9858
- DODIC: N208
- PRIOR MODEL NO: T34
- SIMILAR TO: Simulates Mk 27

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: 40 MM Mk II Gun

- AMMUNITION:
  TP-T, M91;
  Dummy cartridge, M25

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK: NA
- VELOCITY: NA

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: MIL-STD-1316 is NA
SETTERS: None

Supersedes page 7-13 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
NA

SECOND SAFETY:
NA

OTHER SAFETY:
NA

SAFE/ARM INDICATION:
NA

ARMING TIME OR DISTANCE:
NA

EXPLOSIVE COMPONENTS

S&A DEVICE: NA

PRIMER: None

DETONATOR: None

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: NA
TYPE: NA
CHARACTERISTICS:
NA

TARGET: NA
SENSITIVITY:
NA

FUNCTION TEMP:
NA
MODE ON DELIVERY:
NA

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: NA
US HCSDS: NA
UN CL/DIV SCG: NA
US DOT SHIP CL: NA
NET EXPL WT: None
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:

The M69 Dummy Fuze simulate the weight and ballistics of the Mk 27 PD Fuze. It is used with practice rounds for training purposes. Dummy fuzes are for use with such ammunition as target practice and drill, not requiring normal, full-functioning fuzes. Fuzes may be manufactured expressly for the purpose or may be assembled from burned-out or rejected inert parts of service fuzes. Whether assembled from service parts or specially manufactured for the purpose, the assemblies are completely inert. In general, the fuzes are intended to simulate a specific model or type of service fuze. Contour and weight of the service fuze simulated are approximated in the dummy fuze for use with practice ammunition; thus, the dummy fuze gives the proper "feel" when used with dummy ammunition. This also permits use of dummy ammunition in conjunction with fuze setters for training in preparing ammunition for firing and in servicing the piece. Most dummy fuzes are simple in construction, but essential features of the simulated service fuze are incorporated in some types, for example the M59 and M73 which have a setting screw and registration similar to that in M48 and M51 Series Fuzes.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M71, FUZE, PD

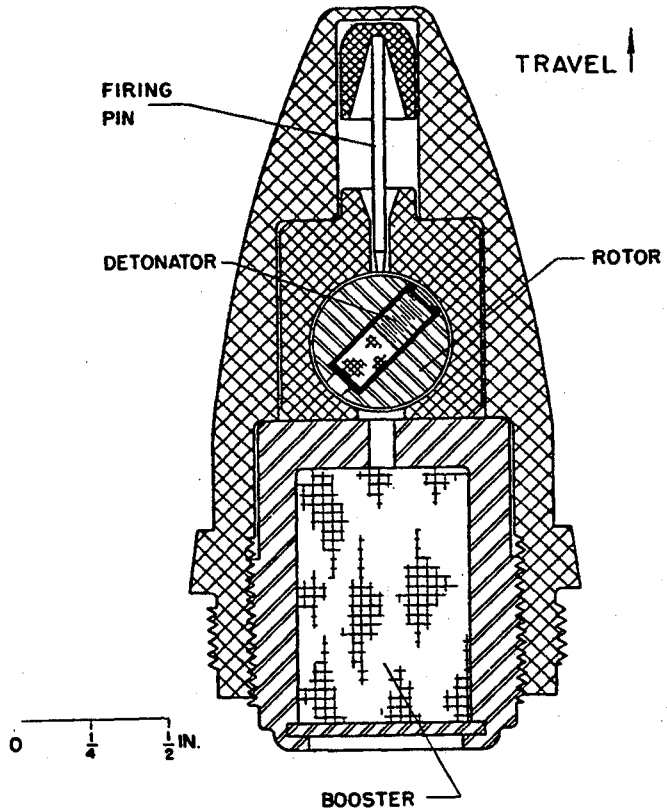

IDENTIFICATION

Agency ARRADCOM, DRDAR-SCA
R. Trifiletti - AV 880-6984

Status Obsolete

Ass'y Dwg. No. 73-2-201

Parts List

Specification

Previous Number T51

GENERAL

Carriers Projectile

Cal. — Size 40 mm

Location Nose

Use GP

MIL-STD's

Max Values

Rotat. (rps) 900

Setback (g) 30,000

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M71, FUZE, PD

ARMING DATA

Method	Spin, setback
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.22 lb
Total Length (in.)	2.45
Body Diam. (in.)	
Intrusion	0.545 in.
Thread Size	1.18-14NS-2A

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M21
Booster	Tetryl

REMARKS

The M71 is similar to Fuze M74 except for tetryl charge in base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M74, FUZE, PD

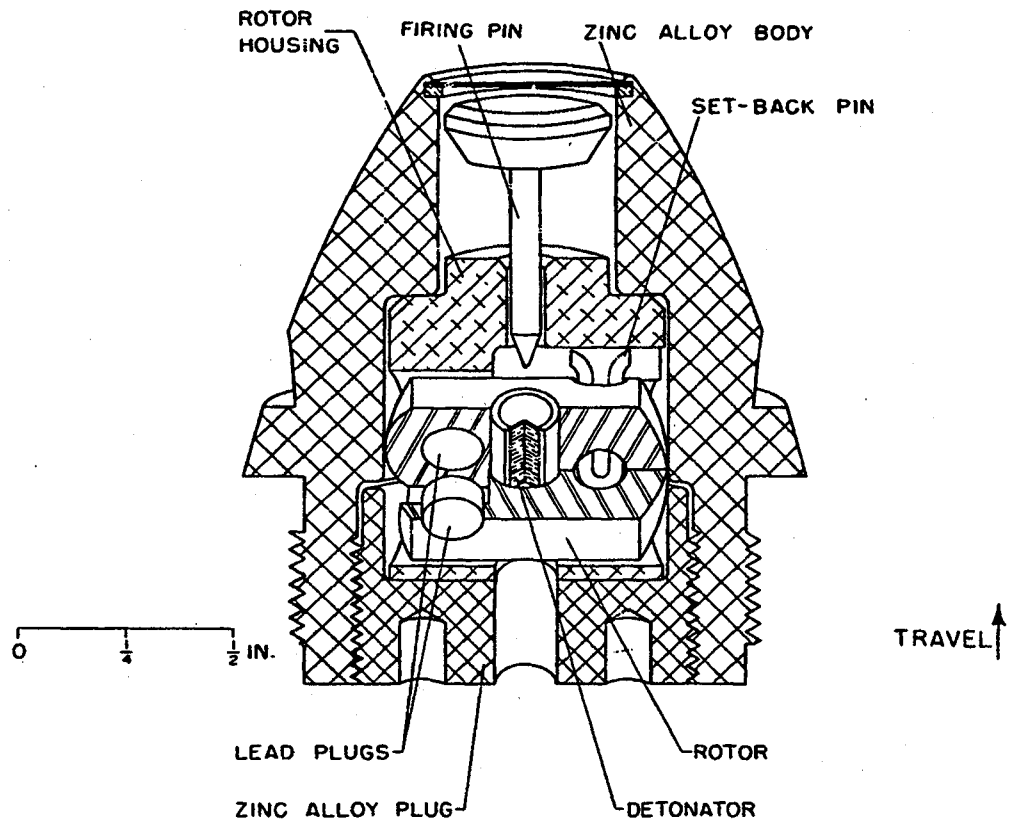

IDENTIFICATION

Agency ARRADCOM, DRDAR-SCA
R. Trifiletti-AV880-6984
Status Obsolete
Ass'y Dwg. No. 73-2-209
Parts List
Specification
Previous Number T54

GENERAL

Carriers Projectile
Cal. — Size 37 mm
Location Nose
Use Practice
MIL-STD's 331, Tests 101, 102
Max Values
Rotat. (rps) 900
Setback (g) 30,000
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2020-10-26T13:37Z
Check the source to verify that this is the current version before use.

M74, FUZE, PD

ARMING DATA

Method	Spin, setback
Delay	
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.21 lb
Total Length (in.)	1.43
Body Diam. (in.)	
Intrusion	0.465 in.
Thread Size	1.125-20NS-1A

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antipersonnel, soft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M29
Booster	None

REMARKS

Out of balance cylindrical rotor that is locked in unarmed position by a hairpin type setback pin.

Similar to Fuze T53 except for firing pin.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M75, FUZE, PD

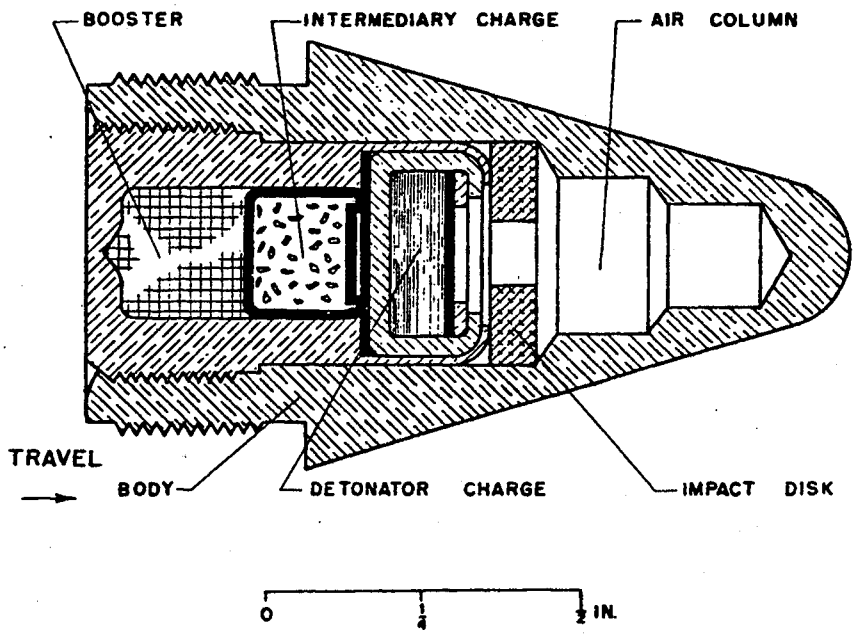

IDENTIFICATION

Agency ARRADCOM, DRDAR-SCA
R. Trifiletti - AV 880-6984

Status Obsolete

Ass'y Dwg. No. 73-1-193

Parts List

Specification

Previous Number T71E5

GENERAL

Carriers Projectile

Cal. — Size 20 mm

Location Nose

Use HEI

MIL-STD's 331, Tests 101 and 102

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M75, FUZE, PD

ARMING DATA

Method	None
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.0497 lb
Total Length (in.)	1.236
Body Diam. (in.)	
Intrusion	0.396 in.
Thread Size	0.5625-32NS-1A

FUNCTIONING DATA

Action	PD
Type	Mechanical, pneumatic
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	X
Booster	Tetryl

REMARKS

Replaced by Fuze M505.

Explosive train is not interrupted.

No firing pin. Initiation is by adiabatic compression.

SERIES: A CHAPTER: 7
DESIGNATION: M75
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

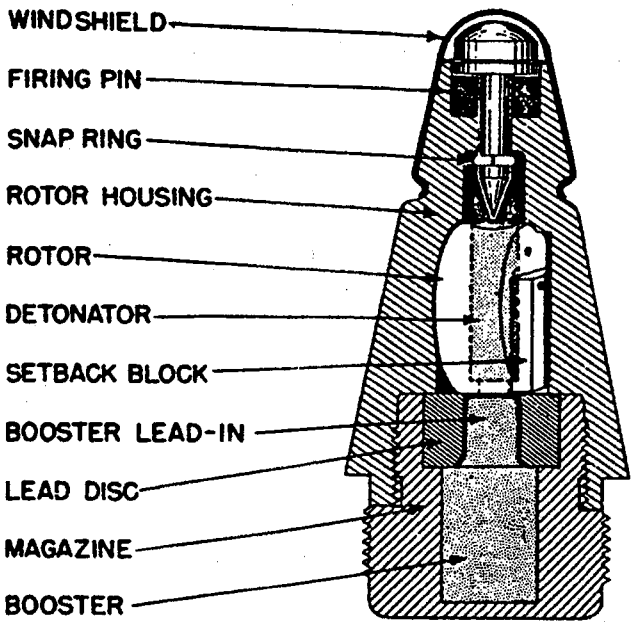

- OVERALL SIZE -	- INTRUSION -	WT: 0.19 lb (86 g)
LG: 1.51 in (38.4 mm)	DP: 0.385 in (09.8 mm)	THD: 0.5625-32NS-2
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G411
- CONTACT: Munach, A
- PHONE: DSN 290-1970
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 2 494 201 (Mod 2)
- PARTS LIST: LD 550 023 (Mod 2)
- SPEC: WS 7629 (Mod 2)
- PUB:

- NATIONAL STOCK NO:
  1390-00-910-9708 (Mod 1)
- DODIC: N346 (Mod 1)
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 20-mm aircraft gun, Mk 12

- AMMUNITION:
  - GP

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 1,950 rps
- SETBACK: 100,000 g
- VELOCITY: 3,300 ft/s (1,000 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS: None

Supersedes page 7-21 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback

SECOND SAFETY:
Spin

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
2-3 s

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Mk 56 See remarks

LEAD: Tetryl

BOOSTER: Tetryl

OTHER:

FUNCTIONING DATA
MODES: PD, SQ
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Antiaircraft
SENSITIVITY:
0.032 in (0.81 mm) aluminum, 80 deg obliq, 1500 ft/s (457 mm), 20 mm. Sensitive to water impact.
FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: 0409
US HCSDS:
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: C
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Mod 0 dwg, 883 614, LD 275 954; Mod 1 dwg, 1 236 837, LD 234 914. Mods 0 and 1 housing die-cast aluminum, Mod 2 housing forged 7075- T6 aluminum. Windshield material changed from aluminum to steel on Mod 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 81 MOD 0, FUZE, PD, SQ

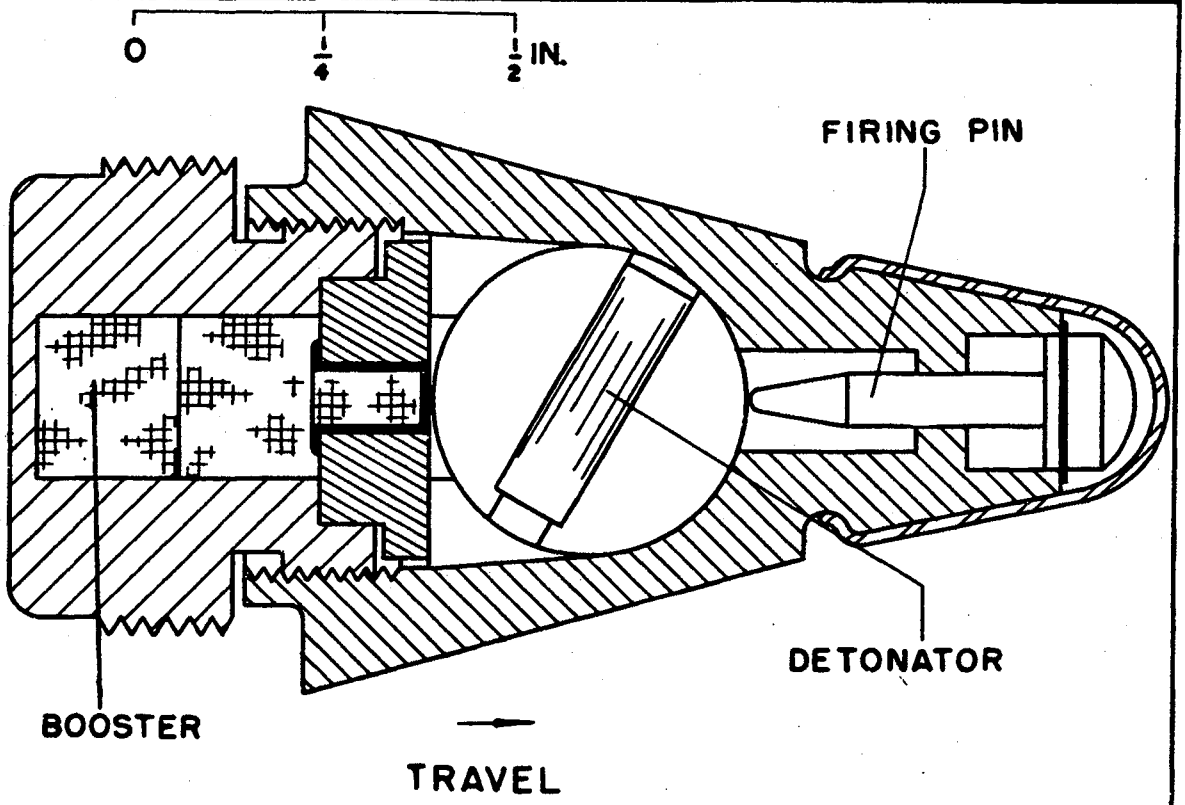

IDENTIFICATION

Agency	NSWC, Code G44 A. Munach
Status	AV 290-2795 Obsolete
Ass'y Dwg. No.	GA 1261926
Parts List	LD 295738
Specification	
Previous Number	XP-79

GENERAL

Carriers	Projectile
Cal. — Size	30 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	1540
Setback (g)	76,500
Velocity (fps)	1500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 81 MOD 0, FUZE, PD, SQ

ARMING DATA

Method	Spin, Setback
Delay	2-3
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	1.530
Body Diam. (in.)	
Intrusion	0.380 in.
Thread Size	0.625-24WEF-2

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	Aluminum
Thickness (in.)	.02
Max Obliq. (°)	80
Velocity (fps)	1500
Carrier	30 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	MK 56 MOD 1
Booster	Tetryl
Lead	Tetryl

REMARKS

SERIES: N CHAPTER: 7
DESIGNATION: MK 81 MOD 0
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

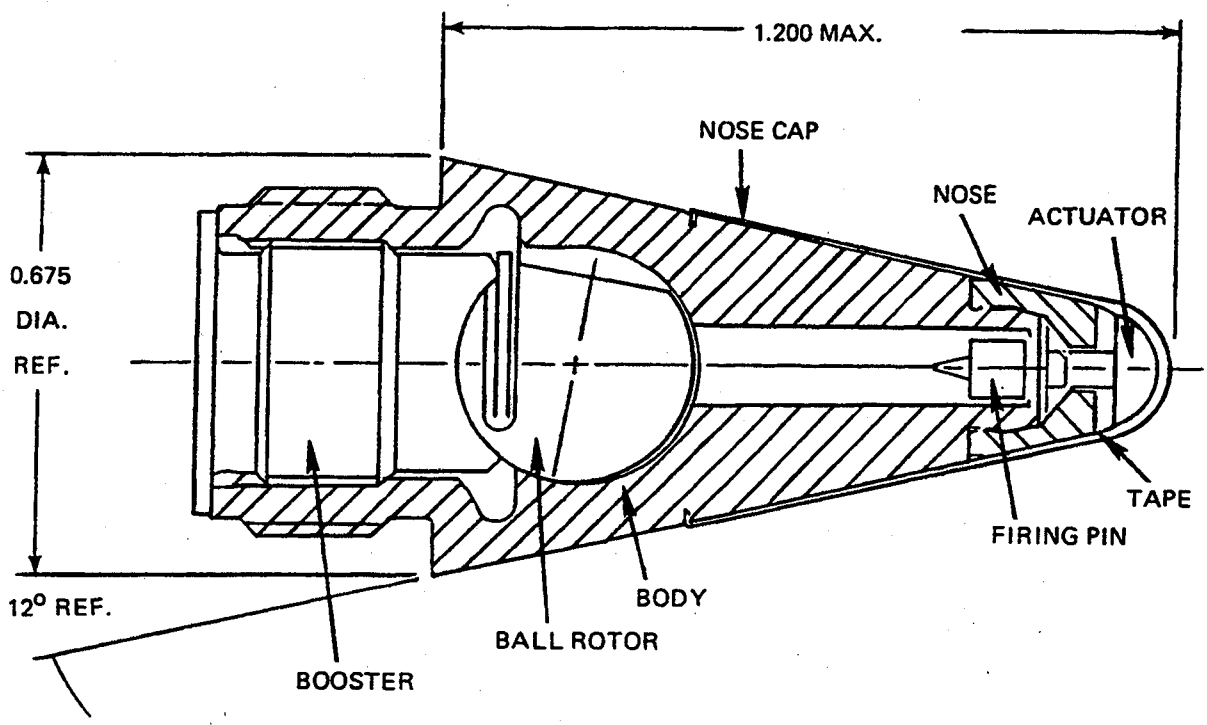

- OVERALL SIZE -	- INTRUSION -	WT: 0.0614 lb (27.86 g)
LG: 1.525 in (38.7 mm)	DP: 0.325 in (8.3 mm)	THD: .5625-32UNS-2A
XSECT: 0.678 in (17.2 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: Eglin AFB, ADTC/SD3
- CONTACT: Slotkim, S
- PHONE: DSN 872-8186
- STATUS: Canceled
- USER: AF
- ASSY DWG: 383 250
- PARTS LIST:
- SPEC: SP 785043
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: Cimp Fuze
- SIMILAR TO:

- REPLACES: M505A3
- REPLACED BY:

GENERAL
- WEAPON: M61A1 20 mm Gun System

- AMMUNITION:
  - HEI

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 2,030 rps
- SETBACK: 124,000 g
- VELOCITY: 3710 ft/s (1131 m/s)

- CREEP: 76 g gun, 140 g hs a/c
- FLIGHT TIME:

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: M47

LEAD:

BOOSTER: T42

OTHER:

FUNCTIONING DATA

MODES: PD, Delay after Impact
TYPE: Mechanical
CHARACTERISTICS:
Delay Time: 100-270 ms

TARGET: Air Targets
SENSITIVITY:
Target .063 to .090 in (1.6 to 2.3 mm) 2024T3 Alum., 0 to 80 degrees obliquity
FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T195E11, FUZE, PD

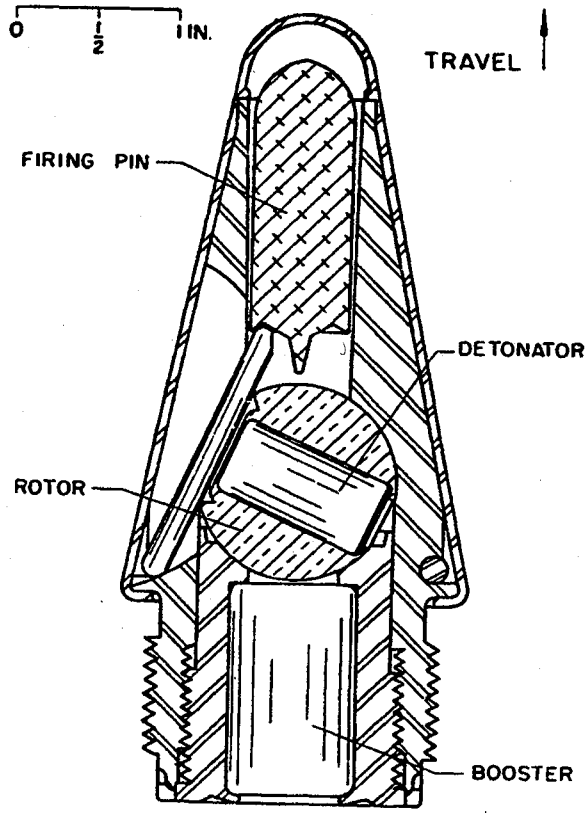

IDENTIFICATION

Agency	ARRADCOM DRDAR-SCA R. Trifilleti - AV880-6984
Status	Terminated
Ass'y Dwg. No.	73-2-365
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	20 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	2080
Setback (g)	124,000
Velocity (fps)	3000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T195E11, FUZE, PD

ARMING DATA

Method	Spin
Delay	20-35 ft
Rotation (rps)	
Non-arm	670
Arm	830
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	265 gr.
Total Length (in.)	
Body Diam. (in.)	
Intrusion	0.358 in.
Thread Size	0.5625-32NS-1

FUNCTIONING DATA

Action	PD, Delay
Type	Mechanical
Delay	0.5 to 2 ft
Time Type	
Time Setting (sec)	
Target	Aircraft, light surface targets
Sensitivity	
Material	24ST Aluminum
Thickness (in.)	0.02-0.4
Max Obliq. (°)	70
Velocity (fps)	3000
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M97
Booster	M123

REMARKS

Same as Fuzes T196 and T 200 except for weight and external contour

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T200E16, FUZE, PD

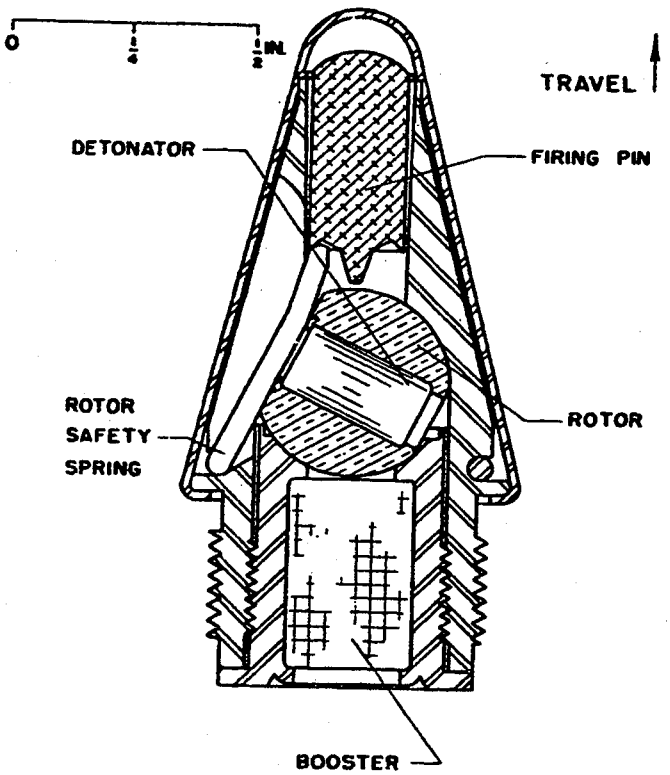

IDENTIFICATION

Agency	ARRADCOM, DRDA -SCA R. Trifiletti - AV 880-6984
Status	Terminated
Ass'y Dwg. No.	73-2-364
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	20 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	2080
Setback (g)	12,400
Velocity (fps)	3000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T200E16, FUZE, PD

ARMING DATA

Method	Spin
Delay	20-35 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.0487 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	0.358 in.
Thread Size	0.5025-32NS1

FUNCTIONING DATA

Action	PD, Delay
Type	Mechanical
Delay	2-4 in.
Time Type	
Time Setting (sec)	
Target	Aircraft, light surface targets
Sensitivity	
Material	Aluminum
Thickness (in.)	0.020
Max Obliq. (°)	60
Velocity (fps)	3000
Carrier	20 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M47
Booster	M123

REMARKS

Same as Fuze T196E4 except for contour

Dummy fuze is the T201E1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T231E3, FUZE, PD

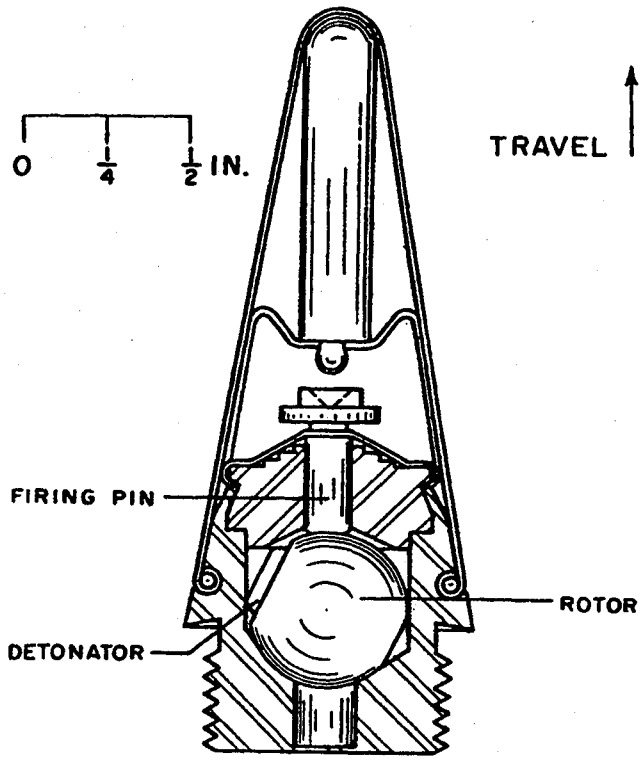

IDENTIFICATION

Agency ARRADCOM, DRDAR-SCA
R. Trifiletti - AV-880-6984

Status Terminated

Ass'y Dwg. No. D5006 (Parke-Thompson)

Parts List

Specification

Previous Number

GENERAL

Carriers	Projectile
Cal. — Size	37 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	1250
Setback (g)	55,000
Velocity (fps)	3000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T231E3, FUZE, PD

ARMING DATA

Method	Setback
Delay	5.0 ft
Rotation (rps)	
Non-arm	50 Arm 60
Setback (g)	
Non-arm	15,000 Arm 25,000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.101 lb
Total Length (in.)	2.39
Body Diam. (in.)	
Intrusion	0.40 in.
Thread Size	0.75-20-UNEF-2A

FUNCTIONING DATA

Action	PD, Delay
Type	Mechanical
Delay	0.0006 sec
Time Type	
Time Setting (sec)	
Target	Aircraft and light targets
Sensitivity	
Material	24ST Aluminum
Thickness (in.)	0.04
Max Obliq. (°)	80
Velocity (fps)	3,000
Carrier	37 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M29A1
Detonator	T85E1
Booster	T54

REMARKS

Used in "Vigilante Ammunition" with Fuze, BDSD, T300 (SD only)

Dummy fuze is T232

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T238, FUZE, TIME

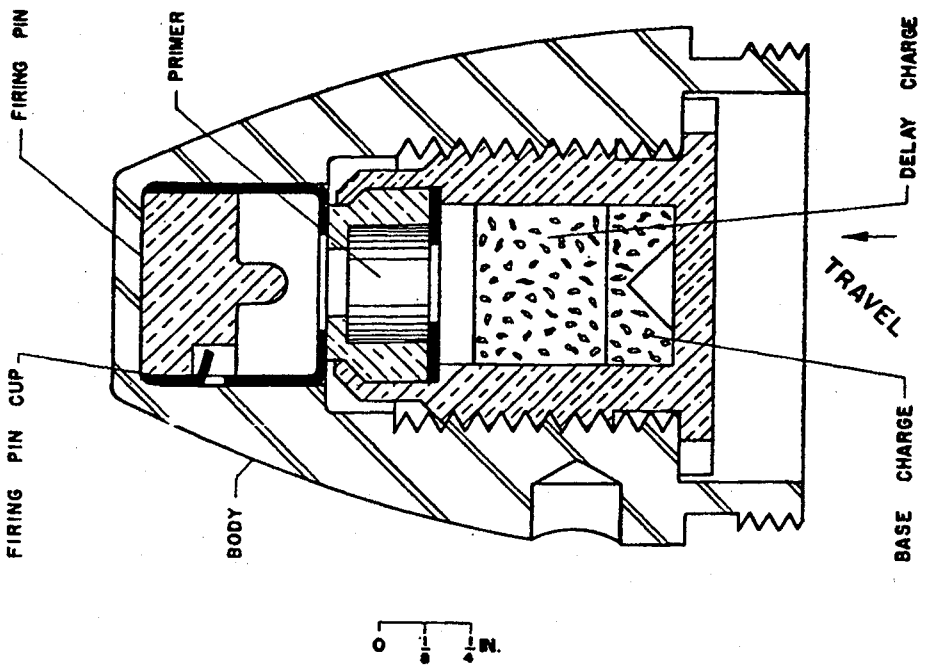

IDENTIFICATION

Agency ARRADCOM, DRDAR-SCA
R. Trifiletti, AV 880-6984

Status Terminated

Ass'y Dwg. No. P83666

Parts List

Specification

Previous Number

GENERAL

Carriers Projectile

Cal. — Size 20 mm

Location Nose

Use

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T238, FUZE, TIME

ARMING DATA

Method	Setback
Delay	
Rotation (rps)	No
Non-arm	Arm
Setback (g)	
Non-arm	20,000 Arm 30,000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	0.996
Body Diam. (in.)	
Intrusion	0.152 in.
Thread Size	0.7187-36NS-1

FUNCTIONING DATA

Action	PI, Time
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	1 sec (fixed)
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M42
Detonator	
Booster	Black powder

REMARKS

Explosive train is not interrupted.

SERIES: A CHAPTER: 7
DESIGNATION: T238
Time Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM246, SELF DESTRUCT CARTRIDGE

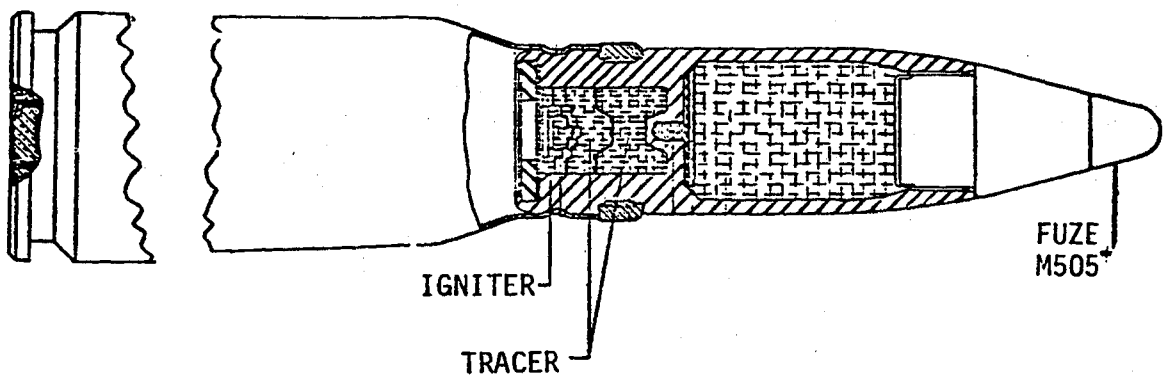

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti - AV 880-6984
Status	Terminated
Ass'y Dwg. No.	10542384
Parts List	PL 10542384
Specification	MIL-C-60678
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	20 mm
Location	Integral
Use	HE
MIL-STD's	331 Tests 101, 102
Max Values	
Rotat. (rps)	2030
Setback (g)	142,000
Velocity (fps)	3380

KEY FEATURES

Self destruction is caused by heat from tracer element after desired time of flight.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM246, SELF DESTRUCT CARTRIDGE

ARMING DATA

Method	Spin
Delay	10 to 35 ft
Rotation (rps)	
Non-arm 670	Arm 830
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1900 grain
Total Length (in.)	3.0
Body Diam. (in.)	20 mm
Intrusion	Integral
Thread Size	

FUNCTIONING DATA

Action	PD, SD
Type	Pyro., & mechanical
Delay	Super quick
Time Type	Pyrotechnic
Time Setting (sec)	Non-settable
Target	Aircraft
Sensitivity	
Material	2024 Aluminum
Thickness (in.)	0.040
Max Obliq. (°)	60
Velocity (fps)	3000
Carrier	20 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M47
Booster	T42

REMARKS

Arming delay obtained from M505 fuze.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T253, FUZE, PD

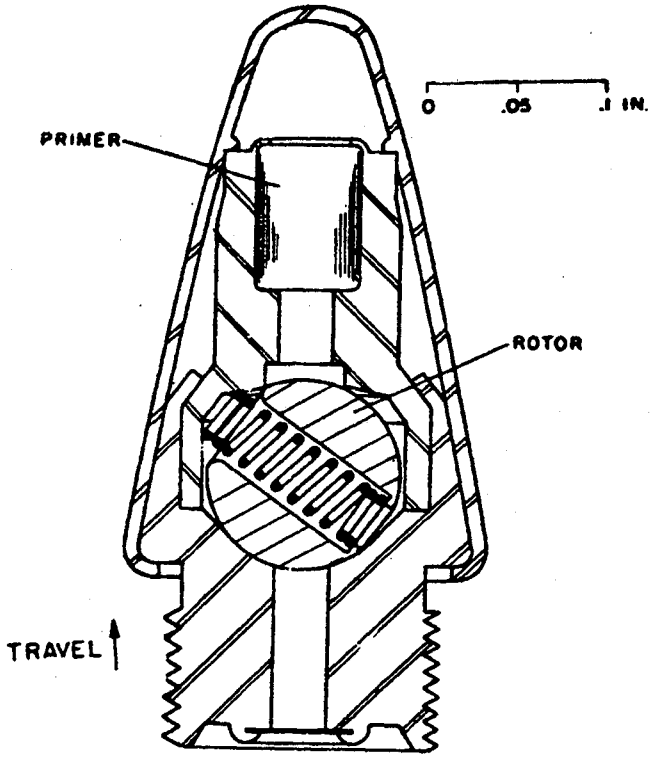

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti -AV 880-6984
Status	Terminated
Ass'y Dwg. No.	D-4069 (PTA), P-83789
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	0.50 in.
Location	Nose
Use	Spotting
MIL-STD's	
Max Values	
Rotat. (rps)	1500
Setback (g)	108,000
Velocity (fps)	2000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T253, FUZE, PD

ARMING DATA

Method	Spin
Delay	50-100 ft
Rotation (rps)	Yes
Non-arm 600 Arm 1000	
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	0.70
Body Diam. (in.)	
Intrusion	0.20 in.
Thread Size	0.3125-32NS-2

FUNCTIONING DATA

Action	PD, SQ, Graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft, ground
Sensitivity	
Material	All but rain
Thickness (in.)	
Max Obliq. (°)	80
Velocity (fps)	2000
Carrier	Cal 50

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Spotting ammo for use with 105 mm weapon

Explosive train is not interrupted

SERIES: A CHAPTER: 7
DESIGNATION: T253
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T262, FUZE, PD

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti, AV 880-6984
Status	Terminated
Ass'y Dwg. No.	KD-3183 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	30 mm (British)
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	1200
Setback (g)	73,000
Velocity (fps)	2100

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T262, FUZE, PD

ARMING DATA

Method	Spin
Delay	10 - 100 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	50,000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.098 lb
Total Length (in.)	2.195
Body Diam. (in.)	
Intrusion	0.695
Thread Size	0.9375-28NS-2

FUNCTIONING DATA

Action	PD, SD
Type	Mechanical
Delay	0.0008 sec
Time Type	
Time Setting (sec)	
Target	Air-to-air
Sensitivity	
Material	24ST Aluminum
Thickness (in.)	0.04
Max Obliq. (°)	80
Velocity (fps)	2100
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	T98
Detonator	
Booster	T49
Relay	T2

REMARKS

Superseded by Fuze T329.

Self destruct after 5 sec.

SERIES: A CHAPTER: 7
DESIGNATION: T262
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T263E14, FUZE, PD

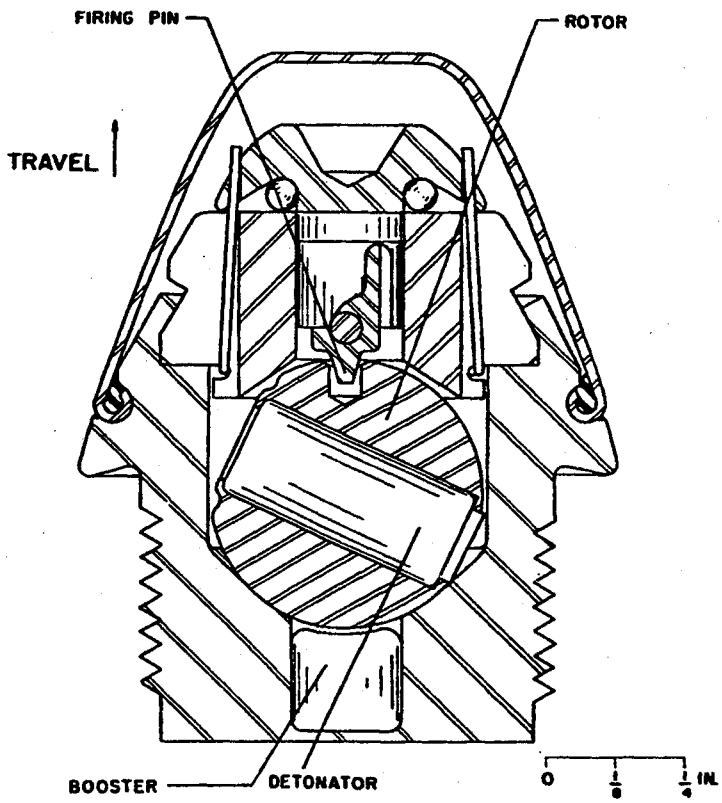

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti -AV-880-6984
Status	Terminated
Ass'y Dwg. No.	FF6379
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	30 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	1200
Setback (g)	73,000
Velocity (fps)	2700

KEY FEATURES

SERIES: A CHAPTER: 7
DESIGNATION: T263E14
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T263E14, FUZE, PD

ARMING DATA

Method	Spin, setback
Delay	10-100 ft
Rotation (rps)	
Non-arm	333 Arm 1000
Setback (g)	
Non-arm	666 Arm 50,000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	753 gr
Total Length (in.)	1.28
Body Diam. (in.)	
Intrusion	0.695 in.
Thread Size	0.75-20-UNEF-2A

FUNCTIONING DATA

Action	PD, SQ
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Aircraft, light structure
Sensitivity	
Material	24ST Aluminum
Thickness (in.)	0.04
Max Obliq. (°)	80
Velocity (fps)	M2700
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T54
Booster	RDX

REMARKS

Dummy fuze is T259E4
Was to be replaced by Fuze T346

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T264E9, FUZE, PD

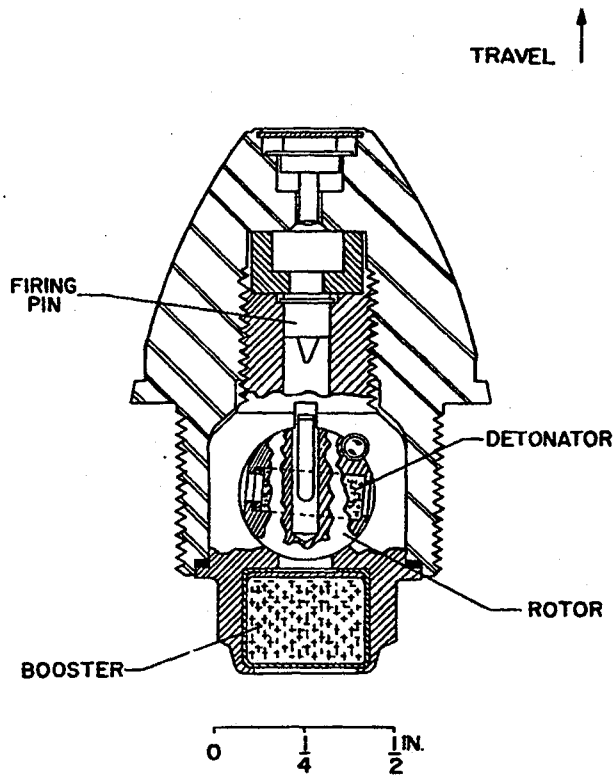

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti, AV 880-6984
Status	Terminated
Ass'y Dwg. No.	D5100 (Hesse-Easten)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	30 mm
Location	Nose
Use	GP, HEI
MIL-STD's	331, Tests 101-105, 208, 108, 115
Max Values	
Rotat. (rps)	1450
Setback (g)	88000
Velocity (fps)	500 - 3000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T264E9, FUZE, PD

ARMING DATA

Method	Spin, setback
Delay	10 - 100 ft
Rotation (rps)	
Non-arm	Arm 1167
Setback (g)	
Non-arm	Arm 70,000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	1.578
Body Diam. (in.)	
Intrusion	0.780 in.
Thread Size	0.75-20-UNEF-2A

FUNCTIONING DATA

Action	PD, delay, SD
Type	Mechanical
Delay	1/4 - 1.5 sec
Time Type	
Time Setting (sec)	
Target	Air to air
Sensitivity	
Material	24ST aluminum
Thickness (in.)	0.04
Max Obliq. (°)	85
Velocity (fps)	500 - 3000
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M29
Detonator	T85E1
Booster	T54

REMARKS

Supersedes Fuze T263.

Dummy is Fuze T258 (dwg. PX-82-629).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T270, FUZE, PDSD

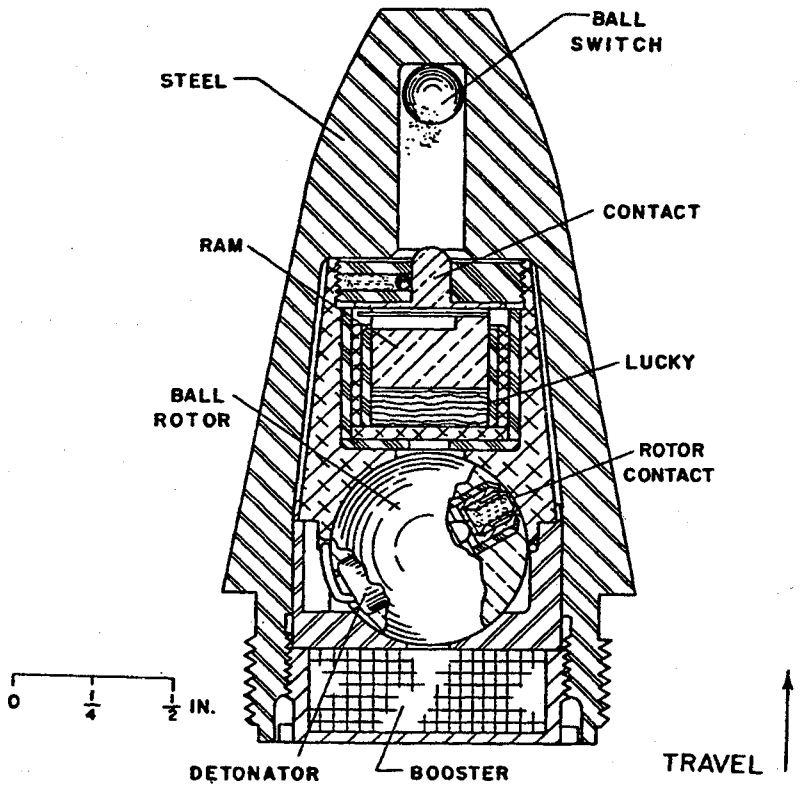

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti -AV-880-6984
Status	Terminated
Ass'y Dwg. No.	3032078 (Patterson-Moos)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	40 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	920
Setback (g)	45,000
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 7
DESIGNATION: T270
PDSD Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

T270, FUZE, PDSD

ARMING DATA

Method	Spin, setback
Delay	100-200 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.225 lb
Total Length (in.)	2.375
Body Diam. (in.)	
Intrusion	0.483 in.
Thread Size	1.18-14NS-2

FUNCTIONING DATA

Action	PD, SD, Delay, Graze
Type	Electric
Delay	0.0008 sec
Time Type	
Time Setting (sec)	
Target	Aircraft, light vehicles
Sensitivity	
Material	
Thickness (in.)	0.04
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T25E1
Booster	

REMARKS

Simulated by Fuze M69

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T292, FUZE, PD

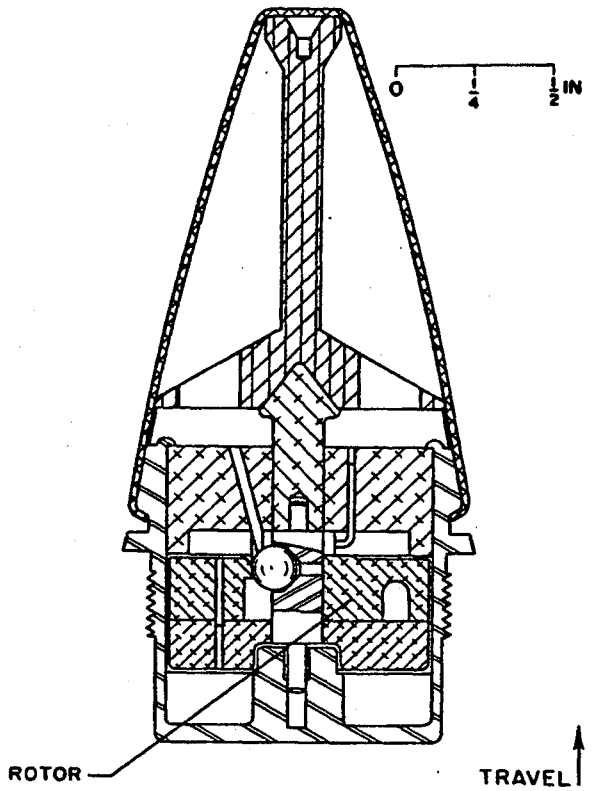

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti AV-880-6984
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	30 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	1200
Setback (g)	73,000
Velocity (fps)	2100

KEY FEATURES

SERIES: A CHAPTER: 7
DESIGNATION: T292
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T292, FUZE, PD

ARMING DATA

Method	
Delay	25-75 ft
Rotation (rps)	
Non-arm	333
Arm	750
Setback (g)	
Non-arm	
Arm	50,000
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	800 gr
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	0.75-20-UNEF-2A

FUNCTIONING DATA

Action	PD, Delay
Type	Mechanical
Delay	0.0008 sec
Time Type	
Time Setting (sec)	
Target	Aircraft, light structures
Sensitivity	
Material	24ST Aluminum
Thickness (in.)	0.04
Max Obliq. (°)	70
Velocity (fps)	2100
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	T98
Detonator	
Booster	T49

REMARKS

Was to be replaced by Fuze T329

High explosive incendiary

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T300, FUZE BDSD

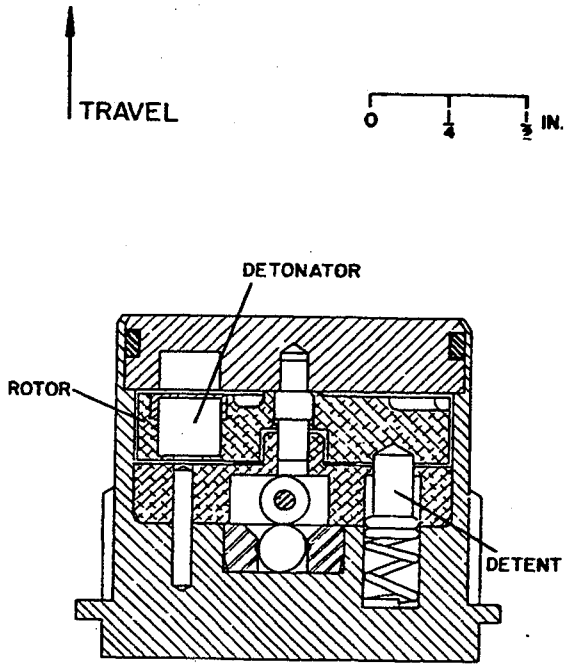

IDENTIFICATION

Agency ARRADCOM, DRDAR-SCA
R. Trifiletti- AV-880-6984

Status Terminated

Ass'y Dwg. No. TR-67532B, TD-9089

Parts List

Specification

Previous Number

GENERAL

Carriers Projectile

Cal. — Size 37 mm

Location Base

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps) 1450

Setback (g) 55,000

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2021-10-07T18:37Z
Check the source to verify that this is the current version before use.

T300, FUZE, BDSD

ARMING DATA

Method	Spin, setback
Delay	150-450 ft
Rotation (rps)	Yes
Non-arm 166 Arm 332	
Setback (g)	
Non-arm 10,000 Arm 14,000	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	1770 gr
Total Length (in.)	1.125
Body Diam. (in.)	
Intrusion	0.937 in.
Thread Size	1.1875-16

FUNCTIONING DATA

Action	BD, SD, Delay
Type	Mechanical
Delay	0.00045 sec
Time Type	
Time Setting (sec)	
Target	Vehicles, light structures
Sensitivity	
Material	24ST Aluminum
Thickness (in.)	0.04
Max Obliq. (°)	80
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	T98
Detonator	T56
Booster	None

REMARKS

The fuze housing has been made an intergal part of the base plug

Used in Vigilante Ammunition with Fuze, PD T231E3

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T301, FUZE, BD

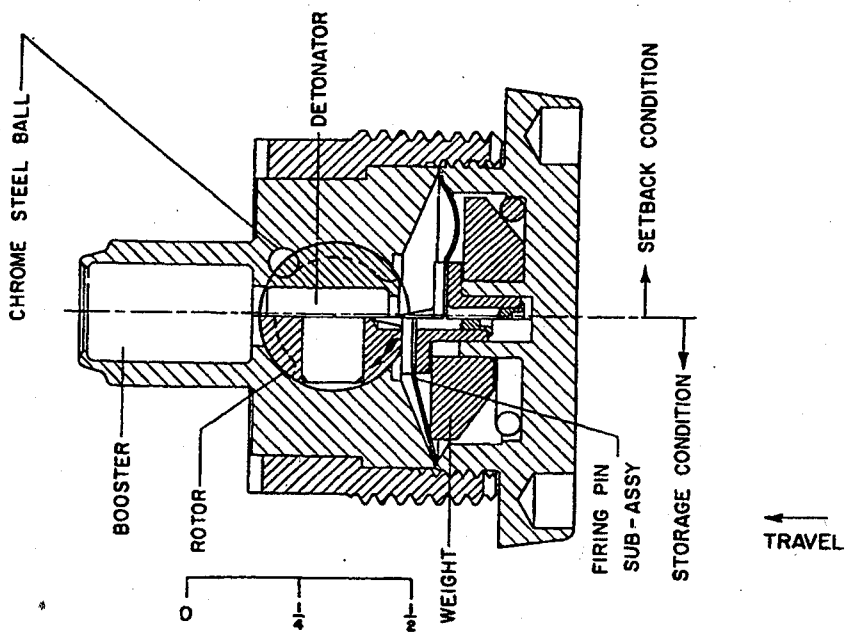

IDENTIFICATION

Agency: ARRADCOM, DRDAR-SCA
R. Trifiletti - AV-880-6934

Status: Terminated

Ass'y Dwg. No.

Parts List

Specification

'Previous Number

GENERAL

Carriers	Projectile
Cal. — Size	30 mm
Location	Base
Use	GP
MIL-STD's	331, Tests 101-104
Max Values	
Rotat. (rps)	1250
Setback (g)	80,000
Velocity (fps)	1000-3000

KEY FEATURES

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T301, FUZE, BD

ARMING DATA

Method	Spin
Delay	25-200 ft
Rotation (rps)	
Non-arm	under 500
Arm	over 500
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	850 grain
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	0.9315-20UNEF-2A (LH)

FUNCTIONING DATA

Action	BD, SD, Delay
Type	Mechanical
Delay	0-1 ft
Time Type	
Time Setting (sec)	
Target	Light armor
Sensitivity	
Material	ST24 Aluminum
Thickness (in.)	0.040
Max Obliq. (°)	70
Velocity (fps)	1000-3000
Carrier	30 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M47
Booster	T48

REMARKS

SERIES: A CHAPTER: 7
DESIGNATION: T301
BD Fuze

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T306, FUZE, BDSD

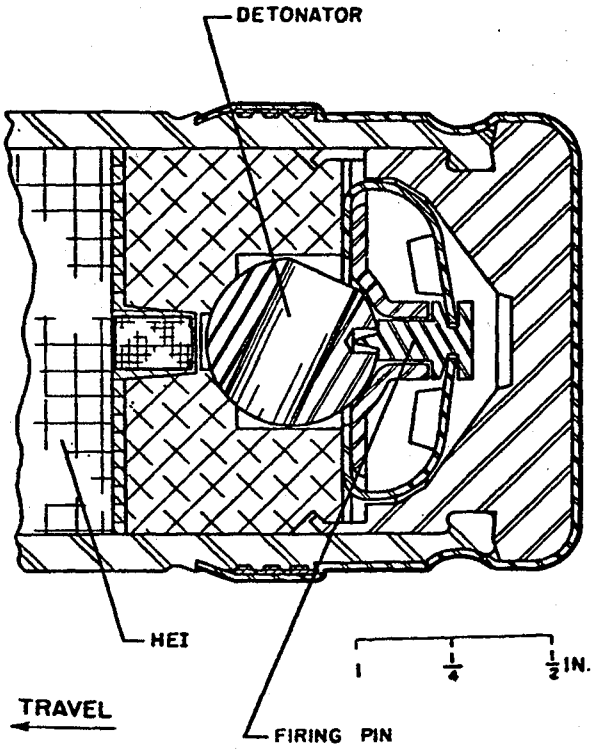

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA
Status	R. Trifiletti - AV-880-6984 Terminated
Ass'y Dwg. No.	PTA-D6208
Parts List	R-6202
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	30 mm
Location	Base
Use	HE or GP
MIL-STD's	331, tests 101-107
Max Values	
Rotat. (rps)	1020
Setback (g)	73,000
Velocity (fps)	750

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T306, FUZE, BDSD

ARMING DATA

Method	Spin, Setback
Delay	10-100 ft
Rotation (rps)	Yes
Non-arm	330
Arm	750
Setback (g)	
Non-arm	
Arm	50,000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	Under 750 gr
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	15/16

FUNCTIONING DATA

Action	BD, SD, Delay
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	24ST Aluminum
Thickness (in.)	0.040
Max Obliq. (°)	80
Velocity (fps)	750
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M47
Booster	

REMARKS

High explosive incendiary

SERIES: A CHAPTER: 7
DESIGNATION: T306
BDSD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T307, FUZE, BD

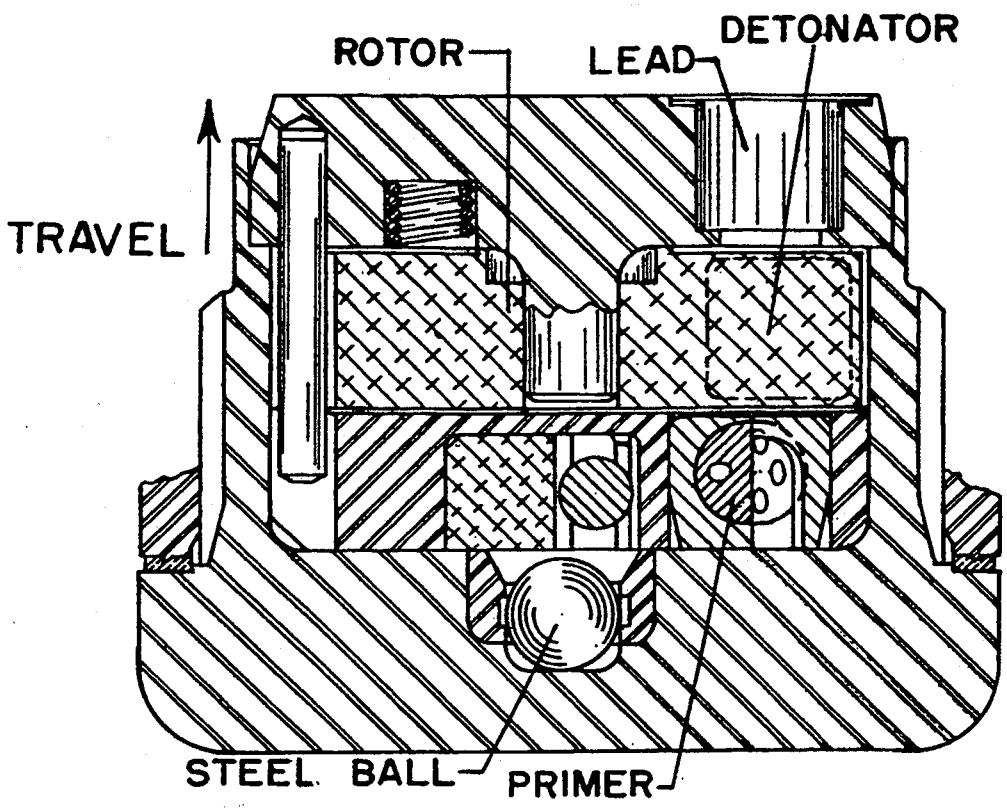

IDENTIFICATION

Agency ARRADCOM, DRDAR-SCA
R. Trifiletti - AV-880-6984

Status Terminated

Ass'y Dwg. No. TR 8322 (Bulova)

Parts List

Specification

Previous Number

GENERAL

Carriers	Projectile
Cal. — Size	30 mm
Location	Base
Use	GP
MIL-STD's	331, Tests 101-104
Max Values	
Rotat. (rps)	1250
Setback (g)	80,000
Velocity (fps)	1000-3000

KEY FEATURES

SERIES: A CHAPTER:7
DESIGNATION: T307

Source: https://assist.dla.mil downloaded: 2025-10-26T13:37Z
Check the source to verify that this is the current version before use.

T307, FUZE, BD

ARMING DATA

Method	Spin
Delay	25-200
Rotation (rps)	
Non-arm	under 500
Arm	over 500
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	750 grain
Total Length (in.)	0.915
Body Diam. (in.)	
Intrusion	0.648 in.
Thread Size	1.000-2 OUNEF-2A (LH)

FUNCTIONING DATA

Action	BD, SD, Delay
Type	Mechanical
Delay	0-1 ft
Time Type	
Time Setting (sec)	
Target	Light armor
Sensitivity	
Material	ST24 Aluminum
Thickness (in.)	0.040
Max Obliq. (°)	70
Velocity (fps)	1000-3000
Carrier	30 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	T98
Detonator	T56
Booster	
Lead	Tetryl

REMARKS

SERIES: A CHAPTER: 7
DESIGNATION: T307
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T308, FUZE, BD

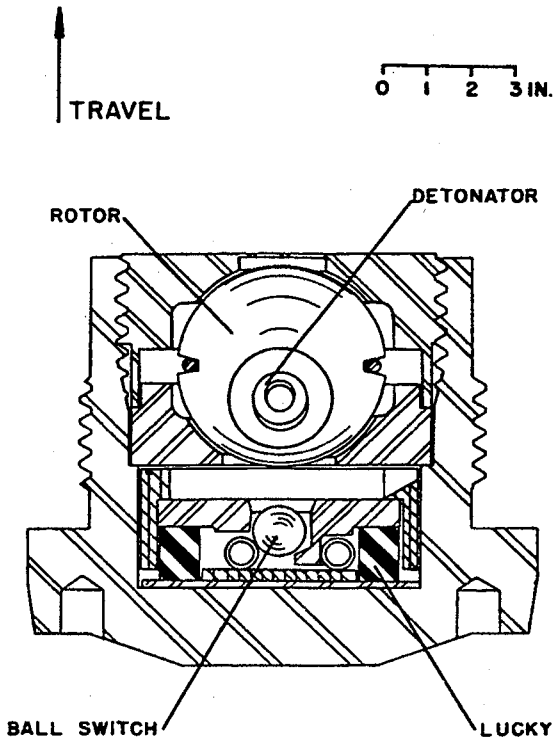

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti, AV 880-6984
Status	Terminated
Ass'y Dwg. No.	6161 (Atlas)
Parts List	D6143 (Parke-Thompson)
Specification	
*Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	30 mm
Location	Base
Use	GP, HEI
MIL-STD's	
Max Values	
Rotat. (rps)	1450
Setback (g)	88,000
Velocity (fps)	500 - 3000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T308, FUZE, BD

ARMING DATA

Method	Spin, setback
Delay	10 - 100 ft
Rotation (rps)	
Non-arm / Arm	1.167
Setback (g)	
Non-arm / Arm	70,000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	750 gr
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	0.9375-20-UNEF

FUNCTIONING DATA

Action	BD, SD, delay
Type	Electromechanical
Delay	1/4 - 1.5 sec
Time Type	
Time Setting (sec)	
Target	Air to air
Sensitivity	
Material	24ST aluminum
Thickness (in.)	0.040
Max Obliq. (°)	85
Velocity (fps)	500 - 3000
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T25E1
Booster	

REMARKS

SERIES: A CHAPTER: 7
DESIGNATION: T308
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T320, FUZE, PD

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti - AV-880-6984
Status	Terminated
Ass'y Dwg. No.	TD-53074, TD-8289
Parts List	(Bulova)
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	20 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	2100
Setback (g)	124,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T320, FUZE, PD

ARMING DATA

Method	Spin
Delay	5 ft
Rotation (rps)	Yes
Non-arm	333 Arm 833
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	330 gr
Total Length (in.)	1.233
Body Diam. (in.)	
Intrusion	0.368 in.
Thread Size	0.562-32NS-1

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M42
Detonator	
Booster	

REMARKS

Was used in the development of the high yaw theory for firing from fast flying aircraft

SERIES: A CHAPTER: 7
DESIGNATION: T320
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T321, FUZE, PD

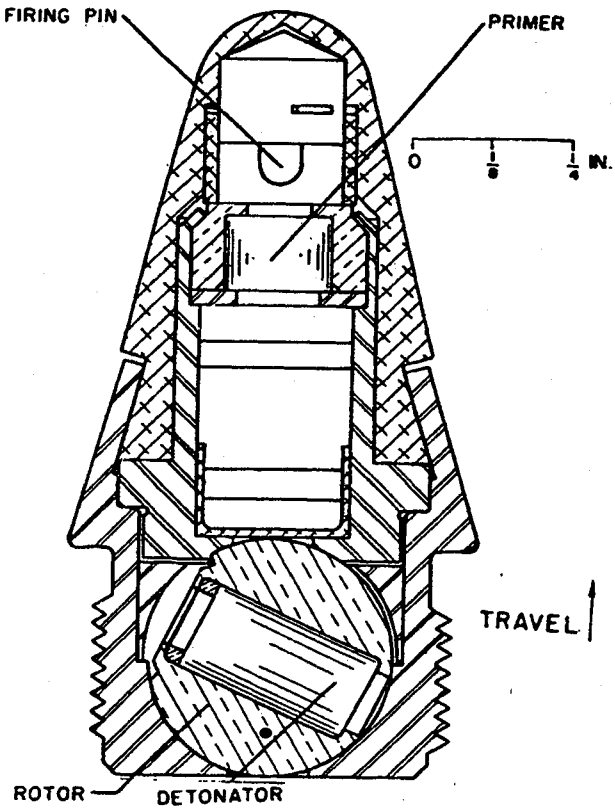

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti - AV-880-6984
Status	Terminated
Ass'y Dwg. No.	TD-53074, TD-8289 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	20 mm
Location	Nose
Use	GP (HE)
MIL-STD's	
Max Values	
Rotat. (rps)	2100
Setback (g)	24,000
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 7
DESIGNATION: T321
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T321, FUZE, PD

ARMING DATA

Method	Spin
Delay	5 ft
Rotation (rps)	
Non-arm	333
Arm	833
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	330 gr
Total Length (in.)	1.233
Body Diam. (in.)	
Intrusion	0.368 in.
Thread Size	0.562-32NS-1

FUNCTIONING DATA

Action	Time, setback
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	2
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M42
Detonator	
Booster	

REMARKS

Was used in the development of the high yaw theory for firing from fast flying aircraft

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T322, FUZE, PD

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti - AV-880-6984
Status	Terminated
Ass'y Dwg. No.	TD-53076 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	30 mm
Location	Nose
Use	GP (HE)
MIL-STD's	
Max Values	
Rotat. (rps)	1200
Setback (g)	73,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil/ Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T322, FUZE, PD

ARMING DATA

Method	Spin
Delay	5 ft
Rotation (rps)	
Non-arm	333
Arm	833
Setback (g)	
Non-arm	
Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	790 gr
Total Length (in.)	1.275
Body Diam. (in.)	
Intrusion	0.511 in.
Thread Size	0.750-20UNEF

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	1
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M42
Detonator	
Booster	

REMARKS

Was used in the development of the high yaw theory for firing from fast flying aircraft

Same as Fuze T320 except for contour

SERIES: A CHAPTER: 7
DESIGNATION: T322
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T323, FUZE, PD

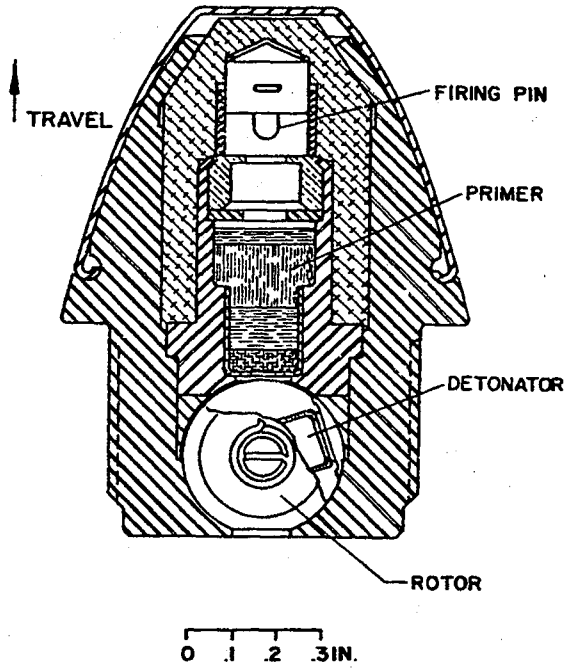

IDENTIFICATION

Agency ARRADCOM, DRDAR-SCA
R. Trifiletti - AV-880-6984

Status Terminated

Ass'y Dwg. No. TD53076 (Bulova)

Parts List

Specification

Previous Number

GENERAL

Carriers Projectile

Cal. — Size 30 mm

Location Nose

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T323, FUZE, PD

ARMING DATA

Method	Spin
Delay	5 ft
Rotation (rps)	Yes
Non-arm	333 Arm 833
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	790 gr
Total Length (in.)	1.275
Body Diam. (in.)	
Intrusion	0.511 in.
Thread Size	0.750-20UNEF-2A

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	2
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M42
Detonator	
Booster	

REMARKS

Was used in the development of the high yaw theory for firing from fast flying aircraft

SERIES: A CHAPTER: 7
DESIGNATION: T323
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T328, FUZE PD

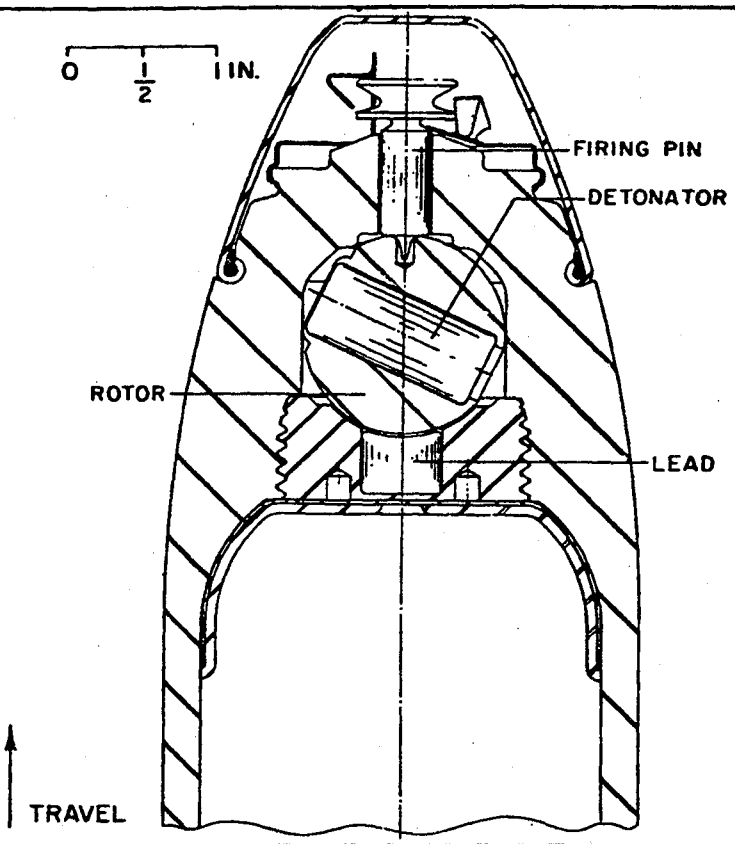

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti -AV-880-6984
Status	Terminated
Ass'y Dwg. No.	PTA, D6368, PX-13-1649
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	30 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	1200
Setback (g)	73,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T328, FUZE PD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3900 gr
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Aircraft and light surface targets
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T54
Booster	T98

REMARKS

Integral fuze shell using same mechanism as Fuze T263E8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T329, FUZE, PDSD

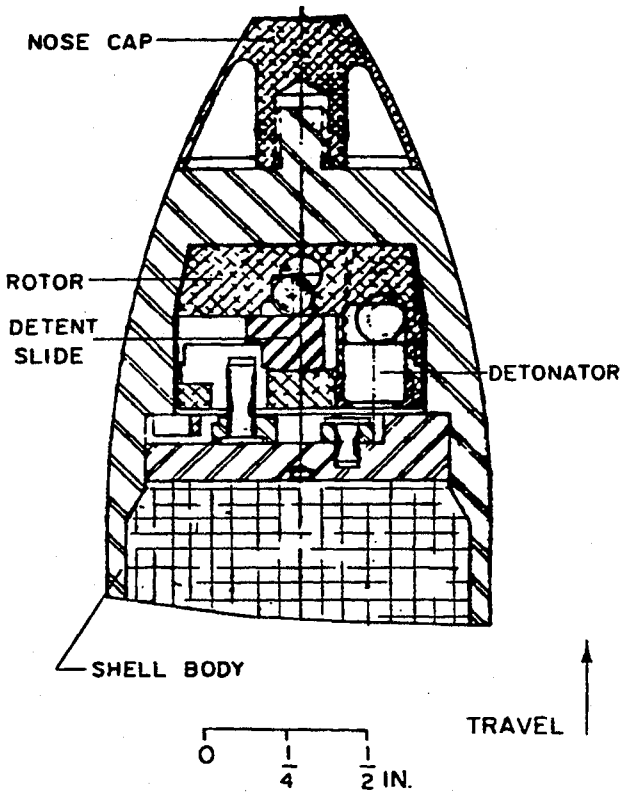

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti -AV-880-6984
Status	Terminated
Ass'y Dwg. No.	KD-4367 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	30 mm
Location	Nose
Use	HE or GP
MIL-STD's	
Max Values	
Rotat. (rps)	1200
Setback (g)	73,000
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T329, FUZE, PDSD

ARMING DATA

Method	Spin
Delay	
Rotation (rps)	Yes
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	3900 gr
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	PD, SD
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antiaircraft
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	T98
Detonator	
Booster	T49

REMARKS

Integral fuze shell using same mechanism as Fuze T292

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T346E7, FUZE, PD

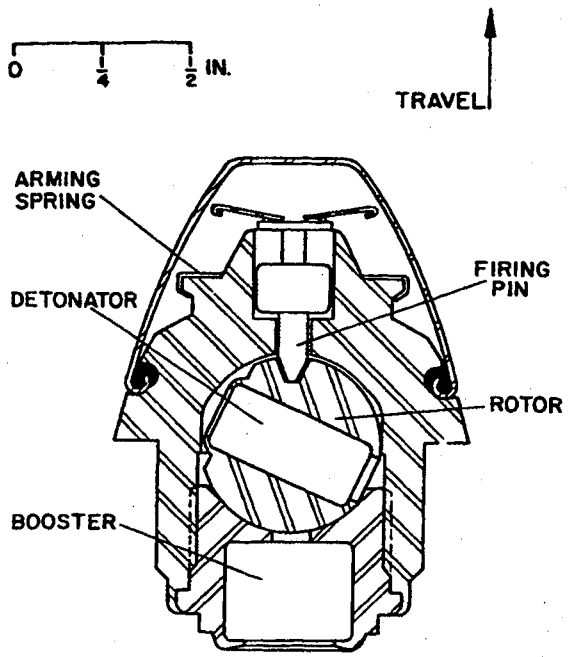

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti, AV 880-6984
Status	Terminated
Ass'y Dwg. No.	E6853 (Atlas)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	30 mm
Location	Nose
Use	HE or GP
MIL-STD's	331, Tests 101-105, 107, 208, 108, 115
Max Values	
Rotat. (rps)	1450
Setback (g)	88,000
Velocity (fps)	500 - 3000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T346E7, FUZE, PD

ARMING DATA

Method	Spin, setback
Delay	10 - 100 ft
Rotation (rps)	Yes
Non-arm / Arm	1.167
Setback (g)	
Non-arm / Arm	70,000
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	1.395
Body Diam. (in.)	
Intrusion	0.605 in.
Thread Size	750-20-UNEF-2A

FUNCTIONING DATA

Action	PD, delay
Type	Mechanical
Delay	1/4 - 1.5 ft
Time Type	
Time Setting (sec)	
Target	Air to air
Sensitivity	
Material	24ST aluminum
Thickness (in.)	0.04
Max Obliq. (°)	85
Velocity (fps)	500 - 3000
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	T54

REMARKS

Was to replace Fuze T263E10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T363, FUZE, BD

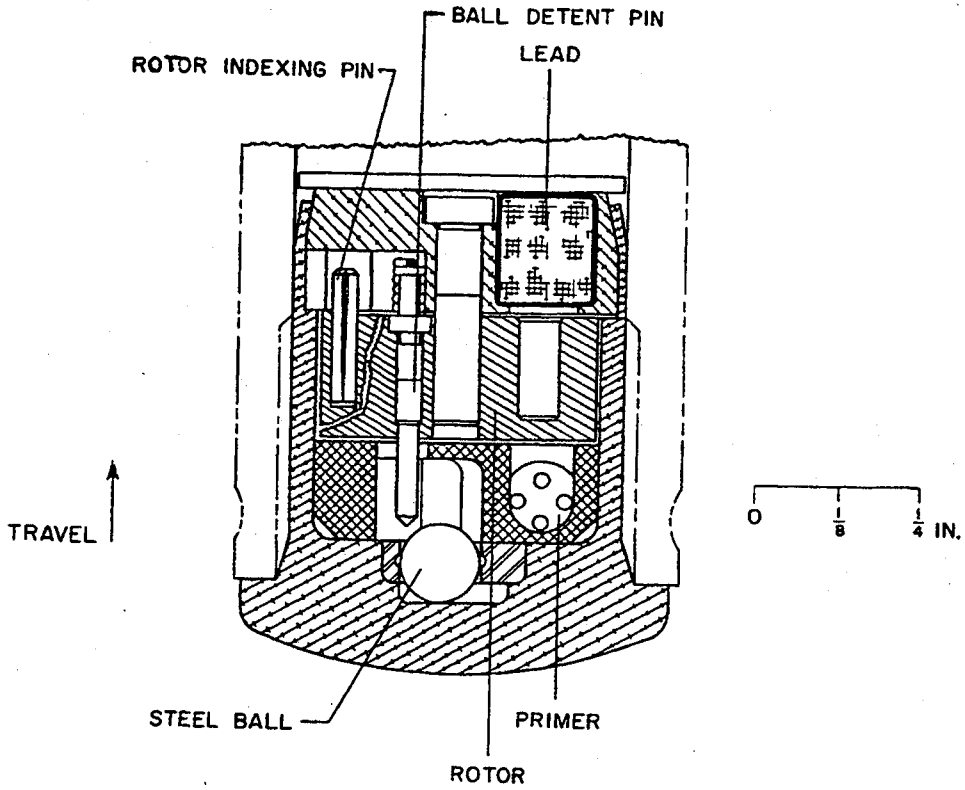

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti -AV-880-6984
Status	Terminated
Ass'y Dwg. No.	KR-61671 (Bulova)
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	20 mm
Location	Base
Use	GP
MIL-STD's	331, Tests 101-107, 201, 206
Max Values	
Rotat. (rps)	2400
Setback (g)	145,000
Velocity (fps)	1000-3000

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T363, FUZE, BD

ARMING DATA

Method	Spin
Delay	10-100 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	345 grain
Total Length (in.)	0.850
Body Diam. (in.)	
Intrusion	0.700 in.
Thread Size	0.625-24NEF-2A (LH)

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0-2 ft
Time Type	
Time Setting (sec)	
Target	Light armor
Sensitivity	
Material	Aluminum
Thickness (in.)	0.051
Max Obliq. (°)	80
Velocity (fps)	1000-3000
Carrier	20 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	T98
Detonator	
Booster	
Lead	Tetryl

REMARKS

Fuze was to have self sterilization feature

SERIES: A CHAPTER: 7
DESIGNATION: T363
BD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T364, FUZE, BD

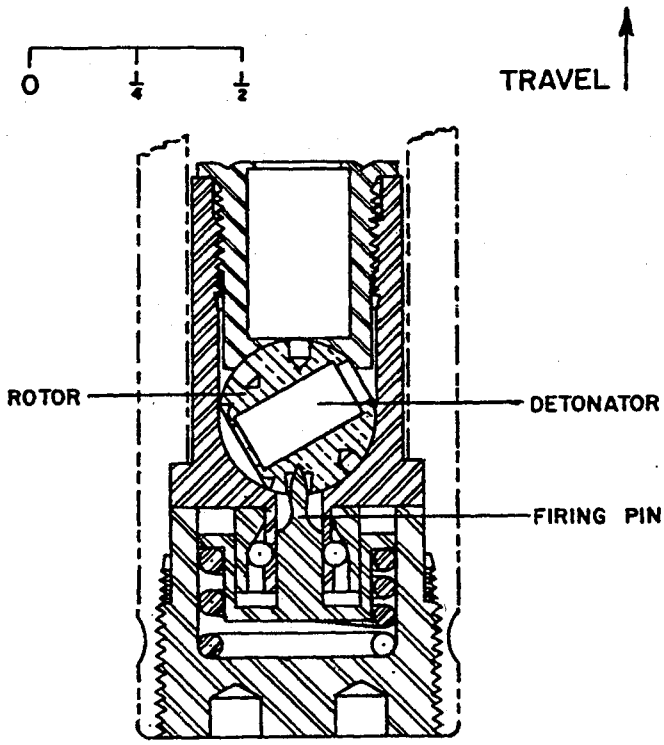

IDENTIFICATION

Agency ARRADCOM, DRDAR-SCA
R. Trifilleti AV-880-6984

Status Terminated

Ass'y Dwg. No.

Parts List

Specification

Previous Number

GENERAL

Carriers	Projectile
Cal. — Size	20 mm
Location	Base
Use	GP
MIL-STD's	331, Tests 101-107, 201, 206
Max Values	
Rotat. (rps)	2400
Setback (g)	145,000
Velocity (fps)	1000-3350

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T364, FUZE, BD

ARMING DATA

Method	Spin, Setback
Delay	10-100 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	1.365
Body Diam. (in.)	
Intrusion	1.365 in.
Thread Size	.6875-24NEF-2A (LH)

FUNCTIONING DATA

Action	BD, Delay
Type	Mechanical
Delay	0-2 ft
Time Type	
Time Setting (sec)	
Target	Light armor
Sensitivity	
Material	Aluminum
Thickness (in.)	0.051
Max Obliq. (°)	80
Velocity (fps)	1000-3350
Carrier	20 mm

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M47
Booster	
Lead	RDX 6.17 grain

REMARKS

Fuze was to have self sterilization feature

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX-380 MOD 0, FUZE, PD

IDENTIFICATION

Agency NSWC, G44, G. Klamm AV 290-1977
Status Terminated
Ass'y Dwg. No. GA 2504683
Parts List
Specification
Previous Number

GENERAL

Carriers Projectile
Cal. — Size 40 mm
Location
Use HE
MIL-STD's
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T13:37Z
Check the source to verify that this is the current version before use.

EX-380 MOD 0, FUZE, PD

ARMING DATA

Method

Delay

Rotation (rps)

Non-arm **Arm**

Setback (g)

Non-arm **Arm**

Arming Wire

External Indicat.

PHYSICAL DATA

Weight .33 lb (approx.)

Total Length (in.)

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action

Type

Delay 2-3 meter

Time Type

Time Setting (sec)

Target Foliage, thatch, earth, logs

Sensitivity

Material

Thickness (in.)

Max Obliq. (°)

Velocity (fps)

Carrier

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device

Primer

Detonator

Booster

REMARKS

SERIES: N CHAPTER: 7
DESIGNATION: EX 380 MOD 0
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

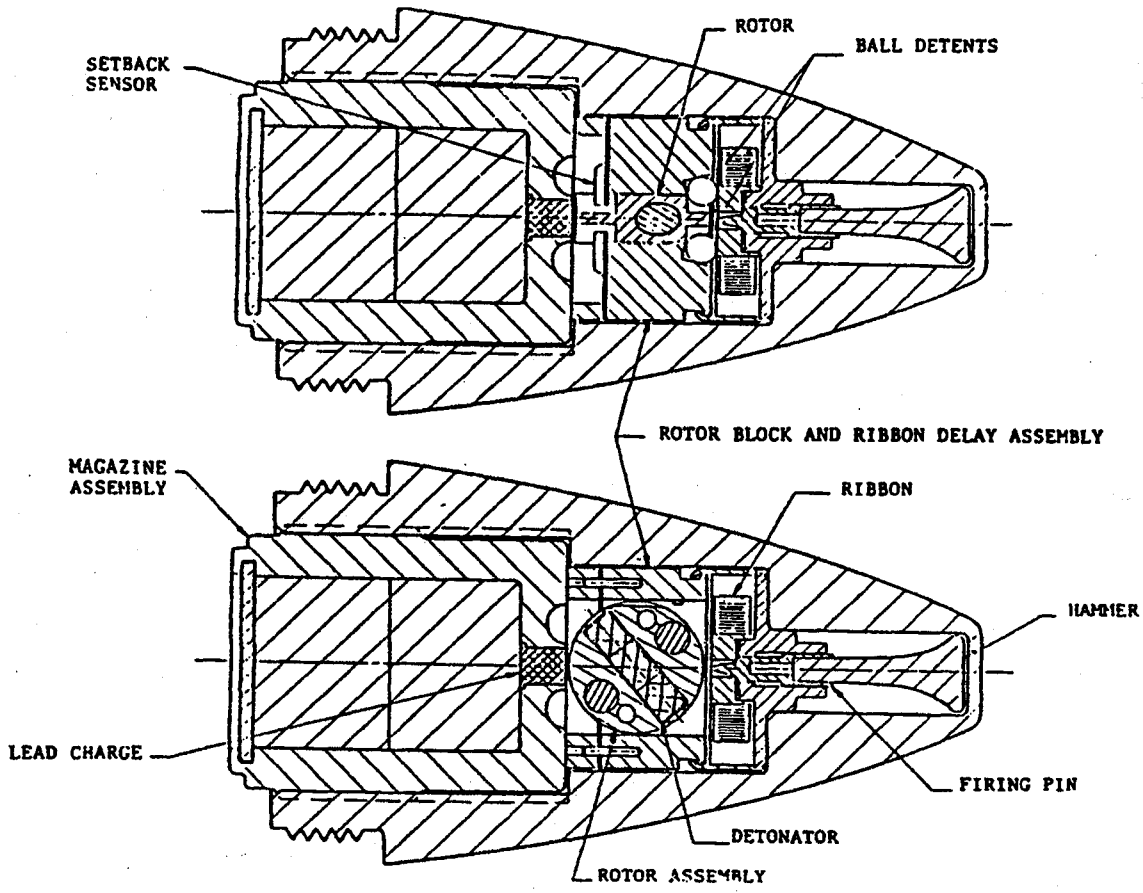

- OVERALL SIZE -	- INTRUSION -	WT: 0.22016 lb (100 g)
LG: 2.452 in (62.3 mm)	DP: 0.545 in (13.8 mm)	THD: 1.18-14NS
XSECT: 1.285 in (32.6 mm)	DIA: 1.18 in (30 mm)	THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G41
- CONTACT: Niemeyer, R
- PHONE: DSN 290-2750
- STATUS: Terminated
- USER: Navy, AF
- ASSY DWG: Not available
- PARTS LIST: Not available
- SPEC: Not available
- PUB:

- NATIONAL STOCK NO: Not available
- DODIC: Not available
- PRIOR MODEL NO: None
- SIMILAR TO: Mk 27 Mod 1

- REPLACES: Mk 27 Mod 1
- REPLACED BY:

GENERAL
- WEAPON: Navy: Mk 2 L60-type 40 mm anti-aircraft gun

- AMMUNITION: PGU-9A/B (AF); Mk 162 Mod 0 (Navy) (identical configurations)

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 730 rps
- SETBACK: 43,200 g
- VELOCITY: 2870 ft/s (875 m/s)

- CREEP:
- FLIGHT TIME: 8 to 10 s

SAFETY STD: MIL-STD-1316

SETTERS: None

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 15,000 g

SECOND SAFETY:
Spin: instantaneous

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None. Has anti-malassembly feature.

ARMING TIME OR DISTANCE:
160 ft (49 m)

EXPLOSIVE COMPONENTS

S&A DEVICE: Out-of-line explosive train

PRIMER: None

DETONATOR: EX 119

LEAD: 38 mg PBXN-5

BOOSTER: 6.10 g PBXN-5

OTHER:

POWER SUPPLY:

None

FUNCTIONING DATA

MODES: PD
TYPE: Mechanical
CHARACTERISTICS:

TARGET: Surface, air
SENSITIVITY:
0.135 in (3.4 mm) chipboard
0.040 in (1.0 mm) 2024-T3 Aluminum

FUNCTION TEMP:

MODE ON DELIVERY:

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG: 1.2 D
US DOT SHIP CL: A
NET EXPL WT: 6.249 g
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Fuze safety is assured by high-magnitude, setback-actuated locks, a spin-actuated ribbon lock and an out-of-line explosive train. On firing, setback moves the setback locks rearward and unlocks a vertical rotor. Centrifugal force acts on the lead counterweight, and arms the rotor. In the armed position, the detonator is aligned with the firing pin and booster. The firing pin is held in the forward position until the spin-actuated ribbon is unwound. The ribbon will unwind and release the firing pin when the projectile has traveled approximately 160 ft (49 m) from the gun muzzle. On impact, the plastic hammer is driven aft, propelling the firing pin. The firing pin stabs the detonator, causing it to fire and thereby initiating the lead and booster.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

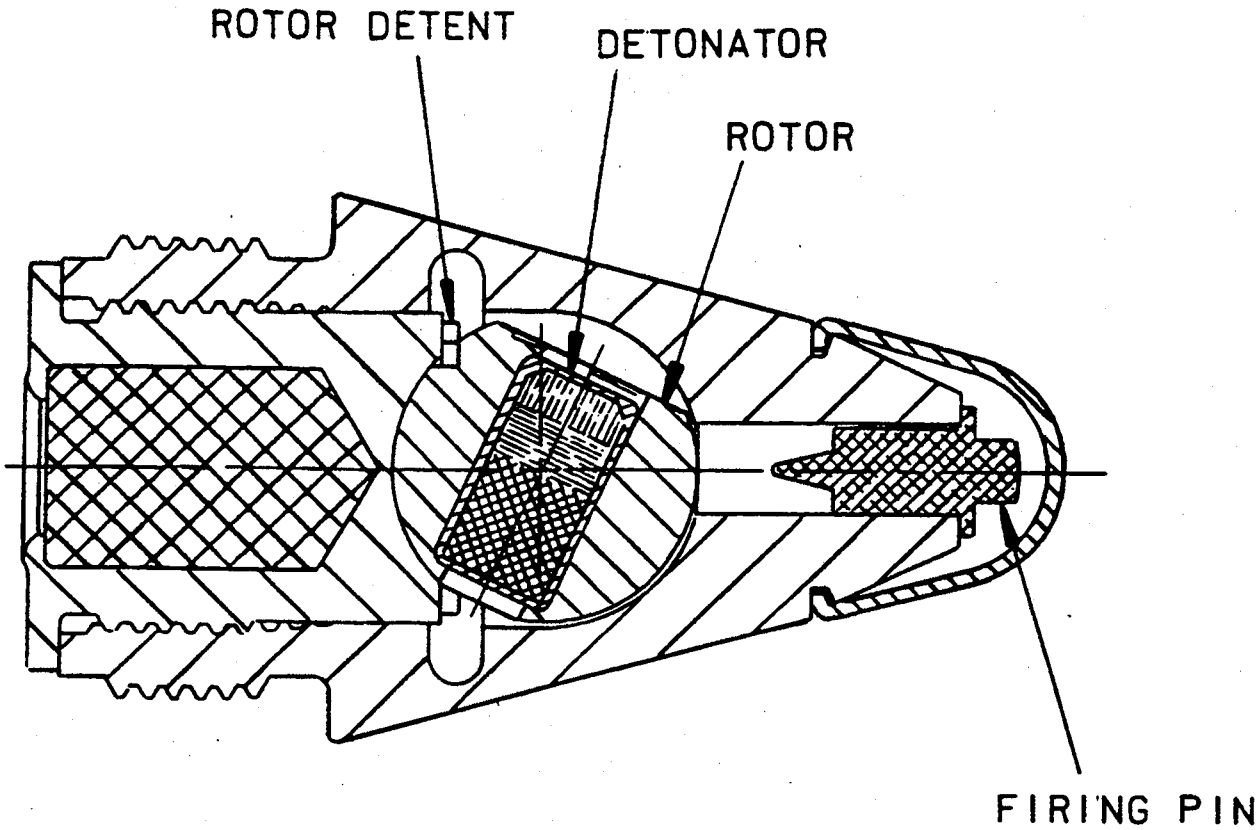

- OVERALL SIZE -	- INTRUSION -	WT: 0.75 oz (21.38 g)
LG: 1.19 in (30.2 mm)	DP: 0.37 in (09.4 mm)	THD: 9/16-32UNS-2A mod
XSECT: 0.67 in (17.0 mm)	DIA: 0.50 in (12.7 mm)	THD DP:

IDENTIFICATION

AGENCY: Eglin AFB, AD/SD3E
CONTACT: Johnson, K, LT
PHONE: DSN 872-8186
STATUS: Canceled
USER: AF
ASSY DWG: 28 115 952 (Honeywell)
PARTS LIST:
SPEC: DS 30046 (Honeywell)
PUB:

NATIONAL STOCK NO:
Not assigned
DODIC:
PRIOR MODEL NO:
SIMILAR TO:

REPLACES: M505A3
REPLACED BY:

GENERAL

WEAPON: 30 mm gun GAU-8

AMMUNITION:
HEI, PGU-13/B

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: 115,000 rpm
SETBACK: 71,700 g
VELOCITY: 3400 ft/s (1036 m/s)

CREEP: 33 g (gun), 57 g (hs a/c)
FLIGHT TIME:
SAFETY STD:
SETTERS:

Supersedes page 7-79 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Ball rotor w/ c-shaped detent.
Spin: 670 rps no arm,
830 rps all arm
SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No
Not meet MIL-STD-1316A
ARMING TIME OR DISTANCE:
10-30 m

EXPLOSIVE COMPONENTS

S&A DEVICE: Ball Rotor

PRIMER: Cal .22 short rim fire

DETONATOR: M57A2 Stab

LEAD: None

BOOSTER: 390 mg HMX or RDX

OTHER:

FUNCTIONING DATA
MODES: PD
TYPE: Mechanical
CHARACTERISTICS:
Functioning Delay
10 in

TARGET: Ground - Light Targets
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Fuze safety is obtained because the diametral detonator in a spherical ball rotor is aligned at a large angle to the axial firing pin and lead. The ball is restrained by a C-shaped spring detent engaged in a shoulder on the ball. On firing, centrifugal force opens the detent arms releasing the ball which then aligns the detonator on the spin axis of the fuze. On impact, the shoulder on the firing pin is sheared and the firing pin strikes the M57A2 Detonator. The M505A1 is similar to the M505A3 except that the detent is a round, cantilever spring engaged with the flat on the ball at the forward end of the detonator. Centrifugal force moves the spring outward and the ball rotates to the armed position. The XM771 is similar to the M505A3, but has an additional setback safety function occuring before ball arming and a spin decay self-destruct feature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM537, FUZE, PD

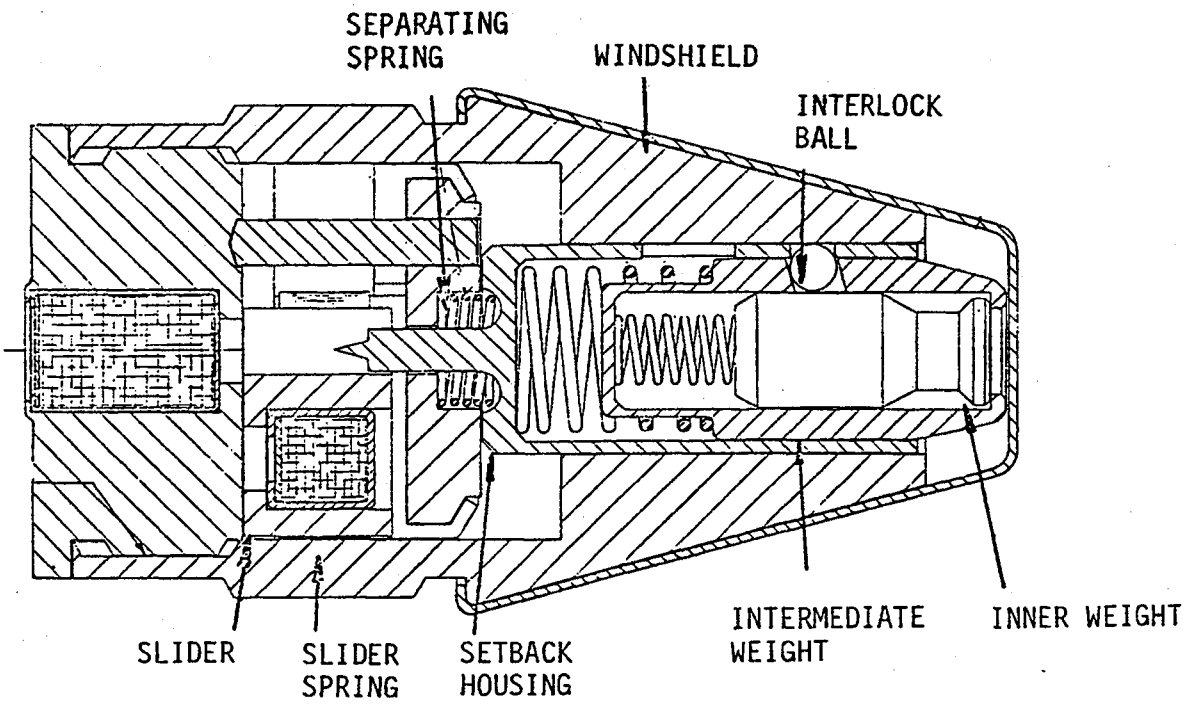

IDENTIFICATION

Agency	ERADCOM, DELHD-DE-OE L. Tozzi, AV 290-2400
Status	Terminated
Ass'y Dwg. No.	TL420C-302/303
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile, Spotting
Cal. — Size	20 mm
Location	Nose
Use	Chemical, Spotting
MIL-STD's	331, Tests 101-107, 115
Max Values	
Rotat. (rps)	12
Setback (g)	10,000
Velocity (fps)	500

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM537, FUZE, PD

ARMING DATA

Method	Setback
Delay	3 1/2-7 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 500 / Arm 1000	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	37 gm
Total Length (in.)	1.381
Body Diam. (in.)	0.742
Intrusion	0.597 in.
Thread Size	.687-24NS-2

FUNCTIONING DATA

Action	PD, Graze
Type	Mechanical
Delay	Less than 500 microsec
Time Type	Mechanical
Time Setting (sec)	
Target	Spotting
Sensitivity	
Material	Ground impact
Thickness (in.)	
Max Obliq. (°)	15°-90°
Velocity (fps)	500
Carrier	XM101 Spotting Ctg

POWER SUPPLY

None

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M55
Booster	RDX

REMARKS

Spotting round

Mechanical counterpart of XM538

XM538 selected due to longer arming delay

SERIES: A CHAPTER: 7
DESIGNATION: XM537
PD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

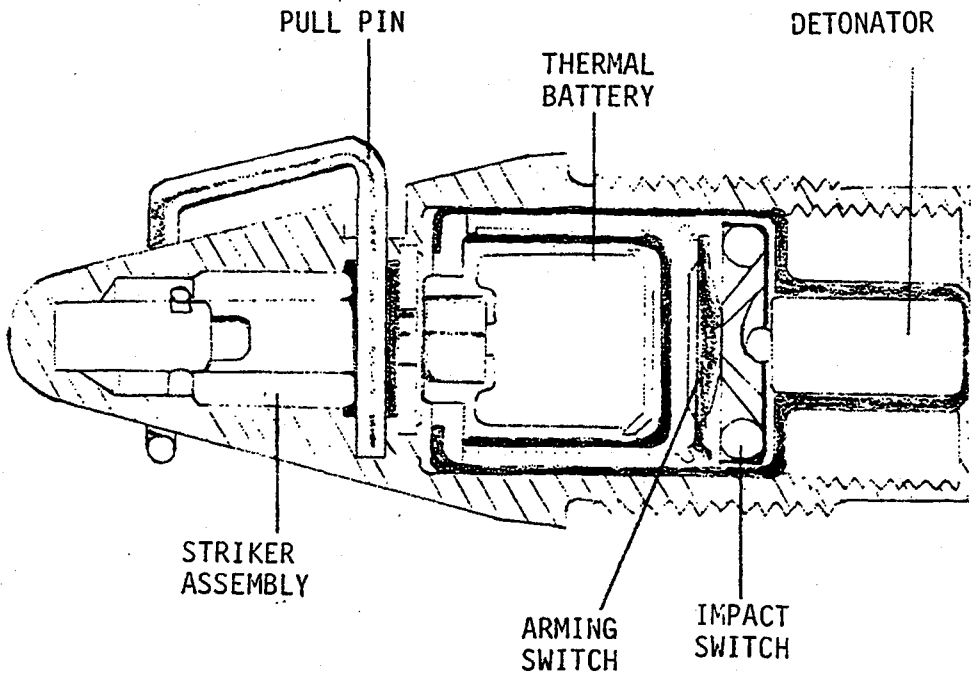

- OVERALL SIZE -	- INTRUSION -	WT: 0.09 lb (40 g)
LG: 1.865 in (47.4 mm)	DP: 0.814 in (20.7 mm)	THD: .687-24NS-2
XSECT: 0.742 in (18.8 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARL
- CONTACT: Tozzi, L
- PHONE:
- STATUS: Canceled
- USER:
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 20 mm gun

- AMMUNITION:
  - Chemical, spotting

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 12
- SETBACK: 10,000 g
- VELOCITY: 500 ft/s (152 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: thermal sw:
500 g no arm; 1,000 g all arm

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
Approx 250 ft

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR: T44

LEAD:

BOOSTER:

OTHER:

FUNCTIONING DATA
MODES: PD, Graze
TYPE: Electrical
CHARACTERISTICS:
500 microsec thermal
switch delay

TARGET: Spotting
SENSITIVITY:
Ground impact; 15-90 deg max obliq.
500 ft/s (152 m/s); XM101 Spotting
Ctg
FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Thermal battery

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Obsolete
- USER: Army
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: T333
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 40 mm gun

- AMMUNITION:
  - M381, M382, M441 Cartridges

LOCATION:
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 7-85 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:
10 to 25 ft (3.0 to 7.6 m)

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

POWER SUPPLY:

FUNCTIONING DATA
MODES:
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

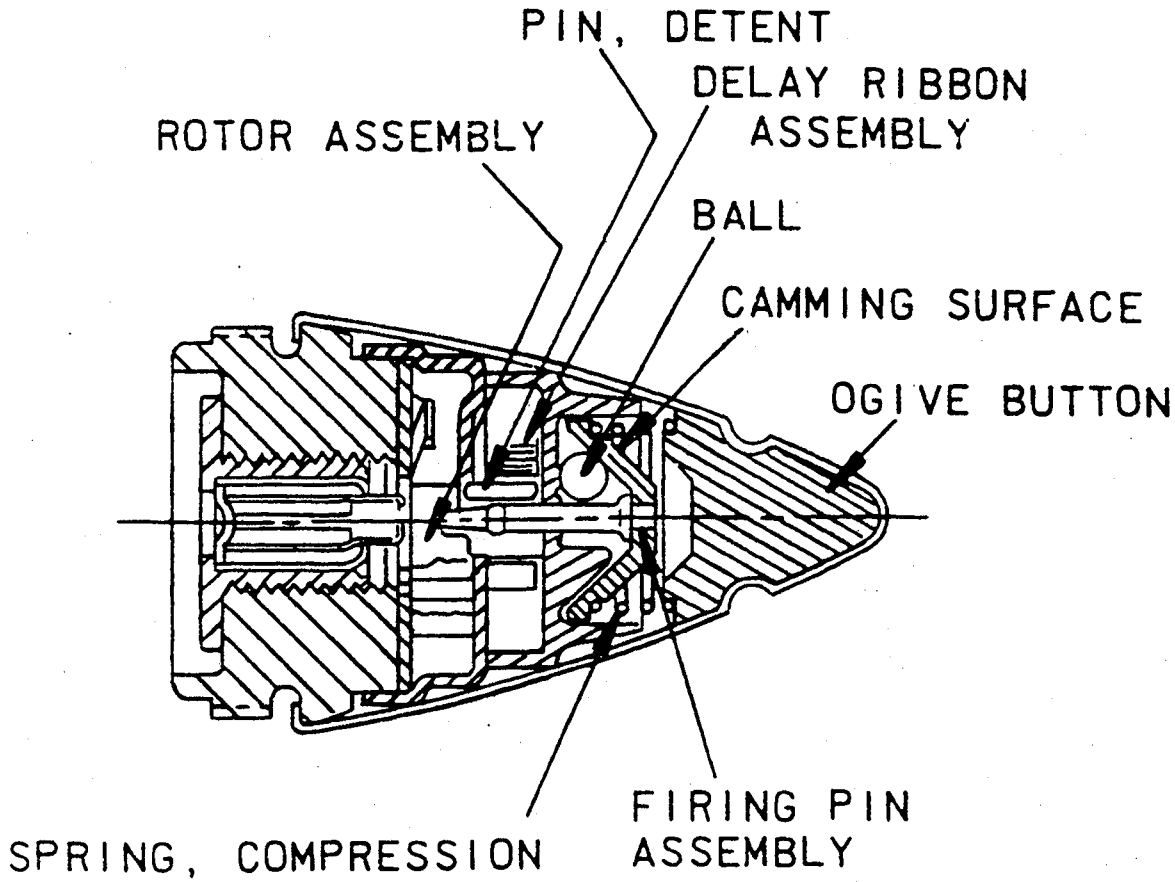

- OVERALL SIZE -	- INTRUSION -	
LG: 1.694 in (43.0 mm)	DP: 0.245 in (6.2 mm)	WT: 0.065 lb (29.5 g)
XSECT: 1.055 in (26.8 mm)	DIA:	THD: 0.9638-32UNS-2A
		THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-
- CONTACT:
- PHONE:
- STATUS: Terminated
- USER: Army
- ASSY DWG: 9 226 650
- PARTS LIST:
- SPEC: AE1-452
- PUB:

- NATIONAL STOCK NO:
  - None
- DODIC: None
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 30-mm Automatic Gun XM140 in Aircraft Armament Subsystem XM30
- AMMUNITION:
  - HE, XM552

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 575 rps
- SETBACK: 80,000 g
- VELOCITY: 2,200 ft/s (671 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316

SETTERS: None

Supersedes page 7-87 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 35,000 g, no arm;
50,000 g, all arm

SECOND SAFETY:
Spin: 250 rps, no arm;
420 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
0.045 s; 164 to 328 ft (50 to 100 m)

EXPLOSIVE COMPONENTS

S&A DEVICE: Ribbon held rotor

PRIMER: None

DETONATOR: M55

LEAD: HMX spitback

BOOSTER: None

OTHER: None

POWER SUPPLY:

FUNCTIONING DATA

MODES: PI BD
TYPE: Mechanical
CHARACTERISTICS:
30 microsecond delay

TARGET: Vehicles, personnel
SENSITIVITY:
1/16 in (1.6 mm) mild steel at 2200 f/s (671 m/s), 60 deg obliquity

FUNCTION TEMP:

MODE ON DELIVERY:
PD

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT: Unknown
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
The XM579 begins to arm after setback ceases. Spin causes self-destruct arming balls to move the firing pin forward while a coiled metal tape unwinds and releases the arming rotor. The rotor locks when the explosive train is aligned. Impact drives the firing pin into the detonator. The fuze is designed to function under all conditions of direct or graze impact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

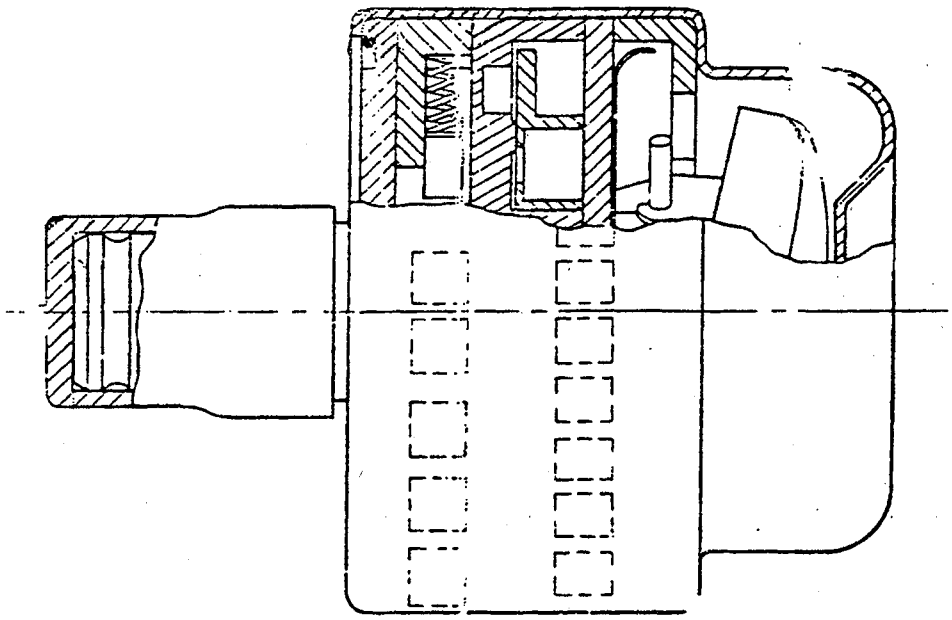

- OVERALL SIZE -	- INTRUSION -	WT: 0.09 lb (41.0 g)
LG: 1.733 in (44.0 mm)	DP: 0.615 in (15.6 mm)	THD:
XSECT: 1.32 in (33.5 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-MUP-P
- CONTACT: Adams, D
- PHONE: DSN 584-3754
- STATUS: Obsolete
- USER: Army, Marines
- ASSY DWG: 9 219 774; D122-2-27
- PARTS LIST: DL9219774
- SPEC: AEI 408
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: XM581
- SIMILAR TO: M551

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Grenade for 40 mm M79 or M203 (attached M16 or M16A1 Rifle) Grenade Launchers
- AMMUNITION:
  - M651 Chemical Cartridge

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 58 rps
- SETBACK: 20,000 g
- VELOCITY: 252 ft/s (77 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316

SETTERS: None

Supersedes page 7-89 of MIL-HDBK-146 .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: spring-driven motor
25 rps no arm,
50 rps all arm
SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
45 - 90 ft (13.7 to 17.4 m)

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER: M42

DETONATOR: M55

LEAD:

BOOSTER:

OTHER:

POWER SUPPLY:

FUNCTIONING DATA
MODES: Point detonating
TYPE: Mechanical
CHARACTERISTICS:
Mechanical time type

TARGET: Antipersonnel
SENSITIVITY:
Ground, 87 deg obliquity,
247 ft/s (75 mm),
40 mm cartridge
FUNCTION TEMP:

MODE ON DELIVERY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

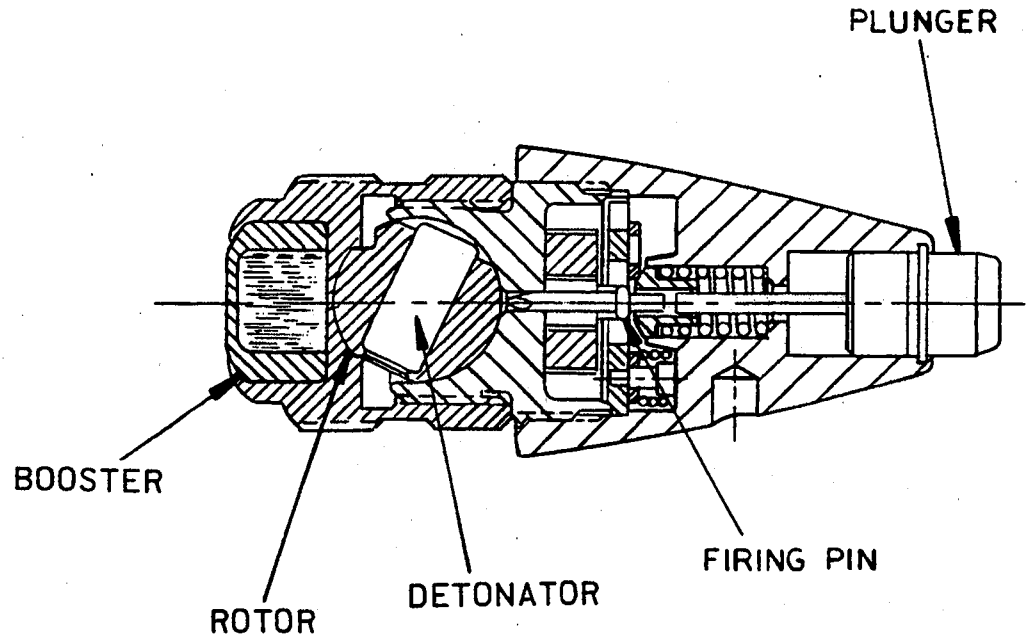

- OVERALL SIZE -	- INTRUSION -	WT: .0464 lb (21.1 g)
LG: 1.774 in (45.1 mm)	DP: 0.69 in (17.5 mm)	THD: M15 x .75 - 6g
XSECT: 0.715 in (18.2 mm)	DIA: Thread	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-CCL-C
- CONTACT: Ghazi, E
- PHONE: DSN 880-3996
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 10 551 759
- PARTS LIST: 10551759
- SPEC: VTL 1305-093
- PUB:

- NATIONAL STOCK NO:
  Not assigned
- DODIC:
- PRIOR MODEL NO: German
- SIMILAR TO:

- REPLACES: XM580
- REPLACED BY:

GENERAL
- WEAPON: 20mm Gun M139 (Interim VRFW)

- AMMUNITION:
  Cartridge, HEIT, M599
  (Proj. M600)

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 1500 rps
- SETBACK: 96,000 g
- VELOCITY: 3500 ft/s (1067 m/s)

- CREEP: 68 g
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 7-91 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Spin: SD Mechanism, 1000 rps no arm, 1250 rps all arm

SECOND SAFETY:
Spin: unwinding ribbon, 500 rps no arm, 1000 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
6 to 10 m delay arming

EXPLOSIVE COMPONENTS

S&A DEVICE: Unwinding ribbon

PRIMER: None

DETONATOR: XM1231 Stab

LEAD: None

BOOSTER: HMX, 10551762

OTHER:

FUNCTIONING DATA

MODES: PD, SD

TYPE: Mechanical

CHARACTERISTICS:
SQ, SD 4-7 s by spin decay (SD 930 to 970 rps)

TARGET: Air, Light Targets

SENSITIVITY:
0.040 in (1.016 mm) 2024 Alum. 70 degrees obliquity, 3500 ft/s (1067 m/s)

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist:dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

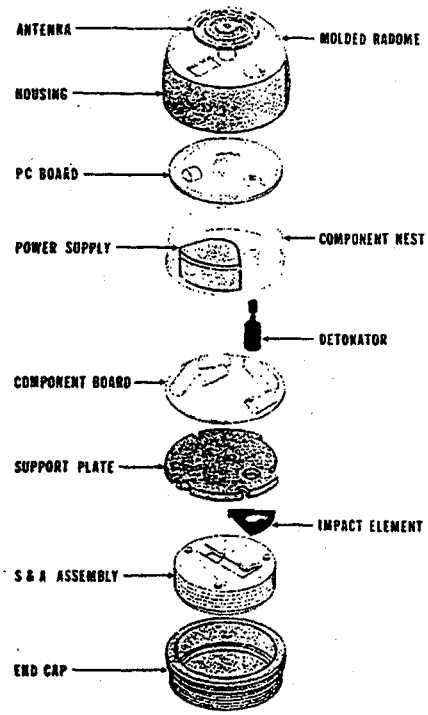

- OVERALL SIZE -	- INTRUSION -	WT: 0.18 lb (80 g)
LG: 1.5 in (38.1 mm)	DP: .276 in (07.0 mm)	THD: 1 15/32-24NS-2A
XSECT: 1.6 in (40.6 mm)	DIA:	THD DP:

IDENTIFICATION
AGENCY: ARL
CONTACT: Wyckoff, R
PHONE: DSN 290-2677
STATUS: Obsolete
USER:
ASSY DWG: 11 714 155
PARTS LIST: EPL 11714155
SPEC: MIL-F-60960
PUB:

NATIONAL STOCK NO:

DODIC:
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY:

GENERAL
WEAPON: 40 mm Helicopter gun system

AMMUNITION:
HE

LOCATION: Nose
BALLISTIC LEVELS:
ROTATION: 200 rps
SETBACK: 40,000 g
VELOCITY: 790 ft/s (241 m/s)

CREEP:
FLIGHT TIME:
SAFETY STD:
SETTERS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 40,000 g all arm

SECOND SAFETY:
Spin: 200 rps all arm

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
Mech. 18 meter, Elect. 125 meter

EXPLOSIVE COMPONENTS

S&A DEVICE: D8800916

PRIMER:

DETONATOR: M84 and M55

LEAD:

BOOSTER: RDX

OTHER:

FUNCTIONING DATA

MODES: Proximity
TYPE: Electrical with Mech. PD backup
CHARACTERISTICS:
No Delay

TARGET: Ground, Water, Antipersonnel
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

PS112 Liquid reserve

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM714, FUZE, PD

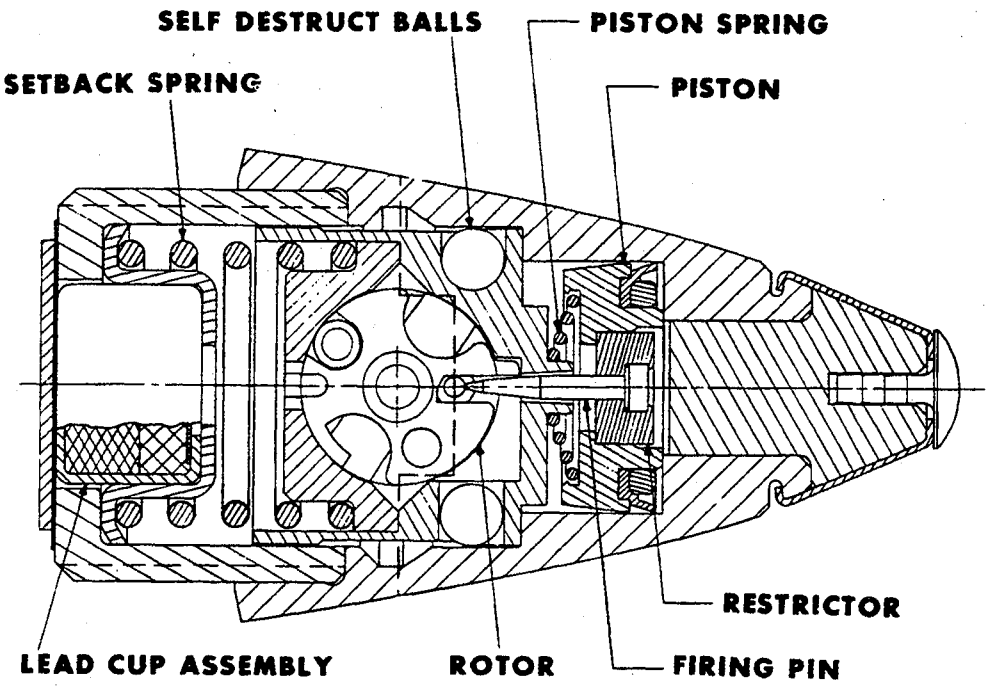

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti, AV 880-6984
Status	Replaced by M755
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Projectile
Cal. — Size	20 mm
Location	Nose
Use	HE
MIL-STD's	331, Tests 101-108, 115, 201, 206, 207
Max Values	
Rotat. (rps)	1470
Setback (g)	96,000
Velocity (fps)	3400

KEY FEATURES

Delay from metered air flow, self-destruct from spin decay.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM714, FUZE, PD

ARMING DATA

Method	Setback, spin
Delay	15 - 40 m
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	13.8 gm
Total Length (in.)	1.362
Body Diam. (in.)	0.714
Intrusion	0.370 in.
Thread Size	19/32-UNS-2A

FUNCTIONING DATA

Action	PD, SD, SQ
Type	Mechanical
Delay	
Time Type	Mechanical
Time Setting (sec)	Non-settable
Target	Light armor
Sensitivity	
Material	2024T3 Aluminum
Thickness (in.)	0.040
Max Obliq. (°)	70
Velocity (fps)	
Carrier	20mm HEI XM600

POWER SUPPLY

Mainspring

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	HMX

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

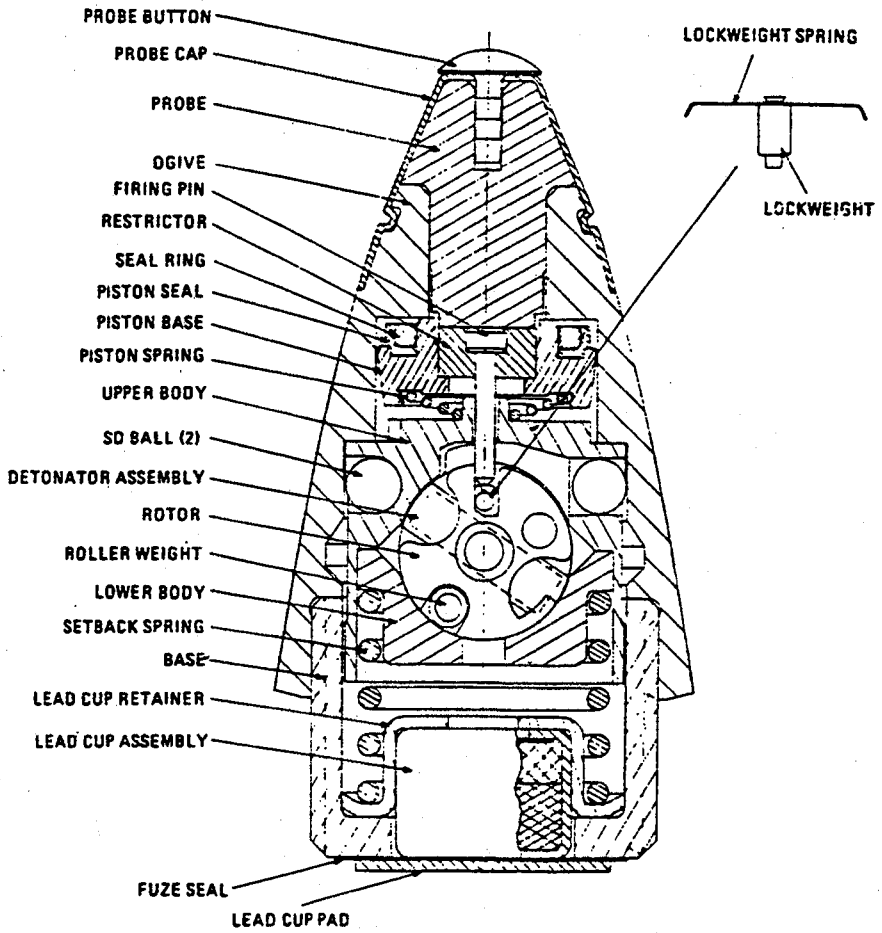

- OVERALL SIZE -	- INTRUSION -	
LG: 1.418 in (36.0 mm)	DP: .515 in (13.1 mm)	WT: 0.04 lb (18 g)
XSECT: 0.66 in (16.8 mm)	DIA: 5.0 in (12.7 mm)	THD: 9/16-32UNS-2A (mod)
		THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Terminated
- USER: Army
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO: XM757, M758, M759 M761
- REPLACES: M505A3
- REPLACED BY: XM75

GENERAL
- WEAPON: 20 mm Gun, M197 f/Helicopter & 20 mm M61 Gun f/winged a/c & VADS
- AMMUNITION: Cartridge, HEI, M56A3, M242 and M246

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 2083 rps
- SETBACK: 128,000 g
- VELOCITY: 3400 ft/s (1036 m/s)

- CREEP: 68 g
- FLIGHT TIME:

SAFETY STD: Waiver for MIL-STD-1316B

SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 2000 g no arm,
2500 g all arm

SECOND SAFETY:
Spin: 200 rps no arm,
800 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
10 to 100m

EXPLOSIVE COMPONENTS

S&A DEVICE: Porous air restrictor

PRIMER: None

DETONATOR: Stab, 11731341

LEAD: 285 mg HMX
Dwg 11 731 329

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: SQ, SD, Graze
TYPE: Mechanical
CHARACTERISTICS:
SQ, SD at 3000 m, Graze
at 80 deg obliq on macadam

TARGET: Ground-Light Targets
SENSITIVITY:
0.04 in (1.016 mm), 2024 T3 Alum.
70 degrees obliquity, 500 to
3400 ft/s (152 to 1036 m/s)
FUNCTION TEMP:
-54 to +71 deg C
MODE ON DELIVERY:
SQ & SD

POWER SUPPLY:

Loaded Piston Spring

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS: 1151
UN CL/DIV SCG: 1.2 B
US DOT SHIP CL: C
NET EXPL WT: 0.323 g
NET PROP WT: None
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:
Fuze safety is obtained by restraining the rotor with two spin detents and the setback-actuated firing pin detent. On firing, setback moves body and piston assys rearward and air passes into cavity forward of piston. Centrifugal force moves two balls into groove of ogive locking body assy rearward, and removes two detents from rotor. When acceleration ceases, piston spring drives piston forward and firing pin releases rotor. Piston is delayed by air passing through its porous restrictor. Centrifugal force arms rotor and locks it with a roiler weight. On impact, nose probe drives firing pin rearward. If impact does not occur, spin decay allows the setback spring to overcome centrifugal force of locking balls and the body assy is driven forward and detonator strikes the firing pin. On graze, either the nose probe is driven rearward or a combination of inertial force from velocity drop and a decrease of centrifugal force due to spin reduction, forces the body assy forward.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

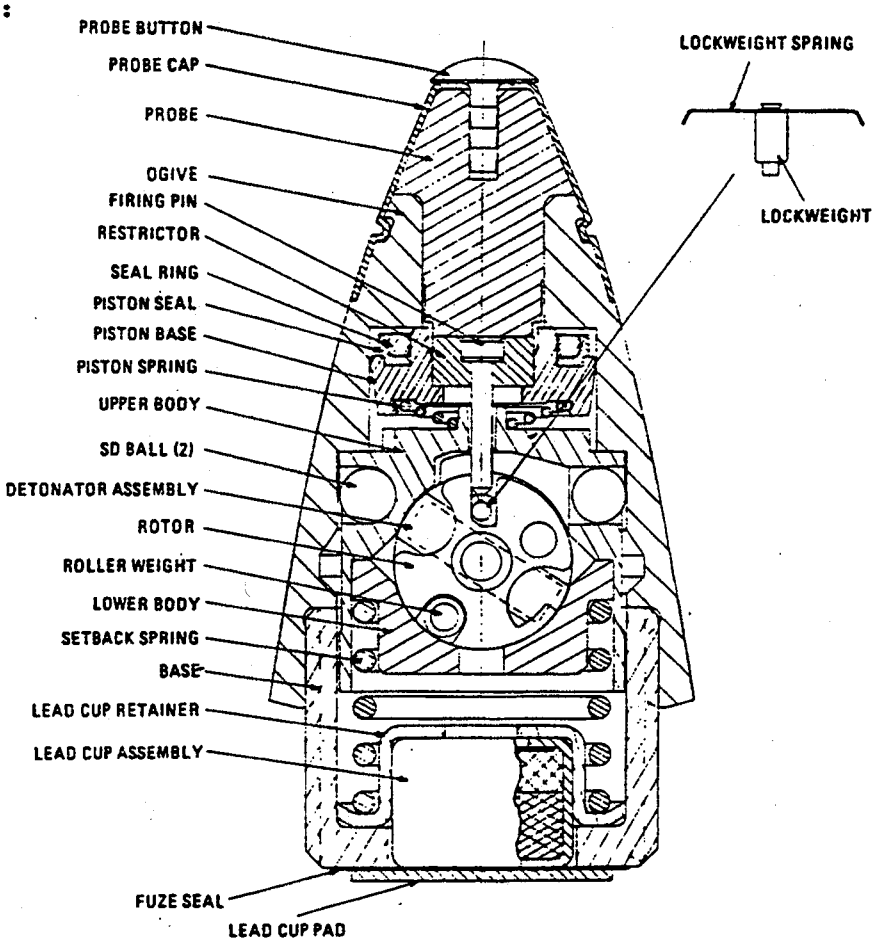

- OVERALL SIZE -	- INTRUSION -	WT: 0.04 lb (18 g)
LG: 1.418 in (36.0 mm)	DP: 0.511 in (13.0 mm)	THD: M15 x 1 - 5 g
XSECT: 0.660 in (16.8 mm)	DIA: 05.0 in (12.7 mm)	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Terminated
- USER: Army
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO: XM757, M758, M759 M761
- REPLACES: KZB 335 (Oerlikon)
- REPLACED BY: M758

GENERAL
- WEAPON: 25 mm Gun, M242, Bushmaster, for IFV M2, & CFV M3
- AMMUNITION: Cartridge, HEI-T, M792, 25 mm

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 1734 rps
- SETBACK: 104,000 g
- VELOCITY: 3600 ft/s (1097 m/s)

- CREEP: 63 g
- FLIGHT TIME: 26 s

SAFETY STD: Waiver for MIL-STD-1316
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 2000 g no arm,
2500 g all arm

SECOND SAFETY:
Spin: 200 rps no arm,
800 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
10 to 100 m

EXPLOSIVE COMPONENTS

S&A DEVICE: Porous air restrictor

PRIMER: None

DETONATOR: Stab, 11731341

LEAD: 285 mg HMX, 11731329

BOOSTER: None

OTHER: None

FUNCTIONING DATA

MODES: SQ, SD, Graze
TYPE: Mechanical
CHARACTERISTICS:
SQ; SD at 6 to 19 s min, 26 max
Graze, Macadam 80 - 90 deg obliq.

TARGET: Ground and Air
SENSITIVITY:
0.04 in (1.016 mm) 2024T3 Alum,
80 deg obliq., 152 to 1097 m/s
or 200 to 3000 m
FUNCTION TEMP:
-54 to +71 deg C
MODE ON DELIVERY:
SQ & SD

POWER SUPPLY:

Loaded Piston Spring

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS: 1151
UN CL/DIV SCG: 1.2 B
US DOT SHIP CL: C
NET EXPL WT: 0.323 g
NET PROP WT: None
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:
Fuze safety is obtained by restraining the rotor with two spin detents and the setback-actuated firing pin detent. On firing, setback moves body and piston assys rearward and air passes into cavity forward of piston. Centrifugal force moves two balls into groove of ogive locking body assy rearward, and removes two detents from rotor. When acceleration ceases, piston spring drives piston forward and firing pin releases rotor. Piston is delayed by air passing through its porous restrictor. Centrifugal force arms rotor and locks it with a roller weight. On impact, nose probe drives firing pin rearward. If impact does not occur, spin decay allows the setback spring to overcome centrifugal force of locking balls and the body assy is driven forward and detonator strikes the firing pin. On graze, either the nose probe is driven rearward or a combination of inertial force from velocity drop and a decrease of centrifugal force due to spin reduction, forces the body assy forward.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

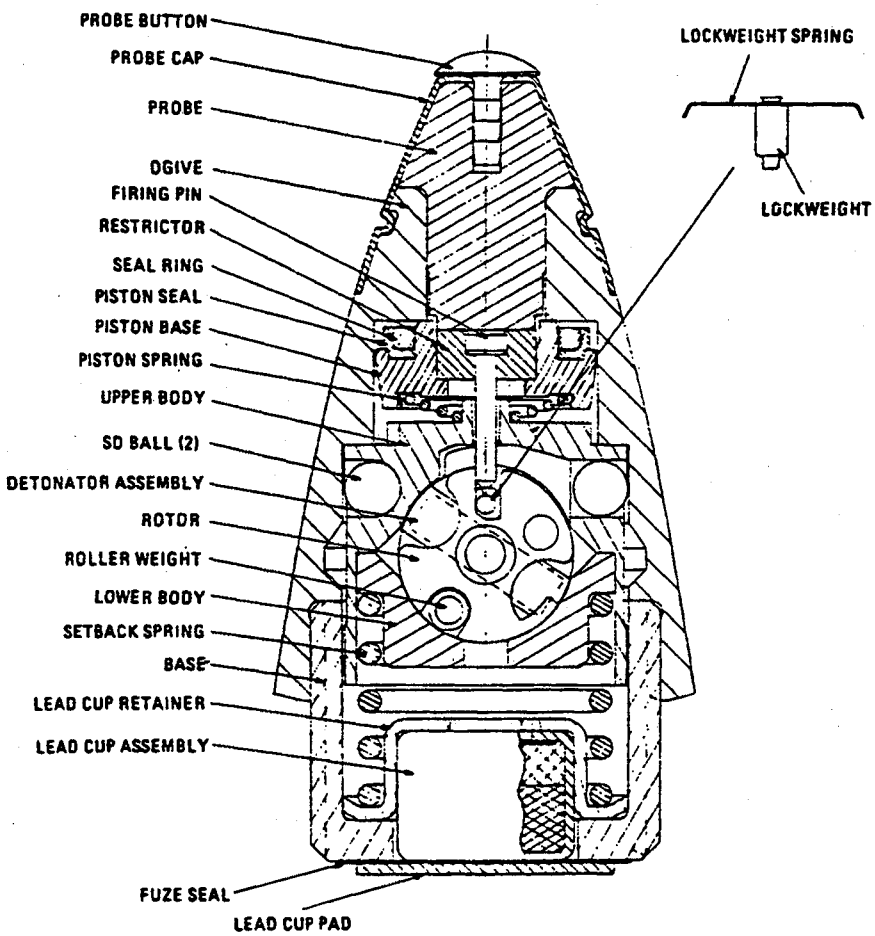

- OVERALL SIZE -	- INTRUSION -	
LG: 1.879 in (47.7 mm)	DP: 0.449 (11.2 mm)	WT: 0.09 lb (40 g)
XSECT: 1.065 in (27.1 mm)	DIA:	THD: M24.5 x 1 - 6 g
		THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Terminated
- USER: Army, Marines
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO: M759, M761
- REPLACES: XM579
- REPLACED BY:

GENERAL
- WEAPON: 30mm Gun, M230, Mk 4 Aden & 553 Defa, in adv attack Helicopter
- AMMUNITION:
  - Cartridge, HE DP M789

LOCATION: Nose and base of shell

BALLISTIC LEVELS:
- ROTATION: 1175 rps (Aden)
- SETBACK: 84,000 g (XM230)
- VELOCITY: 2641 ft/s (805 m/s) (Defa)

- CREEP: 48 g
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316

SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 6000 g no arm,
10,000 g all arm

SECOND SAFETY:
Spin: 200 rps no arm,
800 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
15 to 150 m

EXPLOSIVE COMPONENTS

S&A DEVICE: Porous air restrictor

PRIMER: None

DETONATOR: Stab, Dwg. 11 834 323

LEAD: Spitback,11834355,310mg PBXN-5
Typ 2 Cl 2, 275 mg Typ 1 Cl 3

BOOSTER: In projectile

OTHER: None

FUNCTIONING DATA

MODES: SQ, Graze
TYPE: Mechanical
CHARACTERISTICS:
SQ, Spitback, No SD
Graze, 85 degree obliquity

TARGET: Ground-personnel & Lt Targets
SENSITIVITY:
0.04 in (1.6 mm) 2024T3 aluminum,
80 deg obliquity, 492 to 984 ft
(150 to 300 m)
FUNCTION TEMP:
-54 to +71 deg C
MODE ON DELIVERY:
SQ

POWER SUPPLY:

Loaded piston spring

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS: 1503
UN CL/DIV SCG: 1.2 B
US DOT SHIP CL: C
NET EXPL WT: 0.625 g
NET PROP WT: None
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:
Fuze safety is obtained by restraining the rotor with a setback-actuated firing pin detent and two spin detents. On firing, setback moves body and rotor assembly and the piston and firing pin assembly rearward and air passes into the cavity forward of the piston. Centrifugal force moves two balls into a groove of the ogive, locking the body assembly rearward. It also removes two detents from the rotor. After acceleration, the piston spring drives the piston and firing pin forward releasing the rotor. The piston is delayed by the air passing through its porous restrictor. Centrifugal force arms the rotor and locks it with a roller weight. On impact, the striker drives the firing pin rearward functioning the detonator and the spitback charge. On graze, if the striker is not driven rearward, a combination of inertial force from velociy drop and a decrease of centrifugal force caused by spin reduction, forces the body assembly forward and the detonator strikes the firing pin.

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

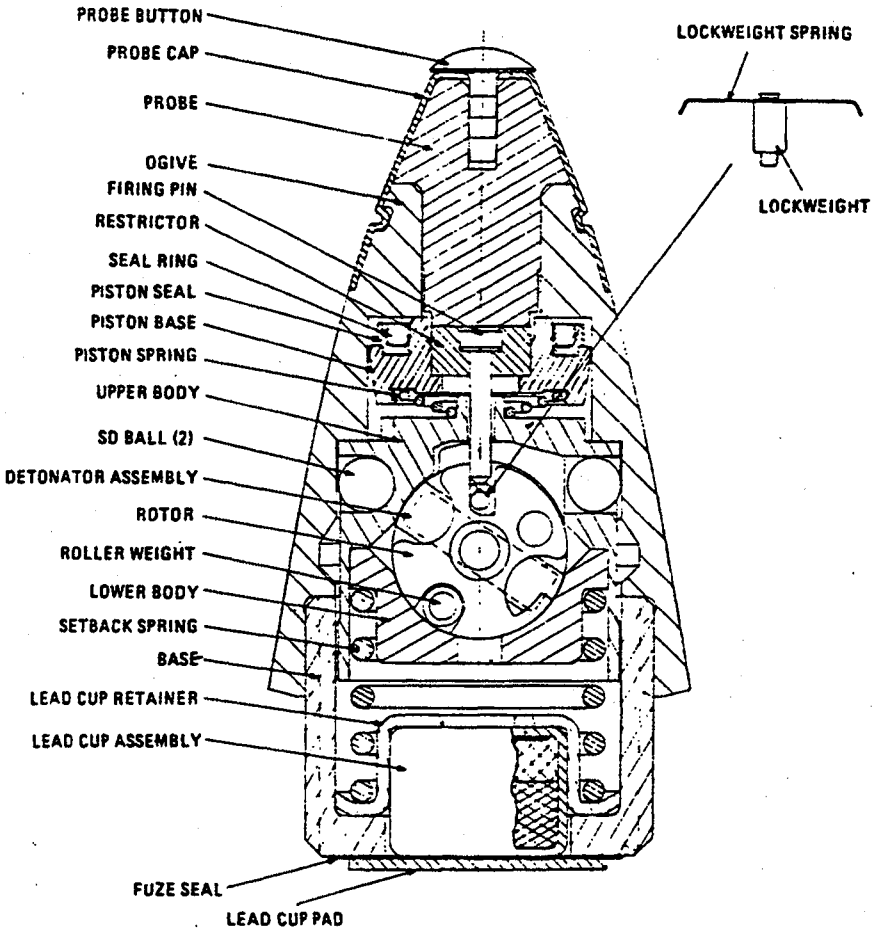

- OVERALL SIZE -	- INTRUSION -	WT: 0.130 lb (59 g)
LG: 3.11 in (79.1 mm)	DP: 1.48 in (37.7 mm)	THD: M22 X1-6g
XSECT: 1.02 in (25.8 mm)	DIA: 0.81 in (20.5 mm)	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Terminated
- USER: Army
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO: M757, M758, M759 M761
- REPLACES: Mk 27 Mod 1
- REPLACED BY: M761

GENERAL
- WEAPON: 40mm Gun, M247 (L/70)

York) 6.5 deg twist
- AMMUNITION:
  - Cartridge, HEI, M811

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 929 rps
- SETBACK: 46,000 g
- VELOCITY: 3363 ft/s (1025 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316B
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 1000 g no arm,
1500 g all arm

SECOND SAFETY:
Spin: 200 rps no arm,
800 rps all arm in primary fuze

OTHER SAFETY:
Spin: 100 rps no arm,
500 rps all arm in delay module

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
10 to 100 m

EXPLOSIVE COMPONENTS

S&A DEVICE: Porous air restrictor

PRIMER: None

DETONATOR: Stab, 12 708 620, 91.5 mg
Stab, 1i 834 323, 36.5 mg

LEAD: None

BOOSTER: 1.10 g PBXN-5,
12 708 652

OTHER: Propulsion charge: 60 mg
PBXN-5, 12 708 648

FUNCTIONING DATA

MODES: Delay, Graze, SD
TYPE: Mechanical
CHARACTERISTICS:
PD 300 microsec delay
SD time
Graze obliq

TARGET: Air-Acft, Grd-Per, Veh
SENSITIVITY:
1.016 mm 2024T3 Alum, 0 t0 80 deg obiq, 200 to 500 m; 0.63 in, 0 to 70 deg obliq, 1000 to 4000 m
FUNCTION TEMP:
-54 to +71 deg C
MODE ON DELIVERY:
Delay and SD

POWER SUPPLY:

Compressed piston spring

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG: 1.2 B
US DOT SHIP CL: C
NET EXPL WT: 1.229 g
NET PROP WT: 0.060 g
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:
On firing, setback moves both the body assy and piston assy rearward and air passes into the cavity forward of the piston. Centrifugal force (CF) moves two balls into the internal groove of the ogive locking the body assy rearward. After acceleration, the piston spring drives the piston and firing pin forward, delayed by air passing through the porous restrictor. This releases the rotor. CF arms the unbalanced rotor and locks it with a roller weight. CF also opens the shutter plates between the delay plunger and the booster. On impact, the nose probe drives the firing pin rearward functioning the det in the rotor. This initiates the charge in the front of the delay plunger which shears the shoulder and drives the delay plunger rearward into the booster cavity. The firing pin in the plunger functions the det which initiates the annular booster. If impact does not occur, the setback spring overcomes CF on spin decay and drives the body assy forward functioning the det. On graze, inertial force due to velocity reduction and/or decrease of CF due to spin reduction, move the body assy forward.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM722, FUZE, PDSD

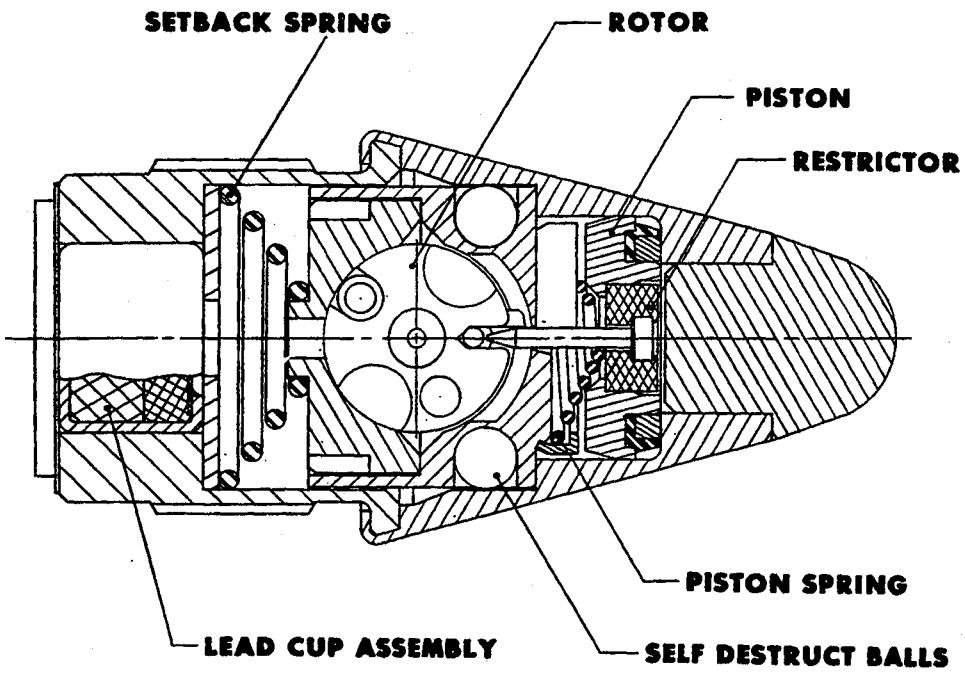

IDENTIFICATION

Agency ARRADCOM, DRDAR-SCA
R. Trifiletti, AV 880-6984

Status Terminated

Ass'y Dwg. No.

Parts List

Specification

Previous Number

GENERAL

Carriers Cartridge M56

Cal. — Size 20 mm

Location Nose

Use HE

MIL-STD's 331 Tests 101-108, 115, 201, 206, 207

Max Values

Rotat. (rps) 2030

Setback (g) 142,000

Velocity (fps) 3380

KEY FEATURES

Delay arming from metered air flow, self-destruct from spin delay.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM722, FUZE, PDSD

ARMING DATA

Method	Setback, spin
Delay	15 - 40 meter
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	15.5 gm
Total Length (in.)	1.322
Body Diam. (in.)	0.651
Intrusion	0.496 in.
Thread Size	9/16-32NS-2A

FUNCTIONING DATA

Action	PDSD
Type	Mechanical
Delay	SQ
Time Type	Mechanical
Time Setting (sec)	Non-settable
Target	Antiaircraft, light armour
Sensitivity	
Material	2024T3 Aluminum
Thickness (in.)	0.040
Max Obliq. (°)	70
Velocity (fps)	
Carrier	20 mm HE1 M56A3

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	HMX

REMARKS

SERIES: A CHAPTER: 7
DESIGNATION: XM722
PD SD Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

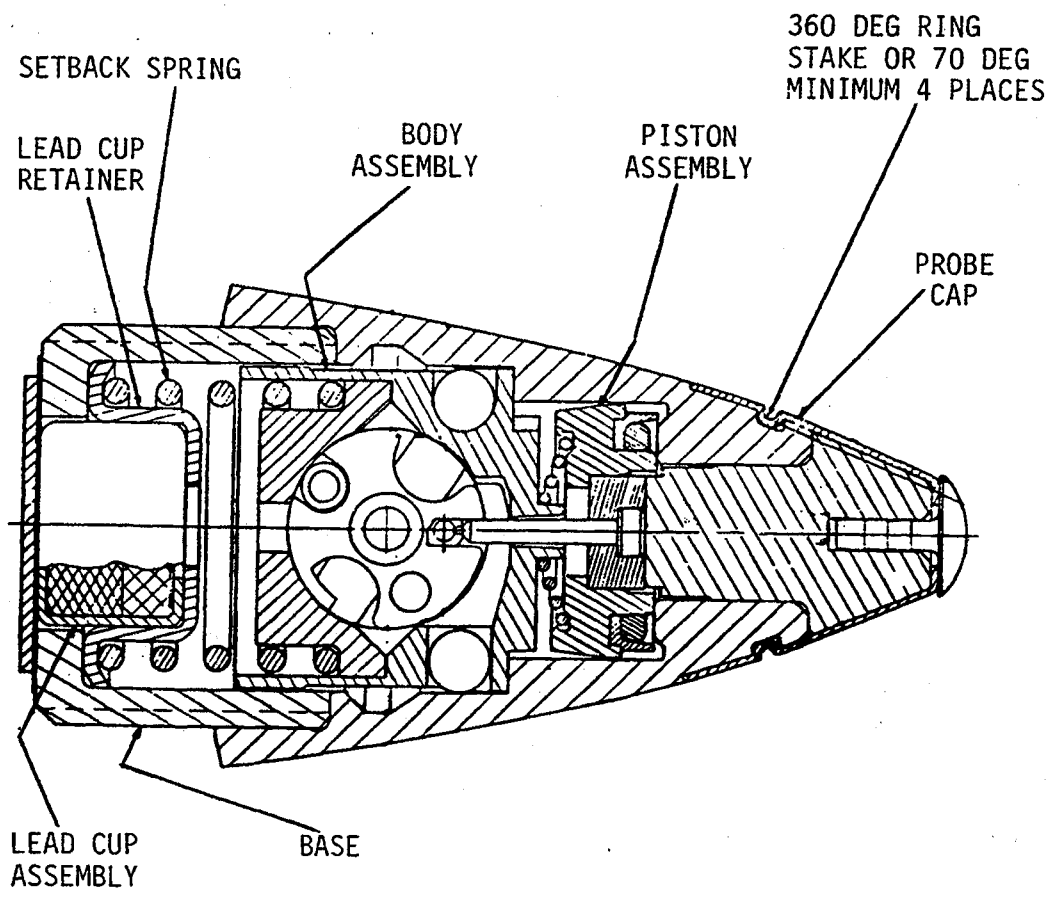

- OVERALL SIZE -	- INTRUSION -	WT: 0.51502 (14.6 g)
LG: 1.42 in (36.1 mm)	DP: 0.295 in (07.5 mm)	THD: 9/16-32UNS-2A
XSECT: 0.718 in (18.2 mm)	DIA:	THD DP:

IDENTIFICATION
AGENCY: ARDEC, SMCAR-CCL-C
CONTACT: Ghazi, E
PHONE: DSN 880-3996
STATUS: Terminated
USER: Army
ASSY DWG: 11 731 326
PARTS LIST:
SPEC: MIL-F-In Preparation
PUB:

NATIONAL STOCK NO:
None assigned
DODIC:
PRIOR MODEL NO: XM714
SIMILAR TO:

REPLACES: XM594
REPLACED BY:

GENERAL
WEAPON: 20mm Gun, M139, Interim VRFW

AMMUNITION:
Cartridge, HEI-T, M599

LOCATION: Nose of Projectile
BALLISTIC LEVELS:
ROTATION: 1500 rps
SETBACK: 96,000 g
VELOCITY: 3500 ft/s (1067 m/s)

CREEP: 68 g
FLIGHT TIME:
SAFETY STD:
SETTERS:

Supersedes page 7-99 of MIL-HDBK-146.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 2000 g no arm,
2500 g all arm

SECOND SAFETY:
Spin: 200 rps no arm,
800 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No
Meets MIL-STD-1316B

ARMING TIME OR DISTANCE:
10 to 100 m

EXPLOSIVE COMPONENTS

S&A DEVICE: Porous air restrictor

PRIMER: None

DETONATOR: Stab. 11731341

LEAD: None

BOOSTER: 285 mg HMX 11731329

OTHER:

FUNCTIONING DATA

MODES: PD SD Graze
TYPE: Mechanical
CHARACTERISTICS:
SQ, SD at 6 to 19 s

TARGET: Air-Aircraft
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Loaded piston spring

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

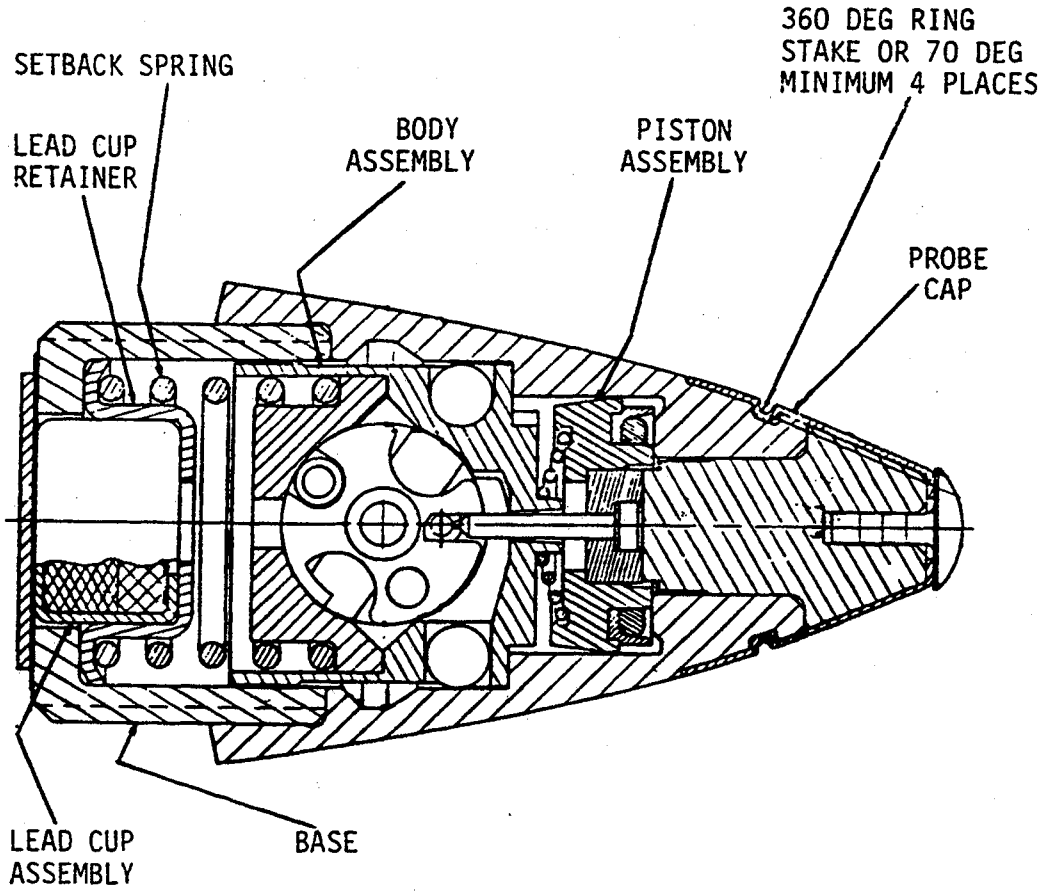

- OVERALL SIZE -	- INTRUSION -	WT: 0.0322 lb (14.6 g)
LG: 1.42 in (36.1 mm)	DP: 0.30 in (7.5 mm)	THD: 9/16-32UNS-2A (mod)
XSECT: 0.72 in (18.2 mm)	DIA: Major thread	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Terminated
- USER: NATO FMS
- ASSY DWG: 11 731 326
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: XM714E1
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 20 mm Guns, M139, RH202 & HS820

- AMMUNITION:
  - Cartridge HEI-T DM51A1 & DM51A2

LOCATION: Nose

BALLISTIC LEVELS:
- ROTATION: 496 rps
- SETBACK: 90,000 g
- VELOCITY: 3445 ft/s (1050 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: Waiver for MIL-STD-1316B

SETTERS: None

Supersedes page 7-101 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 2000 g no arm,
2500 g all arm

SECOND SAFETY:
Spin: 200 rps no arm,
800 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
10 to 100m

EXPLOSIVE COMPONENTS

S&A DEVICE: Porous air restrictor

PRIMER: None

DETONATOR: Stab, 11731341

LEAD: None

BOOSTER: 285 mg HMX
Dwg 11 731 329

OTHER: None

FUNCTIONING DATA

MODES: SQ, SD, Graze
TYPE: Mechanical
CHARACTERISTICS:
SQ, SD at 3000 m, Graze

TARGET: Ground-Light Targets
SENSITIVITY:
0.040 in (1.016 mm), 2024 T3 aluminum, 70 degrees obliquity, 500 to 3400 ft/s (152 to 1036 m/s)
FUNCTION TEMP:

MODE ON DELIVERY:
SQ & SD

POWER SUPPLY:

Loaded Piston Spring

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Fuze safety is obtained by restraining the rotor with two spin detents and a setback-actuated detenting firing pin. On firing, setback moves the body assembly and piston assembly rearward and air passes into the cavity forward of the piston. Centrifugal force (CF) moves two balls into the groove of the ogive, locking the body assembly rearward, and removes two detents from the rotor. When acceleration ceases, the piston spring drives the piston forward and the firing pin releases the rotor. The piston is delayed by the air passing through its porous restrictor. CF arms the rotor and locks it with a roller weight. On impact, the nose probe drives the firing pin rearward. If impact does not occur, the setback spring overcomes centrifugal force of the locking balls as the spin decays and the body assembly is driven forward and the detonator strikes the firing pin. On graze, either the nose probe is driven rear- ward, or a combination of inertial force due to velocity drop and a decrease of centrifugal force due to spin reduction, forces the body assembly forward. XM756 same as XM755 except thread is metric instead of English.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

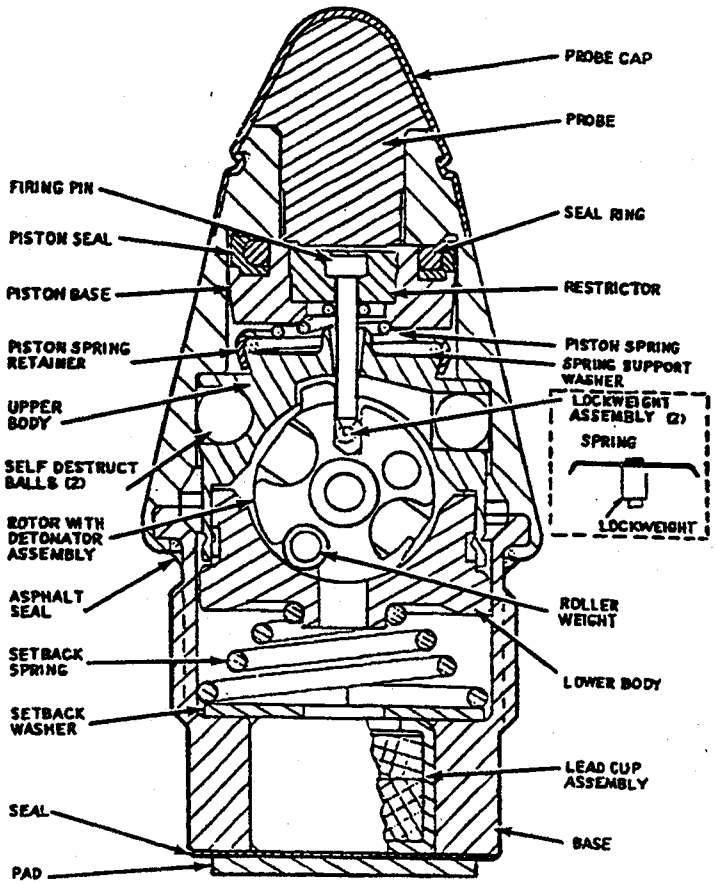

- OVERALL SIZE -	- INTRUSION -	WT: 0.63 oz (17.75 g)
LG: 1.418 in (36.0 mm)	DP: .515 in (13.1 mm)	THD: 9/16-32UNS-2A (mod)
XSECT: 0.66 in (16.8 mm)	DIA: 0.525 in (13.3 mm)	THD DP: 0.511 in (13.0 mm)

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT: Derrig, M
- PHONE: DSN 880-2958
- STATUS: Terminated
- USER: Army
- ASSY DWG: 11 820 583
- PARTS LIST:
- SPEC: 11 820 655
- PUB:

- NATIONAL STOCK NO:
  Not yet assigned
- DODIC: Not yet assigned
- PRIOR MODEL NO: XM714E2
- SIMILAR TO: M758

- REPLACES: M505A3
- REPLACED BY:

GENERAL
- WEAPON: 20 mm Gun, M197 f/ Helicopter,20 mm M61 Gun f/winged a/c VADS & M168
- AMMUNITION:
  Cartridge, HEI, M56A3, M242 and M246

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 2030 rps
- SETBACK: 124,000 g
- VELOCITY: 3400 ft/s (1040 m/s)

- CREEP: 68 g
- FLIGHT TIME:

SAFETY STD: Waiver for MIL-STD-1316B
SETTERS: None

Supersedes page 7-103 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 2000 g no arm,
2500 g all arm

SECOND SAFETY:
Spin: 200 rps no arm,
800 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
10 to 100m

EXPLOSIVE COMPONENTS

S&A DEVICE: Porous air restrictor

PRIMER: None

DETONATOR: Stab, 11731341

LEAD: 285 mg HMX
Dwg 11 731 329

BOOSTER: None

OTHER: None

FUNCTIONING DATA
MODES: SQ, SD, Graze
TYPE: Mechanical
CHARACTERISTICS:
SQ, SD at 3000 m, Graze
at 80 deg obliq on macadam

TARGET: Ground-Light Targets
SENSITIVITY:
0.040 in (1.016 mm), 2024 T3
aluminum, 70 degrees obliquity,
500 to 3400 ft/s (152 to 1036 m/s)
FUNCTION TEMP:
-54 to +71 deg C
MODE ON DELIVERY:
SQ & SD

POWER SUPPLY:

Loaded Piston Spring

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS: 1151
UN CL/DIV SCG: 1.2 B
US DOT SHIP CL: C
NET EXPL WT: 0.323 g
NET PROP WT: None
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:
Fuze safety is obtained by restraining the rotor with two spin detents and a setback-actuated detenting firing pin. On firing, setback moves the body assembly and piston assembly rearward and air passes into the cavity forward of the piston. Centrifugal force (CF) moves two balls into the groove of the ogive, locking the body assembly rearward, and removes two detents from the rotor. When acceleration ceases, the piston spring drives the piston forward and the firing pin releases the rotor. The piston is delayed by the air passing through its porous restrictor. CF arms the rotor and locks it with a roller weight. On impact, the nose probe drives the firing pin rearward. If impact does not occur, the setback spring overcomes centrifugal force of the locking balls as the spin decays and the body assembly is driven forward and the detonator strikes the firing pin. On graze, either the nose probe is driven rearward, or a combination of inertial force due to velocity drop and a decrease of centrifugal force due to spin reduction, forces the body assembly forward. XM757 same as M758 except thread is 9/16-32 instead of metric M15 x 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

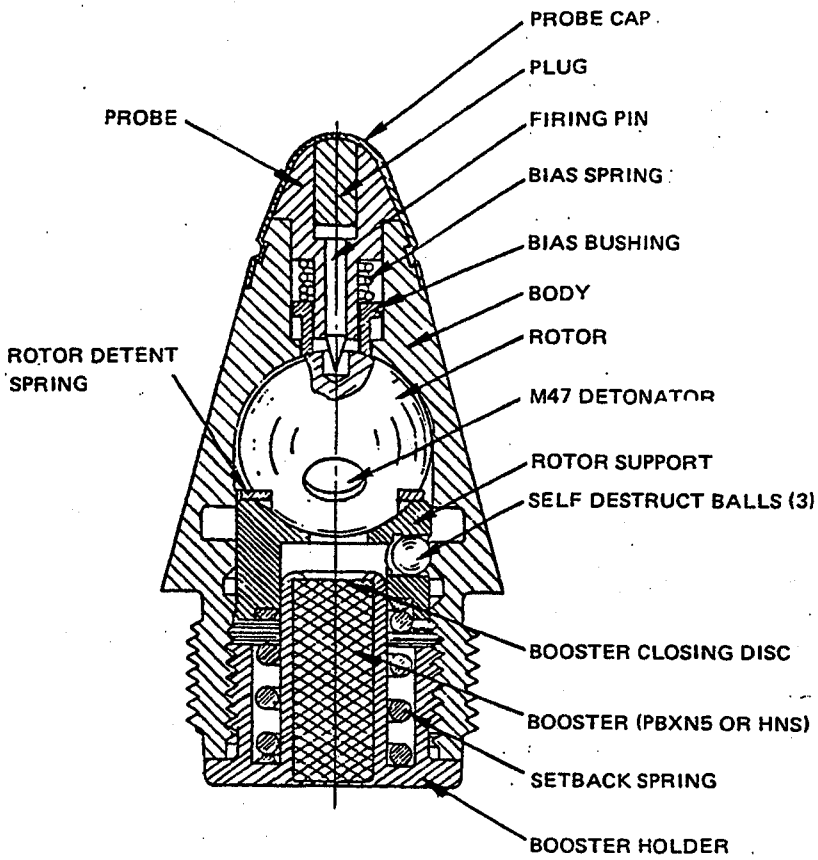

- OVERALL SIZE -	- INTRUSION -	WT: 6.26 oz (17.75 g)
LG: 1.418 in (36.0 mm)	DP: 0.516 in (13.1 mm)	THD: M15 x 1-5g
XSECT: 0.660 in (16.8 mm)	DIA: 0.50 in (12.7 mm)	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT: Derrig, M
- PHONE: DSN 880-2958
- STATUS: Terminated
- USER: Army
- ASSY DWG: 9 390 543
- PARTS LIST:
- SPEC: MIL-F-70864
- PUB:

- NATIONAL STOCK NO:
  Not yet assigned
- DODIC: Not yet assigned
- PRIOR MODEL NO: None
- SIMILAR TO: M503A3, M758

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 25 mm Gun XM242, Bushmaster for IFV M2 & CFV M3

- AMMUNITION:
  Cartridge, HEI, M792

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 1839 rps
- SETBACK: 104000 g
- VELOCITY: 3600 ft/s (1097 m/s)

- CREEP: 63 g
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316B
SETTERS: None

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 3000 g no arm,
5000 g all arm

SECOND SAFETY:
Spin: 670 rps no arm,
1000 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
10 to 100 m

EXPLOSIVE COMPONENTS

S&A DEVICE: Ball rotor

PRIMER: None

DETONATOR: M59

LEAD: None

BOOSTER: 390 mg PBXN--5

OTHER: None

FUNCTIONING DATA

MODES: SQ, Graze, SD
TYPE: Mechanical
CHARACTERISTICS:

TARGET:
SENSITIVITY:
0.040 in (1.016 mm) 2024 T3 aluminum, 80 deg obliquity, 500 to 3600 ft/s (152 to 1097 m/s)
FUNCTION TEMP:
-54 to +71 deg C
MODE ON DELIVERY:
SQ

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG: 1.2 B
US DOT SHIP CL: C
NET EXPL WT: 0.549 g
NET PROP WT: None
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:
The fuze is made safe by restraining the ball rotor with a C-shaped spin detent and a detenting firing pin. On firing, acceleration moves the ball rotor and the sleeve rearward, withdrawing the firing pin from and partially releasing the rotor. Centrifugal force (CF) moves two balls into the groove in the ogive and holds the sleeve rearwards. A creep spring acting through a smaller sleeve holds the rotor to the rear. CF opens the C-shaped detent completely releasing the ball rotor which precesses to the armed position with the axis of the detonator on the axis of the fuze. On impact, the firing pin is forced rearward functioning the PA501 Detonator and in turn, the lead in the fuze body. If impact does not occur when spin decays, the setback spring overcomes the CF of the balls in the ogive and the sleeve and rotor are driven forward, functioning the det on the firing pin. The XM771 Fuze is related to the M505A3 in that it has a ball rotor but it also has a setback arming feature and SD. It is similar to the M758 except that it has a ball rotor instead of a porous restrictor for arming delay.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	
LG: 1.974 in (50.1 mm)	DP: 0.503 in (12.8 mm)	WT: 1.414 oz (40.1 g)
XSECT: 0.958 in (24.3 mm)	DIA: Major thread	THD: M22 x 15-6g
		THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Terminated
- USER: Army
- ASSY DWG: 8 114 677
- PARTS LIST:
- SPEC: None
- PUB:

- NATIONAL STOCK NO:
  - None
- DODIC:
- PRIOR MODEL NO: XM714E7
- SIMILAR TO:

- REPLACES: None
- REPLACED BY:

GENERAL
- WEAPON: 35 mm Gun XM 246 (KDA) for DIVADS

- AMMUNITION:
  - Cartridge, HEI-T, XM808

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 1426 rps
- SETBACK: 68,000 g
- VELOCITY: 3871 ft/s (1180 m/s)

- CREEP: 30 g
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 7-105 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Setback: 2000 g no arm,
2500 g all arm

SECOND SAFETY:
Spin: 200 rps no arm,
800 rps all arm

OTHER SAFETY:
None

SAFE/ARM INDICATION:
No. Waiver for MIL-STD-1316A

ARMING TIME OR DISTANCE:
10 to 100 m

EXPLOSIVE COMPONENTS

S&A DEVICE: Porous air restrictor

PRIMER: None

DETONATOR: Stab, 11731341

LEAD: None

BOOSTER: 285 mg HMX, 11731329

OTHER:

FUNCTIONING DATA
MODES: PD SD Graze
TYPE: Mechanical
CHARACTERISTICS:
SQ
SD at 6-16 s
Graze

TARGET: Air- aircraft
SENSITIVITY:
0.040 in (1.016 mm) 2020 T3
aluminum, 70 degrees obliquity

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

Loaded piston spring.

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

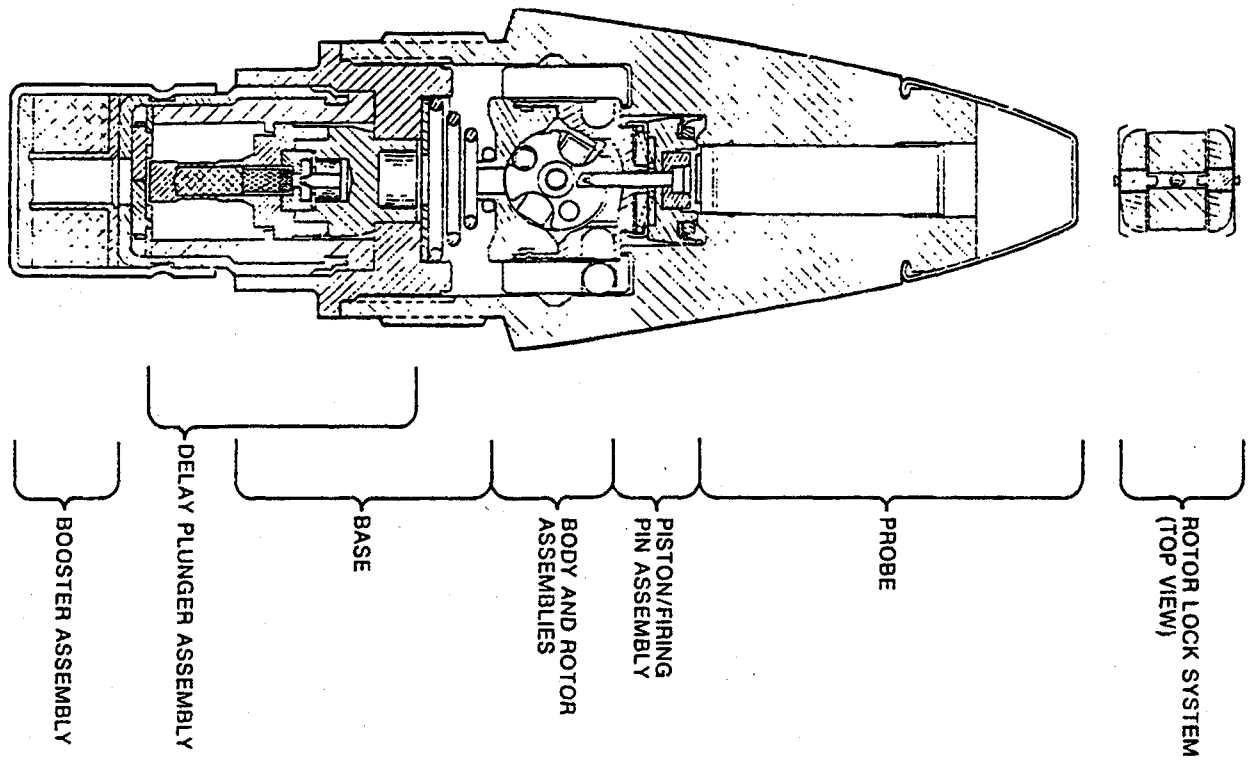

- OVERALL SIZE -	- INTRUSION -	
LG: 3.11 in (79.1 mm)	DP: 1.48 in (37.7 mm)	WT: 0.130 lb (0.059 kg)
XSECT: 1.02 in (25.8 mm)	DIA: 0.81 in (20.5 mm)	THD: M22 X1-6g
		THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-AEF-F
- CONTACT:
- PHONE: DSN 880-
- STATUS: Terminated
- USER: Army
- ASSY DWG: 12 600 049
- PARTS LIST:
- SPEC: MIL-F-63555
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: XM714E8
- SIMILAR TO: M757, M758, M759

- REPLACES: Mk 27 Mod 1
- REPLACED BY:

GENERAL
- WEAPON: 40mm Gun, M247 (L/70)

York) 6.5 deg twist
- AMMUNITION:
  Cartridge, HEI, M811

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: 929 rps
- SETBACK: 46,000 g
- VELOCITY: 3363 ft/s (1025 m/s)

- CREEP:
- FLIGHT TIME:

SAFETY STD: MIL-STD-1316B
SETTERS: None

Supersedes page 7-107 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Setback: 1000 g no arm,
1500 g all arm

SECOND SAFETY:
Spin: 200 rps no arm,
800 rps all arm in primary fuze

OTHER SAFETY:
Spin: 100 rps no arm,
500 rps all arm in delay module

SAFE/ARM INDICATION:
No

ARMING TIME OR DISTANCE:
10 to 100 m

EXPLOSIVE COMPONENTS

S&A DEVICE: Porous air restrictor

PRIMER: None

DETONATOR: Stab, 12 708 620, 91.5 mg
Stab, 11 834 323, 36.5 mg

LEAD: None

BOOSTER: 1.10 g PBXN-5,
12 708 652

OTHER: Propulsion charge: 60 mg
PBXN-5, 12 708 648

FUNCTIONING DATA

MODES: Delay, Graze, SD
TYPE: Mechanical
CHARACTERISTICS:
PD 300 microsec delay
SD time
Graze obliq

TARGET: Air-Acft, Grd-Per, Veh
SENSITIVITY:
1.016 mm 2024T3 Alum, 0 t0 80 deg obiq, 200 to 500 m; 0.63 in, 0 to 70 deg obliq, 1000 to 4000 m
FUNCTION TEMP:
-54 to +71 deg C
MODE ON DELIVERY:
Delay and SD

POWER SUPPLY:

Compressed piston spring

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG: 1.2 B
US DOT SHIP CL: C
NET EXPL WT: 1.229 g
NET PROP WT: 0.060 g
STORAGE TEMP: -54 to +71 deg C

REMARKS/DESCRIPTION:

On firing, setback moves both the body assy and piston assy rearward and air passes into the cavity forward of the piston. Centrifugal force (CF) moves two balls into the internal groove of the ogive locking the body assy rearward. After acceleration, the piston spring drives the piston and firing pin forward, delayed by air passing through the porous restrictor. This releases the rotor. CF arms the unbalanced rotor and locks it with a roller weight. CF also opens the shutter plates between the delay plunger and the booster. On impact, the nose probe drives the firing pin rearward functioning the det in the rotor. This initiates the charge in the front of the delay plunger which shears the shoulder and drives the delay plunger rearward into the booster cavity. The firing pin in the plunger functions the det which initiates the annular booster. If impact does not occur, the setback spring overcomes CF on spin decay and drives the body assy forward functioning the det. On graze, inertial force due to velocity reduction and/or decrease of CF due to spin reduction, move the body assy forward. The M761D is similar to the M758 and M759 except that it has the delay feature.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

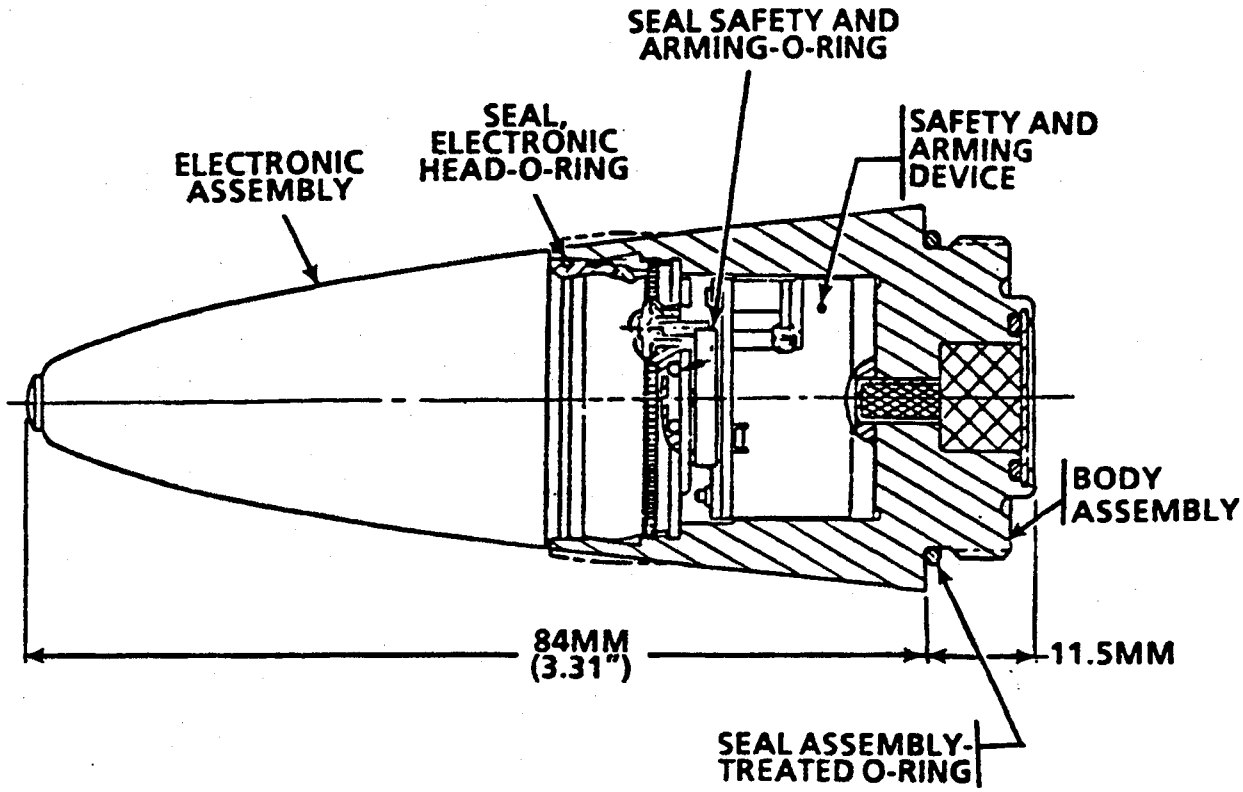

- OVERALL SIZE -	- INTRUSION -	WT: 0.24 lb (110 g)
LG: 3.31 in (84.0 mm)	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC,
- CONTACT:
- PHONE: DSN 880-
- STATUS: Terminated
- USER: Army
- ASSY DWG: 12 703 650
- PARTS LIST:
- SPEC:
- PUB: TM 43-0001-28

- NATIONAL STOCK NO:
  - None
- DODIC: None
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: 40-mm Gun, M247

- AMMUNITION:
  - HE, M822 Cartridge, Sgt. York

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS: None

Supersedes page 7-109 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
0.2 s

EXPLOSIVE COMPONENTS

S&A DEVICE: MS470

PRIMER:

DETONATOR: Lead azide, 135 mg

LEAD: Plastic B, 120 mg

BOOSTER:

OTHER: Igniter, 2 mg
Initiator, 2 mg silver azide

FUNCTIONING DATA

MODES: Proximity, PD, SD
TYPE: Electronic, mechanical
CHARACTERISTICS:
Time to SD: 17 +/- 4 s

TARGET:
SENSITIVITY:
Regulator increases triggering threshold as sea or ground reflection level increases.
FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT: 259 mg
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:

On firing, arming is obtained approximately 0.2 s after muzzle exit by means of the sector gear being turned under the influence of the spin acceleration on the weight to such a position where the electical igniter comes in contact with the blade contact and where its detonator is just opposite the relay charge. Ignition is obtained by proximity or impact function. At power application, the master timer begins to count the flight time. When a total time of 17 +/- 4 s has elapsed without a valid firing pulse from eithe proximity or impact mode, the unit will self destruct.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CHAPTER 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
AGENCY: ARDEC, SMCAR-FSM
CONTACT:
PHONE:
STATUS: Obsolete
USER: Army
ASSY DWG:
PARTS LIST:
SPEC:
PUB:

NATIONAL STOCK NO:
NA
DODIC: NA
PRIOR MODEL NO:
SIMILAR TO:

REPLACES:
REPLACED BY: M200

GENERAL
WEAPON: Hand Grenade

AMMUNITION:
Chemical

LOCATION:
BALLISTIC LEVELS:
ROTATION:
SETBACK:
VELOCITY:

CREEP:
FLIGHT TIME:
SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

FUNCTIONING DATA
MODES: Delay
TYPE: Pyrotechnic
CHARACTERISTICS:
1.7 s delay

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

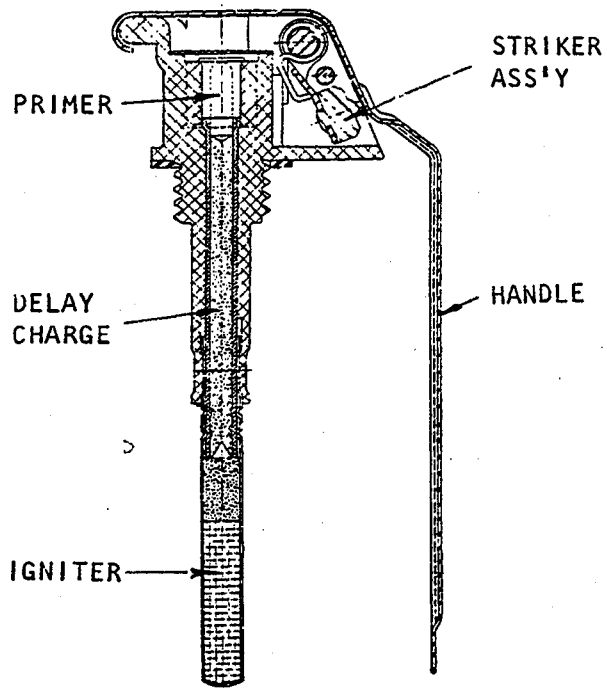

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARDEC, SMCAR-FSA-MM
- CONTACT: Probert
- PHONE: DSN 880-3154
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 82-1-31 (M6A4C)
- PARTS LIST:
- SPEC: MIL-F-2428
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Hand Grenades

- AMMUNITION:
  Mk 2 Fragmentation,
  M3A1, Mk III Hand Grenades

LOCATION:
BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK: NA
- VELOCITY: NA

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: MIL-STD-1316 is NA
SETTERS: None

Supersedes page 8-2C of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Pull pin

SECOND SAFETY:
None

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Yes

ARMING TIME OR DISTANCE:
None

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

FUNCTIONING DATA
MODES: Delay
TYPE: Mechanical
CHARACTERISTICS:
4 to 5 s delay

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

None

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M6A4D, FUZE, GRENADE

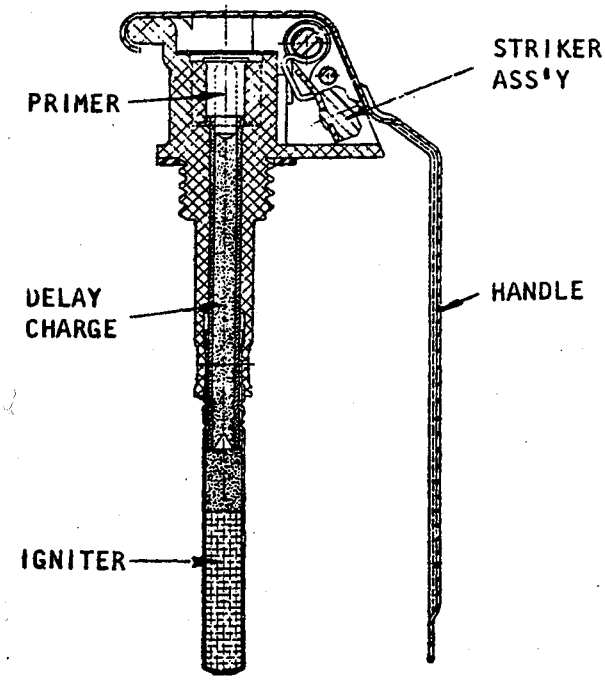

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCU-SI
H. Hadfield, AV 880-2940

Status Obsolete

Ass'y Dwg. No. 82-1-93

Parts List

Specification

Previous Number

GENERAL

Carriers Grenade, hand

Cal. — Size Frag Mk II

Location Top

Use HE

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

REMARKS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M6A4D, FUZE, GRENADE

ARMING DATA

Method	Pull pin
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.0 lb approx
Total Length (in.)	3.5 (approx)
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Release of lever
Type	Mechanical
Delay	4 to 5 sec
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Drawing number for M6A4C: 82-1-31.

SERIES: A CHAPTER: 8
DESIGNATION: M 6A4D
Hand Grenade Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

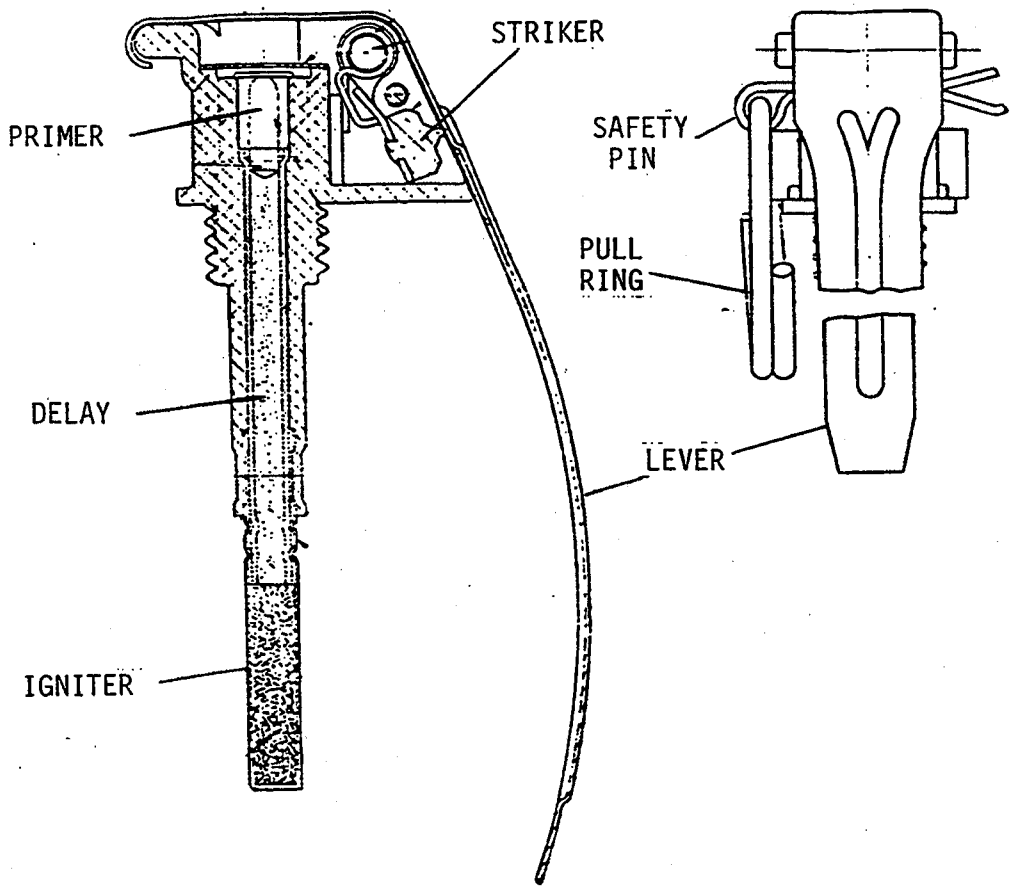

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY:
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Army, Navy
- ASSY DWG: 82-1-46
- PARTS LIST:
- SPEC: MIL-F-2428
- PUB:

- NATIONAL STOCK NO: 1330-00-028-5850
- DODIC: G873
- PRIOR MODEL NO:
- SIMILAR TO: M205A1, A2

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Hand Grenade

- AMMUNITION: M21 Practice Grenade

LOCATION: Top of grenade

BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK: NA
- VELOCITY: 82 ft/s (25 m/s)

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: MIL-STD-1316 is NA

SETTERS: None

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Pull ring of safety pin

SECOND SAFETY:
Lever

OTHER SAFETY:
None

SAFE/ARM INDICATION:
None

ARMING TIME OR DISTANCE:
None

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: < 1 g

DETONATOR: < 1 g

LEAD: None

BOOSTER: None

OTHER: Igniter < 3 g

FUNCTIONING DATA

MODES:
TYPE: Mechanical/pyrotechnic
CHARACTERISTICS:
4.5 s delay

TARGET: Personnel
SENSITIVITY:

FUNCTION TEMP:
-40 to +71 deg C
MODE ON DELIVERY:
Safe

POWER SUPPLY:

None

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT: 3 g
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
The safety pin is removed, freeing the safety lever, which is held in place manually. When the grenade is thrown, the safety lever is released, and is forced away from the grenade body by the spring-loaded striker. The striker impacts the percussion primer, igniting the 4 to 5 s delay, which initiates the black powder charge. On exploding, the black-powder charge forces the stopper from the base of the body and emits a loud report,like a firecracker, and a puff of white smoke.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM75, IGNITER, HAND GRENADE

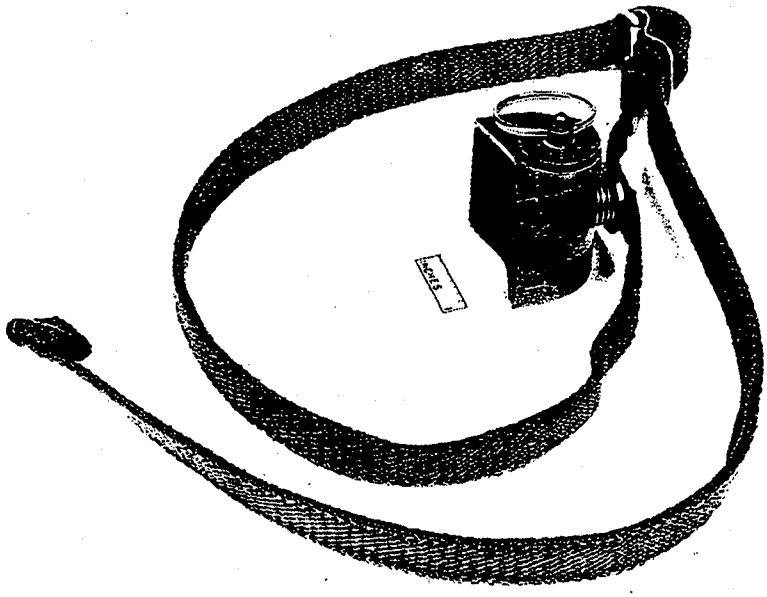

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCU-CM Cutillo
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Molotov cocktail
Cal. — Size	
Location	
Use	Incendiary
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM75, IGNITER, HAND GRENADE

ARMING DATA

Method	Pull pin
Delay	Zero
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	4 oz
Total Length (in.)	1.75
Body Diam. (in.)	1.70 wide x 1.25 deep
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Impact
Type	Pyrotechnic
Delay	
Time Type	Pyrotechnic
Time Setting (sec)	
Target	Tank, bunker, vehicle, etc.
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M55, M39A1
Booster	

REMARKS

SERIES: A CHAPTER: 8
DESIGNATION: XM 75
Hand Grenade Igniter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M201A2 Hand Grenade Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 8-7 and 8-8 of MIL-HDBK 146.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M204A2 Hand Grenade Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 8-9 and 8-10 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M205A2 Hand Grenade Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 8-11 and 8-12 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M211 Rifle Grenade Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 8-13 and 8-14 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M215 Hand Grenade Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 8-15 and 8-16 of MIL-HDBK 146.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

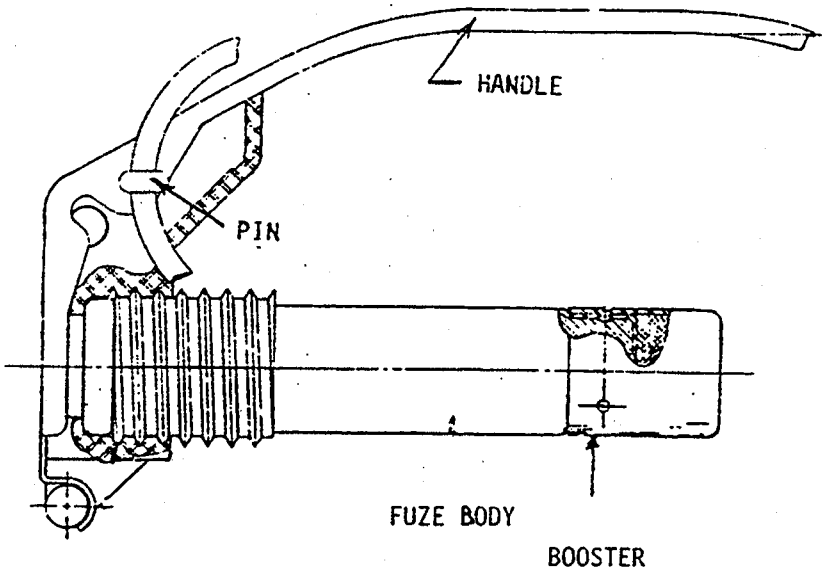

- OVERALL SIZE -	- INTRUSION -	WT: 0.13 lb (60 g)
LG: 2.697 in (69 mm)	DP: 2.215 in (56.3 mm)	THD: 0.625-11UNC-2A
XSECT: 0.504 in (12.8 mm)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: ARL
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Army
- ASSY DWG: 10 998 765
- PARTS LIST: EPL 10 998 765
- SPEC: MIL-F-60494
- PUB: TM 43-0001-29

- NATIONAL STOCK NO:
  1330-00-782-5540 (Grenade)
- DODIC: G889 (Grenade)
- PRIOR MODEL NO: T1012E1
- SIMILAR TO: Nothing

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: Hand Grenade

- AMMUNITION:
  M57 and M26A2 Fragmentation Hand Grenades

LOCATION: Top
BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK: NA
- VELOCITY: NA

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD: None
SETTERS: None

Supersedes page 8-17 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:
Pull pin release handle

SECOND SAFETY:
Heat

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Safety pin and pull ring

ARMING TIME OR DISTANCE:
1.0 to 1.8 s

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: M42G

DETONATOR: M84

LEAD: None

BOOSTER: RDX

OTHER: None

FUNCTIONING DATA

MODES: Impact
TYPE: Electrical
CHARACTERISTICS:
3 to 7 s thermal delay

TARGET: Personnel
SENSITIVITY:

FUNCTION TEMP:
-40 to +52 deg C
MODE ON DELIVERY:
Safe

POWER SUPPLY:

1.5 V thermal reserve battery

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL: A
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
Removal of the safety pin permits release of the safety lever. When the grenade is thrown, the striker assembly, through action of the striker spring, throws off the safety lever and impacts the percussion primer. The primer initiates the power supply, which causes the fuze to arm. At 52 degrees C, arming time may be as short as 1 s, and at -40 degrees C, as long as 2 s. When armed, the grenade will function on impact. If the grenade does not detonate on impact, it will detonate from the secondary pyrotechnic delay feature. If the fuze fails to function after release of the safety lever, the power supply will become inactive within 30 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM225, FUZE, HAND GRENADE: PRACTICE

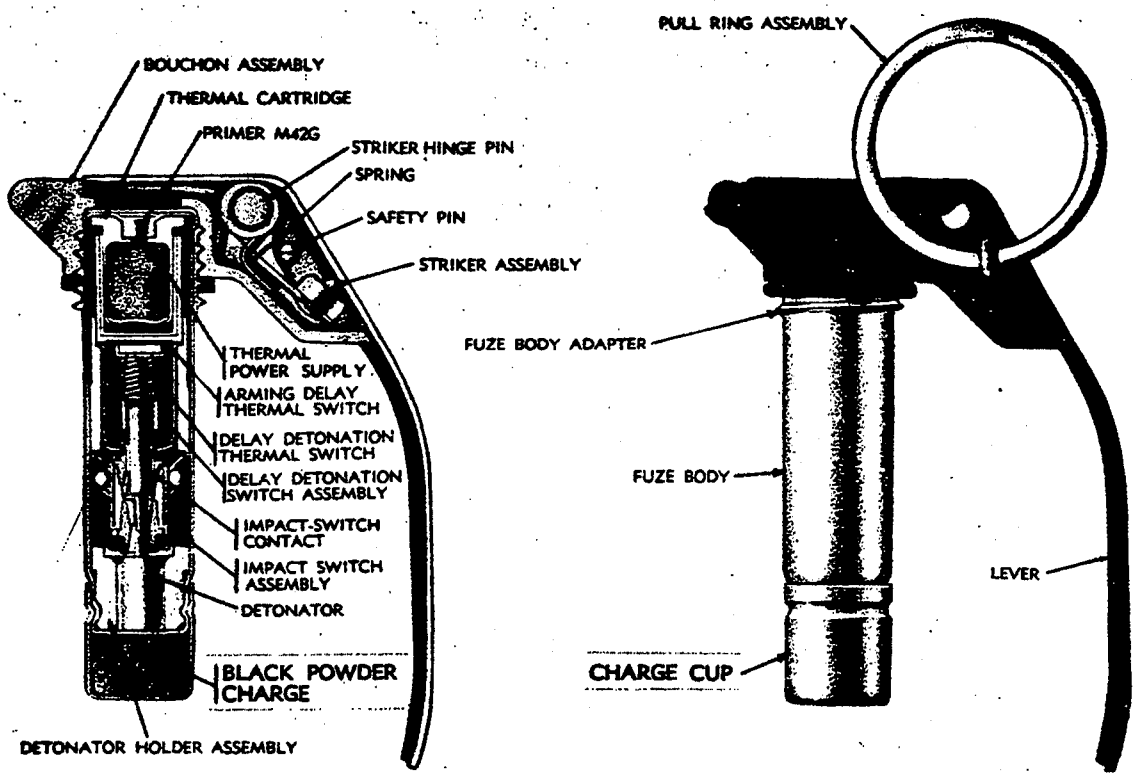

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCU-SI
H. Hadfield, AV 880-2940

Status Obsolete

Ass'y Dwg. No. P9223182

Parts List P9223182

Specification

Previous Number

GENERAL

Carriers Hand grenade

Cal. — Size

Location Insertion

Use Practice

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM225, FUZE, HAND GRENADE: PRACTICE

ARMING DATA

Method	Pull pin, thermal
Delay	1 - 2 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	

PHYSICAL DATA

Weight	2.68 oz
Total Length (in.)	2.7
Body Diam. (in.)	0.57
Intrusion	2.2 in.
Thread Size	5/8-11NC

FUNCTIONING DATA

Action	Impact with delay override
Type	Electrical
Delay	1 - 7 sec
Time Type	Thermal
Time Setting (sec)	Fixed
Target	Antipersonnel
Sensitivity	35 - 85 g impact
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

Thermal battery

EXPLOSIVE TRAIN

S&A Device	
Primer	M42G
Detonator	T77
Booster	10 grain black powder

REMARKS

Modified M217 fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY:
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Navy
- ASSY DWG:
- PARTS LIST:
- SPEC: WS 3029
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Hand Grenade

- AMMUNITION:
  - Mk 9 Mod 0 Hand Grenade ?
  - (WS 3025)

LOCATION:
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

Supersedes page 8-21 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

POWER SUPPLY:

FUNCTIONING DATA
MODES:
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1015, FUZE, GRENADE, HAND, MT

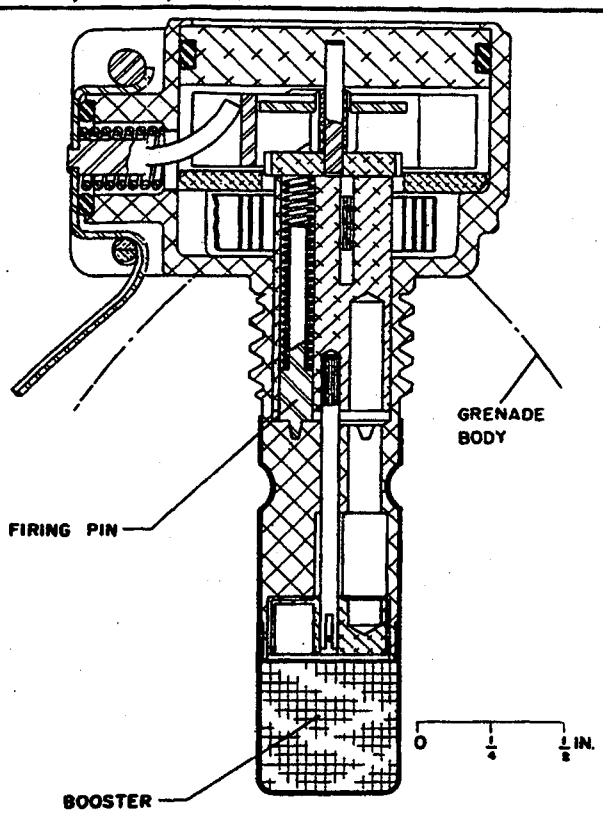

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCU-SI
H. Hadfield, AV 880-2940

Status Terminated

Ass'y Dwg. No. XR-17042D (Bulova)

Parts List

Specification

Previous Number

GENERAL

Carriers Hand grenade

Cal. — Size

Location Insertion

Use GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1015, FUZE, GRENADE, HAND, MT

ARMING DATA

Method	Mechanical train
Delay	
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1.85 lb
Total Length (in.)	2.7
Body Diam. (in.)	
Intrusion	
Thread Size	9/16-12NC

FUNCTIONING DATA

Action	Delay
Type	Mechanical
Delay	4.3 sec
Time Type	
Time Setting (sec)	Antipersonnel
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T32E1
Booster	Tetryl

REMARKS

SERIES: A CHAPTER: 8
DESIGNATION: T1015
Hand Grenade Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1020, FUZE, GRENADE, HAND

IDENTIFICATION

Agency	ARRADCOM, DRDAR-LCU-SI H. Hadfield, AV 880-2940
Status	Terminated
Ass'y Dwg. No.	
Parts List	
Specification	
Previous Number	

GENERAL

Carriers	Hand grenade
Cal. — Size	
Location	Insertion
Use	GP
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	1300
Velocity (fps)	

KEY FEATURES

SERIES: A CHAPTER: 8
DESIGNATION: T1020
Hand Grenade Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1020, FUZE, GRENADE, HAND

ARMING DATA

Method	Mechanical train
Delay	0.85 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	SD
Type	Mechanical
Delay	4.3 sec
Time Type	
Time Setting (sec)	
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Explosive train is not interrupted.

This is Fuze T1016 modified without selective time - impact feature.

SERIES: A CHAPTER: 8
DESIGNATION: T1020
Hand Grenade Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1021, FUZE, GRENADE, RIFLE

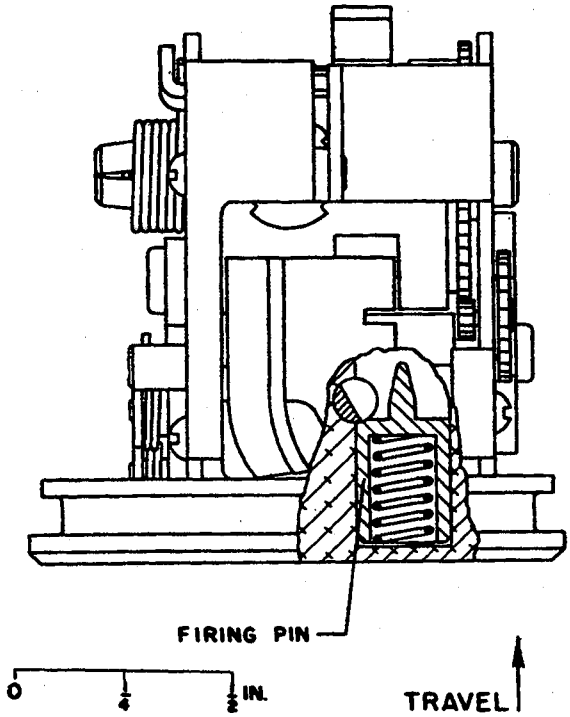

IDENTIFICATION

Agency ARRADCOM, DRDAR-SCA
R. Trifiletti, AV 880-6984

Status Terminated

Ass'y Dwg. No. XD-23053C (Bulova)

Parts List

Specification

Previous Number

GENERAL

Carriers Grenade

Cal. — Size

Location Base

Use HEAT

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1021, FUZE, GRENADE, RIFLE

ARMING DATA

Method	Setback, mech. train
Delay	10 to 25 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm 500 / Arm 700	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.13 lb
Total Length (in.)	1.86
Body Diam. (in.)	
Intrusion	1.86 in.
Thread Size	

FUNCTIONING DATA

Action	PI, BD, graze
Type	Electromechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Armour
Sensitivity	
Material	Normal soil
Thickness (in.)	
Max Obliq. (°)	85
Velocity (fps)	140-160
Carrier	M31 R.G.

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	T96
Detonator	M48
Booster	Tetryl

REMARKS

Modification of Fuze M211.

Fuze for faster acting, graze sensitivitiy, and delay arming.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1022E2, FUZE, GRENADE, RIFLE

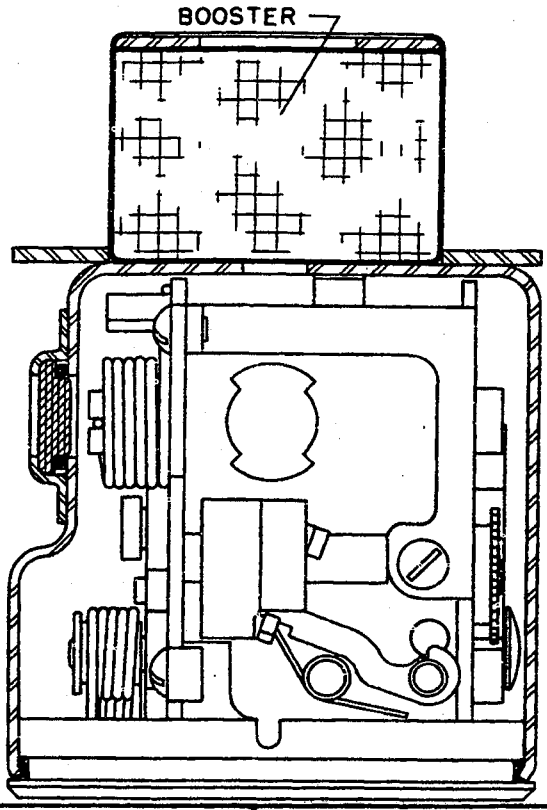

IDENTIFICATION

Agency	ARRADCOM, DRDAR-SCA R. Trifiletti, AV 880-6984
Status	Terminated
Ass'y Dwg. No.	8796376
Parts List	8796376
Specification	MIL-F-13683, 12966
Previous Number	

GENERAL

Carriers	Grenade
Cal. — Size	2.574 In.
Location	Base
Use	HEAT
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	140-160

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1022E2, FUZE, GRENADE, RIFLE

ARMING DATA

Method	Setback
Delay	9 to 25 ft
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	500 Arm 700
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	0.13 lb
Total Length (in.)	1.86
Body Diam. (in.)	1.245
Intrusion	1.86 in. enclosed in end item
Thread Size	None

FUNCTIONING DATA

Action	PI, BD, Graze
Type	Electrical, Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Antitank
Sensitivity	
Material	Normal soil
Thickness (in.)	
Max Obliq. (°)	85
Velocity (fps)	140-160
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M48
Booster	Tetryl, 5.6 g, .750 D × .50 L

REMARKS

SERIES: A CHAPTER: 8
DESIGNATION: T1022E2
Rifle Grenade Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1023, FUZE, GRENADE, RIFLE

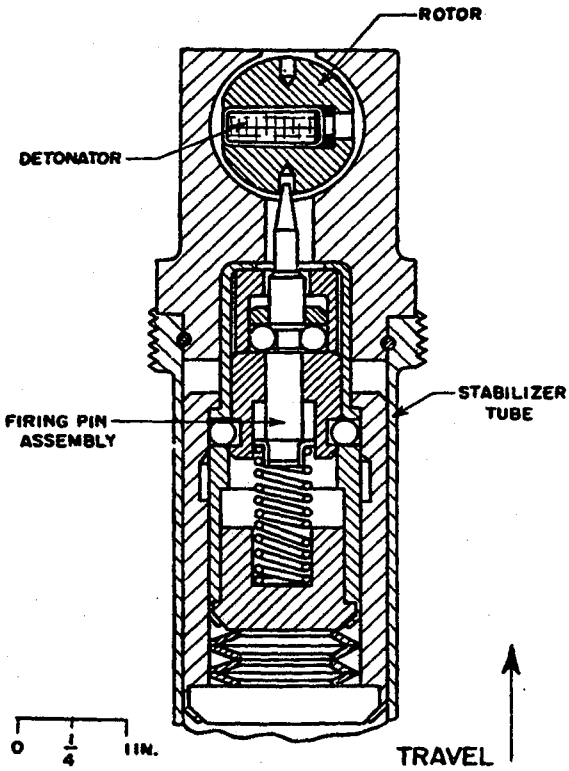

IDENTIFICATION

Agency ARRADCOM DRDAR-SCA
R. Trifiletti, AV-880-6984

Status Terminated

Ass'y Dwg. No. #D3550 (Hesse)

Parts List

Specification

Previous Number

GENERAL

Carriers Grenade

Cal. — Size

Location Base

Use HEAT

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1023, FUZE, GRENADE, RIFLE

ARMING DATA

Method	Setback
Delay	10-15 ft
Rotation (rps)	
Non-arm / Arm	
Setback (g)	
Non-arm / Arm	
Arming Wire	No
External Indicat.	No

PHYSICAL DATA

Weight	
Total Length (in.)	3-1/4
Body Diam. (in.)	
Intrusion	3-1/4 in.
Thread Size	

FUNCTIONING DATA

Action	PI, BD, graze
Type	Mechanical
Delay	
Time Type	
Time Setting (sec)	
Target	Armour
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	T57
Booster	Tetryl

REMARKS

SERIES: A CHAPTER: 8
DESIGNATION: T1023
Rifle Grenade Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1025, FUZE, GRENADE, HAND

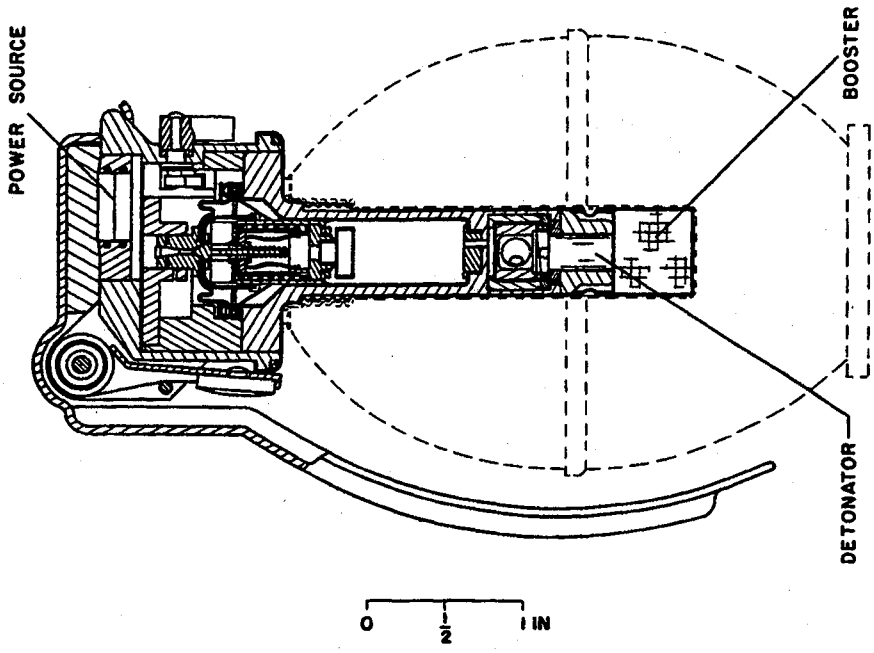

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCU-SI
H. Hadfield, AV 880-2940

Status Terminated

Ass'y Dwg. No. EX-28 729-GA
(Stewart-Warner)

Parts List

Specification

Previous Number

GENERAL

Carriers Hand grenade

Cal. — Size

Location Insertion

Use HE

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1025, FUZE, GRENADE, HAND

ARMING DATA

Method	Mechanical train
Delay	0.85 sec
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	5.2 lb
Total Length (in.)	
Body Diam. (in.)	
Intrusion	
Thread Size	0.5625-12NS

FUNCTIONING DATA

Action	SD, delay, time selec.
Type	Electric
Delay	0.85 sec
Time Type	
Time Setting (sec)	4.3
Target	Antipersonnel
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	M42
Detonator	
Booster	Tetryl

REMARKS

Explosive train is not interrupted.

SERIES: A CHAPTER: 8
DESIGNATION: T1025
Hand Grenade Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CHAPTER 9

MISC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY:
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Navy
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB: NAVAIR 11-1-107

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Signal, Underwater Sound (SUS)

- AMMUNITION:
  - Mk 15 Mods 0-12 Practice Depth Charge (PDC)

LOCATION:
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP:
- FLIGHT TIME:

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Pressure

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:
27 to 39 ft depth

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Mk 43 Mod 1

LEAD: 0.115 g

BOOSTER:

OTHER: None

FUNCTIONING DATA
MODES: Pressure
TYPE: Mechanical
CHARACTERISTICS:
50 ft firing depth

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:
This fuze was used in Practice Depth Charge Mk 15 Mods 0, 1, 3, 4, 6, 11, and 12. All mods are obsolete and hazardous.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

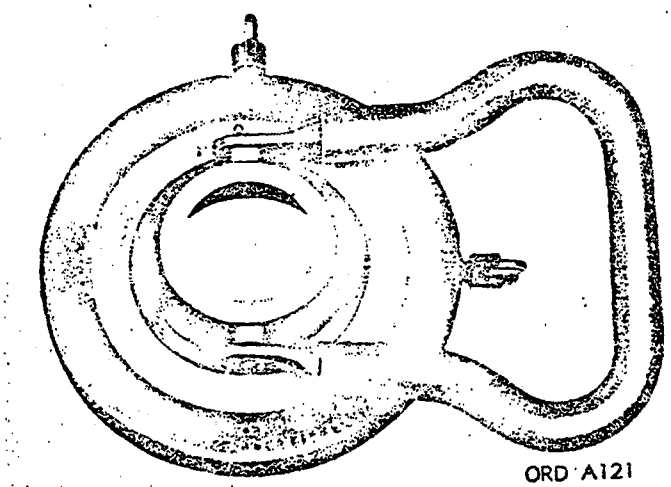

IDENTIFICATION

AGENCY: ARRADCOM, DRDAR-SCF-A

CONTACT: R. McDowell
AV 880-4649

STATUS: Obsolete

USER: Foreign

ASSY DWG: 7582101

PARTS LIST:

SPEC:

NSN: 1290-00-758-2101

PRIOR NOMENCLATURE:

REPLACES:

GENERAL

MUNITION: Fuzes for projectiles for 105mm, 155mm, and 8in Howitzers.

USE: M67 MT, and M501A1 and 520A1 MTSQ Fuze.

LOCATION:

BALLISTIC LEVELS:

ROTATION:

SETBACK:

VELOCITY:

CREEP:

SERIES: A CHAPTER: 9
DESIGNATION: M 23
Fuze Setter

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

PHYSICAL DATA

WEIGHT: 4.67 lb (2.117 kg)

TOTAL LENGTH: 7.625 in (19.37 cm)

CROSS SECTION: 5.25 in (13.34 cm)

INTRUSION:

THREAD SIZE:

OTHER:

2.06 in (5.24 cm)
thickness (fuze axis)

POWER SUPPLY:

FUNCTIONING DATA

MODE(S):

TYPE: Manual

CHARACTERISTICS:

0-75 sec, 0.2 sec incr.
Time corrector 0-60 points,
1 point per incr.

TARGET:

SENSITIVITY:

EXPLOSIVE TRAIN

S&A DEVICE:

PRIMER:

DETONATORS:

LEAD:

BOOSTER:

OTHER:

REMARKS

TM 9-2350-210-12

CHAPTER: 9 SERIES: A
DESIGNATION: M 23
Fuze Setter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M26 Fuze Setter
may be found in MIL-HDBK-145B.

Supersedes pages 9-5 and 9-6 of MIL-HDBK 146.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

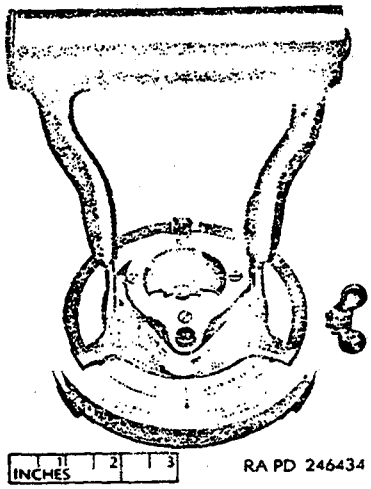

IDENTIFICATION

AGENCY: ARRADCOM, DRDAR-SCF-A

CONTACT: R. McDowell
AV 880-3619

STATUS: Obsolete

USER: Foreign

ASSY DWG: 7688626

PARTS LIST:

SPEC: MIL-S-13461

NSN: 1290-00-300-8033

PRIOR NOMENCLATURE: T46

REPLACES:

GENERAL

MUNITION: Fuzes for projectiles for 105mm, 155mm, and 8in Howitzers.

USE: M513, M514, M728 proximity (CUT) fuzes.

LOCATION: Nose of fuze.

BALLISTIC LEVELS:

ROTATION:

SETBACK:

VELOCITY:

CREEP:

SERIES: A CHAPTER: 9
DESIGNATION: M 28
Fuze Setter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA

FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

DELAY:

SAFE/ARM CONDITION:

FUNCTIONING DATA

MODE(S):

TYPE: Manual

CHARACTERISTICS:

0 to 100 sec, 0.2 sec incr.
0-45 sec, 0.1 sec incr.

TARGET:

SENSITIVITY:

PHYSICAL DATA

WEIGHT: 5.80 lb (2.631 kg)

TOTAL LENGTH: 6.875 in (17.46 cm)

CROSS SECTION: 6.375 in (16.19 cm) *

INTRUSION:

THREAD SIZE:

OTHER:

* 7.75 in (19.69 cm) incl. locking nut.

POWER SUPPLY:

EXPLOSIVE TRAIN

S&A DEVICE:

PRIMER:

DETONATORS:

LEAD:

BOOSTER:

OTHER:

REMARKS

Clockwise rotation. TM 9-2350-212-12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

LAST UPDATE: 02/27/90

FUZE: MK 30 Mod 0
Arming and Firing Device

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY:
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Navy
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB: NAVAIR 11-1-107

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Signals, Underwater Sound (SUS)

- AMMUNITION:
  - Mk 54 Mod 0 and Mk 63 Mod 0 SUS

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK: NA
- VELOCITY: NA

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD:
SETTERS:

NEW PAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Pressure

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:
15 to 25 ft depth

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Mk 43 Mod 1

LEAD: 0.115 g Tetryl

BOOSTER: 1.1 oz Tetryl

OTHER: None

POWER SUPPLY:

FUNCTIONING DATA
MODES:
TYPE:
CHARACTERISTICS:
60 to 300 ft depth

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION
- AGENCY:
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Navy
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB: NAVAIR 11-1-107

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO:
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Signals, Underwater Sound (SUS)

- AMMUNITION:
  - Mk 57 Mod 0 SUS

LOCATION:

BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK: NA
- VELOCITY: NA

- CREEP: NA
- FLIGHT TIME: NA

SAFETY STD:

SETTERS:

NEW PAGE.

Source: https://assist.dla.mil Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Pressure

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:
18 ft

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Mk 43 Mod 1

LEAD: 0.218 g tetryl

BOOSTER: 1.1 g tetryl

OTHER: None

POWER SUPPLY:

FUNCTIONING DATA
MODES:
TYPE:
CHARACTERISTICS:
800 +/- 80 ft depth
46 +/- 5 s firing time

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

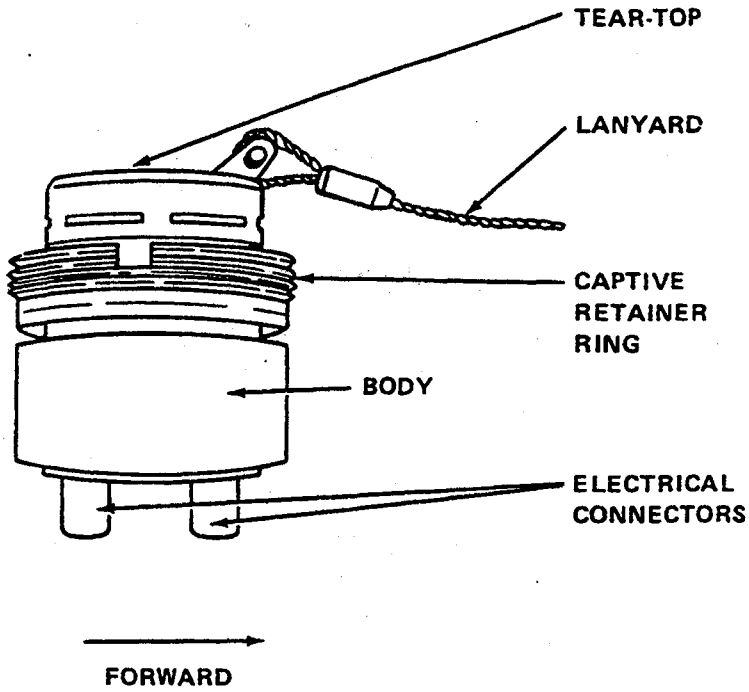

- OVERALL SIZE -	- INTRUSION -	WT: 0.5 lb (227 g)
LG: 2.81 in (71.5 mm)	DP: 1.864 in (47.3 mm)	THD: 2.0-12UN-2B
XSECT: 1.87 in (47.5 mm)	DIA: 1.87 in (47.5 mm)	THD DP: 0.31 in (8.0 mm)

IDENTIFICATION
- AGENCY: Eglin AFB, AD/YN
- CONTACT: Smith, E
- PHONE: DSN 872-5988
- STATUS: Terminated
- USER: AF
- ASSY DWG:
- PARTS LIST:
- SPEC:
- PUB:

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: None
- SIMILAR TO: FZU-32B/B

- REPLACES: Nothing
- REPLACED BY:

GENERAL
- WEAPON: Laser-guided bomb (LGB)

- AMMUNITION:
  With FMU-124A/B Fuze in laser-guided bombs

LOCATION: Side (charging) well
BALLISTIC LEVELS:
- ROTATION:
- SETBACK:
- VELOCITY:

- CREEP: Free fall
- FLIGHT TIME:

SAFETY STD: NA
SETTERS: NA

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Lanyard

SECOND SAFETY:
260 KIAS rotational threshold
(LGB configuration)

OTHER SAFETY:
None

SAFE/ARM INDICATION:
Safe if tear-top in place

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: None

LEAD: None

BOOSTER: None

OTHER: None

FUNCTIONING DATA
MODES: NA
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

FZU-35/B is a power supply for FMU-124A/B Bomb Impact Fuze in LGB Weapon (Navy).

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO: NA
US HCSDS: NA
UN CL/DIV SCG:
US DOT SHIP CL: NA
NET EXPL WT: None
NET PROP WT: None
STORAGE TEMP:

REMARKS/DESCRIPTION:
The FZU-35/B Bomb Fuze Initiator provides electrical power to the FMU-124A/B Guided Bomb Fuze. The Initiator is activated at bomb release by a lanyard which rips off a tear-top section, allowing an airscoop to extend and direct air flow through a turbine-driven generator. Magnetic attraction between the rotor and stator provides a velocity threshold preventing the generator from turning until air flow corresponding to a speed of 260 KIAS is reached. Generator output is approximately 50 Vac. Power from the Initiator is sufficient to operate fuzes in the bomb nose and tail. A special cable, replacing the standard M70 series fuze control cable, is required between the initiator and each fuze. Intrusion depth listed above includes a 0.264 in (6.7 mm) counterbore in the bomb strongback. Thread dimensions are for the captive retainer ring.

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM64, FIRING DEVICE, DEMOLITION

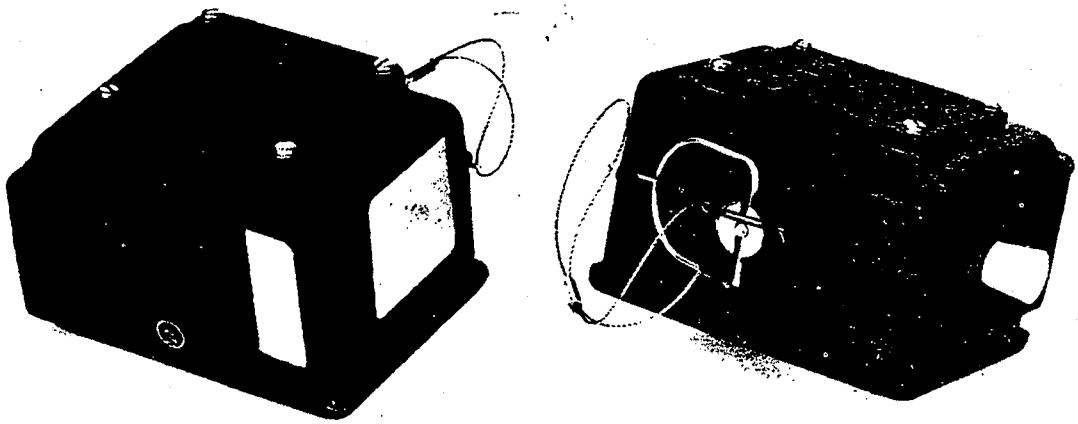

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCU-CM
T. NORTON
AV880-4167

Status TERMINATED

Ass'y Dwg. No. XP133823

Parts List

Specification

Previous Number

GENERAL

Carriers Demolition

Cal. — Size

Location

Use Demolition

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Sound-actuated, simultaneous firing of nearby devices.

SERIES: A CHAPTER: 9
DESIGNATION: XM 64
Firing Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM64, FIRING DEVICE, DEMOLITION

ARMING DATA

Method	Clock pull pin, mechanical
Delay	10 min.
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

PHYSICAL DATA

Weight	1 lb
Total Length (in.)	3.5
Body Diam. (in.)	Width 2.6, ht. 2.5 in.
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Sound actuated
Type	Electrical
Delay	
Time Type	Electrical
Time Setting (sec)	
Target	Demolition type
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

BA 331/U, 15 v

EXPLOSIVE TRAIN

S&A Device	
Primer	No explosives
Detonator	
Booster	

REMARKS

Device is used in conjunction with M2 base coupling.

SERIES: A CHAPTER: 9
DESIGNATION: XM 64
Firing Device

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM70, FIRING DEVICE, DEMOLITION

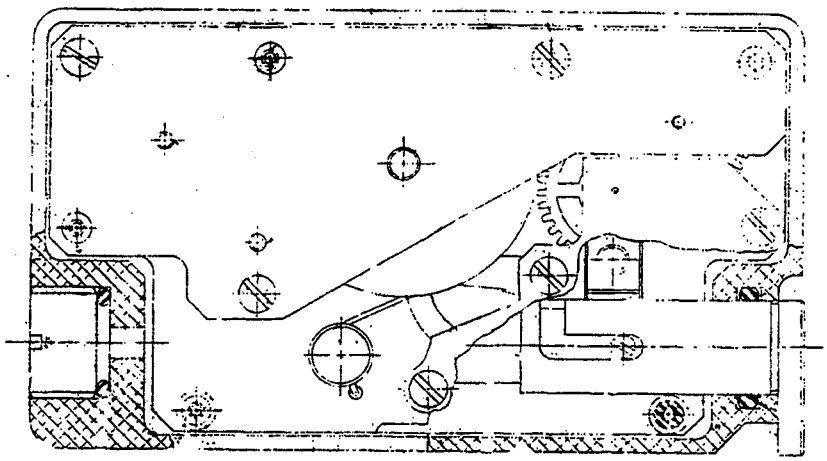

IDENTIFICATION

Agency ARRADCOM-DRDAR-LCNT
Status S. Honickman AV 880-3174
Terminated
Ass'y Dwg. No. 11740407 (FA)
Parts List
Specification
Previous Number

GENERAL

Carriers
Cal. — Size
Location
Use Demolition timer
MIL-STD's 331 Tests 101-105, 108, 111-114, 201
Max Values
Rotat. (rps)
Setback (g)
Velocity (fps)

KEY FEATURES

Time readout is printed directly on negator spring.

SERIES: A CHAPTER: 9
DESIGNATION: XM70
Demolition Firing Device

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM70, FIRING DEVICE, DEMOLITION

ARMING DATA

Method 5 Minute Minimum Setting

Delay

Rotation (rps) NA

Non-arm **Arm**

Setback (g) NA

Non-arm **Arm**

Arming Wire No

External Indicat. Yes

PHYSICAL DATA

Weight 8 oz

Total Length (in.) 3 x 1.25 x 1.50

Body Diam. (in.)

Intrusion

Thread Size

FUNCTIONING DATA

Action Time

Type Mechanical

Delay NA

Time Type Detached lever

Time Setting (sec) 5 min - 24 hrs x 5 min

Target

Sensitivity

Material

Thickness (in.)

Max Obliq. (°)

Velocity (fps)

Carrier

POWER SUPPLY

Negator spring

EXPLOSIVE TRAIN

S&A Device

Primer Inert - output is

Detonator release of spring

Booster loaded firing pin

REMARKS

Can be used with almost any percussion primer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG: 127 mm (5.0 in)	DP:	THD:
XSECT: 76.2 mm (3.0 in)	DIA:	THD DP:

IDENTIFICATION
- AGENCY: NSWC, White Oak, Code G41
- CONTACT:
- PHONE:
- STATUS: Obsolete
- USER: Navy
- ASSY DWG: 554 892
- PARTS LIST: LD 169 851
- SPEC: OS 5806
- PUB: NAVAIR 11-1-107

- NATIONAL STOCK NO:

- DODIC:
- PRIOR MODEL NO: XS-29A
- SIMILAR TO:

- REPLACES:
- REPLACED BY:

GENERAL
- WEAPON: Signal, Underwater Sound (SUS)

- AMMUNITION:
  - Mk 22 Mods 0 and 1 SUS

LOCATION: Nose
BALLISTIC LEVELS:
- ROTATION: NA
- SETBACK: NA
- VELOCITY: NA

- CREEP: NA
- FLIGHT TIME:

SAFETY STD: Doesn't meet MIL-STD-1316
SETTERS:

Supersedes page 9-13 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

ARMING DATA
FIRST SAFETY:
Pressure

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:
8.2 to 11.9 m (27 to 39 ft) depth

FUNCTIONING DATA
MODES:
TYPE: Hydrostatic
CHARACTERISTICS:
457, 610, 767, 914, 1067 & 1220 m (1500, 2000, 2500, 3000, 3500 and 4000 ft) depth settings

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

EXPLOSIVE COMPONENTS

S&A DEVICE: None

PRIMER: None

DETONATOR: Mk 43 Mod 0

LEAD: Tetryl

BOOSTER: 31.2 g tetryl

OTHER:

POWER SUPPLY:

STORAGE AND TRANSPORTATION SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 182 MOD 0, FUZE

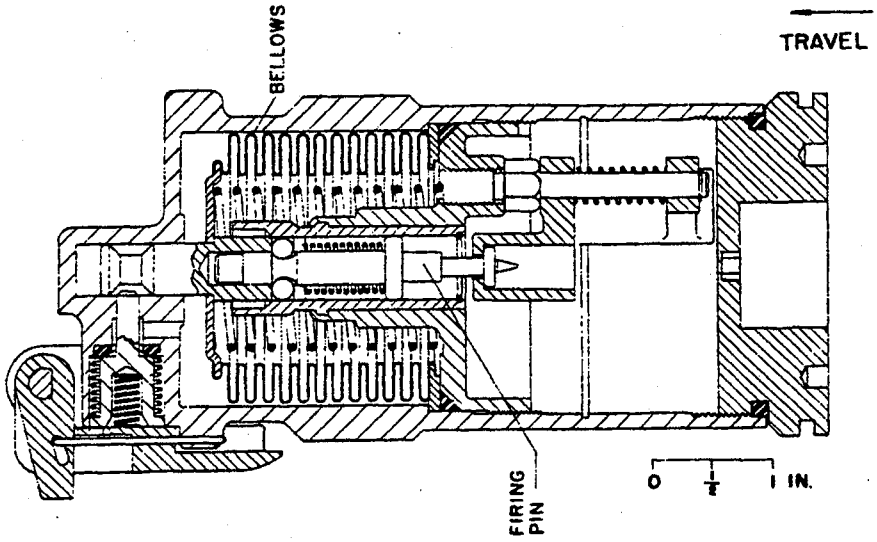

IDENTIFICATION

Agency	NSWC, Crane, R. Daniel
Status	Terminated
Ass'y Dwg. No.	GA 1378233
Parts List	
Specification	
Previous Number	EX-112

GENERAL

Carriers	Submarine rescue signal
Cal. — Size	3 in.
Location	
Use	Chemical, Sub. rescue signal
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 182 MOD 0, FUZE

ARMING DATA

Method	Mech. time, Hydro pressure
Delay	150 ft under water
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2 lb
Total Length (in.)	6
Body Diam. (in.)	3
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Delay
Type	Mechanical, Hydro pressure
Delay	8-10 sec
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	

REMARKS

Identical to Fuze MK 183, but method of attachment to signal differs

Delay element prevents final functioning until water surface is reached

Used in signal MK 29 MOD 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 183 MOD 0, FUZE

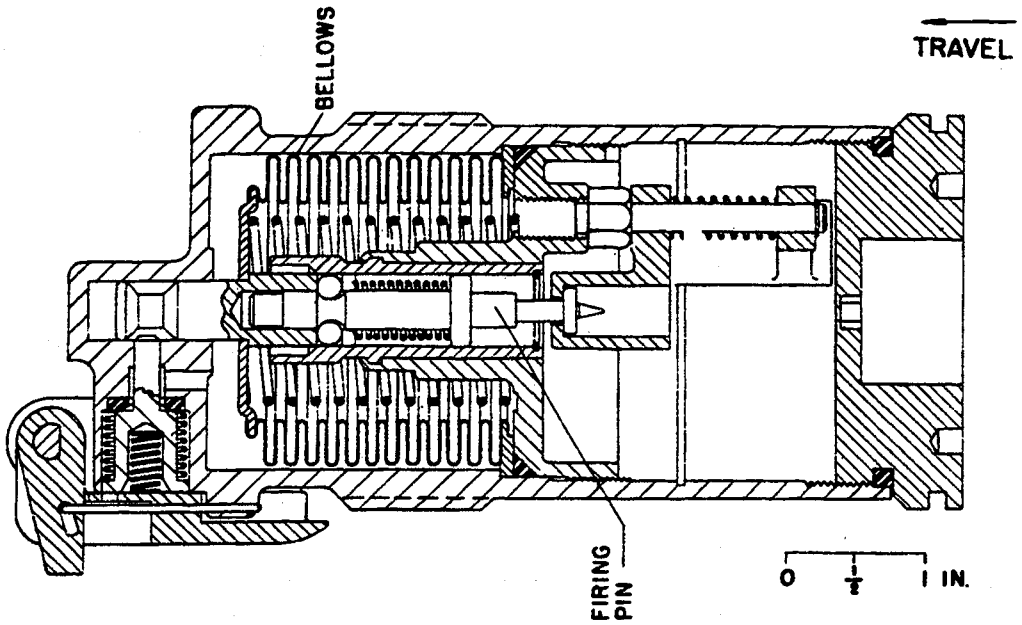

IDENTIFICATION

Agency	NWSC, Crane, R. Daniel
Status	Terminated
Ass'y Dwg. No.	GA 1378232
Parts List	
Specification	
Previous Number	EX-101

GENERAL

Carriers	Submarine rescue signal
Cal. — Size	3"0
Location	
Use	Chemical, sub. rescue signal
MIL-STD's	
Max Values	
Rotat. (rps)	
Setback (g)	
Velocity (fps)	

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

MK 183 MOD 0, FUZE

ARMING DATA

Method	Mech. time, Hydro pressure
Delay	150 ft under water
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	2 lb
Total Length (in.)	6
Body Diam. (in.)	3
Intrusion	
Thread Size	

FUNCTIONING DATA

Action	Delay
Type	Mechanical, Hydro pressure
Delay	8-10 sec
Time Type	
Time Setting (sec)	
Target	
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	
Booster	
Delay	MK 14 MOD 0

REMARKS

Identical to Fuze MK 182 except for method of attaching signals

Delay element prevents final functioning until water surface is reached

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM715, FUZE, MT

IDENTIFICATION

Agency	ARRADCOM-DRDAR-LCN-T S. HONICKMAN AV 880-3174
Status	TERMINATED
Ass'y Dwg. No.	P9224221
Parts List	PL9224221
Specification	
Previous Number	

GENERAL

Carriers	Parachute flare
Cal. — Size	2.790 in.
Location	
Use	Illumination, flare
MIL-STD's	331, Tests 101-106, 108
Max Values	
Rotat. (rps)	
Setback (g)	160
Velocity (fps)	452

KEY FEATURES

SERIES: A CHAPTER: 9
DESIGNATION: XM715
MT FUZE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM715, FUZE, MT

ARMING DATA

Method	Setback
Delay	Variable
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm 28.3
Arming Wire	
External Indicat.	Yes

PHYSICAL DATA

Weight	1.48 lb
Total Length (in.)	2.63
Body Diam. (in.)	2.795
Intrusion	0.495 in.
Thread Size	2.4-18NS-2A

FUNCTIONING DATA

Action	Time
Type	Mechanical
Delay	
Time Type	Mechanical
Time Setting (sec)	4 to 30 sec. by 3 sec
Target	Illumination
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	Mech.-air sensing
Primer	M29
Detonator	None
Booster	BKNO3 Nitrocellulose binder

REMARKS

SERIES: A CHAPTER: 9
DESIGNATION: XM715
_MT FUZE

Source: https://assist.dla.mil Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M1134 Demolition Kit Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 9-21 and 9-22 of MIL-HDBK 146.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

This page intentionally left blank.

Data for the M1147 Demolition Kit Training Fuze
may be found in MIL-HDBK-145B.

Supersedes pages 9-23 and 9-24 of MIL-HDBK 146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1304, FUZE

IDENTIFICATION

Agency ARRADCOM, DRDAR-LCU-SA
M. Stone AV 880-2575

Status Terminated

Ass'y Dwg. No. 90184 (Rheem)

Parts List

Specification

Previous Number

GENERAL

Carriers Line charge

Cal. — Size

Location Nose

Use HE or GP

MIL-STD's

Max Values

Rotat. (rps)

Setback (g)

Velocity (fps)

KEY FEATURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1304, FUZE

ARMING DATA

Method	Mechanical
Delay	9 sec*
Rotation (rps)	
Non-arm	Arm
Setback (g)	
Non-arm	Arm
Arming Wire	Yes
External Indicat.	Yes

*after separation of 200-500 ft

PHYSICAL DATA

Weight	
Total Length (in.)	5.5
Body Diam. (in.)	
Intrusion	
Thread Size	None

FUNCTIONING DATA

Action	Delay, time, select.
Type	Mechanical
Delay	7 - 92 sec
Time Type	Pyrotechnic, mechanical
Time Setting (sec)	
Target	Mine clearance
Sensitivity	
Material	
Thickness (in.)	
Max Obliq. (°)	
Velocity (fps)	
Carrier	

POWER SUPPLY

EXPLOSIVE TRAIN

S&A Device	
Primer	
Detonator	M19A2
Booster	

REMARKS

Two arming lanyards must be pulled in proper sequence:

1. pulled on aircraft release
2. pulled by deployed line charge

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

CHAPTER 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

SCANT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M1	HAND GRENADE FUZE	Pyro Time, 1.7 sec, Igniting for chemical Grenade, Dwg unknown ARRADCOM, Edgewood, redesignated M200
M1	AT MINE FUZE	Pressure, for AT mine, Dwg 73-9-4A, obsolete, ARRADCOM
T1	AT MINE FUZE	Pressure, for AT Mine, Dwg 26103, terminated, ARRADCOM
M2	MT FUZE	30 sec, for 105mm How, Dwg 73-7-9, obsolete, ARRADCOM
M2	PD FUZE	SQ, for 4.2-in Mortar, Dwg unknown, obsolete, ARRADCOM, Edgewood
M2A1	AP MINE FUZE	Igniting output, for AP M2A1 Mine, Dwg 73-9-6, obsolete, ARRADCOM, similar to M3A1 except Igniting
T2	ROCKET PD FUZE	SQ and Del, for 4.5-in Rocket, Dwg P-62235, terminated, ARRADCOM
Mk2 Mod 3	BD FUZE	Delay, for 7-in/45 Gun, AP projectile, Dwg 51695, obsolete, NSWC/WOL
M3	PD FUZE	SQ for 4.2-in Mortar, Dwg B8-11-53, obsolete, ARRADCOM, Edgewood
M3A1	AP MINE FUZE	Detonating output, for AP M3A1 Mine, Dwg 73-9-6B, obsolete, ARRADCOM, replaced by M601
FMU 3/B	ROCKET PD SD FUZE	for 2.75-in FFAR, Dwg 57C 22100, obsolete, Arm Sys Div, MK 176 modified with "Slinky" SD
M4	AT MINE FUZE	Pressure, for M4 AT Mine, Dwg 73-9-8, obsolete, ARRADCOM, Belleville Washer type
T4	PD FUZE	SQ, for field artillery, Dwg 73-2-83, terminated, ARRADCOM
T4	ROCKET PRACTICE FUZE	Dwg 73-10-12, obsolete, ARRADCOM
M5	HAND GRENADE FUZE	Short delay, detonating output, for MkII Frag Hand Grenade, Dwg 82-1-30, obsolete, ARRADCOM, previously MkV

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M5	ROCKET BD FUZE	For 4.5-in HEAT T3 Rocket, Dwg 73-10-5 thru 8, obsolete, ARRADCOM
M5	AT MINE FUZE	Pressure, Chemical, non-metallic, for M5 AT NM mine, Dwg 73-9-10, obsolete, ARRADCOM
T5	BD FUZE	Delay, for 37mm Gun, Dwg P-18252, terminated, ARRADCOM
T5	HAND GRENADE FUZE	Impact, Drag disc arming, for T13 "Beano" Grenade, Dwg 2648 and 2720 (E-K) terminated, ARRADCOM
M6	ROCKET DUMMY FUZE	For 4.5-in M9 Practice Rocket, Dwg 72-5-10, obsolete, ARRADCOM
T6	PD FUZE	"All ways," for Trench Mortar, Dwg GA 1244, discontinued, ARRADCOM
M7	HAND GRENADE FUZE	Igniting, Dwg 82-1-43 and 82-1-50, obsolete, ARRADCOM, formerly MkVII
T7	BD FUZE	Delay, for 2.2-in AP Projectile, Dwg PX-151-1, terminated, ARRADCOM
XP-7A	BD SD FUZE	28 sec pyro SD, for 5-in/38 Gun, Dwg SK-AD-89604, terminated, NSWC/WOL, Mk 28 modified with pyro SD in tracer cavity
M8	RIFLE GRENADE FUZE	Igniting output, Dwg 82-2-26, obsolete, ARRADCOM, previously MkVIII
T8	ROCKET PD FUZE	Delay, for spin stabilized, Dwg P-62905, terminated, ARRADCOM,
M9	AP MINE FUZE	Detonating output, for AP M3 mine, Dwg unknown, ARRADCOM, replaced by M3A1 and M601
M9	RIFLE GRENADE FUZE	Igniting output, for WP Rifle Grenade, Dwg 82-2-28, ARRADCOM, previously MkIX
T9	BOMB FUZE	Nose, Pyro Time, 21 sec, for bomb and flare, Dwg PX-97-31, ARRADCOM, replaced by T10, modified artillery time fuze
M10	MINE COMBINATION FUZE	Pressure - Trip wire, for M8 AP Practice Mine, Dwg 73-9-25, obsolete, ARRADCOM
T10	PD FUZE	SQ, for field artillery, Dwg P-4938, terminated, ARRADCOM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T11	MT SQ FUZE	Combination, for field artillery, Dwg P-18513, terminated, ARRADCOM
T13	TIME FUZE	25 sec, pyrotechnic train, for field artillery, Dwg 73-3-161, terminated, ARRADCOM
M14	FUZE SETTER	Hand wrench type, for M54, M55, M77 and M67 Time Fuzes, substitute for M27, Dwg 6176535, obsolete, ARRADCOM
T15	MT FUZE	30 sec, Igniting output, Dwg RW-167, Navy MkXVIII, ARRADCOM
T16	ROCKET PD FUZE	SQ, for 2.36-in T59 HEAT Rocket, replaced by T2003 and 2009, ARRADCOM, LCN-M
T17	ROCKET BD FUZE	Dwg PX-82-445, terminated, ARRADCOM
XP-17A	BD FUZE	Armor Piercing for 3-in Gun, Dwg 185629, terminated, NSWC/WOL, superseded Type 8B, AP Fuze
T18	ROCKET PD FUZE	Spitback, propeller arming, Dwg PX-99-778, terminated, ARRADCOM
L19A3	BD FUZE	for 105mm HEP (HESH), UK Fuze, standardized as M534 and M578
M19	FUZE SETTER	Setter and Rammer of 120mm Gun M1, for M61A1 Fuze, obsolete, ARRADCOM, SCF-A elec set from FC Director
T19	ROCKET PD FUZE	for 4.5-in M8 HE warhead, Dwg unknown, terminated, ARRADCOM
XP-19A	BD FUZE	for 5-in/38, Dwg SK 98555, terminated, NSWC/WOL, magnetic inertia generator with Mk33 Det.
T20	PD FUZE	SQ and Del, for 81mm Mortar HE Shell, Dwg PX-99-440, cancelled, ARRADCOM, No safety pin - M52 Contour
T20	ROCKET PD FUZE	for 8-in HE Rocket T25, terminated, ARRADCOM
XP-20A	BD SD FUZE	28 sec pyro SD, for 5-in/38 Gun, Dwg SK-AD-98558, terminated, NSWC/WOL, used in conjunction with nose prox Fuze

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T21	MINE FUZE	Electro-chemical, for T10 beach defense mine, Dwg unknown, terminated, ARRADCOM
M22	FUZE SETTER	Hand operated, setting ring, for M54 and M55 T&SQ Fuzes, Dwg 7578410, previously T37E1, obsolete, ARRADCOM
T22	PD FUZE	SQ, for 8mm Mortar HE Shell, Dwg GA 1592, cancelled, ARRADCOM, used arming vane
M23	BOOSTER	for 3-in AA Gun, 1.375-18NS-1LH thread, replaced Mk XVII, Dwg unknown, obsolete, ARRADCOM
M24	FUZE SETTER	Hand Operated, for presetting safe before use in M20 Setter Rammer for 90mm Gun, for Fuze M502A1, obsolete, ARRADCOM SCF-A
XP-24A	PD FUZE	Delay only, for 40mm AA Gun, Dwg SK-AD-89670, terminated, NSWC/WOL, Mk27 modified with pyro impact delay
T25	PD FUZE	Supersensitive, for 90mm Gun, P-25708, terminated, ARRADCOM
T25	BOMB FUZE	Tail, hydralic, 10 to 50 ft depth, Dwg P-41784, terminated, ARRADCOM
T25	ROCKET BD FUZE	for 4.5-in T78 SAP Rocket, Dwg unknown terminated, ARRADCOM, replaced by T156
XP-25A	AUX DET FUZE	Delay arming, for AA Guns, Dwg SK-76467-73 and 87625-29, terminated, NSWC/WOL, double transverse rotors joined by star escapement
T26	BOMB FUZE	Nose, Adjustable delay, Dwg unknown, terminated, ARRADCOM
T27	BOMB BAROMETRIC FUZE	Nose, for M26 Bombardment Flare, Dwg 73-8-300, terminated, ARRADCOM
FMU-27/B T28	ROCKET PROXIMITY FUZE ROCKET PD FUZE	Dwg 61J13502, terminated, Arm Div Eglin SQ and Del, for 4.5-in T38 HE Rocket, DWG 73-10-20, terminated, ARRADCOM, modified M51A2 fuze
FMU-28/B	ROCKET PROXIMITY FUZE	Dwg 61J13512, terminated, Arm Div Eglin
FMU-29/B	BOMB LONG DELAY FUZE	Arm Div Eglin, replaced by FMU-35
T30	ROCKET PROXIMITY FUZE	for 5-in HVAR, Dwg unknown, terminated, ARRADCOM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T31	BOMB IMPACT FUZE	Nose, for GP and Demo Bombs, Dwg P-62193, replaced by M118 and M119
FMU-31/B	GM PROXIMITY FUZE	for Falcon AIR-4, -47, Dwg unknown, obsolete, Arm Div Eglin
Mk32	PROXIMITY FUZE	RF, for 5-in/38 Gun, used with Mk 54 Aux Det and dry energizer, replaced by Mk53, obsolete, NSWC/WOL
T34	BOMB FUZE	Tail, impact, for "B" bomb, Dwg TAM-82, cancelled, ARRADCOM
M35	PD FUZE	SQ, Field Artillery, Dwg 73-2-98, replaced by M46, ARRADCOM
T35	ROCKET PD FUZE	SQ, for T22 Rocket, Dwg unknown, replaced by T159, modified Navy Mk 146 Fuze, ARRADCOM
XP-35A	PD FUZE	SQ and Delay, for 5-in/38 Gun, Dwg unknown, cancelled, NSWC/WOL, ball rotor type
M36	PD FUZE	SQ, Dwg 73-2-102, obsolete, ARRADCOM
T36	ROCKET PD FUZE	SQ, for 4.5-in T84 WP Rocket, Dwg 73-10-16, terminated, ARRADCOM
T37	BOMB FUZE	Tail, instant, cancelled, ARRADCOM, similar to T28 except SQ only
T39	PERCUSSION FUZE	for 20mm Gun, UK No 253 MkIII/A Fuze, Dwg 73-1-186, obsolete, ARRADCOM, similar to T45 and T46
M40	PD FUZE	SQ, for 81mm Mortar Shell, M43, Dwg 73-1-150 or P18863, obsolete, ARRADCOM, RYG type
T40	PD FUZE	SQ, for 20mm Gun, Dwg P-41797, cancelled, ARRADCOM
Mk40	PROXIMITY FUZE	RF, for 5-in/38 Gun used with Mk54 Aux Det, replaced by Mk53, obsolete, NSWC/WOL
Mk41	PROXIMITY FUZE	RF, for 4-in and 4.7-in UK Guns, obsolete, NSWC/WOL
T41	PD FUZE	Supersensitive, for 37mm AA Gun, Dwg P-42544, cancelled, ARRADCOM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M42A1	DUMMY FUZE	Simulates Mk IIIA2 and M1907M for 3-in Gun, obsolete, ARRADCOM
T42	BOMB FUZE	Nose, anti-submarine, Dwg unknown, cancelled, ARRADCOM
T42	ROCKET PD FUZE	SQ, same as Navy Mk 147 Mod 1
T43	BOMB PROXIMITY FUZE	Tail, for 4000 lb AN-M56 bomb, cancelled, ERADCOM, DELHD
Mk43-1	AUX DET FUZE	for 5-in/54 and 6-in/47, similar Mk54, obsolete, NSWC/WOL
FMU-43/B	PROXIMITY FUZE	passive optical, for 20mm Guns M139 & M61, cancelled, Arm Div Eglin
T45	PERCUSSION FUZE	for 20mm Gun, UK No 253 MkIII/A Fuze, Dwg 73-1-186, obsolete, ARRADCOM
XP-45A	BD FUZE	for 5-in/38, 5-in/54 and 6-in/47 Guns, NSWC/WOL, moisture proofed Mk28 BD Fuze
T46	PERCUSSION FUZE	for 20mm Gun, UK No 253 MkIII/A Fuze, Dwg GA 2090, obsolete, ARRADCOM, similar to T39 and T45
T47	ROCKET BD FUZE	for 3.5-in T80 HEAT Rocket, Dwg unknown, replaced by T160, ARRADCOM
Mk47	PROXIMITY FUZE	RF, for 6-in/47 Gun, used with Mk44 Aux Det, obsolete, NSWC/WOL
T49	DUMMY FUZE	for 20mm Gun, Dwg TAM-24, cancelled, ARRADCOM, simulates T50 Fuze
T50	BOMB PROXIMITY FUZE	Nose, Auxiliary excited, T50E1 to E10, Dwg unknown, cancelled, ERADCOM, DELHD
T50	PD FUZE	SQ, for 20mm Gun, Dwg TAM-28, cancelled, ARRADCOM
FMU-51/B	BOMB IMPACT FUZE	for BLU-20 and -23 Fire Bombs, Dwg 64D 10899, cancelled, ASD WPAFB
T52	DUMMY FUZE	simulates UK No 119 Fuze, Dwg TAM-118, cancelled, ARRADCOM
T53	PD FUZE	for 37mm Gun, Practice Shell, Dwg PX-99-657, cancelled, ARRADCOM, similar to M74
T55	BD FUZE	for 155mm HEAT Projectile, Dwg P-62182, cancelled, ARRADCOM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Mk56 MOD 0	PROXIMITY FUZE	RF, for 4.5-in and 5.25-in UK Guns, obsolete, NSWC/WOL
T57	BD FUZE	for 57mm Projectile M86, Dwg BDN 26B, cancelled, ARRADCOM
T58	BOMB FUZE	Nose, for photo-flash bomb, Dwg unknown, cancelled, ARRADCOM
Mk58	PROXIMITY FUZE	RF, for 3-in/50 Gun, spec 2974, obsolete, NSWC/WOL
FMU-58/B	BOMB INERTIAL FUZE	Delay, for jungle canopy penetration, Dwg 66E9000, cancelled, Arm Div Eglin
T59	BOMB FUZE	Tail, Dwg 73-8-278, cancelled, ARRADCOM
T59	BD SD FUZE	for 20mm Gun, Koh-I-Noor Dwg N-23C-A, cancelled, ARRADCOM
M60B1	BD FUZE	Delay, for 155mm Gun and 6-in/47, same as Mk10, replaced by M91, NSWC/WOL
T60	BOMB FUZE	Tail, Dwg 73-8-355, cancelled, ARRADCOM
FMU-60/B	BOMB IMPACT FUZE	"All ways," for BLU-29 Fire Bomb, cancelled, Arm Div Eglin
T61	PD SD FUZE	SQ, for 20mm Gun, Dwg unknown, cancelled, ARRADCOM
T62	PD SD FUZE	SQ, for 20mm Gun, Dwg unknown, cancelled, ARRADCOM, SD by spin decay
T62	BOMB FUZE	Tail, Dwg 73-8-319, cancelled, ARRADCOM
M63	DUMMY FUZE	for 20mm Gun, Dwg 72-5-7, cancelled, ARRADCOM
T63	BOMB FUZE	Nose, Dwg P-74969, cancelled, ARRADCOM
T64	PD FUZE	SQ, for 60 and 81mm Mortars, simulates M52, terminated, ARRADCOM
FMU-64/B	BOMB IMPACT FUZE	for BLU-20 and -23 bombs, Dwg 66D 9192, cancelled, Arm Div Eglin, same as FMU-51 except plate
T65	BOMB FUZE	Tail, for 2000 lb Azon Bomb, Dwg 73-8-403, cancelled, ARRADCOM
T65	PD FUZE	for 60 & 81mm mortars, simulates M53, Dwg unknown, cancelled, ARRADCOM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-66/B	BOMB PROXIMITY FUZE	Nose, for GP retarded bombs, obsolete, Arm Div Eglin
Mk67	PROXIMITY FUZE	RF, for 8-in/55 Gun, Dwg unknown, obsolete, NSWC/WOL, for shore bombardment
FMU-67/B	BOMB PROXIMITY FUZE	for GP Bombs, obsolete, Arm Div Eglin
Mk68	PROXIMITY FUZE	RF, for 12-in, 14-in, 16-in Guns, Dwg unknown, obsolete, NSWC/WOL, for shore bombardment
T69	BOMB IMPACT FUZE	Nose, short delay, modified from M126, Dwg PX-14-364, cancelled, ARRADCOM
FMU-69/B	ROCKET PROXIMITY FUZE	for 2.75-in FFAR Rocket, obsolete, ERADCOM, DELHD
T70	BD FUZE	for 57mm Gun AP Shell, Dwg TAM-282, cancelled, ARRADCOM, similar to T94
T72	BOMB MT FUZE	Tail, impact also, 5-92 sec, Dwg 73-8-323, cancelled, ARRADCOM, same as M138 but reversed vanes
T75	PROXIMITY FUZE	for 120mm AA Gun, cancelled, ERADCOM, DELHD
FMU-75/B	GM IMPACT FUZE	for Shrike Missile AGM-45A, Dwg 67A 86F451, terminated, NAIR, similar to Mk330
M76	PD FUZE	Delay, for 4.2-in Mortar HE Shell, Dwg 73-3-171, obsolete, ARRADCOM
T76	BOMB FUZE	Nose, for GB-7A,, Dwg unknown, terminated, ARRADCOM
FMU-76/B	BOMB PROXIMITY FUZE	Optical IR, for Fire bombs BLU-1, -26 and -27, cancelled, Arm Div Eglin
T77	BOMB MT FUZE	Nose, Dwg 73-8-457, terminated, ARRADCOM, M111A2 with anemometer arming vane
FMU-77/B	GM PROXIMITY FUZE	Short pulse radar, for Phoenix, Dwg 67A84E168, cancelled, NWC, combination of EX334 and TDD EX38
T78	BOMB IMPACT FUZE	Nose, instantaneous, Dwg P-73934, cancelled, ARRADCOM, similar to M103

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-78/B	GM PI BD FUZE	for SRAM AGM-69, Dwg unknown, cancelled, used with MAU 124/A S&A
T79	MT SQ FUZE	75 sec, for all field artillery, Dwg unknown, cancelled, ARRADCOM
FMU-79/B	BOMB PROXIMITY FUZE	cancelled, "slant range fuze," ASD WPAFB
T80	BOMB FUZE	Tail, for SC Bomb, Dwg unknown, terminated, ARRADCOM
FMU-80/B	BOMB TIME FUZE	Spin Decay Timing, for BLU-75 (CBU-56), terminated, Arm Div Eglin
T82	BOMB PROXIMITY FUZE	Nose, for GP and Frag Bombs larger than 100 lbs, terminated, ARRADCOM
T83	BOMB FUZE	Tail, Dwg P-73892, cancelled, ARRADCOM, T36 and M102 modification
T83	PD FUZE	for 57mm Gun, HE Shell, Dwg TAM-387, cancelled, ARRADCOM, similar M85 except shorter
T84	BOMB FUZE	Side, delayed mechanical arming, Dwg 73-8-370, terminated, ARRADCOM, similar to T74
Mk84	MT FUZE	100 sec, for 16-in/45 and 16-in/50 Guns, Dwg 1518704, obsolete, NSWC/WOL, Army Movement FF 7062 and T40 safety adapter
FMU-84/B	GM TRAINING FUZE	Guided Missile Training Fuze, for FOCUS I, Mk 303-2 without Mk 34-0 booster, terminated, NWC
FMU-85/B	GM PROXIMITY FUZE	for Std Arm, AGM-78, Dwg unknown, cancelled, Aero Sys Div WPAFB
Mk86 MOD 0	MT FUZE	assembly of three Mk 84 Mod 0 MT Fuzes for 16" Mk 23-1 Proj., Dwg 1690500, obsolete, NSWC/WO
FMU-86/B	BOMB MT FUZE	5-45 sec, for Mk45 Parachute Flare, Dwg 2127800, NAIR, similar to Mk364
M87	PD FUZE	Delay only, for all Field Artillery, Dwg 73-2-149, obsolete, ARRADCOM
T88	BOMB MT FUZE	Side, settable delay 10 to 60 minutes, Dwg unknown, canceled, ARRADCOM, similar to T48

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T89	PD FUZE	Delay, for 4.2-in Mortar Chemical Shell, Dwg PX-99-681. cancelled, ARRADCOM
FMU-90/B	ROCKET PD FUZE	.05 sec delay, for 2.75-in FFAR HE Rocket, Dwg 67A90D050, Arm Div Eglin, same as Mk352 except delay
FMU-91/B	GM PROXIMITY FUZE	same as DSU-12/B TDD
M92	PROXIMITY FUZE	RF, for 90mm AA Gun, 0.5 sec del arm, replaced by M515, Dwg unknown, T74E6, ERADCOM, DELHD
FMU-92/B	PD FUZE	SQ, ball rotor type, for 20mm Gun, Dwg 295AS100, similar to Mk78, Arm Div Eglin
M93	PROXIMITY FUZE	RF, for 90mm AA Gun, 0.5 sec del arm, replaced by M515, HDL, Dwg unknown, Prev T152
M94	PROXIMITY FUZE	RF, for UK 3.7-in AA Gun, Dwg unknown, obsolete, ERADCOM, DELHD
M95	PROXIMITY FUZE	RF, for UK 3.7-in AA Gun, Dwg unknown, obsolete, ERADCOM, DELHD
M96	PROXIMITY FUZE	RF, for 155-240mm Howitzers, Dwg unknown, obsolete, ERADCOM, DELHD
M97A1	PROXIMITY FUZE	RF, for 75-105mm Howitzers, Dwg unknown, obsolete, ERADCOM, DELHD
M98	PROXIMITY FUZE	RF, for UK 25 pounder and 95mm Guns, Dwg unknown, obsolete, ERADCOM, DELHD
M99	PROXIMITY FUZE	RF, for UK 5.5-in Gun, Dwg unknown, obsolete, ERADCOM, DELHD
FMU-99/B	DISPENSER MT FUZE	1.5-24.2 sec, Dwg 518AS118, NAIR, similar to FMU 83/B
FMU-100/B	BOMB IMPACT FUZE	for Fire Bomb, Dwg 716423, cancelled, Arm Div Eglin, similar to FMU-68/B except arm time
M101	ROCKET PI FUZE	Spitback, for 2.75-in Navy HEAT FFAR Rocket, Dwg 73-10-39, obsolete, ARRADCOM
T101	TIME [illegible] SQ FUZE	Pyrotechnic train, for 4.2-in Mortar HE Shell, Dwg GA 2369, cancelled, ARRADCOM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-101/B	BOMB IMPACT FUZE	instantaneous and settable short delay, for GP Bombs, cancelled, modified M990 & M990E4
T102	PD FUZE	SQ, for 105 and 155mm smooth bore mortars, Dwg P-73396, terminated, ARRADCOM
FMU-102/B	BOMB IMPACT FUZE	Instant and short delay, for GP Bombs, Dwg unknown, cancelled, modified M990E3
T103	PD FUZE	SQ, Arming vane, for smooth bore mortars, Dwg TAM-675, terminated, ARRADCOM
FMU-103/B	BOMBLET IMPACT FUZE	for BLU-26, -61 and -63, short spin arming, Dwg unknown, terminated, Arm Div Eglin
T104	PD FUZE	SQ and Del, for 155mm Smooth Bore Mortar, HE Shell, Dwg TAM-675, terminated, similar to T103, ARRADCOM
FMU-104/B	BOMBLET IMPACT FUZE	for BLU-62, Dwg unknown, cancelled, ASD WPAFB
FMU-105/B	BOMB PROXIMITY FUZE	for guided cluster bombs BLU-26, -63, Dwg 736407 repl by FMU-122, -123, Arm Div Eglin
FMU-106/B	GM PROXIMITY FUZE	for Agile Missile, Dwg 5050168, cancelled, NAIR
FMU-107/B	BOMB MT FUZE	3-82 sec, for MJU-1/B Chaff, Dwg 7227215, cancelled, Arm Div Eglin, similar to M909
FMU-108/B	GM PROXIMITY FUZE	for Harpoon, RGM-84, suspended, NWC
T109	PD FUZE	SQ and Del, for 4.2-in Mortar HE Shell, Dwg GA2391, cancelled, ARRADCOM
T112	TIME & PD FUZE	25 sec, SQ and Del, for 81mm Mortar, HE and WP Shell, Dwg P-73496, cancelled, ARRADCOM, same as M77 except delay
T114	PD FUZE	SQ and Del, for 81mm Mortar, HE Shell, Dwg P-73209, cancelled, ARRADCOM
FMU-114/B	BOMB IMPACT FUZE	Nose and Tail, for GP Bombs, Dwg 728671, replaced by FMU-124, Arm Div Eglin, similar to Mk344

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FMU-115/B	TIME FUZE	for cargo parachute deployment, Dwg unknown, Armament Div, Eglin AFB, terminated
FMU-116/B	ROCKET DUMMY FUZE	for 2.75-in FFAR Dummy WDU-19/B, Dwg 724026, terminated, ADTC Eglin, for training
M118	BOMB IMPACT FUZE	Nose, delay, 4 to 5 sec, previously T32, Dwg 73-8-130 thru 137, obsolete, ARRADCOM
T118	TIME & SQ FUZE	25 sec pyrotechnic train, for 60mm Mortar, Dwg P-73414, cancelled, ARRADCOM
M119	BOMB IMPACT FUZE	Nose, delay, 8 to 11 sec, previously T33, Dwg P-73774 and 73-8-130 to 137, obsolete, ARRADCOM
M120	BOMB IMPACT FUZE	Nose, Instantaneous, for M86 120 lb Frag Bomb, Dwg 73-8-138, obsolete, ARRADCOM
T120	PD FUZE	SQ, for 57mm Rec Rifle, Chem Shell, Dwg P-73256, cancelled, ARRADCOM
FMU-120/B	BOMB IMPACT FUZE	Tail, for GP Bombs, Dwg unknown, replaced by FMU-124/B, Arm Div Eglin, could use with FZU-29/B Sensor Prox
T121	DUMMY BD FUZE	with Tracer, for 75 and 105mm Howitzers, Dwg TAM-829, cancelled, ARRADCOM
M122	BOMB IMPACT FUZE	Tail, for M86 120 lb bomb, Dwgs 73-8-138 and -165, obsolete, ARRADCOM
M122	BOOSTER	Auxiliary, used with M90 PI Fuze in 57mm Rifle HEAT Shell, Dwg 73-2-524, obsolete, ARRADCOM
T125	PD FUZE	for Spigot Mortar, Dwg TAM-868, cancelled, ARRADCOM
Mk127	EJECTOR FUZE	6-9 sec delay, for 3.5-in Flare, Dwg 552720, obsolete, replaced by MK 156
T128	PD SD FUZE	SQ, for 20mm Gun, Dwg TAM-1077, cancelled, ARRADCOM
T130	PROXIMITY FUZE	for 155mm Gun HE Shell, Dwg unknown, cancelled, HDL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T131	PI FUZE	for 105mm HEAT Shell, Dwg unknown, cancelled, ARRADCOM
T132	PROXIMITY FUZE	for 155mm Smooth Bore Mortar HE Shell, Dwg 81-3-137, terminated, HDL
T135	PD FUZE	for 37mm High Velocity Aircraft Gun, Dwg unknown, cancelled, ARRADCOM
T136	BD FUZE	for 37mm Gun, Dwg TAM-1054, Cancelled, ARRADCOM
T137	BD FUZE	SQ and Del, for 914mm Mortar (Little David), Dwg 73-2-253, obsolete, ARRADCOM
T138	PD FUZE	SQ and Del, for 105 and 155mm Smooth Bore Mortars, Dwg P-73439, cancelled, ARRADCOM
T139	PD FUZE	Variable Impact delay, for Field Artillery, cancelled, ARRADCOM
T140	BD FUZE	for 10-in Smooth Bore Mortar, Dwg P-73780, cancelled, ARRADCOM
M143	BOMBLET TIME FUZE	Tail, Bouchon grenade Type, pyro time, for M18 Chemical Grenade, Dwg 73-8-161, obsolete, ARRADCOM, EA
T143	BD FUZE	for 105mm HEAT Projectile M67, magnetic functioning, Dwg unknown, cancelled, ARRADCOM
T146	PD FUZE	SQ and Del, for 105 and 155mm Smooth Bore Mortars, Dwg P-73973, cancelled, ARRADCOM
T148	PD FUZE	for 4.5-in Rocket and 105 and 155mm and 10-in SB Mortars, 73-2-269 thru -274, cancelled, ARRADCOM
T150E2	PI FUZE	for 75mm Rifle HEAT Projectile, Dwg D1846 Parke Thompson, cancelled, ARRADCOM
T151	PI FUZE	for 57mm Spigot Mortar, bore rider, Dwg TAM-1751, cancelled, ARRADCOM
T153	MT SQ FUZE	30 sec, for 3-in and 90mm AA Guns, M43 and integral booster, Dwg 4X-0-0 FA, cancelled, ARRADCOM
M154	BOMB IMPACT FUZE	"All ways," for Fire Bombs, obsolete, ARRADCOM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T154	CP FUZE	for 120mm Gun, HE Shell M73, Dwg unknown, cancelled, ARRADCOM
T156	ROCKET BD FUZE	delay, Dwg 73-10-26, cancelled, ARRADCOM
T158	ROCKET BD FUZE	Non delay, for 2.36-in HEAT T59 Rocket, Dwg unknown, cancelled, ARRADCOM
T161	ROCKET BD FUZE	Non delay, for 2.36-in HEAT T59 Rocket, Dwg unknown, cancelled, ARRADCOM
T162	ROCKET PI BD FUZE	Spitback, for T59 Super Bazooka previously T49, Dwg PX-82-492, cancelled, ARRADCOM
T163	CP FUZE	for 105 and 155mm Smooth Bore Mortars, Dwg DS-4276D, cancelled, ARRADCOM
T164	PD FUZE	SQ and Del, for 105, 155 and 250mm Smooth Bore Mortars, Dwg 73-10-32, cancelled, ARRADCOM
T166	TIME FUZE	Fixed Time, 12 sec, Pyrotechnic train, for 60mm T18 Chaff Dispersing Shell, Dwg P-47087, modified M65, cancelled, ARRADCOM
T167	PD FUZE	SQ and Del, for 105 and 155mm Smooth Bore Mortars, Dwg P-74202, cancelled, ARRADCOM
T168	PI BD FUZE	Ball rotor type, for 105mm Gun HEAT Cartridge, Dwg PX-99-843, cancelled, ARRADCOM
T171	PROXIMITY FUZE	for 81 and 105mm Mortars, Dwg 73-11-85, cancelled, ARRADCOM
T173	PI FUZE	for 60 and 81mm Recoilless Mortars, Dwg P-80177, cancelled, ARRADCOM
T174	BD FUZE	Time, for 81mm Mortar T23 Flare Shell, Dwg TAM-2221, cancelled, ARRADCOM, part of Ignition Cartridge
T187	PD FUZE	1.0 sec delay, for 81mm and 105mm Mortars, Dwg SK-2623-263, Bristol Mach. Tool, replaced by M524, ARRADCOM
T189	PI FUZE	Ball rotor, for 57mm Rifle HEAT Cartridge, Dwg D-1621, Parke Thompson, cancelled, ARRADCOM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M197	BOMB IMPACT FUZE	Nose, for 10 lb M74 Incendiary Bomb, improved M142A1, obsolete, ARRADCOM, Edgewood
M200A1	HAND GRENADE FUZE	1.7 sec pyro time delay, igniting output, for chem grenades, Dwg 82-1-56, obsolete, ARRADCOM Edgewood
M202	RIFLE GRENADE FUZE	Pyro delay, detonating output, for T5 Grenade, Dwg 82-2-40, obsolete, ARRADCOM
M203	RIFLE GRENADE FUZE	Pyro delay, Igniting output, for T6 chemical grenade, Dwg 82-2-41, obsolete, ARRADCOM
T205	PD FUZE	SQ, for 20mm Gun, EC Blank Powder output, ball rotor, Dwg P-81216, cancelled, ARRADCOM
T207	PD FUZE	SQ and Del, for 4.2-in Mortar, HE Projectile, Dwg P-81300, replaced by M535, ARRADCOM
M212	GRENADE FUZE	for submunition, previously T1027E1, Dwg FXP 89967, obsolete, ARRADCOM, also designated M912, for bomblet
T213	PD FUZE	SQ or Del, for 90mm Guns, Dwg P-84098, cancelled, ARRADCOM
XM214	HAND GRENADE FUZE	Igniting output, Dwg unknown, cancelled, ARRADCOM
T217	PD FUZE	SQ or .05 Delay, for 4.2-in Mortar, WP Shell, same as T207 except no booster, Dwg P-82126, cancelled, ARRADCOM
T223	PD FUZE	SQ or Delay, for 105mm BAT, nose spike, Dwg DRD-249-2, cancelled, ARRADCOM
M229	GRENADE FUZE	Impact, spring armed, for submunition M42 in 8-in shell M509, No dwg, ARRADCOM, replaced by M223
T229	PD SD FUZE	SQ or 0.6 to 1.0 millisec del, 127/60mm AA Gun, HE DS Proj, Dwg P-82204, cancelled, ARRADCOM, 30 sec SD
MK229	BOMB HYDROSTATIC FUZE	Five settings, for 500 lb bomb, Dwg unknown, obsolete, NSWC/WOL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Mk231	BOMB HYDROSTATIC FUZE	Tail, 25-125ft depth, for Mk54 and AN-M64 GP Bombs, Dwg 398953, obsolete, NSWC/WOL
Mk 233	BOMB IMPACT FUZE	Nose, for Drones, Dwg 34477, obsolete, NSWC/WOL
Mk235 MOD 2	BOMB IMPACT FUZE	Nose, 0.02 sec del, for Pilotless Aircraft, Dwg 344679, obsolete, NSWC/WOL, LD 166536
Mk236 MOD 2	BOMB IMPACT FUZE	Tail, 0.015 sec del, for Pilotless Aircraft, Dwg 344691, obsolete, NSWC/WOL, LD 166536
Mk237 MOD 1	BOMB LONG DELAY FUZE	Tail, 2-30 hour del, for 500 lb AN-M64A1 GP, Dwg 398969, obsolete, NSWC/WOL, LD 102977
Mk238 MOD 1	BOMB LONG DELAY FUZE	Tail, 2-30 hour del, for 1000 & 2000 lb GP, Dwg 398969, obsolete, NSWC/WOL, LD 102978
Mk239	BOMB IMPACT FUZE	Nose, 0.01 Del, for GP Bombs, Dwg 344722, obsolete, NSWC/WOL, LD 166500
Mk240	BOMB HYDROSTATIC FUZE	Tail, 25ft, for GP Bombs, Dwg 398968, obsolete, NSWC/WOL, LD 166513
T241	PD FUZE	Delay, for 27mm Gun, Dwg D-4903, (Parke Thompson), cancelled, ARRADCOM
T243	PD SD FUZE	Delay, for 37mm AA Gun, 8-10 sec SD, Dwg unknown, cancelled, ARRADCOM, electrical T231
Mk245	BOMB IMPACT FUZE	Nose, semi "All ways," for Fire Bombs, Dwg 398972, obsolete, NSWC/WOL, LD 166514
T248	PD FUZE	SQ or Delay, for 105mm BAT, replaced T198 Fuze, cancelled, ARRADCOM
T251	PD FUZE	SQ or Delay, for Field Artillery, M51 with extended ogive and without T35 Booster, Dwg 73-2-344, cancelled, ARRADCOM
T254	PD FUZE	0.6 millisec delay, for 20mm Gun, Dwg D-4404 Parke Thompson, cancelled, ARRADCOM
T268	PD SD FUZE	Delay, for 90/40mm Gun, HE DS T82 Shell, Dwg FC-3378, cancelled, ARRADCOM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE, WASHINGTON, DC 20025

MIL-HDBK-146
Fuze Catalog
1 October 1982

1. This standardization handbook was developed by the Department of Defense in accordance with established procedure.

2. This publication was approved 1 October 1982 for printing and inclusion in the military standardization handbook series.

3. This document provides technical information on limited standard, obsolescent, obsolete, terminated, and canceled fuzes of the Army, Air Force, Marine Corps, and Navy. It will provide useful information to personnel concerned with the design and procurement of military fuzes. The handbook is not intended to be referenced in purchase specifications except for informational purposes, nor shall it supersede any specification requirements.

4. Every effort has been made to reflect accurate fuze information. It is the intent to review this handbook periodically to ensure its completeness and accuracy. Users of this document are encouraged to report any errors discovered and any recommendations for changes or inclusions. A set of blank data sheets and instructions is included in Appendix A to facilitate the submission of new data.

5. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be submitted on the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter. Address information to Commander, U.S. Army Armament Research and Development Command, DRDAR-TST-S, Dover, NJ 07801.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T290	TIME FUZE	35 sec, pyrotechnic train, for 81 and 105m Mortar Illum Shell, modified M84, cancelled, ARRADCOM
T295	ET SQ FUZE	for 127/60mm AA Tapered Barrel T144 Projectile, Dwg unknown, cancelled, ARRADCOM
Mk301	GM PROXIMITY FUZE	for Terrier RIM-2, Dwg 1499758, Fuze uses Mk1 TDD and Mk1 S&A, obsolete, NWC, previously T3001 S&A
Mk303 MOD 2	GM PROXIMITY FUZE	for Sidewinder AIM-9, Dwg 1504530, uses Mk3 TDD, Mk3 S&A, Mk4 FTD, FMS only, obsolescent, NWC
Mk305 MOD 2	GM IMPACT FUZE	for Talos RIM-8, Dwg unknown, uses Mk4 TDD and Mk4 S&A, obsolete, NWC
Mk308 MOD 3	GM PROXIMITY FUZE	for Tartar RIM-24 and Terrier RIM-2, Dwg unknown, uses Mk7 TDD and Mk7 S&A, obsolete, NWC, interchangeable with Mk307
Mk309 MOD 2	GM PROXIMITY FUZE	for Talos RIM-8, Dwg LD 475913, uses Mk8 TDD and Mk4 S&A, obsolete, NWC, previously EX-12
Mk311	GM DUMMY FUZE	for Sidewinder AIM-9, Dwg 1989489, obsolete, NWC, simulates Mk304
Mk313 MOD 1	GM DUMMY FUZE	for Sidewinder AIM-9, Dwg 1840131, obsolete, NWC, simulates Mk303
Mk315	GM PROXIMITY FUZE	for Sidewinder AIM-9, Dwg LD 521557, uses Mk13 TDD, Mk10 S&A, EX-50 Battery, obsolete, NWC
Mk316	GM PROXIMITY FUZE	for Sidewinder AIM-9, Dwg unknown, uses Mk14 TDD, Mk3 S&A, obsolete, NWC
Mk317	GM IMPACT FUZE	for Sparrow III AIM-7, Dwg unknown, uses Mk3 Trig. Dev., Mk73 Switch, Mk5 S&A, obsolete, NWC
T317	MT FUZE	for 105mm BAT, fin stabilized, Dwg unknown, terminated, ARRADCOM
T318	MT SQ FUZE	100 sec, for 280mm Gun, Dwg unknown, cancelled, ARRADCOM
Mk319 MOD 2	GM PROXIMITY FUZE	for Talos RIM-8, Dwg unknown, uses Mk22-1 TDD, Mk12 S&A, Mk45 Booster, obsolete, NWC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Mk322 MOD 2	GM PROXIMITY FUZE	for Sidewinder AIM-9 and Chaparral MIM-72, IR, LD 521903, obsolete, NWC, uses Mk15-2 TDD and Mk13 S&A
Mk323 MOD 2	GM PROXIMITY FUZE	for Sidewinder AIM-9 and Chaparral MIM-72, LD 533561, uses Mk24-2 TDD, Mk13 S&A, obsolete, NWC
Mk325 MOD 3	GM PROXIMITY FUZE	for Terrier RIM-2 and Tartar RIM-24, Dwg unknown, uses Mk28 TDD, Mk14 S&A, EX-3 Firing Dev., EX-3 Trig. Dev., obsolete, NWC
Mk327 MOD 0	BOMB PROXIMITY FUZE	for 500 lb Chemical Bomb, Dwg unknown, obsolete, NSWC/WOL
T330	MT SQ FUZE	100 sec, for 280mm Gun, same as T289 except with vernier, Dwg unknown, cancelled, ARRADCOM
T341	TIME FUZE	14.5 + .5 sec, pyro time train, for 60mm Mortar, Illum Shell, contour of M65A1, cancelled, ARRADCOM
EX353	MT PD FUZE	45 sec, for 5-in/38, 6-in/47 and 8-in/55, Dwg unknown, terminated, NSWC/WOL
EX354	MT PD FUZE	45 sec, for 5-in/54, Dwg unknown, terminated, NSWC/WOL
EX355	MT PD FUZE	45 sec, for 5-in/38, 6-in/47 and 8-in/55 Illum Proj, Dwg unknown, terminated, NSWC/WOL, 1 in intrusion
T356	PD FUZE	for 81 and 105mm Mortars, extended probe for standoff funct, cancelled, ARRADCOM
EX356	MT PD FUZE	45 sec, for 5-in/54 Illum Proj, Dwg unknown, terminated, NSWC/WOL
EX364	ROCKET TIME FUZE	5-45 sec, pyrotechnic train, for Mk45 Flare, cancelled, NAD/Crane
EX368	TARGET DETECTING DEVICE	for Standard Missile RIM-66 and -67, Dwg unknown, cancelled, NWC
Mk372 MOD 0	HAND GRENADE FUZE	6 sec, pyrotechnic time, detonating output, PL 2113317, for Mk1 Grenade, obsolete, NAD/Crane

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

EX373	AUX DET FUZE	for 5-in/38 Illum Proj. Dwg unknown, terminated, NSWC/WO, out of line safety
EX385	PD FUZE	0.2 to 0.5 millisec delay, for 40mm AA HEI-T and HEI-T Cart., terminated, NSWC/WOL, similar Mk27
EX386	PD FUZE	9-12 meters delay, for 40mm Gun HE-T and HE-IT Cart., terminated, NSWC/WOL, for foilage penetration
EX397	PROXIMITY FUZE	for 5-in/54, CVT, Dwg 250099, terminated, NSWC/WO
Mk401	GM PROXIMITY FUZE	Combination of Mk52 TDD and Mk12 S&A for TALOS, RIM 8G-2, obsolete, NWC
EX408	PROXIMITY FUZE	for 8-in SALGP, impact backup, uses Mk42 Safety Device, Dwg 2838898, ERADCOM, DELHD and NSWC/WOL
EX409	GM PROXIMITY FUZE	for Sea Sparrow RIM-7F, Dwg 5070653, Terminated, NWC
EX410	PROXIMITY FUZE	for 8-in SALGP, Dwg 5021345, Terminated, NSWC/WOL
EX412	GM PROXIMITY FUZE	for Anti Ship Missile, Dwg 5178800, inactive, NWC
M418	ROCKET MT FUZE	for 318mm Little John Rocket MGR-3, previously T2070, obsolete, ARRADCOM, LCN-M
M419	ROCKET MT FUZE	for 318mm Little John Rocket MGR-3, previously T2071, obsolete, ARRADCOM, LCN-M
XM422	ROCKET MT TRAINING FUZE	for 318mm Little John Rocket MGR-3, cancelled, ARRADCOM, DRDAR-LCN-M
XM430	ROCKET PROXIMITY FUZE	for 2.75-in FFAR Rocket, HE Warhead, cancelled, ERADCOM, DELHD
XM437	ROCKET PRACTICE FUZE	for 2.75-in FFAR XM232 Practice Rocket, Dwg 9234555, ARRADCOM-LCN-M, photoflash booster
XM441	ROCKET PD FUZE	for 66mm XM78 warhead, modified M412, cancelled, ARRADCOM, LCN-M
M512	MT FUZE	100 sec, for 280mm Gun, previously T220, proj M354, obsolete, ARRADCOM, LCN-T

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M523	MT SQ FUZE	100 sec, for 280mm Gun, previously T310, proj M366, ARRADCOM, LCN-T
XM529	MT SQ FUZE	75 sec, for 105mm Shell M413, same as M501A1 except has M132 booster, Dwg XP-97089, terminated, ARRADCOM, LCN-T
M542	MT FUZE	100 sec, for 175mm, 8-in and 280mm Gun, and 8-in How, Dwg F895229, obsolete, ARRADCOM, LCN-T
XM544E1	PD FUZE	for 37mm Cartridge XM415 and XM446, SK-1244 Eur-Wms, cancelled, ARRADCOM, SCA
XM545	DUMMY FUZE	simulates XM544, for 37mm Cartridge XM415, cancelled, ARRADCOM, SCA
XM546	PROXIMITY FUZE	for 81mm Mortar, gas operated S&A, fuze in base of proj., cancelled, ERADCOM, DELHD
XM547	MT FUZE	15-80 sec, for 155mm How, Dwg unknown, cancelled, ARRADCOM LCN-T
M552	PD FUZE	for 40mm Grenade Launcher M79, Low vel, M381, 382 and 441 Cart., Dwg unknown, Standard LCC-B, ARRADCOM, SCA-A
XM554	MT SQ FUZE	75 sec, for 105mm How ICM Shell M413, M501A1 with M137 Booster, similar M529, cancelled, ARRADCOM, LCN-T
XM556	MT SQ FUZE	100 sec, for 155mm How Shell M449, same as M548 except with expell chg, Dwg FXP-112619-2, obsolete, ARRADCOM, LCN-T
XM575	MT SQ FUZE	75 sec, for all field artillery, M501 with M125 Booster, obsolete, ARRADCOM, LCN-T
M576	PD FUZE	SQ and Del, for all field artillery, M48A3 with M125A1 Booster, similar M557, obsolete, ARRADCOM, LCN-T
XM595	MT FUZE	100 sec, for all field artillery, same as M564 except without SQ, cancelled, ARRADCOM, LCN-T
M600	AT MINE FUZE	chemical, pressure, for Heavy M6 and Light M7A1 Mines, Dwg 73-9-27, replaced by M603, obsolete, ARRADCOM, LCU

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

M601	AT MINE FUZE	chemical, pressure, for Light M7A1 Mine, same as M600 except load, replaced by M603, obsolete, ARRADCOM, LCU
M602	AT MINE FUZE	chemical, pressure, for M10 and M12 Practice mines, replaced by M604, Dwg 73-9-44, obsolete, ARRADCOM, LCU
XM610	AT MINE FUZE	pressure, for 31 lb Heavy M15 Mine, Dwg unknown, cancelled, ARRADCOM, LCU
XM613	AT MINE FUZE	pneumatic, for M-C Heavy M21 Mine, Dwg unknown, cancelled, ERADCOM, DELHD
XM614	AT MINE FUZE	for M-C Heavy M21 Mine, Dwg unknown, cancelled, ARRADCOM, LCU
XM615	AT MINE FUZE	non metallic, counting, for NM M19 Mine, Dwg unknown, cancelled, ARRADCOM, LCU
XM618	AT MINE INFL FUZE	non metallic, for XM33, integral with Mine, Dwg unknown, cancelled, ERADCOM, DELHD
XM623	AT MINE FUZE	Pressure, for 31 lb Heavy M15 Mine, used in waterways, same as M607, ARRADCOM, LCU
XM714E3	PD SD FUZE	SQ, for 20mm Low Drag Projectile in M61 Gun, Dwg unknown, cancelled, ARRADCOM, SCA-A
XM714E4	PD SD FUZE	SQ, for 30mm WECOM gun, Dwg unknown, cancelled, ARRADCOM, SCA-A
XM721	MT FUZE	10 sec, for Clusters, Dwg unknown, cancelled, ARRADCOM, LCN-T
XM725	PD FUZE	SQ, for 40mm Grenade, similar to M533, cancelled, ARRADCOM, SCA-A
XM729	PD FUZE	for 175mm Gun, Projectile XM510, cancelled, ARRADCOM, LCN-T
XM760	PD SD FUZE	SQ, XM714 Type, for 35mm XM246 Oerlikon Gun DIVADS, terminated, ARRADCOM, SCA
XM801	GM BD SD FUZE	for Hawk AA Missile MIM-23, electrical arming, cancelled, ARRADCOM, LCN-M
XM803	GM IMPACT FUZE	for LaCrosse MGM-18, with T52 WH, cancelled, ARRADCOM, LCN-M

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM806	GM PROXIMITY FUZE	for Mauler MGM-46, used XM62 S&A, replaced by XM810 ,ERADCOM, DELHD
M807	GM PROXIMITY FUZE	for Nike Hercules MIM-14, previously T1409E1, obsolete, ERADCOM, DELHD
XM808	GM PROXIMITY FUZE	for Nike Zeus LIM-49, cancelled, ERADCOM, DELHD
XM809	GM MT FUZE	for Lance MGM-52, cancelled, ARRADCOM, LCN-M
XM810	GM PROXIMITY FUZE	for Mauler MGM-46, and Lance MGM-52, used XM90 S&A, Dwg 10983300, cancelled, ERADCOM, DELHD
M900	BOMB IMPACT FUZE	instantaneous, for Clusters or T57 HEAT Frag Bomb, previously T777, obsolete, ARRADCOM
XM911	BOMBLET IMPACT FUZE	for chemical bomblet E130R1, similar to M212 except 800rpm, cancelled, ARRADCOM, CLN, Edgewood
M918	BOMB IMPACT FUZE	Nose or Tail, "all ways," .3 sec delay function, for Fire Bomb, modified M173A1, obsolescent, NSWC/WOL,
XM919	BOMB MT FUZE	4-90 sec, for CBU-24 and 29, Dwg 9219339, ARRADCOM
XM920E2	BOMB MT FUZE	field expedient for 55 gal drum, M152A1 Fuze & XM55 Burster, cancelled, ARRADCOM, CLN Edgewood
XM921	BOMB MT FUZE	field expedient for 55 gal drum, modified M152A1, without vanes, Dwg D14-15-2587, cancelled, ARRADCOM, CLN Edgewood
XM923	BOMB IMPACT FUZE	Nose or Tail, "all ways," field expedient, modified M173A1, Dwg C14-15-636, cancelled, ARRADCOM, CLN Edgewood
XM924	BOMB IMPACT FUZE	Nose or Tail, "all ways," field expedient, modified M173A1, Dwg C14-15-636, cancelled, ARRADCOM, CLN Edgewood
M925	BOMB IMPACT FUZE	XM923 used in place of XM921, for 55 gal drum, obsolete, ARRADCOM, CLN Edgewood

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

XM926	BOMBLET AD FUZE	for BLU-3 Bomblet, dash pot type, cancelled, ARRADCOM, LCN
XM927	BOMBLET AD FUZE	for BLU-4 bomblet, dash pot type, cancelled, ARRADCOM, LCN
XM929	BOMB IMPACT FUZE	Nose or Tail, "all ways," instantaneous, for field expedient bombs, Mod M173A1, Dwg E314-15-2717, ARRADCOM, CLN Edgewood
XM930	BOMB MT FUZE	3-92 sec, for clusters, CBU-24, -29 and -49, Dwg D9244150, cancelled, ARRADCOM
T1010	RIFLE GRENADE FUZE	BD, impact, for T37 HEAT Grenade, Dwg P-82096, cancelled, ARRADCOM, LCN
T1013	HAND GRENADE FUZE	4-6 sec, pyro time delay, igniting output, for T39 Practice Grenade, cancelled, ARRADCOM, LCN
T1016	HAND GRENADE FUZE	4-5 sec or impact, self destruction, dash pot type, for M26 Grenade, cancelled, ARRADCOM, LCN
T1018	HAND GRENADE FUZE	4-6 sec or impact, same as M217 except no SD, Dwg BS-207020, cancelled, ERADCOM, DELHD
T1019	HAND GRENADE FUZE	impact, bouncing type, for T48 Frag Grenade, 1 sec delay arm, Dwg TL3F-916, cancelled, ERADCOM, DELHD
T1201	AP MINE FUZE	Non metallic, pressure and trip, for AP Mine T17, Dwg P-80060 & 80110, cancelled, ARRADCOM, LCN
T1204	AP MINE FUZE	Non metallic, pressure, belleville washer, integral with M14 Mine, Dwg 82-15-55, Std LCC-B, ARRADCOM, LCU
T1209	AT MINE INFLUENCE FUZE	Magnetic, for T23 and T28 AT Mines, cancelled, ERADCOM, DELHD
T1222	AT MINE INFLUENCE FUZE	Acoustic & magnetic, for M21 Mine, cancelled, ARRADCOM, LCU
T1225	AT MINE INFLUENCE FUZE	Magnetic induction coil, for M21 Mine, cancelled, ARRADCOM LCU
T1227	AT MINE INFLUENCE FUZE	for T23 and T28 AT Mines, cancelled, ARRADCOM, LCU

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

T1230	AP MINE FUZE	Remote controlled, for T5 AP Mine, cancelled, ARRADCOM, LCU
T1232	AT MINE FUZE	Pressure, counting mechanism, cancelled, ARRADCOM, LCU
T1407	GM IMPACT FUZE	Magnetic funct., for Falcon Missile AIM-4 (GAR-1) modified M51 (T1403), cancelled, ERADCOM, DELHD
T1408	GM FUZE	for MX2013 Missile, cancelled, ARRADCOM, LCN-M
T2003	ROCKET PI BD FUZE	for 2.36-in HEAT Rocket T59, Dwg PX-8-25, replaced by T2009, ARRADCOM, LCN-M
T2006	ROCKET PD FUZE	SQ, modified bomb fuze, Dwg P-74394, cancelled, ARRADCOM, LCN-M
T2009	ROCKET PI BD FUZE	for 2.36-in HEAT Rocket T59, similar to T16 and T2003, cancelled, ARRADCOM, LCN-M
T2013	ROCKET PD FUZE	SQ, for 4.5-in Rocket, HE warhead, similar to T28 and T36 Fuzes, 73-2-276, cancelled, ARRADCOM, LCN-M
T2017	ROCKET PROXIMITY FUZE	for 5-in Gen Purpose Rocket, Dwg D300, 094 (NBS), cancelled, ERADCOM, DELHD
T2026	ROCKET PD FUZE	Delay, for 2.75-in FFAR Rocket, similar to T2025, replaced by Mk176, ARRADCOM, LCN-M
T2032	ROCKET ET FUZE	for 5-in High Velocity Aircraft Rocket, cancelled, ARRADCOM, LCN-M
T2035	ROCKET PROXIMITY FUZE	for 4.5-in Spinning and Fin stabilized rockets, cancelled, ERADCOM, DELHD
T2045	ROCKET TIME FUZE	also SQ, for 2.75-in FFAR Rocket, Dwg SK-1254 (Electro Mech Devices), cancelled, ARRADCOM, LCN-M
T2059	ROCKET PD FUZE	SQ, for 2.5-in FFAR Rocket Target Marker, Dwg P-87109, cancelled, ARRADCOM, LCN-M
T2067	ROCKET TIME FUZE	25 sec, for 115mm T229 Leaflet warhead, Dwg unknown, similar to M77, replaced by M84, ARRADCOM-LCN-M

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Appendix A

Field Descriptions of Fuze Data Sheet

This appendix contains descriptions for each field in the fuze database. It should be used to interpret data appearing in MIL-HDBK-145 and MIL-HDBK-146 or when preparing material for inclusion in the catalogs. A blank data sheet has been included at the end of this appendix. It may be reproduced locally and used to submit new entries for either catalog.

Some information appearing below pertains to the use of the Fuze Automated Catalog System (FACS), the PC database used to produce the catalogs and which may be used at selected DoD facilities as an alternate means of accessing data. Field numbers, field names, field names used in the display and data size limitations and a brief description are included for each field. The field numbers, 1 through 108, should be used when performing string searches. Field names (shown in parentheses) are only used in system maintenance. All fields are character data except where indicated. Certain data fields are reserved for use in publication of the NATO fuze catalog, AOP-8. They are not displayed or printed when using FACS.

- FUZE MODEL NUMBER -

The model number of the fuze, that is, M, Mk, or FMU- number. If none is assigned, the next highest assembly is indicated. For example, "F/M600 Mine" would indicate an unnumbered fuze used in an M600 Mine. For purposes of indexing, the model number is broken down into a service prefix, core number, and modification.

1 (A102) SERVICE PREFIX - Data limit: 1 line, 4 characters.

M, Mk, FMU-, and so forth.

2 (A105) BASIC NUMBER - Data limit: 1 line, 4 characters.

0 thru 9999.

3 (A106) MODIFICATION - Data limit 1 line, 10 Characters.

Modifications A1, Mod 1, A/B, and so forth.

4 (A110) TYPE - Data limit: 1 line, 32 characters.

Basic type of fuze. For example, proximity, point detonating, time, and so forth.

5 (DOI) Date of Information - Data limit: 1 line, 8 characters. This is a date type field.

Date of latest revision to fuze information.

6 (NOTI) Notice Change - Data limit: 1 line, 9 characters.

Indicates if current data is issued as a notice change to the handbook.

- ILLUSTRATION -

Final art size not to exceed 5-in (H) x 7-in (W) inches. Cutaway line drawings used wherever possible.

7 (A120) MIL-HDBK-Number - Data limit: 1 line, 3 characters.

Indicates military handbook containing the data sheet - MIL-HDBK-145 for current fuzes; -146 for older fuzes.

8 (A130) CHAPTER - Data limit: 1 line, 2 characters.

For MIL-HDBK-145A: 1 - Small Projectiles, 2 - Large Projectiles, 3 - Submunitions, 4 - Bombs and Dispensers, 5 - Rockets, 6 - Missiles, 7 - Mines and Demolition Devices, 8 - Hand Grenades and Smoke Pots, 9 - Miscellaneous, and 10 - Tools. For MIL-HDBK-146: 1 - Projectiles, 2 - Bombs, 3 - Submunitions, 4 - Mines,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

5 - Rockets, 6 - Missiles, 7 - Small Caliber (40 mm or less), 8 - Grenades, 9 - Miscellaneous, and 10 - fuzes with scant information.

10 (PAGE1) Face page - Data limit: 1 line, 4 characters.

Face page number of data sheet.**11 (PAGE2) Back page** - Data limit: 1 line, 4 characters.

Back page number of data sheet.

- IDENTIFICATION -

12 (B200) AGENCY - Data limit: 1 line 29 characters.

Name and office code of cognizant agency (not necessarily developer).

14 (B210) CONTACT - Data limit: 1 line, 28 characters.

Last name, and first initial of cognizant engineer.

15 (B212) AUTOVON - Data limit: 1 line, 28 characters.

AUTOVON phone number of cognizant engineer.

16 (B220) STATUS - Data limit: 1 line, 29 characters.

Development - fuze is in design, engineering development, or testing phase.

Development complete - all development and testing has been completed. The fuze may have been standardized or released to production but has never been procured.

Procurement Standard - fuze is being procured or is in stock as standard issue. There are no immediate plans to supercede or restrict future production.

Obsolescent - fuze is safe, reasonably reliable, and authorized for use, but it is unlikely it will ever be procured again. Obsolescent fuzes are normally issued in lieu of standard fuzes until remaining stock is consumed. Sometimes use may be restricted to practice or training.

Obsolete - fuze is unsafe, unreliable, or technically outmoded. Any remianing stock is in process of disposal.

Terminated - development or procurement was stopped before the fuze went into service.

Beginning with, Revision 1, for each handbook, fuzes determined to be in development, having completed development, procurement standard, or obsolescent will be contained in MIL-HDBK-145. Obsolete and terminated fuzes constitute MIL-HDBK-146.

17 (B230) USER - Data limit: 1 line, 31 characters.

Using Services (Army, Air Force, Marine Corps, Navy)

18 (B240) ASSY DWG - Data limit: 1 line, 27 characters.

Top level assembly drawing number.

19 (B250) PARTS LIST - Data limit: 1 line, 25 characters.

Number of parts list.

20 (B260) SPEC - Data limit: 1 line, 31 characters.

Top level procurement specification number.

21 (B265A), 22 (B265B) PUB - Data limit: 2 lines, 32 characters/line.

Reference to any technical manual or report having further information.

23 (B270) NATIONAL STOCK NO. (NSN) - Data limit: 1 line, 35 characters.

A 13-digit number consisting of the four-digit Federal Supply Class (FSC) and the nine-digit National Item Identification Number (NIIN). The NIIN, in turn, consists of the two-digit NATO code and seven nonsignificant digits. For ammunition

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

and explosives (FSC 13XX), the last seven digits identify the specific packaging for a given item. A specific item may have several NSNs assigned. The most significant stock number is listed under this element on each data sheet. Any other important stock numbers are given in the Remarks/Description element. FSCs commonly assigned to fuzes contained in this catalog are as follows, 1305, 1310, 1315, and 1320 - small caliber, 1325 - bombs, 1330 - grenades, 1340 - rockets, 1345 - mines, 1365 - chemical, smoke pot, & pyrotechnics, 1375 - demolition materials; and 1390 - projectiles. NATO codes used for US fuzes are 00 and 01.

24 (B275) DODIC - Data limit: 1 line, 30 characters.

DoD Identification Code. A four-position code consisting of one- or two-position alpha followed by numerics. Also called Navy Amunition Logistics Code (NALC) in the Navy and Locally Assigned Reporting Code (LARC) in the Air Force. The DoD Ammunition Codes (DODAC) may be encountered in some fuze data. These are eight-digit codes consiting of the first four digits of the NSN, known as the Federal Supply Class (FSC) (see also element 270 explanation) plus the DODIC.

25 (B280) PRIOR MODEL - Data limit: 1 line, 24 characters.

Previously used model number for the same fuze such as experimental numbers and common description names. Generally, previous modifications of the same model number are not indicated.

26 (B285A), 27 (B285B) SIMILAR TO - Data limit: 2 lines, 25 characters.

All model numbers of similar fuzes such as derivations or fuze families. Specific differences may be described in element 901. List obsolete items in element 290. Does not include modifications of the same basic model.

28 (B290) REPLACES - Data limit: 1 line, 27 characters.

Model numbers of fuzes which will not be produced as a result of this fuze's introduction. Includes modification of the same basic model.

29 (B295) REPLACED BY - Data limit: 1 line, 19 characters.

Model number of item replacing any obsolescent, obsolete, or terminated item.

- GENERAL -

30 (C300A), 31 (C300B), 32 (C300C) WEAPON - Data limit: 3 lines, 27 characters/line.

General weapon category, for example, general-purpose bomb, air-surface missile, 5-inch rocket. For projectiles, specify caliber and model; for example, 5-in/38 Mk 12 Gun.

33 (C310A), 34 (C310B), 35 (C310C) AMMUNITION - Data limit: 3 lines, 32 characters/line.

Specific nomenclature of the round; for example, Mk 49 Projectile, Mk 80 Series Bombs, AGM-122 Side ARM Missile. Application or use may be specified; for example, HE (high explosive), inert, practice, and so forth. For fuze system components or tools, specify the fuze model number.

36 (C320) LOCATION - Data limit: 1 line, 27 characters/line.

Location of the fuze on the weapon assembly (nose, base, mid-body, etc.).

- BALLISTIC LEVELS -

37 (C331) ROTATION - Data limit: 1 line, 25 characters.

Maximum rotation (in rps) the fuze can withstand and perform properly.

38 (C332) SETBACK - Data limit: 1 line, 25 characters.

Maximum acceleration (in g's) the fuze can withstand and perform properly.

39 (C333A), 40 (C333B), 41 (C333C) VELOCITY - Data limit: 3 lines, 25 characters/line.

Supersedes page A-3 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

Maximum velocity the fuze can withstand and perform properly. Duration is specified where it is known.

42 (C334) CREEP - Data limit: 1 line, 28 characters.

Maximum deceleration (during flight) that the fuze can withstand and perform properly.

43 (C335) FLIGHT TIME - Data limit 1 line, 24 characters.

Maximum possible time of flight. Determined by battery operating time or clock movement running time.

45 (C361) SAFETY STD - Data limit: 1 line, 25 characters.

Applicable design safety standard; for example, MIL-STD-1316.

46 (C370) SETTERS - Data limit: 1 line, 28 characters.

Model number of tool or device used to preset fuze arming or functioning characteristics.

- ARMING DATA -

47 (D401A), 48 (D401B), 49 (D401C) FIRST SAFETY - Data limit: 3 lines, 35 characters/line.

First safety feature and no-arm and all-arm levels. Examples are arming wire, spin, setback, creep, and so forth.

50 (D410A), 51 (D410B), 52 (D410C) SECOND SAFETY - Data limit: 3 lines, 35 characters/line.

Second safety feature and no-arm and all-arm levels.

53 (D420A), 54 (D420B), 55(D420C) OTHER SAFETY - Data limit: 3 lines, 35 characters/line.

Appropriate information as given for first and second safeties.

56 (D426A), 57 (D426B) SAFE SEPARATION - Data limit: 2 lines, 35 characters/line.

Initial period of munition travel during which the fuze is safe; expressed in time, distance, or turns to arm as appropriate.

58 (D430A), 59 (D430B) SAFE/ARM INDICATION - Data limit: 2 lines, 35 characters/line.

External indication of the unarmed condition when the fuze is installed into the carrier.

- FUNCTIONING DATA -

60 (E500) MODES - Data limit: 1 line, 30 characters.

PI - point initiating; PD - point detonating; BD - base detonating; SD - self-destruct; PROX - proximity; SQ - superquick; delay after impact; time; other.

61 (E510) TYPE - Data limit: 1 line, 31 characters.

Design type such as electrical, mechanical, chemical, pyrotechnic or other.

62 (E520A), 63 (E520B), 64 (E520C), 65 (E520D) CHARACTERISTICS - Data limit: 4 lines, 35 characters/line.

Pertinent unclassified performance data such as setting range and accuracy for time fuzes, time for delay fuzes, etc.

66 (E530) TARGET - Data limit: 1 line, 29 characters.

Class of targets. For example, air, ground, light material, etc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

67 (E540A), 68 (E540B), 69 (E540C) SENSITIVITY - Data limit: 3 lines, 35 characters/line.

Test criteria for each mode, other than proximity fuzes, for evaluating proper fuze initiation such as materials, thickness, impact obliquity and velocity. All data should be specified in metric units.

70 (E550) FUNCTION TEMP - Data limit: 1 line, 35 characters.

Range of temperatures where fuze is expected to function. Expressed in degrees C.

71 (E560) MODE ON DELIVERY - Data limit: 1 line, 35 characters.

Functioning status of the fuze as deliverd by the manufacturer.

PHYSICAL DATA

72 (E600) WEIGHT - Data limit: 1 line, 20 characters.

Weight in pounds (lb). Equivalent grams (g) in parentheses.

- OVERALL SIZE -

74 (E610) LG - Data limit: 1 line, 20 characters.

Maximum length in inches (in). Equivalent millimeters (mm) in parentheses.

76 (E620) XSECT - Data limit: 1 line, 20 characters.

Maximum cross-section (e.g., diameter) in inches (in). Equivalent millimeters (mm) in parentheses.

- INTRUSION -

78 (E630) DP - Data limit: 1 line, 20 characters.

Depth or distance the fuze extends into the weapon in inches (in) and millimeters (mm) in parentheses.

80 (E632) DIA - Data limit: 1 line, 20 characters.

Maximum diameter of fuze intrusion into the weapon, including thread, in inches (in) and millimeters (mm) in parentheses.

82 (E640) THD - Data limit: 1 line, 24 characters.

The basic thread size in conventional form (English units). Threads are male unless marked female and right-hand (RH) unless marked left-hand (LH).

83 (E645) THD DP - Data limit: 1 line, 20 characters.

Maximum depth or length of thread in inches (in). Equivalent millimeters (mm) in parentheses.

85 (F700A), 86 (F700B), 87 (F700C) POWER SUPPLY - Data limit: 3 lines, 35 characters/line.

Number, name designation, and type. Assemby drawing and specification numbers included where applicable.

- EXPLOSIVE COMPONENTS -

88 (G800A), 89 (G800B) S & A DEVICE - Data limit: 2 lines, 25 characters/line.

Nomenclature and type of safety and arming device.

90 (G810) PRIMER - Data limit: 1 line, 29 characters.

Number and nomenclature or materials and weights.

91 (G820A), 92 G(820B) DETONATOR - Data limit: 2 lines, 26 characters/line.

Same type of information as 810.

Supersedes page A-5 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

93 (G840A), 94 (G840B) LEAD - Data limit: 2 lines, 31 characters/line.

Same type of information as 810.

95 (G850A), 96 (G850B), 97 (G850C) BOOSTER - Data limit: 3 lines, 28 characters/line.

Same type of information as 810.

98 (G860A), 99 (G860B), 100 (G860C) OTHER - Data limit: 3 lines, 30 characters/line.

Items in the explosive train not listed above or other explosive components such as batter primers, rotor actuators, bellows, and so forth.

STORAGE AND TRANSPORTATION

SAFETY DATA

101 (G870) UN SER NO - Data limit: 1 line, 25 characters.

The United Nations Serial Number is a four-digit, internationally-recognized identifier which indicates specicific hazardous materials; the appropriate hazardous classification, division, and compatibility group; and any special packing requirements.

For detailed information, see United Nations Economic and Social Council - Transport of Dangerous Goods, 2nd revised edition, published in 1982 by International Regulations Publishing and Distributing Organization, P.O. Box 60105, Chicago, IL 60660. For descriptions of UN Class/Division and Storage Compatibility Group (SCG), see element number 874, below. Numbers commonly assigned to fuzes include the following:

UN Serial	DescriptionClass/Division	SCG
0042	Booster without detonator	1.1 D
0048	Demolition charge	1.1 D
0106	Detonating fuzes	1.1 B
0107	Detonating fuzes	1.2 B
0247	Incendiary ammunition, liquid or gel, with burster, expelling or propelling charge	1.3 J
0257	Detonating fuzes	1.4 B
0349	Explosive articles	1.4 S
0408	Detonating fuzes with protective features	1.1 D
0409	Detonating fuzes with protective features	1.2 D
0410	Detonating fuzes with protective features	1.4 D

102 (G872) HCSDS NO - Data limit: 1 line, 24 characters.

US Hazardous Component Safety Data Statement Number. A summary of sensitivity, hazards, and shipping/storage classification information. These data are maintained for each fuze on AMCCOM Form 47-R by the US Army.

103 (G874) UN CL/DIV SCG - Data limit: 1 line, 22 characters.

United Nations Organization Hazardous Class/Division and Storage and Compatibility Group.

Hazard Class/Division - a three-position code dividing and subdividing hazardous material into classes and divisions based on the character and predominance of the associated hazards and of the potential for causing personnel casualties or property

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

damage. All fuzes are in Class 1, Explosives. There are three applicable divisions:

1.1 - Explosives with an instantaneous explosion or mass detonation risk.

1.2 - Explosives that do not explode en masse and for which the principal hazards are fragment and blast.

1.4 - Explosives that present a fire hazard with no blast hazard and virtually no fragmentation or toxic hazard.

Storage/Compatibility Group (SCG) - Fuzes come under one of three groups:

B - Detonators and similar initiating devices. Items containing initiating explosives that are designed to initiate or continue the functioning of an explosive train.

D - Black powder, high explosives (HE) and ammunition containing HE without its own means of initiation and without propelling charge. Ammunition and explosives that can be expected to explode or detonate when any given item or component thereof is initiated.

S - Ammunition presenting no significant hazard. Ammunition so designed or packed that when in storage, all hazardous explosive effects are confined and self-contained within the item or package. An incident may destroy all items in a single pack, but must not be communicated to other packs so all are destroyed.

Criteria for assignment of the proper Class/Division and Storage Compatibility Group to each fuze are given in United Nations Economic and Social Counsil - Transport of Dangerous Goods, referenced in element 870, above and Department of Defense Explosive Hazard Classification Procedures, Army TB 700-2, Navy NAVSEAINST 8020.8, Air Force TO 11A-1-47, or Defense Logistics Agency DLAR 8220.1.

104 (G878) US DOT SHIP CL - Data limit: 1 line, 21 characters.

The US Department of Transportation has classified hazardous material which poses an unreasonable risk to health, safety, and property when transported in commerce. All US fuzes are either Class A or C explosive. Class A are all detonating explosives of maximum hazard. Class C contain Class A or Class B explosives, or both, as components but in restricted quantities. They present minimum hazard. The DoT Class determines package marking and any air or sea restrictions on transportation.

105 (G882) NET EXPL WT - Data limit: 1 line, 24 characters.

Net explosive weight of components such as primers, detonators, and leads. In some cases, fuzes may be shipped with or without boosters. In these cases, multiple national stock numbers will be issued and the DOT shipping class and marking may be affected.

106 (G884) NET PROP WT - Data limit: 1 line, 24 characters.

Net weight of propellant charges used in the fuze. Propellants are distinguished from explosives in that they can be made to burn at reproducible, controllable, and predetermined rates.

107 (G888A), 108 (G888B) STORAGE TEMP - Data limit: 2 lines, 23 characters/line.

Range of storage temperatures expressed in degrees C, and, when applicable, the maximum time the fuze may endure these temperatures.

109 (H901) REMARKS/DESCRIPTION - Data limit: 15 lines, 84 characters/line. This is a memo field.

Brief, operational description (safe to arm and functioning) of the fuze, including variations in settings and similarities with other fuzes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FUZE:

LAST UPDATE:

ILLUSTRATION:

- OVERALL SIZE -	- INTRUSION -	WT:
LG:	DP:	THD:
XSECT:	DIA:	THD DP:

IDENTIFICATION	GENERAL
AGENCY:	WEAPON:
CONTACT:	
PHONE:	
STATUS:	AMMUNITION:
USER:	
ASSY DWG:	
PARTS LIST:	
SPEC:	LOCATION:
PUB:	BALLISTIC LEVELS:
	ROTATION:
NATIONAL STOCK NO:	SETBACK:
	VELOCITY:
DODIC:	
PRIOR MODEL NO:	
SIMILAR TO:	CREEP:
	FLIGHT TIME:
REPLACES:	SAFETY STD:
REPLACED BY:	SETTERS:

Supersedes page A-8 of MIL-HDBK-146.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

FUZE:
See M403

LAST UPDATE:

ARMING DATA
FIRST SAFETY:

SECOND SAFETY:

OTHER SAFETY:

SAFE/ARM INDICATION:

ARMING TIME OR DISTANCE:

EXPLOSIVE COMPONENTS

S&A DEVICE:

PRIMER:

DETONATOR:

LEAD:

BOOSTER:

OTHER:

FUNCTIONING DATA
MODES:
TYPE:
CHARACTERISTICS:

TARGET:
SENSITIVITY:

FUNCTION TEMP:

MODE ON DELIVERY:

POWER SUPPLY:

STORAGE AND
TRANSPORTATION
SAFETY DATA

UN SER NO:
US HCSDS:
UN CL/DIV SCG:
US DOT SHIP CL:
NET EXPL WT:
NET PROP WT:
STORAGE TEMP:

REMARKS/DESCRIPTION:

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

THIS PAGE LEFT BLANK INTENTIONALLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
ADAM	See F/Mine F/M692/731 PROJ		-	10/01/82
AMRAAM	See FZU-49/B S-A		-	10/01/82
APAM	See FMU-88/B Fuze		-	10/01/82
ATACMS	Electronic S&A Device	145B	6-1	12/10/91
ATACMS	Safe Arm Fuze Assembly	145B	6-3	12/10/91
Bomine	PI and Proximity Fuze	146	4-59	10/01/82
CGLP	See XM740 Fuze		-	10/01/82
Chapparal	See M145 S-A		-	10/01/82
Chapparal	See M817 TDD		-	10/01/82
Copperhead	See XM740 Fuze		-	10/01/82
DADT	Bomblet AD SD Fuze	146	3-33	10/01/82
Dragon	See M118 S-A		-	10/01/82
FAE	Bomb Proximity Fuze	146	2-321	10/01/82
FAE	See FMU-83/B Fuze		-	10/01/82
FAE	See FSU-9A/B, -13/B S-A		-	10/01/82
Falcon	See T1407 Fuze		-	10/01/82
GEMSS	See F/XM74,75 Mines		-	10/01/82
Gator	See F/BLU-91, -92 Mines		-	10/01/82
HARM	See FMU-111/B, -129/B Fuzes		-	10/01/82
HARM	See Mk 29 Mod 0 AFD		-	10/01/82
Harpoon	See FMU-109/B, -141/B Fuzes		-	10/01/82
Hawk	See M100 S-A		-	10/01/82
Hawk	See XM821 TDD		-	10/01/82
Hellfire	See XM820 Fuze		-	10/01/82
LAW	See M412E1 Fuze		-	10/01/82
Lance	See M811, M819E1 Fuzes		-	10/01/82
MARS	Timer	146	5-255	10/01/82
MINIRAD	Proximity Fuze	146	6-87	10/01/82
MLRS	See M445, M447 Fuzes		-	10/01/82
MOPMS	See XM131,132 MINE SYS		-	10/01/82
Maverick	See FMU-133/B, -135/B Fuzes		-	10/01/82
ORATMS	See F/XM84 Mine		-	10/01/82
Opener	ET Opener	146	2-323	10/01/82
PAM	Safety & Arming Device	145B	7-0A	08/12/93
Patriot	See XM143 S-A		-	10/01/82
Patriot	See XM818E1 Fuze		-	10/01/82
RAAMS	See M718/741 PROJ		-	10/01/82
RAM	See Mk 13 Mod 0 S-A		-	10/01/82
RAM	See Mk 22 FCD		-	10/01/82
Redeye	See M814 Fuze		-	10/01/82
SADARM	Fuzing Safe & Arm (FSA)	145B	3-0A	08/10/93
SHAWL (F)	PI BD Fuze	146	5-257-	01/15/93
SHAWL (R)	BD Fuze	146	5-259-	01/15/93
SIR	See Mk 139 Fuze		-	10/01/82
SLAM	Safety & Arming Device	145B	7-0C	04/13/94
SLUFAE	See XM750 Fuze		-	10/01/82
SMAW	See Mk 420 Mod 0 BD Fuze		-	04/19/90
Shillelagh	See M805 and M813 Fuzes		-	10/01/82
Shrike	See Mk 330 Mod 2 Fuze		-	10/01/82
Side ARM	See Mk 13 Mod 0 S-A		-	10/01/82
Sidewinder	See MK 13 Mod 0 S-A		-	10/01/82
Sparrow	See Mk 33-0, Mk 35-0 S-A		-	10/01/82

Supersedes page I-1 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
Std ARM	See Mk 29 Mod 0 AFD		-	10/01/82
Std ARM	See Mk 34-1 S-A		-	10/01/82
Std Miss	See Mk 17-0, 51-0, & 76-0 S-A		-	10/01/82
Std Miss	See Mk 30 Mod 0 AFD		-	10/01/82
Std Miss	See Mk 5-0 FCD		-	10/01/82
Stinger	See M934 Fuze		-	10/01/82
Storm	See F/XM84 Mine		-	10/01/82
TOW	See M114 S-A		-	10/01/82
TOW	See M812 Fuze		-	10/01/82
Terrier	See Mk 1 Mod 1 AFD		-	10/01/82
Tomahawk	See FMU-138/B Fuze		-	10/01/82
Viper	See XM754 Fuze		-	10/01/82
WAM	Safety & Arming Device	145B	3-0C	07/28/94
Walleye	See FMU-94/B, -125/B Fuzes		-	10/01/82
Walleye	See Mk 328 Mod 0 Fuze		-	10/01/82
M1	Hand Grenade Fuze	146	8-2A	04/01/87
M1 (Delay)	Demolition Firing Device	145B	7-1	12/10/93
M1 (Press.)	Demolition Firing Device	145B	7-3	09/08/93
M1 (Pull)	Demolition Firing Device	145B	7-5	12/10/93
M1,A1	AT Mine Fuze	146	10-3	04/01/87
T1	AT Mine Fuze	146	10-3	04/01/87
T1	Bomb Fuze	146	10-3	04/01/87
T1	See M35 PD Fuze		-	10/01/82
T1	See T1E4 Rocket PD Fuze		-	/ /
T1E2	See T1E4 Rocket PD Fuze		-	04/01/87
T1E4	Rocket PD Fuze	146	5-3	04/01/87
EX 1 Mod 0	See MK 1 Mod 0		-	10/01/82
MK 1	Combination Fuze	146	10-3	04/01/87
MK 1	PD Fuze	146	10-3	04/01/87
MK 1 Mod 0	Safety-Arming Device	146	6-2A	12/19/92
MK 1 Mod 0	Submunition Impact Fuze	145B	3-1	05/16/94
MK 1 Mod 1	Arming-Firing Device	145B	6-5	01/01/87
MK 1 Mod 1	Demolition Firing Device	145B	7-7	01/01/87
MK 1 Mods 0,1	BD Fuze	146	10-3	04/01/87
MK 1 Mods 0-1	BD Fuze	146	10-	07/27/94
MK 1 Mods 0-4	Base Ignition Fuze	146	10-3	04/01/87
F/MK1-0,1 Sys	Base Fuze	145B	3-3	05/16/94
F/MK1-0,1 Sys	Impact Sensing Element	145B	3-5	05/16/94
HIR 1	See MK 135		-	10/01/82
LUU-1/B Flare	Target Marker Fuze	145B	9-1	01/01/87
PIR-1	See MK 145 Mod 1		-	10/01/82
M2	Bomb Impact Fuze	146	2-3	04/01/87
M2	MT Fuze	146	10-3	04/01/87
M2	PD Fuze	146	10-3	04/01/87
M2A1	APERS Mine Fuze	146	10-3	04/01/87
T2	AT Mine Fuze	146	10-3	04/01/87
T2	Bomb Fuze	146	10-3	04/01/87
T2	Rocket PD Fuze	146	10-3	04/01/87
T2	See M39 PD Fuze		-	10/01/82
T2E1	See M204A2 Hand Gren Fuze		-	10/01/82
AM-2	Multipurpose Fuze	146	7-2A	08/03/93
EX 2	See FMU-74/B		-	10/01/82

Supersedes page I-2 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
MK 2	Spanner Wrench	145B	10-1	03/06/92
MK 2 Mod 0	BD Fuze	146	10-3	04/01/87
MK 2 Mod 0	Safety-Arming Device	146	6-3	04/01/87
MK 2 Mod 1	BD Fuze	146	10-3	04/01/87
MK 2 Mod 2	BD Fuze	146	10-3	04/01/87
MK 2 Mod 3	BD Fuze	146	10-3	04/01/87
MK 2 Mod 9	Base Iginition Fuze	146	1-3	01/15/93
MK 2 Mods 0-8	Base Iginition Fuze	146	10-	01/15/93
AIR-2	See MK 137 Mod 2		-	10/01/82
F/SM2 Missile	Fuze Contact Device	145B	6-7	01/01/87
LUU-2B/B Flare	Timer	145B	9-3	01/01/87
NIR-2	See MK 144		-	10/01/82
PIR-2	See MK 147 Mod 2		-	10/01/82
M3	Demolition Firing Device	145B	7-9	05/13/94
M3	PD Fuze	146	10-3	04/01/87
M3A1	APERS Mine Fuze	146	10-3	04/01/87
T3	PD Fuze	146	10-3	04/01/87
T3	Rocket PD Fuze	146	5-4A	01/15/93
T3	See XM26		-	10/01/82
T3E1	See M12 AT Mine Fuze		-	10/01/82
T3E5	See AN-M103A1 Bomb Fuze		-	10/01/82
EX 3 Mod 2	See MK 5 Mod 2		-	10/01/82
MK 3	PD Fuze	146	10-3	04/01/87
MK 3	Spanner Wrench	145B	10-3	03/06/92
MK 3 Mod 0	BD Fuze	146	10-3	04/01/87
MK 3 Mod 0	Base Iginition Fuze	146	10-3	04/01/87
MK 3 Mod 0	Contact Sensor	145B	6-9	01/01/87
MK 3 Mod 1	BD Fuze	146	10-3	04/01/87
MK 3 Mod 2	BD Fuze	146	10-3	04/01/87
MK 3 Mod 3	Safety-Arming Device	146	6-4A	12/19/92
MK 3 Mod 5	Safety-Arming Device	145B	6-11	01/01/87
MK 3 Mods 0-2	BD Fuze	146	1-5	04/01/87
MK 3A2	Time Fuze	146	10-3	04/01/87
AIR-3	Rocket PD Fuze	146	5-5	04/01/87
DDR-3A	See MK 162 Mod 0		-	10/01/82
FMU-3/B	Rocket PD SD Fuze	146	10-3	04/01/87
HIR-3	See MK 140		-	10/01/82
PIR-3	See MK 159 Mod 1		-	10/01/82
M4	AT Mine Fuze	146	10-3	10/01/82
M4A2	Rocket PD Fuze	146	5-7	10/01/82
T4	PD Fuze	146	10-3	10/01/82
T4	Rocket Practice Fuze	146	10-3	10/01/82
T4E2	See AN-M100A2,M101A2,M102A2		-	10/01/82
MK 4 Mod 0	BD Fuze	146	10-	07/27/94
MK 4 Mod 0	Fuze Triggering Device	145B	6-13	01/01/87
MK 4 Mod 1	Safety-Arming Device	146	6-5	10/01/82
MK 4 Mods 0-3	Base Ignition Fuze	146	10-	07/26/94
DDR-4A	See MK 166 Mod 2		-	10/01/82
LUU-4/B Flare	Flare Fuze	145B	9-5	01/01/87
WDU-4A/A W/H	Rocket Airburst Fuze	145B	5-1	09/08/93
M5	AT Mine Fuze	146	10-3	10/01/82
M5	Demolition Firing Device	145B	7-11	05/13/94

Supersedes page I-3 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
M5	Hand Grenade Fuze	146	10-3	10/01/82
M5	Rocket BD Fuze	146	10-4	10/01/82
M5	Time & SQ Fuze	146	1-7	10/01/82
T5	BD Fuze	146	10-4	10/01/82
T5	Hand Grenade Fuze	146	10-4	10/01/82
MK 5 Mod 0	BD Fuze	146	10-3	07/27/94
MK 5 Mod 0	Fuze Contact Sensor	145B	6-15	01/01/87
MK 5 Mod 2	Safety-Arming Device	146	6-7	10/01/82
MK 5 Mods 0-2	Base Ignition Fuze	146	10-	07/26/94
AIR-5	See MK 147 Mod 1		-	10/01/82
M6	Rocket Dummy Fuze	146	10-4	10/01/82
M6A1	Mine Combination Fuze	146	4-3	12/10/91
M6A3	Hand Grenade Fuze	146	8-2C	12/10/93
M6A4D	Hand Grenade Fuze	146	8-3	10/01/82
T6	PD Fuze	146	10-4	10/01/82
T6	See M38		-	10/01/82
MK 6 Mod 0	Demolition Firing Device	145B	7-13	01/01/87
MK 6 Mod 0	Nose Ignition Fuze	146	10-	07/26/94
MK 6 Mod 1	Safety-Arming Device	146	6-9	10/01/82
MK 6 Mods 0, 2	BD Fuze	146	10-	07/27/94
M7	Hand Grenade Fuze	146	10-4	10/01/82
M7A1	Mine Combination Fuze	146	4-5	12/10/91
T7	BD Fuze	146	10-4	10/01/82
MK 7 Mod 0	Nose Ignition Fuze	146	10-	07/26/94
MK 7 Mod 0	PD Fuze	146	1-9	09/24/90
MK 7 Mod 1	PD Fuze	146	1-10A	09/24/90
MK 7 Mod 1	Safety-Arming Device	146	6-11	10/01/82
XP-7A	BD SD Fuze	146	10-4	10/01/82
AIR-7	See MK 148		-	10/01/82
BLU-7A/B	Bomblet, Fuze for	146	3-3	10/01/82
FMU-7B/B, C/B	Bomb Impact Fuze	145B	4-1	12/10/91
M8	PD Fuze	146	1-11	12/10/93
M8	Rifle Grenade Fuze	146	10-4	10/01/82
T8	Rocket PD Fuze	146	10-4	10/01/82
T8	See M22, M68		-	10/01/82
MK 8 Mod 0-6	BD Fuze	146	1-13	07/27/94
MK 8 Mods 0-6	Base Ignition Fuze	146	10-	07/26/94
XR-8	See MK 179 Mod 0		-	10/01/82
AIR-8	See MK 149 Mod 1		-	10/01/82
FMU-8/B	See FMU-30A/B		-	10/01/82
PIR-8	Rocket BD Fuze	146	5-9	10/01/82
E9R15	See M142A1		-	10/01/82
E9R22	See M157		-	10/01/82
E9R23,33	See M142A1		-	10/01/82
M9	AP Mine Fuze	146	10-4	10/01/82
M9	PD Fuze	146	1-15	12/10/91
M9	Rifle Grenade Fuze	146	10-4	10/01/82
T9	Bomb Fuze	146	10-4	10/01/82
T9E5	See M45		-	10/01/82
MK 9 Mod 0-3	BD Fuze	146	1-17	07/27/94
MK 9 Mods 0-3	Nose Ignition Fuze	146	10-	07/26/94
AIR-9-1	Rocket PD Fuze	146	5-11	10/01/82

Supersedes page I-4 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
FSU-9A/B	Safety-Arming Device	145B	4-3	01/01/87
PIR-9	Rocket BD Fuze	146	5-13	10/01/82
M10, A2, A3	AP Practice Mine Fuze	146	4-7	09/08/93
M10A1	AP Practice Mine Fuze	145B	7-15	09/08/93
M10A3	Hand Grenade Fuze	146	8-4A	12/10/93
T10	PD Fuze	146	10-4	10/01/82
T10	See M107		-	10/01/82
EX 10 Mod 1	See MK 6 Mod 1		-	10/01/82
MK 10 Mod 0	BD Fuze	146	1-19	10/01/82
MK 10 Mod 0	Safety-Arming Device	146	6-13	10/01/82
MK 10 Mods 0-9	Base Ignition Fuze	146	10-	07/26/94
DSU-10/B	Target Detecting Device	145B	6-17	01/01/87
FSU-10/A	GM Fuze	145B	6-19	05/17/90
T11	MT SQ Fuze	146	10-5	10/01/82
T11	See M104		-	10/01/82
MK 11 Mods 0-5	Nose Ignition Fuze	146	10-	07/26/94
MK 11 Mods 0-8	BD Fuze	146	10-	07/27/94
M12	AT Mine Practice Fuze	146	4-9	10/01/82
M12	Safety-Arming Device	145B	6-21	01/01/87
T12	See M43A4		-	10/01/82
T12E2	See M6A1		-	10/01/82
MK 12 Mod 0	PD Fuze	146	7-3	09/24/90
MK 12 Mod 0	Safety-Arming Device	146	6-15	10/01/82
MK 12 Mod 1	PD Fuze	146	7-4A	09/24/90
MK 12 Mod 2	PD Fuze	146	7-4C	09/24/90
MK 12 Mod 3	PD Fuze	146	7-4E	09/24/90
AIR-12-1	Rocket PD Fuze	146	5-15	10/01/82
T13	Time Fuze	146	10-5	10/01/82
T13E2	See M7A1		-	10/01/82
MK 13 Mod 0	Fire Bomb Initiator (Impact)	145B	4-5	05/16/94
MK 13 Mod 0	Safety-Arming Device	146	6-16A	02/21/90
MK 13 Mod 0-7	BD Fuze	146	1-21	07/27/94
MK 13 Mod 2	Safety-Arming Device	145B	6-23	01/01/87
FSU-13/B	Safety-Arming Device	145B	4-7	01/01/87
M14	Fuze Setter	145B	10-5	12/17/93
T14	See M54, M10A3		-	10/01/82
EX 14 Mod 1	See MK 6 Mod 1		-	10/01/82
F/M14 AP Mine	AP Mine, Fuze for	145B	7-17	12/10/93
MK 14 Mod 0	Base Ignition Fuze	146	10-	07/26/94
MK 14 Mod 0	Safety-Arming Device	146	6-17	10/01/82
MK 14 Mods 0-3	Aux Det Fuze	146	10-	07/27/94
XP-14A	See MK 29 Mod 5		-	10/01/82
PIR-14	Rocket BD Fuze	146	5-17	10/01/82
T15	MT Fuze	146	10-5	10/01/82
MK 15 Mod 0	BD Fuze	146	10-	07/27/94
MK 15 Mod 0	Rear Fitting Safety Device	145B	2-1	04/21/94
MK 15 Mods 0-1	Nose Ignition Fuze	146	10-	07/26/94
XP-15A	See MK 30 Mod 5		-	10/01/82
DSU-15A/B	Target Detecting Device	145B	6-25	01/01/87
F/MK15 Mod 1 SUS	Arming and Firing Mechanism	146	9-2A	02/21/90
T16	Rocket PD Fuze	146	10-5	10/01/82
T16	See M48, M205		-	10/01/82

Supersedes page I-5 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
MK 16 Mods 0-5	Nose Ignition Fuze	146	10-	07/26/94
XP-16A	See MK 30 Mod 5		-	10/01/82
T17	Rocket BD Fuze	146	10-5	10/01/82
T17	See M24,M67A3,M106,M603		-	10/01/82
MK 17 Mod 0	Safety-Arming Device	145B	6-27	01/01/87
MK 17 Mod 0-13	Aux Det Fuze	146	1-25	10/01/82
XP-17A	BD Fuze	146	10-5	10/01/82
E18R1	See M2		-	10/01/82
M18	Fuze Wrench	145B	10-7	05/13/94
T18	Rocket PD Fuze	146	10-5	10/01/82
T18	See M105		-	10/01/82
T18E2	See M57		-	10/01/82
EX 18 Mod 0	Arming Safety Device (ASD)	146	1-26A	05/13/94
MK 18 Mod 0	MT Fuze	146	1-27	09/25/90
MK 18 Mod 1	MT Fuze	146	1-28A	09/25/90
MK 18 Mod 2	MT Fuze	146	1-28C	09/25/90
MK 18 Mod 3	MT Fuze	146	1-28E	09/25/90
MK 18 Mod 4	MT Fuze	146	1-28G	09/25/90
MK 18 Mod 5	MT Fuze	146	1-28I	09/25/90
MK 18 Mods 0-7	Rear Fitting Safety Device	145B	2-3	04/21/94
L19A3	BD Fuze	146	10-5	10/01/82
M19	Fuze Setter	146	10-5	10/01/82
T19	Rocket PD Fuze	146	10-5	10/01/82
T19	See M46		-	10/01/82
MK 19	See AN-MK 219		-	10/01/82
MK 19 Mod 0-3	BD Fuze	146	1-29	10/01/82
XP-19A	BD Fuze	146	10-5	10/01/82
DSU-19A/B	Targe Detecting Device	145B	6-29	01/01/87
PIR-19	See MK 163 Mod 1		-	10/01/82
M20	Bomb Proximity Sensor	146	2-4A	05/16/94
M20A1	Bomb Proximity Sensor	146	2-4C	05/16/94
M20A2	Booster	146	1-31	10/01/82
T20	PD Fuze	146	10-5	10/01/82
T20	Rocket PD Fuze	146	10-5	10/01/82
EX 20	See MK 75 Mod 5		-	10/01/82
MK 20	Target Detecting Device	145B	6-31	01/01/87
MK 20 Mod 0-5	BD Fuze	146	1-33	10/01/82
XP-20A	BD SD Fuze	146	10-5	10/01/82
PIR-20	See MK 164		-	10/01/82
M21A4	Booster	145B	2-5	12/17/93
T21	Mine Fuze	146	10-6	10/01/82
T21	See M47, M108		-	10/01/82
EX 21 Mod 0	See MK 12 Mod 0		-	10/01/82
MK 21 Mod 3	BD Fuze	145B	2-7	03/06/92
PIR-21	See MK 165 Mod 0		-	10/01/82
M22	Booster	146	1-39	09/21/93
M22	Fuze Setter	146	10-6	10/01/82
T22	PD Fuze	146	10-6	10/01/82
T22	See M111A2		-	10/01/82
EX 22	See T279		-	10/01/82
MK 22	Fuze Contact Device	145B	6-33	01/01/87
MK 22 Mod 0-3	MT Fuze	146	1-41	09/26/90

Supersedes page I-6 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
MK 22 Mod 4-6	MT Fuze	146	1-42A	09/26/90
PIR-22	Rocket BD Fuze	146	5-19	10/01/82
M23	Booster	146	10-6	10/01/82
M23	Fuze Setter	146	9-3	10/01/82
T23E1	See M125A1		-	10/01/82
EX 23	Proximity Fuze	146	1-43	10/01/82
EX 23 Mod 1	See MK 10 Mod 0		-	10/01/82
EX 23 Mod 1	See MK 13 Mod 0		-	10/01/82
MK 23 Mod 0	BD Fuze	146	1-45	10/01/82
DSU-23/B	Target Detecting Device	146	2-5	11/05/90
PIR-23	Rocket BD Fuze	146	5-21	10/01/82
E24R1	See M196		-	10/01/82
M24	Fuze Setter	146	10-6	10/01/82
M24B1	Booster	146	1-47	09/21/93
T24	See AN-M110A1		-	10/01/82
T24	See M87		-	10/01/82
XP-24A	PD Fuze	146	10-6	10/01/82
BLU-24/B Bomblet	Bomblet Fuze	145B	3-7	05/13/94
BLU-24C/B Bmblt	Bomblet Fuze	145B	3-9	05/13/94
F/MK24 Mod 4	Flare Fuze	145B	9-7	01/01/87
M25	Booster	145B	2-9	12/10/93
M25	Fuze Setter	145B	10-9	09/21/93
M25	Wrench, Fuzing, AP Mine	145B	10-10A	12/10/93
T25	Bomb Fuze	146	10-6	10/01/82
T25	PD Fuze	146	10-6	10/01/82
T25	Rocket BD Fuze	146	10-6	10/01/82
EX 25 Mod 0	See MK 330 Mod 0		-	10/01/82
MK 25 Mod 5	MT Fuze	146	1-51	08/23/93
XP-25A	Aux Det Fuze	146	10-6	10/01/82
ABCM25A2 CS1 HG	Hand Grenade Fuze	145B	8-1	12/10/93
BLU-25/B	Bomblet, Fuze for	146	3-5	10/01/82
M26	Fuze Setter	145B	10-11	05/16/94
M26	Wrench, Arming	145B	10-12A	12/10/93
T26	Bomb Fuze	146	10-6	10/01/82
XM26	Movement	146	6-19	10/01/82
EX 26	Proximity Fuze	146	1-53	10/01/82
F/M26 AP Mine	Land Mine, Fuze for	146	4-10A	09/08/93
MK 26 Mod 0	PD Fuze	146	7-4G	09/27/90
MK 26 Mod 1	PD Fuze	146	7-4I	10/12/90
MK 26 Mod 2	PD Fuze	146	7-4K	10/12/90
BLU-26/B	See M219E1		-	10/01/82
DSU-26/B	Target Detecting Device	145B	6-35	01/01/87
FMU-26/B,A/B,B/B	Bomb Impact/Airburst Fuze	145B	4-13	12/12/91
M27 (T40)	Fuze Setter	145B	10-13	01/01/87
T27	Bombl Barometric Fuze	146	10-6	10/01/82
T27	See M56		-	10/01/82
MK 27 Mod 0	PD Fuze	146	7-5	10/17/90
MK 27 Mod 1	PD Fuze	145B	1-3	12/12/91
FMU-27/B	Rocket Proximity Fuze	146	10-6	10/01/82
E28	Bomb Fuze	146	2-9	10/01/82
M28	Fuze Setter	146	9-7	10/01/82
T28	Rocket PD Fuze	146	10-6	10/01/82

Supersedes page I-7 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
T28	See M52A2		-	10/01/82
EX 28 Mod 0	See MK 17 Mod 0		-	10/01/82
MK 28 Mod 17	BD Fuze	145B	2-11	03/06/92
DSU-28/B	Target Detecting Device	145B	6-37	01/01/87
FMU-28/B)	Rocket Proximity Fuze	146	10-6	10/01/82
E29	Bomb Fuze	146	2-11	10/01/82
T29	See M53A1		-	10/01/82
T29E2	See M149		-	10/01/82
EX 29 Mod 0	See MK 28 Mod 0		-	10/01/82
MK 29 Mod 0	Arming-Firing Device	145B	6-39	02/21/90
MK 29 Mod 0-2	PD Fuze	146	1-59	08/23/93
MK 29 Mod 2	Arming-Firing Device	145B	6-41	02/21/90
MK 29 Mod 3	PD Fuze	146	1-60A	08/23/93
MK 29 Mod 3 RFM	PD Fuze	145B	2-13	08/23/93
MK 29 Mod 4	PD Fuze	146	1-60C	09/27/90
MK 29 Mod 5	PD Fuze	145B	2-15	12/12/91
XS-29A	See MK 175 Mod 0		-	10/01/82
DSU-29/B	Target Detecting Device	146	2-12A	11/05/90
FMU-29/B	Bomb Long Delay Fuze	146	10-6	10/01/82
E30	Bomb Fuze	146	2-13	10/01/82
M30A1	Safety-Arming Device	146	6-21	10/01/82
T30	Rocket Proximity Fuze	146	10-6	10/01/82
T30	See M56		-	10/01/82
MK 30 Mod 0	Arming and Firing Device	146	9-8A	02/27/90
MK 30 Mod 0	Arming-Firing Device	145B	6-43	01/01/87
MK 30 Mod 0-2	PD Fuze	146	1-60E	10/12/90
MK 30 Mod 3	PD Fuze	146	1-60G	09/21/93
MK 30 Mod 4	Rocket PD Fuze	146	5-22A	09/21/93
MK 30 Mod 5	PD Fuze	145B	2-17	09/21/93
DSU-30/B	Target Detecting Device	146	2-14A	03/20/90
FMU-30A/B	Mine Seismic Fuze	146	4-11	10/01/82
T31	Bomb Impact Fuze	146	10-7	10/01/82
T31E1A	See MK 170		-	10/01/82
T31E2	See M61		-	10/01/82
MK 31 Mod 0	Arming and Firing Mechanism	146	9-8C	02/27/90
MK 31 Mod 2	BD Fuze	145B	2-19	03/09/92
DSU-31/B	Target Detecting Device	145B	6-45	01/01/87
FMU-31/B	GM Proximity Fuze	146	10-7	10/01/82
T32	See M118		-	10/01/82
XM32	Safety-Arming Device	146	6-23	10/01/82
XM32E6	Safety-Arming Device	146	6-25	10/01/82
MK 32 Mod 0-40	Proximity Fuze	146	1-62A	10/03/90
MK 32 Mod 1	Arming Device	145B	9-9	01/01/87
FZU-32B/B	Bomb Fuze Initiator	145B	9-11	09/18/90
T33	See M119		-	10/01/82
EX 33 Mod 0	See MK 33 Mod 0		-	10/01/82
MK 33 Mod 0	Arming and Firing Mechanism	145B	9-13	02/27/90
MK 33 Mod 0	Safety-Arming Device	145B	6-47	01/01/87
MK 33 Mod 1	Delay Firing Device	145B	9-15	01/01/87
E34R4	Bomb Impact Fuze	146	2-15	10/01/82
M34	Fuze Setter	145B	10-15	01/01/87
T34	Bomb Fuze	146	10-7	10/01/82

Supersedes page I-8 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
T34	See M69		-	10/17/90
EX 34 Mod 1	See MK 34 Mod 1		-	10/01/82
MK 34 Mod 0,1	PD Fuze	146	7-7	10/01/82
MK 34 Mod 1	Safety-Arming Device	145B	6-49	02/27/90
DSU-34/B	Target Detecting Device	145B	6-51	01/01/87
FZU-34/B	Proximity Fuze Sensor	145B	4-15	01/01/87
M35	Fuze Setter	145B	10-17	09/21/93
M35	PD Fuze	146	10-7	10/01/82
T35	Rocket PD Fuze	146	10-7	10/01/82
T35	See M121, M122		-	10/01/82
T35E7, E8	See M124		-	10/01/82
EX 35 Mod 0	See MK 34 Mod 0		-	10/01/82
F/M35	Grenade	145B	3-10A	09/22/93
MK 35 Mod 0	BD Fuze	146	1-63	10/01/82
MK 35 Mod 0	Fuze Setter	145B	10-19	07/08/92
MK 35 Mod 0	Safety-Arming Device	145B	6-53	01/01/87
XP-35A	PD Fuze	146	10-7	10/01/82
FMU-35/B	Bomb Long Delay Fuze	146	2-17	10/01/82
FZU-35/B	Bomb Fuze Initiator	146	9-8E	01/01/87
M36	Fuze Setter	145B	10-21	05/13/94
M36	PD Fuze	146	10-7	10/01/82
M36E1	See M36		-	10/01/82
T36	Rocket PD Fuze	146	10-7	10/01/82
T36	See M79		-	10/01/82
T36E2	Booster	146	1-65	10/01/82
F/M36	Grenade	145B	3-10C	09/22/93
MK 36 Mod 0,1	BD Fuze	146	1-67	10/01/82
XR-36	Rocket BD Fuze	146	5-23	10/01/82
M37A1	Time & SQ Fuze	146	1-69	10/01/82
T37	Bomb Fuze	146	10-7	10/01/82
T37	See M502A1		-	10/01/82
FZU-37A/B	Bomb Fuze Initiator	145B	9-17	01/01/87
E38	Bomb Impact Fuze	146	2-19	10/01/82
M38A1	BD Fuze	146	7-9	10/01/82
T38	See M64,M123A1,M124A1,M125A1		-	10/01/82
M39A2	PD Fuze	146	1-71	10/01/82
T39	Percussion Fuze	146	10-7	10/01/82
T39	See M127		-	10/01/82
T39E1	See M138		-	10/01/82
F/M39	Grenade	145B	3-10E	09/22/93
MK 39 Mod 0	Demolition Safety-Arming Device	145B	7-19	09/23/93
MK 39 Mod 0,1	BD Fuze	146	1-73	10/01/82
FZU-39/B	Proximity Fuze Sensor	145B	4-17	01/01/87
E40	Bomb Impact Fuze	146	2-21	10/01/82
M40	PD Fuze	146	10-7	10/01/82
T40	PD Fuze	146	10-7	10/01/82
MK 40	Proximity Fuze	146	1-74A	10/04/90
E41	Bomb Impact Fuze	146	2-23	10/01/82
T41	PD Fuze	146	10-7	10/01/82
T41	See M132, M133, M134		-	10/01/82
MK 41	Proximity Fuze	146	10-8	10/01/82
MK 41 Mods 0, 1	Delay Arming-Safety Device	145B	2-21	04/21/94

Supersedes page I-9 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
M42A1	Dummy Fuze	146	10-8	10/01/82
T42	Bomb Fuze	146	10-8	10/01/82
T42	Rocket PD Fuze	146	10-8	10/01/82
MK 42	MT Fuze	146	1-75	10/01/82
MK 42 Mod 4	Firing Mechanism	145B	9-19	01/01/87
MK 42 Mods 0-3	Rear Fitting Safety Device	145B	2-23	04/21/94
E43	Bomb Impact Fuze	146	2-25	10/01/82
M43	Safety-Arming Device	146	5-25	01/01/87
M43A4	MT Fuze	146	1-77	09/23/93
T43	Bomb Proximity Fuze	146	10-8	10/01/82
F/M43A1	Grenade	145B	3-10G	09/23/93
MK 43 Mod 0	Bomb Proximity Sensor	145B	4-19	05/16/94
MK 43 Mod 1	Aux Det Fuze	146	10-8	10/01/82
FMU-43/B	Proximity Fuze	146	10-8	10/01/82
M44A2	Dummy Fuze	146	1-78A	12/16/93
T44	Booster	146	1-79	10/01/82
XM44	Anti-Instrusion Device	146	4-13	10/01/82
MK 44 Mod 1,2	Aux Det Fuze	146	1-81	08/23/93
M45	PD Fuze	146	1-83	10/01/82
T45	Percussion Fuze	146	10-8	10/01/82
MK 45 Mod 5-9	Target Detecting Device	145B	6-55	01/01/87
MK 45 Mods 1-12	Proximity Fuze	146	1-85	10/04/90
XP-45A	BD Fuze	146	10-8	10/01/82
M46	PD Fuze	146	1-87	10/01/82
T46	Percussion Fuze	146	10-8	10/01/82
MK 46	Aux Det Fuze	146	1-89	10/01/82
XV-46	See EX 23		-	10/01/82
CBU-46	See FMU-80/B		-	10/01/82
M47	PD Fuze	146	1-91	10/01/82
T47	Rocket BD Fuze	146	10-8	10/01/82
T47E1	See M70, M129		-	10/01/82
MK 47 Mod 0	Proximity Fuze	146	1-92A	10/04/90
M48A3	PD Fuze	145B	2-25	05/16/94
M48A3E2	PD Fuze	146	1-95	10/01/82
T48E2	See M70, M130A1		-	10/01/82
MK 48 Mod 0	Demolition Firing Device	145B	7-21	01/01/87
MK 48 Mod 4	BD Fuze	145B	2-27	09/23/93
FZU-48/B	Bomb Fuze Initiator	145B	9-21	08/06/90
T49	Dummy Fuze	146	10-8	10/01/82
T49E2	See M131A1		-	10/01/82
MK 49 Mod 0, 1	Delay Arming Safety Device	145B	2-29	04/21/94
MK 49 Mod 2	Delay Arming Safety Device	145B	2-31	04/21/94
XR-49	See MK 180 Mod 0		-	10/01/82
BLU-49/B Bomb	Bomb Impact Fuze	145B	4-21	10/27/92
FZU-49/B	Safety-Arming Device	145B	6-57	12/19/91
M50	PD Dummy Fuze	146	7-10A	12/16/93
T50	Bomb Proximity Fuze	146	10-8	10/01/82
T50	PD Fuze	146	10-8	10/01/82
MK 50 Mod 8	MT Fuze	146	1-99	09/23/93
FMU-50/B	Bomb Impact Fuze	146	3-7	10/01/82
M51	GM PIBD Element	146	6-27	10/01/82
M51A5	PD Fuze	145B	2-33	05/16/94

Supersedes page I-10 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
M51A5-3	PD Fuze	146	1-103	10/01/82
T51	See M71		-	10/01/82
T51E1	See M166E3		-	10/01/82
MK 51 Mod 0	Safety-Arming Device	145B	6-59	01/01/87
MK 51 Mod 5	MT Fuze	146	1-104A	02/11/92
XR-51	Rocket BD Fuze	146	5-27	10/01/82
FMU-51/B	Bomb Impact Fuze	146	10-8	10/01/82
M52A2	PD Fuze	145B	2-35	09/23/93
M52A2E3	See XM717		-	10/01/82
T52	Dummy Fuze	146	10-8	10/01/82
MK 52 Mod 0	Aux Det Fuze	145B	2-37	03/06/92
M53A1	PD Fuze	146	1-109	01/01/87
T53	PD Fuze	146	10-8	10/01/82
T53E1	See M152A1		-	10/01/82
MK 53 Mods 0-6	Proximity Fuze	146	1-111	10/04/90
M54	Time & SQ Fuze	146	1-113	09/23/93
T54	See M74, M148		-	10/01/82
MK 54 Mod 2	Aux Det Fuze	145B	2-39	03/06/92
XP-54A	ET Fuze	146	1-115	10/01/82
FMU-54A/B	Bomb Impact Fuze	145B	4-23	08/23/93
M55A3	Time & SQ Fuze	146	1-117	09/23/93
T55	BD Fuze	146	10-8	10/01/82
T55	See AN-M128		-	10/01/82
T55E1	See AN-M145E1		-	10/01/82
T55E2	See AN-M146A1		-	10/01/82
T55E3	See AN-M147A1		-	10/01/82
MK 55 Mod 0	Aux Det Fuze	145B	2-41	09/23/93
M56	AT Mine System, fuze for	145B	7-23	12/10/93
M56	PD Fuze	146	7-11	09/23/93
T56	See M72, M135A1, M136A1		-	10/01/82
MK 56 Mod 0	Proximity Fuze	146	10-9	10/01/82
XP-56A	BD Fuze	146	1-121	10/01/82
FMU-56/B Fuze	Battery Firing Device (BFD)	145B	9-23	01/01/87
FMU-56/B, A-D/B	Bomb Proximity Fuze	145B	4-25	02/11/92
M57	Firing Device	145B	7-25	12/10/93
M57	PD Fuze	146	1-123	09/23/93
T57	BD Fuze	146	10-9	10/01/82
MK 57 Mod 0-3	MT Fuze	146	1-125	03/06/92
XP-57A	See MK 83 Mod 0		-	10/01/82
FMU-57A/B	Bomb Proximity Fuze	146	2-29	10/01/82
M58	BD Fuze	146	1-127	09/23/93
T58	Bomb Fuze	146	10-9	10/01/82
EX 58	See MK 328		-	10/01/82
MK 58 Mod 0	Proximity Fuze	146	1-128A	10/04/90
XP-58A	BD Fuze	146	1-129	10/01/82
FMU-58/B	Bomb Inertial Fuze	146	10-9	10/01/82
M59	PD Dummy Fuze	145B	2-42A	12/16/93
T59	BD SD Fuze	146	10-9	10/01/82
T59	Bomb Fuze	146	10-9	10/01/82
MK 59 Mod 0	Proximity Fuze	146	1-131	10/04/90
XP-59	See EX 26		-	10/01/82
M60	BD Fuze	146	1-133	10/01/82

Supersedes page I-11 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
M60B1	BD Fuze	146	10-9	10/01/82
M60B1	Dummy PD Fuze		-	10/01/82
T60	Bomb Fuze	146	10-9	10/01/82
EX 60	Target Detecting Device	146	1-136A	02/11/92
MK 60 Mod 1	Proximity Fuze	146	1-135	10/01/82
XP-60	See MK 28 Mod 18		-	10/01/82
FMU-60/B	Bomb Impact Fuze	146	10-9	10/01/82
M61A2	MT Fuze	146	1-137	09/23/93
T61	PD SD Fuze	146	10-9	10/01/82
T61	See M137		-	10/01/82
EX 61	Target Detecting Device	146	1-140A	02/11/92
MK 61 Mods 0, 1	MT Fuze	145B	2-43	12/17/93
XP-61	See MK 80 MOD0		-	10/01/82
M62A2	BD Fuze	145B	2-45	05/01/91
T62	Bomb Fuze	146	10-9	10/01/82
T62	PD SD Fuze	146	10-9	10/01/82
EX 62	Target Detecting Device	145B	6-61	01/01/87
MK 62 Mod 0,1	MT Fuze	146	1-141	03/06/92
M63	Dummy Fuze	146	10-9	10/01/82
M63	Fuze Setter	145B	10-22A	05/18/94
T63	Bomb Fuze	146	10-9	10/01/82
T63E5	See M507		-	10/01/82
XM63	See XM122		-	10/01/82
MK 63 Mod 0	MT Fuze	146	1-143	10/01/82
XP-63A	BD Fuze	146	1-145	10/01/82
FMU-63/B	Bomb Impact Fuze	146	2-31	10/01/82
E64	Bomb MT Initiator	146	2-33	10/01/82
M64A1	PD Fuze	145B	1-5	01/01/87
T64	PD Fuze	146	10-9	10/01/82
T64	See M144		-	10/01/82
XM64	Firing Device	146	9-9	10/01/82
MK 64 Mods 2, 3	BD Fuze	145B	2-47	11/25/92
XP-64A	BD Fuze	146	1-149	10/01/82
FMU-64/B	Bomb Impact Fuze	146	10-9	10/01/82
SUU-64/B TMD	Fuze	145B	4-27	01/01/87
M65A1	Time Fuze	145B	2-49	09/23/93
M65A1E1	See XM769 Time Fuze		-	10/01/82
T65	Bomb Fuze	146	10-9	10/01/82
T65	PD Fuze	146	10-10	10/01/82
XB-65A	Bomb Impact Fuze	146	2-35	10/01/82
FMU-65/B	Bomb Impact Fuze	146	3-9	10/01/82
SUU-65/B TMD	Fuze	145B	4-29	01/01/87
M66A1, A2	BD Fuze	146	1-153	11/05/92
T66	See AN-M139A1		-	10/01/82
EX 66 Mod 0	See MK 339 Mod 0		-	10/01/82
MK 66 Mod 0	PD Fuze	146	1-155	10/10/90
MK 66 Mod 1	PD Fuze	145B	2-51	02/11/92
XB-66C	See MK 257 Mod 0		-	10/01/82
FMU-66/B	Bomb Proximity Fuze	146	10-10	10/01/82
M67A3	MT Fuze	146	1-157	10/01/82
T67	See AN-M140A1		-	10/01/82
MK 67	Proximity Fuze	146	10-10	10/01/82

Supersedes page I-12 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
FMU-67/B	Bomb Proximity Fuze	146	2-36A	10/10/90
M68A1	BD Fuze	146	1-159	02/11/92
T68	See M156		-	10/01/82
MK 68	Proximity Fuze	146	10-10	10/01/82
XP-68B	BD Fuze	146	1-161	10/01/82
FMU-68/B	Bomb Impact Fuze	146	2-37	10/01/82
M69	Dummy Fuze	146	7-13	02/11/92
T69	Bomb Impact Fuze	146	10-10	10/01/82
MK 69	Proximity Fuze	146	1-163	10/01/82
XP-69A,B	MT Fuze	146	1-165	10/01/82
FMU-69/B	Rocket Proximity Fuze	146	10-10	10/01/82
M70	PD Fuze	146	1-167	10/01/82
T70	BD Fuze	146	10-10	10/01/82
T70	See AN-M158, AN-M159		-	10/01/82
XM70	Demolition Firing Device	146	9-11	10/01/82
XM70 Mine	See M718 Proj, Mine for		-	10/01/82
XP-70A,B	MT Fuze	146	1-169	10/01/82
FMU-70/B	Bomb Impact Fuze	146	2-39	10/01/82
M71	PD Fuze	146	7-15	10/01/82
T71	See M155A1		-	10/01/82
T71E5	See M75		-	10/01/82
MK 71 Mod 11&12	Proximity Fuze	145B	2-53	12/16/93
MK 71 Mod 15	Proximity Fuze	145B	2-55	04/21/94
XP-71A,B	MT Fuze	146	1-173	10/01/82
FMU-71/B	GM Proximity Fuze	146	6-29	10/01/82
M72	BD Fuze	146	1-175	10/01/82
T72	Bomb MT Fuze	146	10-10	10/01/82
XM72	See M219A1 Grenade Fuze		-	10/01/82
XM72	See M692 Proj, Mine for		-	10/01/82
MK 72 Mod 12&13	Proximity Fuze	145B	2-57	12/16/93
MK 72 Mod 16&17	Proximity Fuze	145B	2-59	04/21/94
FMU-72/B	Bomb Impact Fuze	145B	4-31	01/01/87
FMU-72/B Fuze	Battery Firing Device (BFD)	145B	9-25	01/01/87
FMU-72/B Fuze	Battery Firing Device Tool	145B	10-23	01/01/87
M73	PD Dummy Fuze	145B	2-61	05/13/94
T73	See M153, M516		-	10/01/82
T73E12	See M516		-	10/01/82
XM73	See M718 Proj, Mine for		-	10/01/82
MK 73 Mod 8-11	Proximity Fuze	145B	2-63	04/14/94
MK 73 Mod 12&13	Proximity Fuze	145B	2-65	04/14/94
FMU-73/B	Bomb Impact Fuze	146	3-11	10/01/82
M74	AP Mine, Fuze for	145B	7-27	12/10/93
M74	PD Fuze	146	7-17	10/01/82
T74E6	See M92		-	10/01/82
XM74	See M219A1 Grenade Fuze		-	10/01/82
MK 74 Mod 0,1	Proximity Fuze	146	1-177	09/23/93
XB-74B	Bomb Long Delay Fuze	146	2-43	10/01/82
FMU-74/B	Submunition Impact Fuze	146	3-13	05/16/94
M75	AT Mine, fuze for	145B	7-29	12/10/93
M75	PD Fuze	146	7-19	10/01/82
T75	Proximity Fuze	146	10-10	10/01/82
T75E2	See M167		-	10/01/82

Supersedes page I-13 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
T75E6, E7	See M504, A1, A2		-	/ /
XM75	Hand Grenade Igniter	146	8-5	10/01/82
XM75	See XM230 Grenade Fuze		-	10/01/82
MK 75 Mod 0-5	Proximity Fuze	146	1-179	09/24/93
MK 75 Mod 12	Destructor Modification Kit	145B	9-27	01/01/87
FMU-75/B	GM Impact Fuze	146	10-10	10/01/82
M76	PD Fuze	146	10-10	10/01/82
T76	Bomb Fuze	146	10-10	10/01/82
T76E9	See M96		-	10/01/82
F/M76	Launcher Grenade, Fuze for	145B	8-3	05/20/94
MK 76 Mod 0	Safety-Arming Device	145B	6-63	01/01/87
MK 76 Mod 0,3	Proximity Fuze	146	1-181	10/01/82
FMU-76/B	Bomb Proximity Fuze	146	10-10	10/01/82
M77	PD, Time & SQ Fuze	145B	2-67	08/06/90
T77	Bomb MT Fuze	146	10-10	10/01/82
FMU-77/B	GM Proximity Fuze	146	10-10	10/01/82
M78A1	CP Fuze	145B	2-69	05/01/91
T78	Bomb Impact Fuze	146	10-10	10/01/82
T78	See M84		-	10/01/82
MK 78 Mod 0-2	PD Fuze	146	7-21	08/23/93
XR-78	Rocket BD Fuze	146	5-29	10/01/82
FMU-78/B	GM PI BD Fuze	146	10-11	10/01/82
M79	Dummy Fuze	146	1-185	12/16/93
T79	MT SQ Fuze	146	10-11	10/01/82
T79E1	See M151E2		-	10/01/82
XM79	Safety-Arming Device	146	5-31	10/01/82
MK 79 Mod 0	BD Safety-Arming Device	145B	6-65	12/10/93
MK 79 Mod 0,1	Proximity Fuze	146	1-187	09/24/93
XP-79	See MK 81 Mod 0		-	10/01/82
FMU-79/B	Bomb Proximity Fuze	146	10-11	10/01/82
M80	PD Dummy Fuze	145B	2-71	01/01/87
T80	Bomb Fuze	146	10-11	10/01/82
T80E9	See M97		-	10/01/82
MK 80 Mod 0	PD Fuze	146	1-189	10/01/82
FMU-80/B	Bomb Time Fuze	146	10-11	10/01/82
M81A1	PD Fuze	146	1-191	01/01/87
T81	See M160, M161, M162		-	10/01/82
MK 81 Mod 0	PD Fuze	146	7-23	10/01/82
FMU-81/B	Bomb Impact Fuze	145B	4-33	09/27/93
M82, A1, A1B1	PD Fuze	146	1-193	09/27/93
T82	Bomb Proximity Fuze	146	10-11	10/01/82
T82	See M85		-	10/01/82
MK 82 Mod 0	Aux Det Fuze	146	1-195	10/01/82
F/XM82	Launcher Grenade, Fuze for	145B	8-4A	05/20/94
FMU-82/B	Bomb Proximity Fuze	146	2-47	10/01/82
M83	CP Fuze	146	1-197	10/01/82
T83	Bomb Fuze	146	10-11	10/01/82
T83	PD Fuze	146	10-11	10/01/82
MK 83 Mod 0	BD Fuze	145B	2-73	03/06/92
FMU-83/B	MT Fuze	145B	4-35	05/16/94
M84A1	Time Fuze	145B	2-75	05/01/91
M84A1E1	See XM768 Time Fuze		-	10/01/82

Supersedes page I-14 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
T84	Bomb Fuze	146	10-11	10/01/82
XM84	AT/AV Mine, fuze for	146	4-14A	10/27/92
MK 84	MT Fuze	146	10-11	10/01/82
FMU-84/B	GM Training Fuze	146	10-11	10/01/82
M85	PD Fuze	146	1-201	10/01/82
T85	See M171		-	10/01/82
MK 85 Mod 0	MT Fuze	146	10-11	10/01/82
XR-85	See MK 191 Mod 1		-	10/01/82
FMU-85/B	GM Proximity Fuze	146	10-11	10/01/82
M86	See M91A2		-	10/01/82
M86E1	PD Fuze	146	1-203	10/01/82
T86	See M86E1		-	10/01/82
F/M86 AP Mine	Safety-Arming Device for	145B	7-31	12/10/93
MK 86	MT Fuze	146	10-11	10/01/82
FMU-86/B	Bomb MT Fuze	146	10-11	10/01/82
M87	PD Fuze	146	10-11	10/01/82
FMU-87(XCR-1)/B	Target Detecting Device	145B	5-3	01/01/87
M88	See M91A2		-	10/01/82
T88	Bomb MT Fuze	146	10-11	10/01/82
T88	See M77		-	10/01/82
FMU-88/B	Submunition Impact Fuze	145B	3-13	05/16/94
M89	PD Fuze	146	1-205	12/17/93
T89	PD Fuze	146	10-12	10/01/82
MK 89 Mod 0	Aux Det Fuze	145B	2-77	03/06/92
M90, M90A1	PI Fuze	146	1-209	12/10/93
T90	See M30A1		-	10/01/82
T90E3	Safety-Arming Device	146	6-31	10/01/82
XM90	Safety-Arming Device	146	6-33	10/01/82
MK 90 Mod 1	Proximity Fuze	145B	2-79	12/16/93
FMU-90/B	Rocket Impact Fuze	145B	5-5	05/20/94
M91A2	BD Fuze	145B	2-81	05/13/94
T91E1	See M168E2		-	10/01/82
MK 91 Mod 1	Proximity Fuze	145B	2-83	12/16/93
BLU-91/B	AT Mine, fuze for	145B	7-33	07/28/94
FMU-91/B	GM Proximity Fuze	146	10-12	10/01/82
M92	Proximity Fuze	146	10-12	10/01/82
XM92	Safety-Arming Device	146	1-215	05/13/94
MK 92 Mod 1	Proximity Fuze	145B	2-85	08/23/93
BLU-92/B	AP Mine, Fuze for	145B	7-35	07/28/94
FMU-92/B	PD Fuze	146	10-12	10/01/82
M93	Proximity Fuze	146	10-12	10/01/82
T93	Bomb Proximity Fuze	146	2-49	10/01/82
T93	See M91		-	10/01/82
T93E8	Safety-Arming Device	146	6-35	10/01/82
MK 93 Mod 0	Rocket Proximity Fuze	145B	5-7	05/20/94
M94	Proximity Fuze	146	10-12	10/01/82
T94	See M163, M164, M165		-	10/01/82
FMU-94/B	Guided Weapon Impact Fuze	145B	6-67	03/06/90
M95	Proximity Fuze	146	10-12	10/01/82
T95	See M142A1		-	10/01/82
FMU-95/B	Submunition Impact Fuze	145B	3-15	05/16/94
M96	Proximity Fuze	146	10-12	10/01/82

Supersedes page I-15 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
M97A1	Proximity Fuze	146	10-12	10/01/82
BLU-97/B	Bomblet, Fuze for	145B	3-17	02/20/92
M98	Proximity Fuze	146	10-12	10/01/82
FMU-98/B	Rocket Proximity Fuze	146	5-33	05/13/94
M99	Proximity Fuze	146	10-12	10/01/82
FMU-99/B	Dispenser MT Fuze	146	10-12	10/01/82
M100	Safety-Arming Device	145B	6-69	12/10/93
EX 100	See MK 176 Mod 1		-	10/01/82
MK 100 Mod 0-2	Rocket PD Fuze	146	5-35	10/01/82
AN-M100A2	Bomb Impact Fuze	146	2-51	10/01/82
FMU-100/B	Bomb Impact Fuze	146	10-12	10/01/82
M101	Rocket PI Fuze	146	10-12	10/01/82
T101	Time & SQ Fuze	146	10-12	10/01/82
EX 101	See MK 183 Mod O		-	10/01/82
AN-M101A2	Bomb Impact Fuze	146	2-53	10/01/82
FMU-101/B	Bomb Impact Fuze	146	10-13	10/01/82
T102	PD Fuze	146	10-13	10/01/82
EX 102	See MK 177 Mod 1		-	10/01/82
AN-M102A2	Bomb Impact Fuze	146	2-55	10/01/82
FMU-102/B	Bomb impact Fuze	146	10-13	10/01/82
T103	PD Fuze	146	10-13	10/01/82
AN-M103A2	Bomb Impact Fuze	146	2-57	10/01/82
FMU-103/B	Bomblet Impact Fuze	146	10-13	10/01/82
T104	PD Fuze	146	10-13	10/01/82
T104	Safety-Arming device	146	6-37	10/01/82
EX 104 Mod 0	Rocket Time Fuze	146	5-37	10/01/82
AN-M104	Bomb Impact Fuze	146	2-59	10/01/82
FMU-104/B	Bomblet Impact Fuze	146	10-13	10/01/82
M105	Bomb Impact Fuze	146	2-61	10/01/82
T105	See M78		-	10/01/82
EX 105	See MK 178 Mod 2		-	10/01/82
FMU-105/B	Bomb Proximity Fuze	145B	4-37	01/01/87
M106A2	Bomb Impact Fuze	146	2-63	10/01/82
FMU-106/B	GM Proximity Fuze	146	10-13	10/01/82
M107	Bomb MT Fuze	146	2-65	10/01/82
EX 107	Rocket Time & SQ Fuze	146	5-39	10/01/82
FMU-107/B	Bomb MT Fuze	145B	4-39	02/20/92
M108	Bomb Impact Fuze	146	2-67	10/01/82
FMU-108/B	GM Proximity Fuze	146	10-13	10/01/82
M109	Bomb Impact Fuze	146	2-69	10/01/82
T109	PD Fuze	146	10-13	10/01/82
XM109	Bomb MT Initiator	146	2-71	10/01/82
EX 109	See MK 184		-	10/01/82
EX 109	See MK 188 Mod 1		-	10/01/82
FMU-109/B	GM Impact Fuze	145B	6-71	06/15/90
EX 110A	Rocket MT Fuze	146	5-41	10/01/82
AN-M110A1	Bomb Impact Fuze	146	2-73	10/01/82
FMU-110/B	Proximity Fuze	145B	4-41	02/20/92
FMU-110/B Fuze	Battery Firing Device	145B	9-29	01/01/87
M111A2	Bomb MT Fuze	146	2-75	10/01/82
EX 111	Rocket PD Fuze	146	5-43	10/01/82
FMU-111/B	GM Fuze	145B	6-73	03/06/90

Supersedes page I-16 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
M112A1	Bomb Impact Fuze	146	2-77	10/01/82
T112	Time & PD Fuze	146	10-13	10/01/82
EX 112	See MK 182 Mod 0		-	10/01/82
FMU-112/B	Bomb Impact Fuze	146	2-78A	08/06/90
M113A1	Bomb Impact Fuze	146	2-79	10/01/82
XB-113A	See MK 255 Mod 0		-	10/01/82
FMU-113/B	Bomb Proximity Fuze	145B	4-43	08/23/93
M114	Safety-Arming Device	145B	6-75	12/10/93
M114A1	Bomb Impact Fuze	146	2-81	10/01/82
T114	PD Fuze	146	10-13	10/01/82
FMU-114/B	Bomb Impact Fuze	146	10-13	10/01/82
M115	Bomb Impact Fuze	146	2-83	10/01/82
T115	See M500		-	10/01/82
FMU-115/B	Time Fuze	146	10-14	10/01/82
M116	Bomb Impact Fuze	146	2-85	10/01/82
T116	MT Fuze	146	10-14	10/01/82
FMU-116/B	Rocket Dummy Fuze	146	10-14	10/01/82
M117	Bomb Impact Fuze	146	2-87	10/01/82
FMU-117/B	Bomb Impact Fuze	146	2-89	05/16/94
M118	Bomb Impact Fuze	146	10-14	10/01/82
M118	Safety-Arming Device	145B	6-77	10/27/92
T118	Time & SQ Fuze	146	10-14	10/01/82
M119	Bomb Impact Fuze	146	10-14	10/01/82
T119	See M89		-	10/01/82
M120	Bomb Impact Fuze	146	10-14	10/01/82
T120	PD Fuze	146	10-14	10/01/82
AN-M120A1	Bomb Impact Fuze	146	2-91	10/01/82
FMU-120/B	Bomb Impact Fuze	146	10-14	10/01/82
M121	Bomb Impact Fuze	146	2-93	10/01/82
T121	Dummy BD Fuze	146	10-14	10/01/82
M122	Bomb Impact Fuze	146	10-14	10/01/82
M122	Booster	146	10-14	10/01/82
M122	Firing Device	145B	7-37	04/14/94
FMU-122/B	Bomb Proximity Fuze	146	2-95	10/01/82
M123A1	Bomb Long Delay Fuze	146	2-97	10/01/82
T123	See M90		-	10/01/82
FMU-123/B	Bomb Proximity Fuze	146	2-98A	01/01/87
NOTS123	See MK 185		-	10/01/82
M124	Booster	146	1-219	12/10/93
M124A1	Bomb Long Delay Fuze	146	2-99	10/01/82
FMU-124A/B	Guided Bomb Impact Fuze	145B	4-45	01/01/87
M125A1	Bomb Long Delay Fuze	146	2-101	10/01/82
M125A1 (Ver 1)	Booster	145B	2-87	05/16/94
M125A1 (Ver 2)	Booster	145B	2-89	05/16/94
M125A1 (Ver 3)	Booster	145B	2-91	05/16/94
T125	PD Fuze	146	10-14	10/01/82
XB-125A	See MK 256		-	10/01/82
FMU-125/B	Guided Weapon Impact Fuze	145B	6-79	03/06/90
T126	Dummy Fuze	146	1-221	12/16/93
AN-M126A1	Bomb Impact Fuze	146	2-103	10/01/82
FMU-126/B	Bomb Fuze	146	2-105	10/01/82
FMU-126/B	See FSU-9A/B		-	10/01/82

Supersedes page I-17 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
M127	Bomb MT Fuze	146	2-107	10/01/82
MK 127	Ejector Fuze	146	10-14	10/01/82
T128	PD Fuze	146	10-14	10/01/82
XM128	See XM74, XM75 Dispenser		-	10/01/82
XW128A	See MK 193 Mod 0		-	10/01/82
AN-M128	Bomb Impact Fuze	146	2-109	10/01/82
FMU-128/B	PD Fuze	146	7-24A	10/01/82
NOTS128	See MK 189 Mod 1		-	10/01/82
M129	Bomb Impact Fuze	146	2-111	10/01/82
FMU-129/B	GM Fuze	145B	6-81	03/06/90
M130A1	Bomb MT Fuze	146	3-15	10/01/82
T130	Proximity Fuze	146	10-14	10/01/82
FMU-130/B	Bomb Impact Fuze	146	2-112A	08/06/90
M131 Dispenser	S&A for AP/AT Mines	145B	7-39	01/01/87
M131A1	Bomb AD Fuze	146	2-113	10/01/82
T131	PI Fuze	146	10-15	10/01/82
MK 131	Rocket PD Fuze	146	5-45	10/01/82
FMU-131/B	GM Impact Fuze	146	6-38A	12/19/92
M132	Bomb Time Fuze	146	2-115	10/01/82
T132	Proximity Fuze	146	10-15	10/01/82
XM132	AT Mine System, fuze for	146	4-14C	01/01/87
MK 132 Mod 0	Rocket PD Fuze	146	5-47	10/01/82
FMU-132/B	GM Impact Fuze	146	10-15	01/01/87
M133	Bomb Time Fuze	146	2-117	10/01/82
MK 133	Rocket PD Fuze	146	5-49	10/01/82
FMU-133/B	GM Impact Fuze	146	6-38C	12/19/92
M134	Bomb Time Fuze	146	2-119	10/01/82
MK 134 Mod 0	Rocket Time Fuze	146	5-51	10/01/82
FMU-134/B	See FMU-109/B		-	10/01/82
M135A1	Bomb MT Fuze	146	2-121	10/01/82
T135	PD Fuze	146	10-15	10/01/82
MK 135	Rocket PD Fuze	146	5-53	10/01/82
FMU-135/B	GM Impact Fuze	145B	6-83	04/16/90
M136A1	Bomb MT Fuze	146	2-123	10/01/82
T136	BD Fuze	146	10-15	10/01/82
MK 136	Rocket PD Fuze	146	5-55	10/01/82
FMU-136/B	Rocket Time Fuze	145B	5-9	05/20/94
M137	Bomb Impact Fuze	146	2-125	10/01/82
T137	BD Fuze	146	10-15	10/01/82
MK 137 Mod 0-2	Rocket PD Fuze	146	5-57	10/01/82
FMU-137/B	Safety-Arming Device	146	6-38E	12/19/92
M138	Bomb MT Fuze	146	2-127	10/01/82
T138	PD Fuze	146	10-15	10/01/82
FMU-138/B	GM Impact Fuze	145B	6-85	04/16/90
WOX-138B	See MK 346 Mod 0		-	10/01/82
T139	PD Fuze	146	10-15	10/01/82
MK 139	Rocket PD Fuze	146	5-59	10/01/82
AN-M139A1	Bomb Impact Fuze	146	2-129	10/01/82
FMU-139/B (Navy)	Bomb Impact Fuze	145B	4-47	05/13/94
FMU-139A/B (AF)	Bomb Impact Fuze	145B	4-49	05/13/94
T140	BD Fuze	146	10-15	10/01/82
MK 140	Bomb Hydrostatic Fuze	146	2-131	10/01/82

Supersedes page I-18 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
AN-M140A1	Bomb Impact Fuze	146	2-133	10/01/82
FMU-140/B	Proximity Fuze	145B	4-51	05/01/91
MK 141 Mod 0	Rocket PD Fuze	146	5-61	10/01/82
FMU-141/B	GM Impact Fuze	145B	6-87	05/13/94
M142	Demolition Firing Device	145B	7-41	12/10/93
M142A1	Bomb Impact Fuze	146	2-135	10/01/82
NOTS142B	See MK 190 Mod 0		-	10/01/82
M143	Bomblet Time Fuze	146	10-15	10/01/82
M143	Safety-Arming Device	145B	6-89	02/20/92
M143E1	Safety-Arming Device	145B	6-91	02/20/92
T143	BD Fuze	146	10-15	10/01/82
FMU-143A/B	Bomb Impact Fuze	145B	4-53	01/01/87
FMU-143B/B	Bomb Impact Fuze	145B	4-55	02/20/92
M144	Bomb MT Fuze	146	2-137	10/01/82
MK 144	Rocket PD Fuze	146	5-63	10/01/82
M145	Safety-Arming Device	145B	6-93	01/01/87
MK 145 Mod 0,1	Rocket PD Fuze	146	5-65	10/01/82
AN-M145A1	Bomb MT Fuze	146	2-139	10/01/82
T146	PD Fuze	146	10-15	10/01/82
MK 146 Mod 1	Rocket BD Fuze	146	5-67	10/01/82
AN-M146A1	Bomb MT Fuze	146	2-141	10/01/82
XM147	Demolition Firing Device	145B	7-43	10/27/92
MK 147 Mod 0,1	Rocket PD Fuze	146	5-69	10/01/82
AN-M147A1	Bomb Time Fuze	145B	4-57	02/20/92
M148	Bomb Impact Fuze	146	2-145	10/01/82
T148	PD Fuze	146	10-15	10/01/82
MK 148	Rocket PD Fuze	146	5-71	10/01/82
M149	Bomb Impact Fuze	146	2-147	10/01/82
T149	See M95		-	10/01/82
MK 149 Mod 0,1	Rocket PD Fuze	146	5-73	10/01/82
M150A1	Bomb Impact Fuze	146	2-149	10/01/82
T150E2	PI Fuze	146	10-15	10/01/82
M151E2	Bomb Impact Fuze	146	2-151	10/01/82
T151	PI Fuze	146	10-15	10/01/82
T152	See M93		-	10/01/82
MK 152	Rocket PD Fuze	146	5-75	10/01/82
AN-M152A1	Bomb Time Fuze	145B	4-59	01/01/87
M153	Bomb MT Fuze	146	2-155	10/01/82
T153	MT SQ Fuze	146	10-15	10/01/82
M154	Bomb Impact Fuze	146	10-15	10/01/82
T154	CP Fuze	146	10-16	10/01/82
MK 154 Mod 0,2,3	Rocket PD Fuze	146	5-77	10/01/82
M155A1	Bomb Time Fuze	145B	4-61	01/01/87
T155E2	PD Fuze	146	1-223	10/01/82
MK 155 Mod 0	Rocket PD Fuze	146	5-79	10/01/82
M156	Bomb Impact Fuze	146	2-159	10/01/82
T156	Rocket BD Fuze	146	10-16	10/01/82
MK 156	Rocket PD Fuze	146	5-81	10/01/82
M157	Bomb Impact Fuze	146	2-161	10/01/82
XM157	Arming Assembly	146	2-163	10/01/82
MK 157 Mod 0-2	Rocket BD Fuze	146	5-83	10/01/82
T158	Rocket BD Fuze	146	10-16	10/01/82

Supersedes page I-19 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
MK 158	Rocket BD Fuze	146	5-85	10/01/82
AN-M158	Bomb Impact Fuze	145B	4-63	05/16/94
MK 159 Mod 0,1	Rocket BD Fuze	146	5-87	10/01/82
AN-M159	Bomb Impact Fuze	145B	4-65	05/16/94
M160	Bomb Impact Fuze	146	2-169	10/01/82
T160E6	See M404		-	10/01/82
MK 160	Rocket BD Fuze	146	5-89	10/01/82
M161	Bomb Impact Fuze	146	2-171	10/01/82
T161	Rocket BD Fuze	146	10-16	10/01/82
MK 161 Mod 0	Rocket BD Fuze	146	5-91	10/01/82
M162	Bomb Impact Fuze	146	2-173	10/01/82
T162	Rocket PI BD Fuze	146	10-16	10/01/82
MK 162 Mod 0	Rocket BD Fuze	146	5-93	10/01/82
M163	Bomb Impact Fuze	146	2-175	10/01/82
T163	CP Fuze	146	10-16	10/01/82
MK 163 Mod 0,1	Rocket BD Fuze	146	5-95	10/01/82
M164	Bomb Impact Fuze	146	2-177	10/01/82
T164	PD Fuze	146	10-16	10/01/82
MK 164	Rocket BD Fuze	146	5-97	10/01/82
M165	Bomb Impact Fuze	146	2-179	10/01/82
T165E7	BD Fuze	146	1-225	10/01/82
MK 165 Mod 0	Rocket BD Fuze	146	5-99	10/01/82
M166E3	Bomb Proximity Fuze	146	2-181	10/01/82
T166	Time Fuze	146	10-16	10/01/82
MK 166 Mod 0-2	Rocket BD SD Fuze	146	5-101	10/01/82
M167	Bomb Impact Fuze	146	2-183	10/01/82
T167	PD Fuze	146	10-16	10/01/82
M168E2	Bomb Proximity Fuze	146	2-185	10/01/82
T168	PI BD Fuze	146	10-16	10/01/82
M169	Bomb Impact Fuze	146	2-187	10/01/82
M170	Bomb Impact Fuze	146	2-189	10/01/82
MK 170	Rocket Proximity Fuze	146	5-103	10/01/82
M171	Bomb Impact Fuze	146	2-191	10/01/82
T171	Proximity Fuze	146	10-16	10/01/82
M172	Bomb Impact Fuze	146	2-193	10/01/82
T172	See M504, A1, A2		-	10/01/82
MK 172 Mod 0-2	Rocket Proximity Fuze	146	5-105	10/01/82
T173	PI Fuze	146	10-16	10/01/82
MK 173 Mod 0-4	Rocket Proximity Fuze	146	5-107	10/01/82
AN-M173A1	Bomb Impact Fuze	145B	4-67	05/16/94
M174	Bomb Impact Fuze	146	2-197	10/01/82
T174	BD Fuze	146	10-16	10/01/82
MK 174 Mod 0-3	Rocket Proximity Fuze	146	5-109	10/01/82
M175	Bomb Impact Fuze	146	2-199	10/01/82
T175E3	CP Fuze	146	1-227	10/01/82
MK 175 Mod 0	Signal Hydrostatic Fuze	146	9-13	03/06/90
M176	Bomb Impact Fuze	146	2-201	10/01/82
T176E3	See M506		-	10/01/82
MK 176 Mod 0 & 1	Rocket PD Fuze	145B	5-11	05/20/94
T177E3	See M535		-	10/01/82
MK 177 Mod 0,1	Rocket PD Fuze	146	5-113	10/01/82
AN-M177	Bomb Impact Fuze	146	2-203	10/01/82

Supersedes page I-20 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
M178	Bomb Impact Fuze	146	2-205	10/01/82
T178E3	See M517		-	10/01/82
MK 178 Mod 2	Rocket PD Fuze	145B	5-13	05/20/94
M179	Bomb Impact Fuze	146	2-207	10/01/82
MK 179 Mod 0	Rocket BD Fuze	146	5-117	10/01/82
M180	Bomb Impact Fuze	146	2-209	10/01/82
MK 180 Mod 0	Rocket BD Fuze	146	5-119	10/01/82
M181	Bomb Impact Fuze	146	2-211	10/01/82
MK 181 Mod 3	Rocket Impact Fuze	145B	5-15	05/20/94
M182	Bomb Impact Fuze	146	2-213	10/01/82
MK 182 Mod 0	Signal Hydrostatic Fuze	146	9-15	10/01/82
M183	Bomb Impact Fuze	146	2-215	10/01/82
T183E4	PD Fuze	146	1-229	10/01/82
MK 183 Mod 0	Signal Hydrostatic Fuze	146	9-17	10/01/82
M184	Bomb Impact Fuze	146	2-217	10/01/82
T184E11	PD Fuze	146	1-231	10/01/82
MK 184	Rocket PD Fuze	146	5-121	10/01/82
M185	Bomb Impact Fuze	146	2-219	10/01/82
T185E3	See M524A6		-	10/01/82
MK 185	Rocket PD Fuze	146	5-123	10/01/82
M186	Bomb Impact Fuze	146	2-221	10/01/82
T186	See M524A6		-	10/01/82
M187	Bomb Impact Fuze	146	2-223	10/01/82
T187	PD Fuze	146	10-16	10/01/82
M188	Bomb Proximity Fuze	146	2-225	10/01/82
T188	PD Practice Fuze	146	1-233	10/01/82
T188	See XM713		-	10/01/82
MK 188 Mod 1	Rocket Impact Fuze	145B	5-17	05/20/94
M189	Bomb Impact Fuze	146	2-227	10/01/82
T189	PI Fuze	146	10-16	10/01/82
MK 189 Mod 0,1	Rocket PD Fuze	146	5-125	10/01/82
M190	Bomb Impact Fuze	146	2-229	10/01/82
T190	See M503		-	10/01/82
MK 190 Mod 0	Rocket PI BD Fuze	146	5-127	10/01/82
M191	Bomb Impact Fuze	146	2-231	10/01/82
T191E6	PD Fuze	146	1-235	10/01/82
MK 191 Mod 1	Rocket Impact Fuze	145B	5-19	05/20/94
M192	Bomb Impact Fuze	146	2-233	10/01/82
T192E1	See T191E6		-	10/01/82
MK 192 Mod 0-2	Rocket MT Fuze	146	5-129	10/01/82
M193	Bomb Impact Fuze	146	2-235	10/01/82
T193	PD Fuze	146	1-237	10/01/82
MK 193 Mod 0	Rocket Time Fuze	145B	5-21	05/20/94
M194	Bomb Impact Fuze	146	2-237	10/01/82
T194	PD Fuze	146	1-239	10/01/82
M195	Bomb Impact Fuze	146	2-239	10/01/82
T195E11	PD Fuze	146	7-25	10/01/82
M196	Bomb Impact Fuze	146	2-241	10/01/82
T196E4	See M505A3		-	10/01/82
M197	Bomb Impact Fuze	146	10-17	10/01/82
T197E1	See M564		-	10/01/82
M198	Bomb MT Fuze	146	2-243	10/01/82

Supersedes page I-21 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
T198E1	PD Fuze	146	1-241	10/01/82
MK 198	Rocket MT Fuze	146	5-131	10/01/82
T199E5	BD Fuze	146	1-243	10/01/82
M200A1	Hand Grenade Fuze	146	10-17	10/01/82
T200E16	PD Fuze	146	7-27	10/01/82
EX 200 Mod 4	Bomb Impact Fuze	146	2-245	10/01/82
M201A1	Hand Grenade Fuze	145B	8-5	05/13/94
M201A1E2	Hand Grenade Fuze	145B	8-7	09/05/90
M201A2	Hand Grenade Fuze	145B	8-9	09/05/90
T201E6	See T200E13		-	10/01/82
M202	Rifle Grenade Fuze	146	10-17	10/01/82
T202	Proximity Fuze	146	1-245	10/01/82
M203	Rifle Grenade Fuze	146	10-17	10/01/82
T203	See M86E1		-	10/01/82
M204A2	Hand Grenade Fuze	145B	8-11	09/08/93
T204	PD Fuze	146	1-247	10/01/82
M205A2	Hand Grenade Fuze	145B	8-13	09/08/93
T205	PD Fuze	146	10-17	10/01/82
M206A2	Hand Grenade Fuze	145B	8-15	09/08/93
M206A2 (MOD)	See M206A2E2 Fuze		-	04/17/90
M206A2E2	Grenade Fuze	145B	3-19	09/08/93
T206E4	PD Fuze	146	1-249	10/01/82
M207A1	Floating Smoke Pot Fuze	145B	8-17	05/13/94
T207	PD Fuze	146	10-17	10/01/82
M208	Time Fuze	145B	8-19	05/16/94
T208	See M509		-	10/01/82
M209	Smoke Pot Fuze	145B	8-21	05/13/94
T209E3	PI BD Fuze	146	1-251	10/01/82
M210	Time Fuze	145B	8-23	01/01/87
T210E2	PD Fuze	146	1-253	10/01/82
M211	Rifle Grenade Fuze	145B	8-25	12/10/93
M212	Grenade Fuze	146	10-17	10/01/82
T212	PD Fuze	146	1-255	10/01/82
M213	Hand Grenade Fuze	145B	8-27	09/08/93
T213	PD Fuze	146	10-17	10/01/82
T214	Rocket MT SQ Fuze	146	5-133	10/01/82
XM214	Hand Grenade Fuze	146	10-17	10/01/82
M215	Hand Grenade Fuze	145B	8-29	12/17/93
T215	See M511		-	10/01/82
T216	PD Fuze	146	1-257	10/01/82
M217	Hand Grenade Fuze	146	8-17	12/10/93
T217	PD Fuze	146	10-17	10/01/82
M218	Submunition Time Fuze	146	3-19	06/07/94
M219	Submunition Impact Fuze	145B	3-23	02/20/92
M219A1	Submunition Impact Fuze	145B	3-25	02/20/92
M219A2	Submunition Impact Fuze	145B	3-27	03/12/92
T219	PD SD Fuze	146	1-259	10/01/82
ANMK219	Bomb Impact Fuze	146	2-247	10/01/82
M220	Bomb Time Fuze	146	2-249	10/01/82
T220	See M510		-	10/01/82
T221	BD Fuze	146	1-261	10/01/82
XM221	General Purpose Grenade Fuze	146	3-23	10/01/82

Supersedes page I-22 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
MK 221	Bomb Impact Fuze	146	2-251	10/01/82
XM222	General Purpose Grenade Fuze	146	3-25	10/01/82
M223	Grenade Fuze	145B	3-29	05/13/94
T223	PD Fuze	146	10-17	10/01/82
MK 223	Bomb Impact Fuze	146	2-253	10/01/82
M224	Submunition Time Fuze	145B	3-31	06/07/94
T224	PI BD Fuze	146	1-263	10/01/82
T225	See M515		-	10/01/82
XM225	Hand Grenade Fuze	146	8-19	10/01/82
M226	Hand Grenade Fuze	145B	8-31	05/16/94
T226	See M513		-	10/01/82
M227	Hand Grenade Fuze	145B	8-33	12/10/93
T227	See M514		-	10/01/82
MK 227	Bomb Impact Fuze	146	2-255	10/01/82
M228	Hand Grenade Fuze	145B	8-35	09/08/93
T228	PD Fuze	146	1-265	10/01/82
T228E1	See M520		-	10/01/82
ANMK228	Bomb Impact Fuze	146	2-257	10/01/82
M229	Grenade Fuze	146	10-17	10/01/82
T229	PD SD Fuze	146	10-17	10/01/82
MK 229	Bomb Hydrostatic Fuze	146	10-17	10/01/82
M230	Submunition Impact Fuze	145B	3-33	02/20/92
T230	PD Fuze	146	1-267	10/01/82
MK 230 Mod 4B	Bomb Hydrostatic Fuze	146	2-259	10/01/82
M231	Submunition Impact Fuze	145B	3-35	02/20/92
T231E3	PD Fuze	146	7-29	10/01/82
MK 231	Bomb Hydrostatic Fuze	146	10-18	10/01/82
XM233	Grenade Self-destruct (SD) Fuze	145B	3-37	04/18/90
MK 233	Bomb Hydrostatic Fuze	146	10-18	10/01/82
T234E2	PD SD Fuze	146	1-269	10/01/82
XM234	Grenade Self-destruct (SD) Fuze	145B	3-39	04/18/90
T235	PI BD Fuze	146	1-271	10/01/82
MK 235	Bomb Impact Fuze	146	10-18	10/01/82
T236	PI BD Fuze	146	1-273	10/01/82
MK 236	Bomb Impact Fuze	146	10-18	10/01/82
T237E1	See M508A1		-	10/01/82
MK 237	Bomb Long Delay Fuze	146	10-18	10/01/82
T238	Time Fuze	146	7-31	10/01/82
MK 238	Bomb Long Delay Fuze	146	10-18	10/01/82
MK 239	Bomb Impact Fuze	146	10-18	10/01/82
T240	MT SQ Fuze	146	1-275	10/01/82
MK 240	Bomb Hydrostatic Fuze	146	10-18	10/01/82
T241	PD Fuze	146	10-18	10/01/82
T243	PD SD Fuze	146	10-18	10/01/82
MK 243 Mod 0	Bomb Impact Fuze	146	2-261	10/01/82
T244	PD Fuze	146	1-277	10/01/82
MK 244 Mod 1	Bomb Impact Fuze	146	2-263	10/01/82
MK 245	Bomb Impact Fuze	146	10-18	10/01/82
T246	PD Fuze	146	1-279	10/01/82
XM246 PROJ	SD FOR	146	7-33	10/01/82
T247	See M521		-	10/01/82
MK 247 Mod 0	Bomb Impact Fuze	146	2-265	10/01/82

Supersedes page I-23 of MIL-HDBK-146.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
T248	PD Fuze	146	10-18	10/01/82
T250E1	MT SQ Fuze	146	1-281	10/01/82
T251	PD Fuze	146	10-18	10/01/82
T252	MT Fuze	146	1-283	10/01/82
T253	PD Fuze	146	7-35	10/01/82
T254	PD Fuze	146	10-18	10/01/82
MK 255 Mod 0	Bomb Impact Fuze	146	2-267	10/01/82
MK 256	Bomb MT Fuze	146	2-269	10/01/82
T257	BD Fuze	146	1-285	10/01/82
MK 257 Mod 0	Bomb Proximity Fuze	146	2-271	10/01/82
T258	See T264E9		-	10/01/82
T259E4	See T263E14		-	10/01/82
MK 259 Mod 0	PIBD Fuze	145B	5-23	12/10/93
T262	PD Fuze	146	7-37	10/01/82
T263E14	PD Fuze	146	7-39	10/01/82
T264E9	PD Fuze	146	7-41	10/01/82
T265	PD Fuze	146	1-287	10/01/82
T267	PI BD Fuze	146	1-289	10/01/82
T268	PD SD Fuze	146	10-18	10/01/82
T270	PD SD Fuze	146	7-43	10/01/82
T271	PD SD Fuze	146	1-291	10/01/82
T272	PD SD Fuze	146	1-293	10/01/82
T273	PD SD Fuze	146	1-295	10/01/82
T274	Rocket MT SQ Fuze	146	5-135	10/01/82
F/M274 Warhead	Rocket PD Fuze	145B	5-25	02/20/92
T275	See M562		-	10/01/82
T275E1	See M565		-	10/01/82
T277	PI BD Fuze	146	1-297	10/01/82
T278E8	See M530A1		-	10/01/82
T279	Proximity Fuze	146	1-299	10/01/82
T280	PI BD Fuze	146	1-301	10/01/82
T282	ET SQ Fuze	146	1-303	10/01/82
T283	See XM587E1		-	10/01/82
T284	MT SQ Fuze	146	1-305	10/01/82
T285	PD Fuze	146	1-307	10/01/82
T286E1	See M518		-	10/01/82
T287	PD Fuze	146	1-309	10/01/82
T289	MT SQ Fuze	146	1-311	10/01/82
T290	Time Fuze	146	10-19	10/01/82
T291E3	PD Fuze	146	1-313	10/01/82
T292	PD Fuze	146	7-45	10/01/82
T293	Proximity Fuze	146	1-315	10/01/82
T294	Proximity Fuze	146	1-317	10/01/82
T295	ET SQ Fuze	146	10-19	10/01/82
T296	BD Fuze	146	1-319	10/01/82
T297	PD Fuze	146	1-321	10/01/82
T298	PD Fuze	146	1-323	10/01/82
T299	BD Fuze	146	1-325	10/01/82
T300	BD SD Fuze	146	7-47	10/01/82
T301	BD Fuze	146	7-49	10/01/82
MK 301	GM Proximity Fuze	146	10-19	10/01/82
T302	MT SQ Fuze	146	1-327	10/01/82

Supersedes page I-24 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
T303	BD Fuze	146	1-329	10/01/82
MK 303 Mod 2	GM Proximity Fuze	146	10-19	10/01/82
MK 304 Mod 2	GM Impact Fuze	146	6-39	10/01/82
T305	Proximity Fuze	146	1-331	10/01/82
MK 305 Mod 2	GM Impact Fuze	146	10-19	10/01/82
T306	BD SD Fuze	146	7-51	10/01/82
T307	BD Fuze	146	7-53	10/01/82
T308	BD Fuze	146	7-55	10/01/82
MK 308 Mod 3	GM Proximity Fuze	146	10-19	10/01/82
T309	See M522		-	10/01/82
MK 309 Mod 2	GM Proximity Fuze	146	10-19	10/01/82
MK 310 Mod 0	GM Impact Fuze	146	6-41	10/01/82
T311	PD Fuze	146	1-333	10/01/82
MK 311	GM Dummy Fuze	146	10-19	10/01/82
T312	PD Fuze	146	1-335	10/01/82
MK 312 Mod 0,1	GM Impact Fuze	146	6-43	10/01/82
MK 312 Mod 2	GM Impact Fuze	146	6-45	10/01/82
MK 312 Mod 3	GM Impact Fuze	146	6-47	10/01/82
T313	PD Fuze	146	1-337	10/01/82
MK 313 Mod 1	GM Dummy Fuze	146	10-19	10/01/82
T314	PD Fuze	146	1-339	10/01/82
T315	PD Fuze	146	1-341	10/01/82
MK 315	GM Proximity Fuze	146	10-19	10/01/82
T316E1	See M543		-	10/01/82
MK 316	GM Proximity Fuze	146	10-19	10/01/82
T317	MT Fuze	146	10-19	10/01/82
MK 317	GM Impact Fuze	146	10-19	10/01/82
T318	MT SQ Fuze	146	10-19	10/01/82
T319	See M519		-	10/01/82
MK 319 Mod 2	GM Proximity Fuze	146	10-19	10/01/82
T320	PD Fuze	146	7-57	10/01/82
T321	PD Fuze	146	7-59	10/01/82
T322	PD Fuze	146	7-61	10/01/82
MK 322 Mod 2	GM Proximity Fuze	146	10-20	10/01/82
T323	PD Fuze	146	7-63	10/01/82
MK 323 Mod 2	GM Proximity Fuze	146	10-20	10/01/82
T324	PI BD Fuze	146	1-343	10/01/82
T325	BD Fuze	146	1-345	10/01/82
MK 325 Mod 3	GM Proximity Fuze	146	10-20	10/01/82
T326	BD Fuze	146	1-347	10/01/82
T327E1	BD Fuze	146	1-349	10/01/82
MK 327 Mod 0	Bomb Proximity Fuze	146	10-20	10/01/82
T328	PD Fuze	146	7-65	10/01/82
MK 328 Mod 0	GM Impact Fuze	145B	6-95	04/18/90
T329	PD SD Fuze	146	7-67	10/01/82
T330	MT SQ Fuze	146	10-20	10/01/82
MK 330 Mod 0	GM Impact Fuze	146	6-51	10/01/82
MK 330 Mod 1	GM Impact Fuze	146	6-53	10/01/82
MK 330 Mod 2	GM Impact Fuze	145B	6-97	01/01/87
T331	PD Fuze	146	1-351	10/01/82
T332	Rocket MT Fuze	146	5-137	10/01/82
MK 334 Mod 0	GM Proximity or Impact Fuze	145B	6-99	04/18/90

Supersedes page I-25 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
T335	Proximity Fuze	146	1-353	10/01/82
EX 335 Mod 0	Rocket Proximity Fuze	146	5-139	10/01/82
T336E7	See M525A1		-	10/01/82
MK 336 Mod 0	MT Fuze	146	1-355	10/01/82
T337	BD Fuze	146	1-357	10/01/82
EX 337 Mod 0	Proximity Fuze	146	1-359	10/01/82
T338	PD Fuze	146	1-361	10/01/82
EX 338	See MK 338 Mod 0		-	10/01/82
MK 338 Mod 0	Proximity Fuze	146	1-363	10/01/82
T339	PD Fuze	146	1-365	10/01/82
MK 339 Mod 1	MT Fuze	145B	4-69	05/16/94
T341	Time Fuze	146	10-20	10/01/82
T342E1	See M543		-	10/01/82
MK 342 Mod 0 & 1	MT Fuze	145B	2-93	08/23/93
F/MK342 Fuze	Aux Fuze Setting Wrench	145B	10-25	03/09/92
T343	See M530A1		-	10/01/82
MK 343 Mod 0	Bomb Impact Fuze	145B	4-71	05/16/94
T344	MT Fuze	146	10-20	10/01/82
MK 344 Mod 0	Bomb Impact Fuze	145B	4-73	05/16/94
MK 344 Mod 1	Bomb Fuze	145B	4-75	05/16/94
T345	MT Fuze	146	10-20	10/01/82
T346E7	PD Fuze	146	7-69	10/01/82
MK 346 Mod 0	Bomb Fuze	145B	4-77	05/16/94
MK 347 Mod 0	Bomb Impact Fuze	146	2-273	10/01/82
MK 349 Mod 0 & 1	MT Fuze	145B	2-95	08/23/93
F/MK349 Fuze	Aux Fuze Setting Wrench	145B	10-27	03/06/92
MK 352 Mod 2	Rocket Impact Fuze	145B	5-27	05/20/94
EX 353	MT PD Fuze	146	10-20	10/01/82
EX 354	MT PD Fuze	146	10-20	10/01/82
T355	MT Fuze	146	1-369	10/01/82
EX 355	PD Fuze	146	10-20	10/01/82
T356	PD Fuze	146	10-20	10/01/82
EX 356	MT PD Fuze	146	10-20	10/01/82
MK 357 Mod 0	Fuze & Adapter Assembly	146	1-371	04/21/94
MK 357 Mod 1	Fuze & Adapter Assembly	145B	2-97	04/21/94
F/MK357-0,-1 Fuze	Windshield Wrench	145B	10-29	03/06/92
MK 358	See MK 357 Mod 1		-	10/01/82
T359	See M551		-	10/01/82
MK 359	See MK 357 Mod 1		-	10/01/82
MK 360 Mod 0	Fuze & Adapter Assembly	146	1-372A	04/21/94
MK 360 Mod 1	Fuze & Adapter Assembly	145B	2-99	04/21/94
MK 361	See MK 357 Mod 1		-	10/01/82
MK 362	See MK 357 Mod 1		-	10/01/82
T363	BD Fuze	146	7-71	10/01/82
MK 363 Mod 0	PD Fuze	146	1-373	04/19/90
T364	BD Fuze	146	7-73	10/01/82
EX 364	Rocket Time Fuze	146	10-20	10/01/82
MK 364 Mod 0	Flare Fuze	145B	9-31	01/01/87
MK 365	See MK 357 Mod 1		-	10/01/82
MK 366	See MK 357 Mod 1		-	10/01/82
MK 367	See MK 357 Mod 1		-	10/01/82
T368E2	See XM718		-	10/01/82

Supersedes page I-26 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
EX 368	Target Detecting Device	146	10-20	10/01/82
T369	See M563		-	10/01/82
MK 369	See MK 357 Mod 1		-	10/01/82
T370E1	PI BD Fuze	146	1-375	10/01/82
MK 370	See MK 357 Mod 1		-	10/01/82
MK 371	See MK 357 Mod 1		-	10/01/82
MK 372 Mod 0	Hand Grenade Fuze	145B	8-37	12/10/93
EX 373	Aux Det Fuze	146	10-21	10/01/82
MK 374 Mod 0	Bomb Impact Fuze	146	2-275	05/16/94
MK 374 Mod 1	Bomb Impact Fuze	146	2-276A	05/16/94
MK 375	See FMU-136		-	10/01/82
MK 376 Mod 0	Bomb Impact Fuze	145B	4-83	05/16/94
EX 377	See FMU-83/B		-	10/01/82
MK 378 Mod 0,1	Rocket Proximity Fuze	146	5-141	10/01/82
MK 379 Mod 0 & 1	Aux Det Fuze	145B	2-101	08/23/93
EX 380 Mod 0	PD Fuze	146	7-75	10/01/82
EX 382	See FMU-88/B		-	10/01/82
MK 383 Mod 0	GM Impact Fuze	146	6-55	10/01/82
MK 384 Mod 0	Aux Det Fuze	145B	2-103	03/06/92
EX 385	PD Fuze	146	10-21	10/01/82
EX 386	PD Fuze	146	10-21	10/01/82
MK 387 Mods 0-2	Proximity Fuze	146	5-143	03/06/92
MK 388 Mod 0	Flare Fuze	145B	9-33	01/01/87
MK 392 Mod 0	MT Fuze	146	1-379	11/05/92
MK 393 Mod 0	MT/PD Fuze	145B	2-105	04/21/94
MK 394 Mod 0	Hand Grenade Fuze	146	8-21	01/15/93
MK 395 Mod 0 & 1	Aux Det Fuze	145B	2-107	03/06/92
MK 396 Mod 0	Aux Det Fuze	145B	2-109	03/06/92
EX 397	Proximity Fuze	146	10-21	10/01/82
MK 399 Mod 0	PD/Delay Fuze	145B	2-111	04/21/94
MK 399 Mod 1	PD/Delay Fuze	145B	2-113	04/21/94
M400	Rocket BD Fuze	146	5-145	10/01/82
MK 400	Proximity Fuze	146	1-383	04/21/94
M401	Rocket BD Fuze	146	5-147	10/01/82
MK 401	GM Proximity Fuze	146	10-21	10/01/82
M402A2	Rocket Proximity Fuze	146	5-149	10/01/82
EX 402	Proximity Fuze	146	1-385	11/05/92
M403A2	Rocket Proximity Fuze	146	5-151	10/01/82
MK 403 Mod 0	MT/PD Fuze	145B	2-115	10/27/92
MK 403 Mod 1	MT/PD Fuze	145B	2-117	10/27/92
M404A2	Rocket BD Fuze	145B	5-29	02/25/92
MK 404 Mod 0	Proximity Fuze	145B	2-119	08/23/93
MK 404 Mod 1	Proximity Fuze	145B	2-121	04/21/94
M405	See M404A2		-	10/01/82
MK 405	See MK 339 Mod 0,1		-	10/01/82
M406	Rocket PI BD Fuze	146	5-155	10/01/82
M407	See MK 181 Mod 0-3		-	10/01/82
MK 407 Mod 0	PD/D Fuze	145B	2-123	04/21/94
MK 407 Mod 1	PD/D Fuze	145B	2-125	04/21/94
MK 407 Mod 2	PD/D Fuze	145B	2-127	04/21/94
M408E1	Rocket PI BD Fuze	146	5-157	10/01/82
EX 408	Proximity Fuze	146	10-21	10/01/82

Supersedes page I-27 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
M409	Rocket PI BD Fuze	146	5-159	10/01/82
EX 409	GM Proximity Fuze	146	10-21	10/01/82
M410	See M409		-	10/01/82
EX 410	Proximity Fuze	146	10-21	10/01/82
M411	Rocket MT Fuze	146	5-161	10/01/82
MK 411 Mod 0	Aux Det Fuze	145B	2-129	08/23/93
M412A2	Rocket PI BD Fuze	145B	5-31	05/18/94
EX 412	Target Detecting Device	145B	6-101	01/01/87
XM413	Rocket Proximity Fuze	146	5-163	10/01/82
MK 413 Mod 0	Aux Det Fuze	145B	2-131	08/23/93
M414A1	Rocket Proximity Fuze	145B	5-33	05/20/94
M415	Rocket PD Fuze	146	5-167	10/01/82
MK 415 Mod 0	MT/PD Fuze	145B	2-133	02/25/92
XM416	Rocket MT Fuze	146	5-169	10/01/82
EX 416	ET Fuze	146	1-386A	11/05/92
M417	Rocket PD Fuze	146	5-171	04/19/91
MK 417 Mod 0	Proximity Fuze	145B	2-135	04/21/94
MK 417 Mod 1	Proximity Fuze	145B	2-137	04/21/94
M418	Rocket MT Fuze	146	10-21	10/01/82
MK 418 Mod 0	Proximity Fuze	145B	2-139	04/21/94
M419	Rocket MT Fuze	146	10-21	10/01/82
EX 419 Mod 0	Multifunction Fuze	145B	2-141	02/27/92
M420	See M421		-	10/01/82
MK 420 Mod 0	BD Fuze	145B	5-35	12/10/93
M421	Rocket MT Fuze	146	5-173	10/01/82
EX 421	PD Fuze	146	7-77	02/27/92
XM422	Rocket MT Training Fuze	146	10-21	10/01/82
EX 422 Mod 0	BD Fuze	145B	2-143	01/01/87
M423	Rocket Impact Fuze	145B	5-37	05/13/94
M423 Alternate	Rocket Impact Fuze	145B	5-39	09/08/93
MK 423 Mod 0	ET/PD Fuze	145B	2-145	12/10/93
XM424	See M411		-	10/01/82
MK 424 Mod 0	ET Fuze	146	1-386C	03/06/92
XM425	Rocket Proximity Fuze	146	5-177	10/01/82
MK 425 Mod 0	ET Training Fuze	145B	2-147	06/05/91
XM426E4	Rocket MT Fuze	146	5-179	10/01/82
EX 426 Mod 0	MT/PD Fuze	145B	2-149	02/27/92
M427	Rocket Impact Fuze	145B	5-41	05/13/94
M427 Alternate	Rocket PD Fuze	145B	5-43	09/08/93
EX 427 Mod 0	Electronic Time Fuze	146	5-181	03/10/92
XM428	See M414A1		-	10/01/82
M429	Rocket Proximity Fuze	145B	5-45	05/13/94
XM430	Rocket Proximity Fuze	146	10-21	10/01/82
M431	Rocket PD Fuze	146	5-182A	09/08/93
XM432	Rocket ET Fuze	146	5-183	10/01/82
M433	Rocket Impact Fuze	145B	5-47	05/13/94
M434E1	Rocket BD Fuze	145B	5-49	05/01/91
M435	Dummy Rocket Fuze	145B	5-51	05/13/94
XM436	See WDU-4/A Warhead		-	10/01/82
XM437	Rocket Practice Fuze	146	10-21	10/01/82
M438 Type I	Rocket Impact Fuze	145B	5-53	09/08/93
M438 Type II	Rocket Impact Fuze	145B	5-55	09/08/93

Supersedes page I-28 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
M439	Rocket Time Fuze	145B	5-57	05/13/94
M440	Rocket Impact Fuze	145B	5-59	02/27/92
XM441	Rocket PD Fuze	146	10-21	10/01/82
M442	Rocket Airburst Fuze	145B	5-61	05/16/94
XM443	Rocket ET Fuze	146	5-185	05/13/94
XM444	Rocket Multi-option Fuze	146	5-187	05/13/94
M445	Rocket ET Fuze	145B	5-63	05/13/94
M446	Rocket Airburst Fuze	145B	5-65	09/08/93
M447	Rocket ET Fuze	145B	5-67	05/13/94
XM448	Rocket ET Fuze	146	5-188A	05/13/94
XM450	Rocket Prox/Time Fuze	146	5-188C	05/13/94
XM451	Rocket ET Fuze	145B	5-69	12/10/93
XM459	See XM451 Rocket Fuze		-	/ /
M500A1	MT SQ Fuze	145B	2-151	05/02/91
M501A1	MT SQ Fuze	145B	2-153	08/23/93
M502, A1	MT SQ Fuze	146	1-391	12/17/93
M503A2	PD Fuze	145B	2-155	05/16/94
M504, A1, A2	Proximity Fuze	146	1-395	12/15/93
M505A3	PD Fuze	145B	1-7	09/08/93
M505A3E2	PD Fuze	146	7-79	10/01/82
M506	MT SQ Fuze	146	1-397	12/15/93
M507	PD Fuze	146	1-399	12/15/93
M508A1	PD Fuze	145B	2-157	05/16/94
M509A2	PI BD Fuze	145B	2-159	05/01/91
M509A2E1	PI BD Fuze	146	1-402A	11/05/92
M510	MT SQ Fuze	146	1-403	10/01/82
M511	MT Fuze	146	1-405	10/01/82
M512	MT Fuze	146	10-21	10/01/82
M513, B1	Proximity Fuze	146	1-407	12/15/93
M513A1, A2	Proximity Fuze	145B	2-161	12/15/93
M514, B1	Proximity Fuze	146	1-409	12/15/93
M514A1	Proximity Fuze	145B	2-163	04/21/94
M514A3	Proximity Fuze	146	1-411	12/15/93
M515	Proximity Fuze	146	1-413	12/15/93
M516,B1,B2,A1	Proximity Fuze	146	1-415	12/15/93
M517	Proximity Fuze	146	1-417	05/13/94
M518, A1	MT SQ Fuze	146	1-419	12/15/93
M519	PD Fuze	146	1-421	08/23/93
M520A1	MT SQ Fuze	145B	2-165	12/15/93
M521	PD Fuze	145B	2-167	05/16/94
M522	MT SQ Fuze	146	1-427	10/01/82
M523	MT SQ Fuze	146	10-22	10/01/82
M524A6	PD Fuze	145B	2-169	03/03/92
M524A6 Mod 0	See Mk 363 Mod 0		-	/ /
M525A1	PD Fuze	145B	2-171	05/16/94
M526A1	PD Fuze	145B	2-173	05/16/94
M527B1	PD Fuze	145B	2-175	12/15/93
M528	See M505A3		-	10/01/82
XM529	MT SQ Fuze	146	10-22	10/01/82
M530A1	PI BD Fuze	145B	2-177	05/16/94
M531	PD Training Fuze	145B	2-179	05/01/91
M532	Proximity Fuze	145B	2-181	05/16/94

Supersedes page I-29 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
M533	PD Fuze	145B	1-9	05/16/94
M534A1	BD Fuze	145B	2-183	05/01/91
M535	PD Fuze	146	1-441	01/01/87
M536A1	PD Fuze	145B	1-11	05/16/94
XM537	PD Fuze	146	7-81	10/01/82
XM538E1	PD Fuze	146	7-83	05/13/94
M539A1	PI BD Fuze	145B	2-185	03/03/92
XM540	MT Fuze	146	5-189	10/01/82
XM541	See M539		-	10/01/82
M542	MT Fuze	146	10-22	10/01/82
M543	MT Fuze	146	1-445	10/01/82
XM544E1	PD Fuze	146	10-22	10/01/82
XM545	Dummy Fuze	146	10-22	10/01/82
XM546	Proximity Fuze	146	10-22	10/01/82
XM547	MT Fuze	146	10-22	10/01/82
M548	MT SQ Fuze	145B	2-187	12/15/93
M549	PI BD Fuze	145B	1-13	05/13/94
M549E1	PI BD Fuze	145B	1-15	07/22/93
M550	PI BD Fuze	145B	1-17	05/13/94
M551	PD Fuze	145B	1-19	05/13/94
M552	PD Fuze	146	7-85	03/04/92
M553	BD Dummy Fuze	145B	2-189	05/01/91
XM554	MT SQ Fuze	146	10-22	10/01/82
XM556	MT SQ Fuze	146	10-22	10/01/82
M557	PD Fuze	145B	2-191	05/16/94
M557E1	PD Fuze	146	1-451	10/01/82
XM558	MT Fuze	146	1-453	10/01/82
XM559E1	PI BD Fuze	146	1-455	10/01/82
XM560	MT SQ Fuze	146	1-457	10/01/82
XM561	Time & SQ Fuze	146	1-459	10/01/82
M562	MT SQ Fuze	145B	2-193	05/01/91
M563	MT Fuze	145B	2-195	05/16/94
M564	MT SQ Fuze	145B	2-197	05/13/94
M565	MT Fuze	145B	2-199	05/13/94
XM566	PD Fuze	146	1-465	10/01/82
M567	PD Fuze	145B	2-201	06/07/94
XM568	MT Fuze	146	1-467	10/01/82
XM569	PI BD Fuze	146	1-469	10/01/82
XM570	MT Fuze	146	1-471	10/01/82
M571	MT Fuze	145B	2-203	05/01/91
M572	PD Fuze	145B	2-205	05/16/94
M572A2	See M739		-	10/01/82
M572E1	PD Fuze	146	1-477	10/01/82
XM573	See M62A2		-	10/01/82
XM574	ET Fuze	146	1-479	10/01/82
XM575	MT SQ Fuze	146	10-22	10/01/82
M576	PD Fuze	146	10-22	10/01/82
M577	MT SQ Fuze	145B	2-207	07/13/93
M577A1	MT SQ Fuze	145B	2-209	07/13/93
M578	BD Fuze	145B	2-211	05/16/94
M578A1	BD Fuze	146	1-480A	11/05/92
XM579	PI BD Fuze	146	7-87	10/10/90

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
XM580	See M594		-	10/01/82
M581	PD Fuze	145B	1-20A	07/15/93
M581E1	PD Fuze	146	7-89	07/15/93
M582	MT SQ Fuze	145B	2-213	05/13/94
M582A1	MT SQ Fuze	145B	2-215	05/13/94
XM583	Proximity Fuze	146	1-481	10/01/82
XM584	ET Fuze	146	1-483	10/01/82
XM585E4	PD Fuze	146	1-485	10/01/82
M587	ET/PD Fuze	146	1-486A	05/13/94
XM588	Proximity Fuze	146	1-487	10/01/82
XM589	Proximity Fuze	146	1-489	10/01/82
XM590E2	Time Fuze	146	2-277	10/01/82
M591	MT Fuze	146	1-491	10/01/82
M592	MT Fuze	146	1-495	12/15/93
M592A1	MT Fuze	145B	2-217	05/02/91
XM593, E1	PD Fuze	146	1-497	12/16/93
M594	PD SD Fuze	146	7-91	09/08/93
XM595	MT Fuze	146	10-22	10/01/82
M596	Proximity Fuze	146	7-93	05/13/94
XM597	PD Fuze	146	1-499	10/01/82
XM598	See M526A2E1		-	10/01/82
XM599	MT Fuze	146	1-501	10/01/82
M600	AT Mine Fuze	146	10-22	10/01/82
M601	AT Mine Fuze	146	10-23	10/01/82
M602	AT Mine Fuze	146	10-23	10/01/82
M603	AT Mine Fuze	145B	7-45	09/08/93
M604	AT Mine Practice Fuze	145B	7-47	09/08/93
M605	Mine Combination Fuze	145B	7-49	09/08/93
M606	AT Mine Fuze	145B	7-51	09/08/93
M607	AT Mine Fuze	145B	7-53	12/16/93
M608	AT Mine Fuze	145B	7-55	09/08/93
M609	AT Mine Influence Fuze	146	4-19	10/01/82
XM610	AT Mine Fuze	146	10-23	10/01/82
XM611	AP Mine Combination Fuze	146	4-21	10/01/82
M612	AT Mine Fuze	146	4-23	10/01/82
XM613	AT Mine Fuze	146	10-23	10/01/82
XM614	AT Mine Fuze	146	10-23	10/01/82
XM615	AT Mine Fuze	146	10-23	10/01/82
M616	AT Mine Fuze	146	4-25	09/08/93
XM617	AP Mine Influence Fuze	146	4-27	10/01/82
XM618	AT Mine Influence Fuze	146	10-23	10/01/82
M619	AT Mine Influence Fuze	146	4-29	09/08/93
XM621	Anti Disturb Device	146	4-31	10/01/82
XM622	See M56 SYSTEM		-	10/01/82
XM623	AT Mine Fuze	146	10-23	10/01/82
M624	AT Mine Fuze	145B	7-57	03/04/92
M692/731 Proj	AP Mine Fuze	145B	7-59	12/16/93
T702E1	Bomb Proximity Fuze	146	2-279	10/01/82
T704	Bomb Proximity Fuze	146	2-281	10/01/82
T708	See M169		-	10/01/82
T709	See M904E2		-	10/01/82
M711	MT Fuze	146	1-503	10/28/92

Supersedes page I-31 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
XM712E2	PD Fuze	146	1-505	10/01/82
XM713	See M524A6		-	10/01/82
M714E5	PD SD Fuze	146	7-96C	03/05/92
M714E6	PI BD Fuze	146	7-96E	03/05/92
M714E8	PD SD Fuze	146	7-96G	03/05/92
XM714	PD SD Fuze	146	7-95	10/01/82
XM714E2	PD SD Fuze	146	7-96A	03/05/92
XM714E3	PD SD Fuze	146	10-23	10/01/82
XM714E4	PD SD Fuze	146	10-23	10/01/82
XM715	MT Fuze	146	9-19	10/01/82
M716	PD Fuze	145B	2-219	12/17/93
M717	PD Fuze	145B	2-221	12/16/93
XM718	Proximity Fuze	146	1-511	10/01/82
F/M718& M741	Projectiles, AT Mine Fuze S&A	145B	7-61	04/12/94
F/M718A1&M741A1	Projectiles, AT Mine Fuze S&A	145B	7-61A	04/12/94
M719	PD Fuze	146	1-513	10/28/92
M720E1	PD Fuze	145B	2-223	05/16/94
XM721	MT Fuze	146	10-23	10/01/82
XM722	PD SD Fuze	146	7-97	10/01/82
XM723E1	PD Fuze	146	1-517	10/01/82
M724	ET/PD Fuze	145B	2-225	05/13/94
XM725	PD Fuze	146	10-23	10/01/82
XM726	See M577		-	10/01/82
M728	Proximity Fuze	145B	2-227	05/16/94
XM729	PD Fuze	146	10-23	10/01/82
T730	See M198		-	10/01/82
T730E4	See M907		-	10/01/82
XM730	See M735		-	10/01/82
XM731	See M735		-	10/01/82
M732	Proximity Fuze	145B	2-229	05/13/94
M732A1	Proximity Fuze	146	1-520A	05/13/94
M732A2	Proximity Fuze	145B	2-231	07/20/93
M733	Impact Fuze	145B	1-21	05/16/94
M734	Multi-Option Fuze	145B	2-233	06/07/94
M736	See M735		-	10/01/82
T736	Bomb MT Fuze	146	2-283	10/01/82
XM737	Impact Fuze	146	3-27	10/01/82
T738	See M172		-	10/01/82
M739	PD Fuze	145B	2-235	12/16/93
M739A1	PD Fuze	145B	2-237	12/16/93
T739	See M184		-	10/01/82
F/M739 Fuze	Delay Arming Mechanism	145B	2-239	10/28/92
M740	PI BD Fuze	145B	2-241	05/13/94
T740	See M185		-	10/01/82
XM741	Multi-Option Fuze	146	1-520C	05/13/94
XM742	ET Fuze	146	1-521	10/01/82
XM743	See M757		-	10/01/82
M744	ET Training Fuze	145B	2-243	03/06/92
M745	PD Fuze	145B	2-245	06/07/94
XM746	See M747		-	10/01/82
M747E2	PD Practice Fuze	146	1-522A	03/04/92
T747	See M178, M179, M180		-	10/01/82

Supersedes page I-32 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
M748	PD Practice Fuze	146	1-522C	03/04/92
T750E2	See M910		-	10/01/82
XM750	Rocket ET Fuze	146	5-190A	03/13/92
M751	PD Practice Fuze	145B	2-247	07/28/94
XM752	See XM752		-	10/01/82
XM753	See M762		-	10/01/82
XM754	Rocket PI BD Fuze	145B	5-71	01/01/87
XM755	PD SD Fuze	146	7-99	09/08/93
XM756	PD SD Fuze	146	7-101	10/31/92
XM757	PD SD Fuze	146	7-103	10/31/92
M758	PD SD Fuze	145B	1-23	05/13/94
M758E1	PD SD Fuze	146	7-104A	07/22/93
M759	PI BD Fuze	145B	1-27	03/03/92
T759E1	See M190		-	10/01/82
M760	PD SD Fuze	146	7-105	10/31/92
T760E1	See M191		-	10/01/82
XM760	PD SD Fuze	146	10-23	10/01/82
M761	PD SD Fuze	146	7-107	10/31/92
T761E1	See M192		-	10/01/82
M762	ET Fuze	145B	2-249	12/16/93
T763	Bomb ET Fuze	146	2-285	10/01/82
XM763	PI BD Fuze	146	1-522E	03/04/92
M764	PI BD Fuze	145B	2-251	06/07/94
T765	See M188		-	10/01/82
XM765	PI BD Fuze	146	1-523	10/01/82
M766	Proximity Fuze	146	7-109	10/31/92
T766	Bomb Proximity Fuze	146	2-287	10/01/82
M767	ET Fuze	145B	2-253	12/16/93
T768	See M913		-	10/01/82
XM768	Time Fuze	146	1-524A	03/04/92
XM769	Time Fuze	146	1-524C	12/16/93
T770	See M903		-	10/01/82
XM770	Medium-Altitude Proximity Fuze	146	1-524E	05/13/94
T771	See M905		-	10/01/82
XM771	See M758E1		-	03/03/92
M772	MT SQ Fuze	145B	2-255	05/13/94
XM773	Multi-option Fuze, Artillery	145B	2-257	03/01/94
M774	PI BD Fuze	145B	2-259	06/07/94
M775	Multioption Practice Fuze	145B	2-261	05/13/94
M775E1	See XM779		-	10/27/92
M776	MT SQ Fuze	145B	2-263	12/16/93
M777	PI BD Fuze	146	1-524G	03/04/92
T777	See M900		-	10/01/82
T778	See M193		-	10/01/82
XM778	Electronic Time Fuze	146	1-524I	11/04/92
M779	Multioption Practice Fuze	145B	2-265	05/13/94
T779	Bomb Proximity Fuze	146	2-289	10/01/82
XM780	BD Fuze	145B	2-266A	07/28/94
T781	See M181		-	10/01/82
T782	See M182		-	10/01/82
T783	See M183		-	10/01/82
T784	See M901, M908		-	10/01/82

Supersedes page I-33 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
T785	See M902, M909		-	10/01/82
T787E4	Bomb Long Delay Fuze	146	2-291	10/01/82
T788E3	See M906		-	10/01/82
T789	See M189		-	10/01/82
T791	See M194		-	10/01/82
T792	See M195		-	10/01/82
T796	Bomb Proximity Fuze	146	2-293	10/01/82
M800	GM BD Fuze	146	6-57	10/01/82
XM801	GM BD SD Fuze	146	10-23	10/01/82
XM802	GM BD SD Fuze	146	6-59	10/01/82
XM803	GM Impact Fuze	146	10-23	10/01/82
XM804E1	GM Impact Fuze	146	6-61	10/01/82
M805	Safety-Arming Device	145B	6-103	01/01/87
XM806	GM Proximity Fuze	146	10-24	10/01/82
M807	GM Proximity Fuze	146	10-24	10/01/82
XM808	GM Proximity Fuze	146	10-24	10/01/82
XM809	GM MT Fuze	146	10-24	10/01/82
XM810	GM Proximity Fuze	146	10-24	10/01/82
M811	GM ET Fuze	145B	6-105	12/16/93
M812	GM Impact Fuze	145B	6-107	03/04/92
M813	Safety-Arming Device	146	6-67	06/07/94
M814	GM Impact Fuze	145B	6-109	12/16/93
XM815	GM Impact Fuze	146	6-71	10/01/82
M816	See M811		-	10/01/82
M817	Target Detecting Device	145B	6-111	05/13/94
M818E1	GM Proximity Fuze	145B	6-113	05/13/94
M819	GM ET Practice Fuze	146	6-72A	12/19/92
M819E1	GM ET Practice Fuze	145B	6-115	05/13/94
M820	GM Impact Fuze	145B	6-117	12/16/93
M821	Target Detecting Device	145B	6-119	01/01/87
M900	Bomb Impact Fuze	146	10-24	10/01/82
M901	See M908		-	10/01/82
M902	See M909		-	10/01/82
M903	Bomb AD Fuze	146	2-295	10/01/82
M904E4	Bomb Impact Fuze	145B	4-85	05/16/94
M905	Bomb Impact Fuze	145B	4-87	01/01/87
M906	Bomb Impact Fuze	146	2-299	10/01/82
T906	Bomb ET Fuze	146	2-301	10/01/82
M907E2	Bomb MT Fuze	145B	4-89	10/28/92
M908	Bomb MT Fuze	146	2-305	10/01/82
T908E4	Bomb Impact Fuze	146	2-307	10/01/82
M909	Bomb MT Fuze	145B	4-91	05/13/94
M910	Bomb Proximity Fuze	146	2-311	10/01/82
XM911	Bomblet Impact Fuze	146	10-24	10/01/82
M912	See M212		-	10/01/82
M913	Bomb Proximity Fuze	146	2-313	05/13/94
M914E1	Bomb Proximity Fuze	146	2-315	10/01/82
XM915	See M219		-	10/01/82
XM917	See BLU-7A/B Bomblet		-	10/01/82
M918	Bomb Impact Fuze	145B	4-93	05/16/94
F/M918 Cartridge	PD Fuze	145B	1-29	05/13/94
XM919	Bomb MT Fuze	146	10-24	10/01/82

Supersedes page I-34 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
XM920E2	Bomb MT Fuze	146	10-24	10/01/82
XM921	Bomb MT Fuze	146	10-24	10/01/82
XM922	Bomblet Impact Fuze	146	3-29	10/01/82
XM923	Bomb Impact Fuze	146	10-24	10/01/82
XM924	Bomb Impact Fuze	146	10-24	10/01/82
M925	Bomb Impact Fuze	146	10-24	10/01/82
XM926	Bomblet AD Fuze	146	10-25	10/01/82
XM927	Bomblet AD Fuze	146	10-25	10/01/82
XM928	Bomblet Impact Fuze	146	3-31	10/01/82
XM929	Bomb Impact Fuze	146	10-25	10/01/82
XM930, E1	Bomb MT Fuze	145B	4-95	01/01/87
M931	See M577		-	10/01/82
XM932	See XM441		-	10/01/82
M934E2	GM Fuze	145B	6-121	06/07/94
M934E3	GM Fuze	145B	6-123	06/07/94
M934E5	GM Fuze	145B	6-125	06/07/94
M934E6	GM Fuze	145B	6-127	06/07/94
M935	PD Fuze	145B	2-267	06/07/94
M936	PD Fuze	145B	2-269	05/13/94
M990E4	Bomb Impact Fuze	145B	4-97	05/16/94
T1010	Rifle Grenade Fuze	146	10-25	10/01/82
T1011E2	See M213		-	10/01/82
T1011E3	See M215		-	10/01/82
T1012E1	See M217		-	10/01/82
T1013	Hand Grenade Fuze	146	10-25	10/01/82
T1014E1	See M10A3, M211		-	10/01/82
T1015	Hand Grenade Fuze	146	8-23	10/01/82
T1016	Hand Grenade Fuze	146	10-25	10/01/82
T1018	Hand Grenade Fuze	146	10-25	10/01/82
T1019	Hand Grenade Fuze	146	10-25	10/01/82
T1020	Hand Grenade Fuze	146	8-25	10/01/82
T1021	Rifle Grenade Fuze	146	8-27	10/01/82
T1022E2	Rifle Grenade Fuze	146	8-29	10/01/82
T1023	Rifle Grenade Fuze	146	8-31	10/01/82
T1025	Hand Grenade Fuze	146	8-33	10/01/82
M1117	BD Fuze	146	1-525	10/01/82
XM1133	Rocket Time Fuze	146	5-191	10/01/82
M1134A2	Demolition Kit Fuze	145B	7-63	05/16/91
M1134A3	Demolition Kit Fuze	145B	7-65	05/16/91
XM1146	See XM1133		-	10/01/82
M1147	Demolition Kit Training Fuze	145B	7-67	03/12/92
T1200E1	AP Mine Fuze	146	4-33	10/01/82
T1201	AP Mine Fuze	146	10-25	10/01/82
T1202	See M606		-	10/01/82
T1204	AP Mine Fuze	146	10-25	10/01/82
T1205	GP Mine Fuze	146	4-35	10/01/82
T1209	AT Mine Influence Fuze	146	10-25	10/01/82
T1210	See M604		-	10/01/82
T1212E1	See M609		-	10/01/82
T1214	AT Mine Fuze	146	4-37	10/01/82
T1215	AT Mine Practice Fuze	146	4-39	10/01/82
T1216	AT Mine Fuze	146	4-41	10/01/82

Supersedes page I-35 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
T1217E2	See M612		-	10/01/82
T1221E1	Mine Combination Practice Fuze	146	4-43	10/01/82
T1222	AT Mine Influence Fuze	146	10-25	10/01/82
T1223	AT Mine Influence Fuze	146	4-45	10/01/82
T1224E1	AT Mine Influence Fuze	146	4-47	10/01/82
T1225	AT Mine Influence Fuze	146	10-25	10/01/82
T1226	AT Mine Fuze	146	4-49	10/01/82
T1227	AT Mine Influence Fuze	146	10-25	10/01/82
T1228	AT Mine Fuze	146	4-51	10/01/82
T1229	AT Mine Fuze	146	4-53	10/01/82
T1230	AP Mine Fuze	146	10-26	10/01/82
T1231	AT Mine Fuze	146	4-55	10/01/82
T1232	AT Mine Fuze	146	10-26	10/01/82
T1233	AT Mine Influence Fuze	146	4-57	10/01/82
T1234	See T1233		-	10/01/82
T1235	See T1233		-	10/01/82
T1301	Bomb Proximity Fuze	146	2-319	10/01/82
T1302E1	See M1134		-	10/01/82
T1302E2	See XM1147		-	10/01/82
T1304	Line Charge Time Fuze	146	9-25	10/01/82
T1400	See M800		-	10/01/82
T1402E5	GM PD Fuze	146	6-73	10/01/82
T1403E2	GM Impact SD Fuze	146	6-75	10/01/82
T1404	GM MT Fuze	146	6-77	10/01/82
T1405	See M51		-	10/01/82
T1407	GM Impact Fuze	146	6-78A	12/19/92
T1408	GM Fuze	146	10-26	10/01/82
T1409	GM Impact Fuze	146	6-79	10/01/82
T1410	GM PI BD Fuze	146	6-81	10/01/82
T1411	GM Impact Fuze	146	6-83	10/01/82
T1412	GM Impact Fuze	146	6-85	10/01/82
M1907M	Fuze Combination	146	1-527	10/01/82
T2000E3	Rocket PI BD Fuze	146	5-193	10/01/82
T2003	Rocket PI BD Fuze	146	10-26	10/01/82
T2004	See M403		-	10/01/82
T2006	Rocket PD Fuze	146	10-26	10/01/82
T2008	See M405		-	10/01/82
T2009	Rocket PI BD Fuze	146	10-26	10/01/82
T2013	Rocket PD Fuze	146	10-26	10/01/82
T2017	Rocket Proximity Fuze	146	10-26	10/01/82
T2019	Rocket PD Fuze	146	5-195	10/01/82
T2021E6	Rocket PD SD Fuze	146	5-197	10/01/82
T2022E8	Rocket BD Fuze	146	5-199	10/01/82
T2023E1	See MK 181 Mod 1		-	10/01/82
T2024	Rocket PD SD Fuze	146	5-201	10/01/82
T2025E2	Rocket PD Fuze	146	5-203	10/01/82
T2026	Rocket PD Fuze	146	10-26	10/01/82
T2027	Rocket PD Fuze	146	5-205	10/01/82
T2028	Rocket PI BD Fuze	146	5-207	10/01/82
T2029	Rocket PI BD Fuze	146	5-209	10/01/82
T2030E4	See M408		-	10/01/82
T2031E1	See M414A1		-	10/01/82

Supersedes page I-36 of MIL-HDBK-146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

INDEX

MODEL	TYPE	HDBK	CH/PG	DATE OF INFO.
T2032	Rocket ET Fuze	146	10-26	10/01/82
T2033E1	See M406, M409		-	10/01/82
T2034	Rocket PI BD SD Fuze	146	5-211	10/01/82
T2035	Rocket Proximity Fuze	146	10-26	10/01/82
T2036	Rocket PD SD Fuze	146	5-213	10/01/82
T2037	Rocket Time Fuze	146	5-215	10/01/82
T2039	Rocket Proximity Fuze	146	5-217	10/01/82
T2040	Rocket PD Fuze	146	5-219	10/01/82
T2041	Rocket PD SD Fuze	146	5-221	10/01/82
T2043	Rocket PD SD Fuze	146	5-223	10/01/82
T2044E5	Rocket PD Fuze	146	5-225	10/01/82
T2045	Rocket Time Fuze	146	10-26	10/01/82
T2046	Rocket Proximity Fuze	146	5-227	10/01/82
T2047	Rocket PD SD Fuze	146	5-229	10/01/82
T2048	Rocket PD Fuze	146	5-231	10/01/82
T2049	Rocket PD Fuze	146	5-233	10/01/82
T2051	Rocket PD Fuze	146	5-235	10/01/82
T2052	Rocket BD SD Fuze	146	5-237	10/01/82
T2053	Rocket PI BD Fuze	146	5-239	10/01/82
T2054	Rocket BD SD Fuze	146	5-241	10/01/82
T2055	Rocket BD SD Fuze	146	5-243	10/01/82
T2056	Rocket BD Fuze	146	5-245	10/01/82
T2057	Rocket BD Fuze	146	5-247	10/01/82
T2058	See M417		-	10/01/82
T2059	Rocket PD Fuze	146	10-26	10/01/82
T2061	See XM79		-	10/01/82
T2061E1	See M414A1		-	10/01/82
T2062	See M410		-	10/01/82
T2063	Rocket PI BD Fuze	146	5-249	10/01/82
T2065	See M411		-	10/01/82
T2066	Rocket Fuze	146	5-251	10/01/82
T2067	Rocket Time Fuze	146	10-26	10/01/82
T2069	Rocket Time Fuze	146	5-253	10/01/82
T2100E2	See M607		-	10/01/82
T2275E1	See M421		-	10/01/82

NEW PAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-HDBK-146 - Fuze Catalog Limited Standard, Obsolescent, Obsolete, Terminated and Cancelled Fuzes

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T13:37Z
Check the source to verify that this is the current version before use.