MILITARY SPECIFICATION SHEET

NUT, PLAIN, WELDING, METRIC

METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the nuts described herein consist of this document and the latest issue of specification DOD-N-63476.

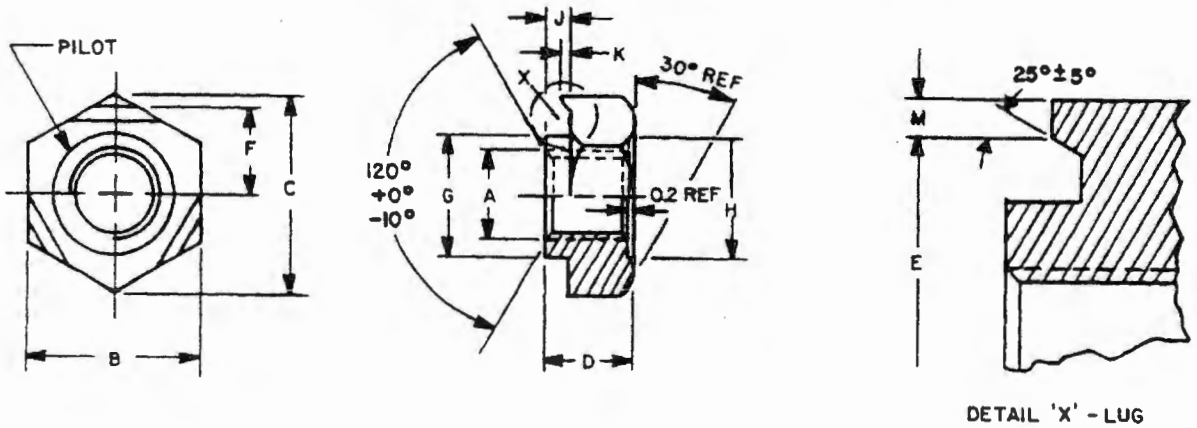


FIGURE 1. Design and dimensions.

NOTES:

1. Unless otherwise specified, dimensions are in millimeters.
2. Part number consists of the letter "D", followed by the basic number of this specification sheet and a dash number taken from table I. Example: D63476/1-1.
3. Recommended mounting practice is shown on figure 2.

REQUIREMENTS:

1. Material: Steel, carbon.
2. Protective finish: None.
3. Design and dimensions shall be in accordance with figure 1.


FSC 5310

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions.

Dash No.	A Thread dia. & pitch	B		C Ref	D		E ±0.2	F ±0.1	G		H		J		K		M	
-1	M3 X 0.5	7.5	-0.22	8.6	3	-0.25	6.2	3.10	4.47	-0.075	4.5	+0.180	0.55	-0.1	0.25	-0.1	0.8	±0.2
-2	M4 X 0.7	9	-0.22	10.4	3.5	-0.30	7.7	3.85	5.97	-0.075	6	+0.180	0.65	-0.1	0.35	-0.1	0.8	±0.2
-3	M5 X 0.8	10	-0.22	11.5	4	-0.30	8.7	4.35	6.96	-0.090	7	+0.220	0.7	-0.1	0.4	-0.1	0.8	±0.2
-4	M6 X 1	11	-0.27	12.7	5	-0.30	9.7	4.85	7.96	-0.090	8	+0.220	0.75	-0.15	0.4	-0.1	0.9	±0.22
-5	M8 X 1.25	14	-0.27	16.2	6.5	-0.36	12.6	6.30	10.45	-0.110	10.5	+0.270	0.9	-0.15	0.5	-0.15	1.0	±0.25
-6	M10 X 1.5	17	-0.27	19.6	8	-0.36	15.1	7.55	12.45	-0.110	12.5	+0.270	1.15	-0.2	0.65	-0.15	1.25	±0.3
-7	M12 X 1.75	19	-0.33	21.9	10	-0.36	17.3	8.65	14.75	-0.110	14.8	+0.270	1.4	-0.2	0.8	-0.2	1.25	±0.3
-8	M14 X 2	22	-0.33	25.4	11	-0.43	19.8	9.90	16.75	-0.110	16.8	+0.270	1.8	-0.2	1	-0.2	1.5	±0.4
-9	M16 X 2	24	-0.33	27.7	13	-0.43	21.8	10.90	18.735	-0.130	18.8	+0.330	1.8	-0.2	1	-0.2	1.5	±0.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

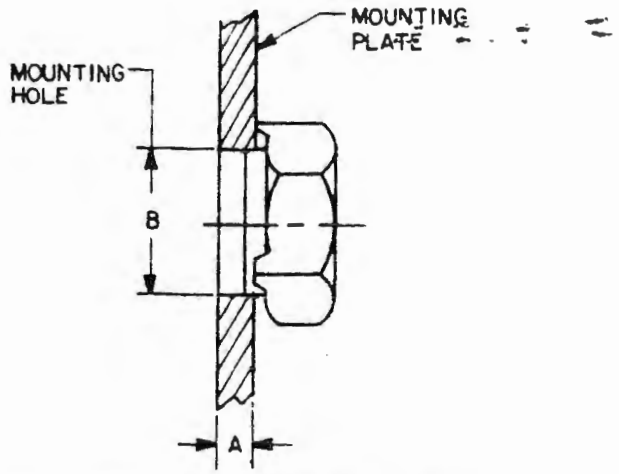

Nut thread size	A min (mm)	B (mm)	
M3	0.63	4.5	+0.075
M4	0.75	6.0	+0.075
M5	0.88	7.0	+0.090
M6	0.88	8.0	+0.090
M8	1.00	10.5	+0.110
M10	1.25	12.5	+0.110
M12	1.50	14.8	+0.110
M14	2.00	16.8	+0.110
M16	2.00	18.8	+0.130

FIGURE 2. Recommended mounting practice.

Custodians:
Army - AR
Air Force - 99

Review activities:
Army - AV, CR, AT
DLA - IS
NSA - NS

User activities:
Army - ME
Navy - AS, MC

Preparing activity:
Army - AR

Agent:
DLA - IS

(Project 5310-1062)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.