
MIL-C-55302/107A(EL)
27 April 1976
SUPERSEDING
MIL-C-55302/107(EL)
30 May 1975

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: SUPPORT PIN, FOR CONNECTOR MOUNTING BRACKET

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the support pin described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

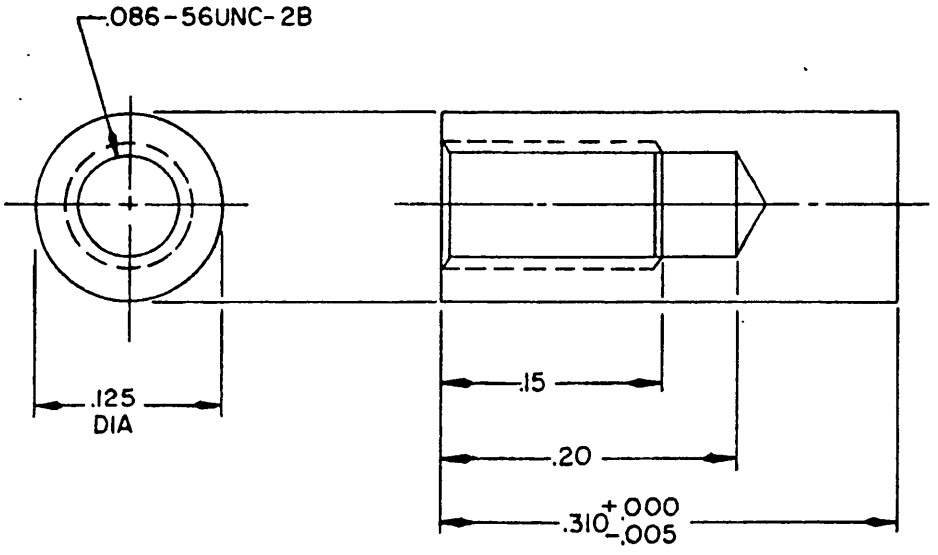

INCHES	MM
.005	.13
.086	2.18
.125	3.18
.15	3.81
.20	5.08
.310	7.87

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.02 (.51 mm) for two place decimals.
4. This pin shall be used to support the mounting bracket assembly.

Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration- - - - - - - - - - - See figure.

(A) Material- Aluminum alloy QQ-A-225/3, temper T3.

Finish- Gold chromate per MIL-C-5541, class 1A.

Application - This support pin shall be used with MIL-C-55302/102 and MIL-C-55302/104 (see note 4).

Part number - M55302/107-01.

Qualification and quality conformance requirements are not applicable.

Custodian:
Army - EL

Review activities:
Army - AV, AT, MI
DSA - ES

User activities:
Army - WC, ME

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5935-A028-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.