MILITARY SPECIFICATION SHEET

# CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES RECEPTACLE, 80 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.050 INCH SPACING)

This specification sheet is approved for use by Rome Air Development Center, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-55302


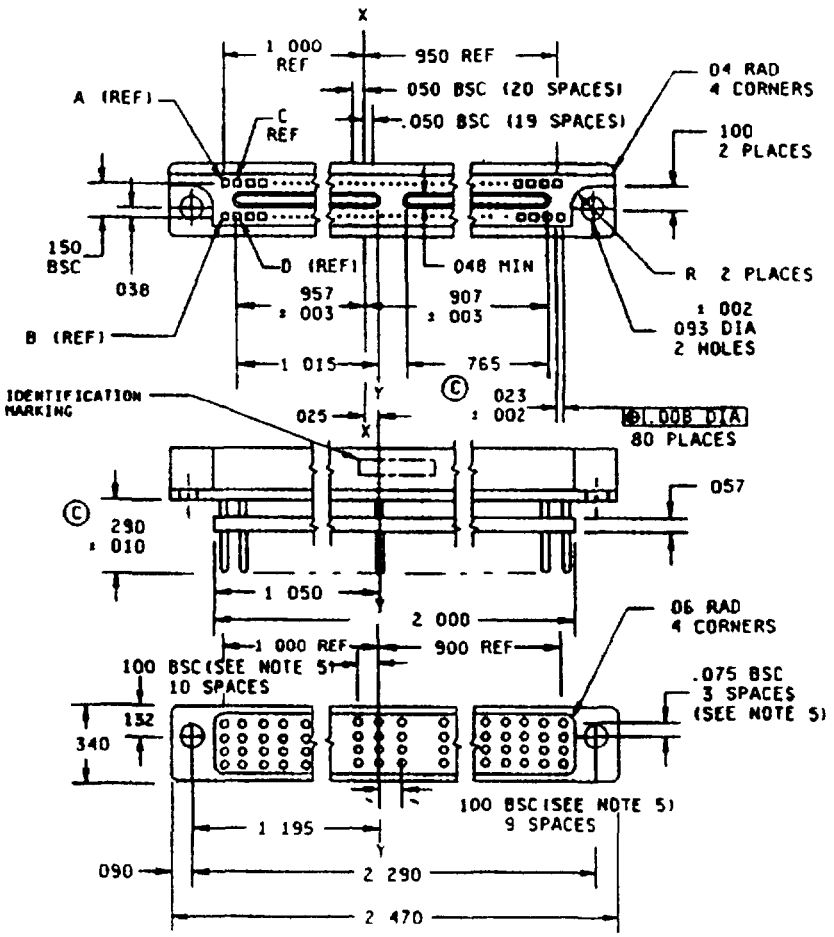



FIGURE 1 Connectors, receptacle, 050 (1.27 mm) spacing

(C) denotes change


DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

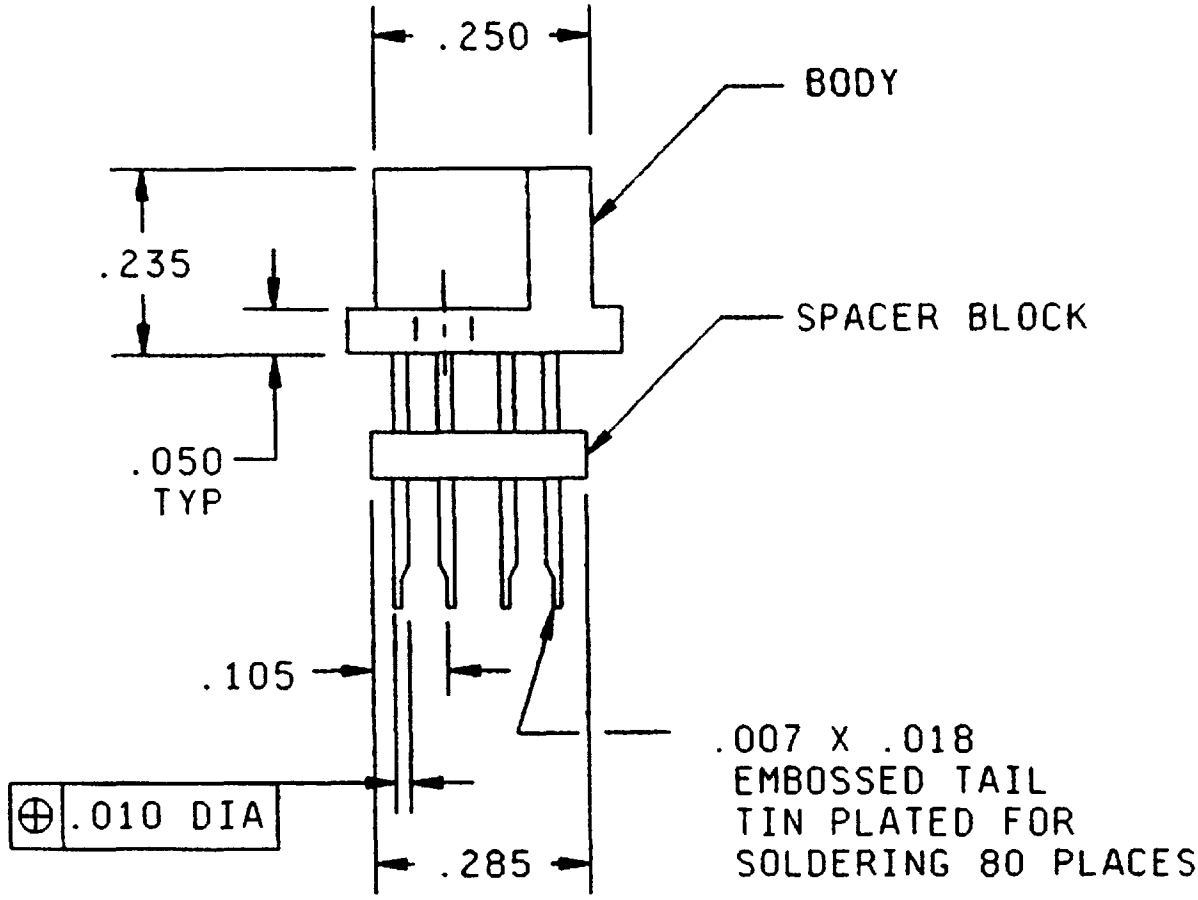


| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| 002 | 0.05 | .057 | 1 45 | .235 | 5 97 | 957 | 22 86 |
| 005 | 0.13 | 060 | 1 52 | 250 | 6 35 | 1 000 | 24 13 |
| 008 | 0.20 | 075 | 1 90 | 285 | 7 24 | 1 015 | 25.78 |
| 010 | 0.25 | 090 | 2.29 | 300 | 7 62 | 1 050 | 26 67 |
| 023 | 0.58 | 093 | 2.36 | .340 | 8.64 | 1 150 | 29 21 |
| 025 | 0 64 | 100 | 2 54 | 765 | 19.43 | 1.195 | 30.35 |
| .038 | 0 97 | 105 | 2.67 | .900 | 22.86 | 2.000 | 50.80 |
| .040 | 1 02 | 132 | 3 35 | 907 | 23.04 | 2 290 | 58 17 |
| 048 | 1 22 | 150 | 3 81 | .950 | 24.13 | 2 470 | 62 74 |
| 050 | 1 27 | | | | | | |

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 005 (0 13 mm) and ±2° on angles
4. These connectors mate with connectors specified in MIL-C-55302/125
5. Dimension applies at point of egress from spacer block

FIGURE 1 Connectors, receptacle, 050 (1 27 mm) spacing - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configurations See figure 1

Material·

Body In accordance with MIL-C-55302

(C) Plating. Contact plating shall be gold in accordance with MIL-C-55302 over nickel in accordance with MIL-C-55302 in the contact engagement area for 100 inch minimum length The termination area plating shall be tin lead in accordance with MIL-C-55302 over nickel in accordance with MIL-C-55302 for 250 inch minimum length

Contact identification. See figure 1

Contact rating 1 5 amperes per contact, maximum

Operating temperature -65°C to +125°C

Keying See MIL-C-55302/31

Oversized pin exclusion 0330 diameter pin

Mating and unmating The maximum mating force in pounds shall be the number of contacts multiplied by .30 and the withdrawal force in pounds shall be a minimum of .03 times the number of contacts and shall not exceed the measured insertion force

Contact engagement and separation force

Engagement force. Maximum force to engage maximum test pin 0190 inch + 0000, - 0001 diameter shall be 6 ounces

Separation force. Minimum force to extract minimum test pin 0170 inch +.0001, -.0000 diameter shall be 10 ounce

Contact resistance The average contact resistance of all contacts measured shall not exceed 025 ohm, and no individual contact pair shall have resistance exceeding 030 ohm

Contact retention 75 pound, minimum

Dielectric withstanding voltage

Sea level 450 volts rms

High altitude 150 volts rms

Solderability· Each connector shall be subjected to method 208 of MIL-STD-202 (solder termination only) (applicable to qualification and retention of qualification only)

Part number M55302/126-01

Patent number 3,404,367 The Government has a royalty free license under this patent for the benefit of manufacturers of the item either for the Government or for use in equipment to be delivered to the Government



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian
Air Force - 17

Review activities
Air Force - 11, 85, 99
DLA - ES

User activity
Air Force - 19

Preparing activity
Air Force - 17

Agent
DLA - ES

(Project 5935-F414)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.