INCH-POUND
MIL-PRF-55629/1D
9 October 1997
SUPERSEDING
MIL-C-55629/1C
10 January 1986

PERFORMANCE SPECIFICATION SHEET

CIRCUIT BREAKERS, MAGNETIC, UNSEALED TRIP-FREE, SINGLE POLE (0.2 TO 100 AMPERES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-55629.

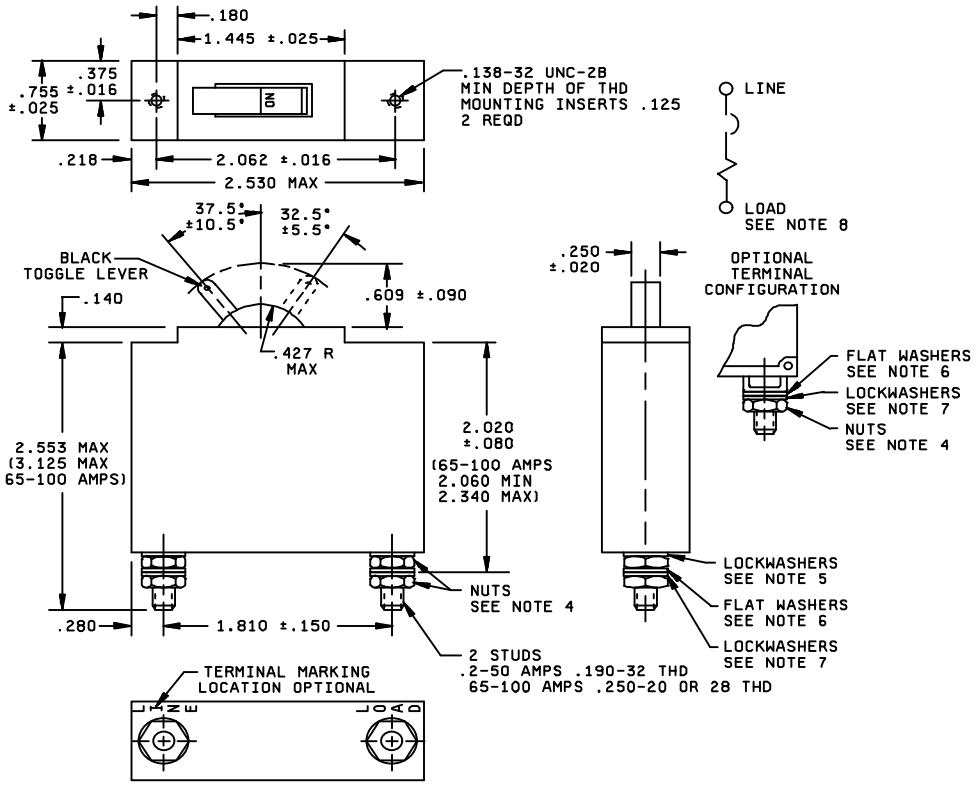


FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.125	3.18	.280	7.11	1.445	36.70
.010	0.25	.138	3.50	.281	7.14	1.810	45.97
.016	0.41	.140	3.56	.303	7.70	2.020	51.31
.020	0.51	.150	3.81	.313	7.95	2.060	52.32
.025	0.64	.156	3.96	.368	9.35	2.062	52.37
.031	0.79	.180	4.58	.375	9.52	2.340	59.44
.032	0.81	.190	4.83	.378	9.60	2.530	64.26
.035	0.89	.204	5.18	.438	11.13	2.553	64.85
.080	2.03	.218	5.54	.500	12.70	3.125	79.38
.109	2.77	.250	6.35	.755	19.18		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.031 (0.79 mm).
4. NUT-HEX: (.2 - 50 amperes) .190 - 32 UNF-2B .313/.303 across flats, .109 ±.010 thick. (65 - 100 amperes) .250 - 28 UNF-2B .438 ±.016 across flats or .250 - 20 UNC-2B .375 ±.016 across flats. Material - Brass (ASTM B121 or equivalent), Tin Plated (ASTM B545 or equivalent) or Stainless Steel, for each terminal.
5. Captive washer nut assembly of brass nut, bronze washer, tin plated; or lockwasher, internal or external tooth, MS35333-107 or MS35335-88 (.2 - 50 amperes), MS35333-108 or MS35335-89 (65 - 100 amperes) or equivalent. (Use of washers optional on 65 - 100 amperes units.)
6. Washer, flat: (.2 - 50 amperes) .378/.368 0D, .204/.190 ID, .032 ±.005 thick. (65 - 100 amperes) .500 ±.016 OD, .281 ±.016 ID, .035 ±.005 thick. Material - Brass (ASTM B121 or equivalent) Tin plated (ASTM B545 or equivalent) or Phosphor Bronze, composition (ASTM B139 or equivalent).
7. Lockwasher, Split: (.2 - 50 amperes) MS35338-138 or equivalent. (65 - 100 amperes) MS35338-139 or equivalent.
8. Physical item marking of load terminal optional.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Current ratings: See table I.

Voltage ratings: See table II through V. 240 V ac breakers are designed also for use at 120 V ac.

High inrush: Applicable to time delays K, L, M, N, P, R, and S.

Tripping-time delays: See tables II through V.

Terminal and mounting hardware: See figure 1.

Terminals: See figure 1.

Actuator strength: 25 pounds.

Actuator operating force: 4 pounds, maximum.

Endurance (65 through 100 amperes): 6,000 mechanically performed make and break operations.

Terminal strength:

Applied load: 30 pounds.

Applied torque: 22 inch-pounds.

Vibration: Energized current shall be 90 percent for characteristics H, I, and J.

Shock: Energized current shall be 90 percent for characteristics H, I, and J.

Moisture resistance (65 through 100 amperes): Change in resistance shall not exceed 50 percent.

Temperature rise (65 through 100 amperes): 65°C.

Interrupting capacities:

2,000 amperes at 50 Volts, dc (32 V dc for 65 through 100 amperes).

2,000 amperes at 120 Volts, ac, 60 Hz.

1,500 amperes at 120 Volts, ac, 400 Hz.

1,000 amperes at 240 Volts ac, 60 and 400 Hz.

Part number: M55629/1- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max.)		Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max.)
001	0.2	A	32		271	0.5	P	12
002	0.2	B	32		272	0.5	R	12
003	0.2	C	34		273	0.5	S	12
004	0.2	D	34		436	0.5	T	6
005	0.2	E	72		152	0.75	A	3
006	0.2	F	72		153	0.75	B	3
007	0.2	G	72		155	0.75	C	3
136	0.2	H	32		156	0.75	D	3
137	0.2	I	34		158	0.75	E	7
138	0.2	J	72		159	0.75	F	7
253	0.2	K	32		160	0.75	G	7
254	0.2	L	32		154	0.75	H	3
255	0.2	M	34		157	0.75	I	3
256	0.2	N	34		161	0.75	J	7
257	0.2	P	72		274	0.75	K	3
258	0.2	R	72		275	0.75	L	3
259	0.2	S	72		276	0.75	M	3
434	0.2	T	34		277	0.75	N	3
139	0.25	A	21		278	0.75	P	7
140	0.25	B	21		279	0.75	R	7
142	0.25	C	23		280	0.75	S	7
143	0.25	D	23		437	0.75	T	3
145	0.25	E	43		015	1.0	A	2
146	0.25	F	43		016	1.0	B	2
147	0.25	G	43		017	1.0	C	2
141	0.25	H	21		018	1.0	D	2
144	0.25	I	23		019	1.0	E	4
148	0.25	J	43		020	1.0	F	4
260	0.25	K	21		021	1.0	G	4
261	0.25	L	21		162	1.0	H	2
262	0.25	M	23		163	1.0	I	2
263	0.25	N	23		164	1.0	J	4
264	0.25	P	43		281	1.0	K	2
265	0.25	R	43		282	1.0	L	2
266	0.25	S	43		283	1.0	M	2
435	0.25	T	23		284	1.0	N	2
008	0.5	A	6		285	1.0	P	4
009	0.5	B	6		286	1.0	R	4
010	0.5	C	6		287	1.0	S	4
011	0.5	D	6		438	1.0	T	2
012	0.5	E	12		165	1.5	A	.9
013	0.5	F	12		166	1.5	B	.9
014	0.5	G	12		168	1.5	C	.9
149	0.5	H	6		169	1.5	D	.9
150	0.5	I	6		171	1.5	E	2
151	0.5	J	12		172	1.5	F	2
267	0.5	K	6		173	1.5	G	2
268	0.5	L	6		167	1.5	H	.9
269	0.5	M	6		170	1.5	I	.9
270	0.5	N	6		174	1.5	J	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics. - Continued.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max.)	Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max.)
288	1.5	K	.9	035	3.0	G	.5
289	1.5	L	.9	188	3.0	H	.3
290	1.5	M	.9	189	3.0	I	.3
291	1.5	N	.9	190	3.0	J	.5
292	1.5	P	2	309	3.0	K	.3
293	1.5	R	2	310	3.0	L	.3
294	1.5	S	2	311	3.0	M	.3
439	1.5	T	.9	312	3.0	N	.3
022	2.0	A	.5	313	3.0	P	.5
023	2.0	B	.5	314	3.0	R	.5
024	2.0	C	.5	315	3.0	S	.5
025	2.0	D	.5	442	3.0	T	.3
026	2.0	E	.8	191	3.5	A	.15
027	2.0	F	.8	192	3.5	B	.15
028	2.0	G	.8	194	3.5	C	.15
175	2.0	H	.5	195	3.5	D	.15
176	2.0	I	.5	197	3.5	E	.35
177	2.0	J	.8	198	3.5	F	.35
295	2.0	K	.5	199	3.5	G	.35
296	2.0	L	.5	193	3.5	H	.15
297	2.0	M	.5	196	3.5	I	.15
298	2.0	N	.5	200	3.5	J	.35
299	2.0	P	.8	316	3.5	K	.15
300	2.0	R	.8	317	3.5	L	.15
301	2.0	S	.8	318	3.5	M	.15
440	2.0	T	.5	319	3.5	N	.15
178	2.5	A	.35	320	3.5	P	.35
179	2.5	B	.35	321	3.5	R	.35
181	2.5	C	.35	322	3.5	S	.35
182	2.5	D	.35	443	3.5	T	.15
184	2.5	E	.6	036	4.0	A	.1
185	2.5	F	.6	037	4.0	B	.1
186	2.5	G	.6	038	4.0	C	.1
180	2.5	H	.35	039	4.0	D	.1
183	2.5	I	.35	040	4.0	E	.3
187	2.5	J	.6	041	4.0	F	.3
302	2.5	K	.35	042	4.0	G	.3
303	2.5	L	.35	201	4.0	H	.1
304	2.5	M	.35	202	4.0	I	.1
305	2.5	N	.35	203	4.0	J	.3
306	2.5	P	.6	323	4.0	K	.1
307	2.5	R	.6	324	4.0	L	.1
308	2.5	S	.6	325	4.0	M	.1
441	3.0	T	.35	326	4.0	N	.1
029	3.0	A	.3	327	4.0	P	.3
030	3.0	B	.3	328	4.0	R	.3
031	3.0	C	.3	329	4.0	S	.3
032	3.0	D	.3	444	4.0	T	.1
033	3.0	E	.5	043	5.0	A	.08
034	3.0	F	.5	044	5.0	B	.08

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics. - Continued.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max.)	Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max.)
045	5.0	C	.08	350	7.0	S	.07
046	5.0	D	.08	447	7.0	T	.04
047	5.0	E	.15	064	8.0	A	.03
048	5.0	F	.15	065	8.0	B	.03
049	5.0	G	.15	066	8.0	C	.03
204	5.0	H	.08	067	8.0	D	.03
205	5.0	I	.08	068	8.0	E	.06
206	5.0	J	.15	069	8.0	F	.06
330	5.0	K	.08	070	8.0	G	.06
331	5.0	L	.08	213	8.0	H	.03
332	5.0	M	.08	214	8.0	I	.03
333	5.0	N	.08	215	8.0	J	.06
334	5.0	P	.15	351	8.0	K	.03
335	5.0	R	.15	352	8.0	L	.03
336	5.0	S	.15	353	8.0	M	.03
445	5.0	T	.08	354	8.0	N	.03
050	6.0	A	.06	355	8.0	P	.06
051	6.0	B	.06	356	8.0	R	.06
052	6.0	C	.06	357	8.0	S	.06
053	6.0	D	.06	448	8.0	T	.03
054	6.0	E	.08	071	9.0	A	.018
055	6.0	F	.08	072	9.0	B	.018
056	6.0	G	.08	073	9.0	C	.02
207	6.0	H	.06	074	9.0	D	.02
208	6.0	I	.06	075	9.0	E	.05
209	6.0	J	.08	076	9.0	F	.05
337	6.0	K	.06	077	9.0	G	.05
338	6.0	L	.06	216	9.0	H	.02
339	6.0	M	.06	217	9.0	I	.02
340	6.0	N	.06	218	9.0	J	.05
341	6.0	P	.08	358	9.0	K	.018
342	6.0	R	.08	359	9.0	L	.018
343	6.0	S	.08	360	9.0	M	.02
446	6.0	T	.06	361	9.0	N	.02
057	7.0	A	.04	362	9.0	P	.05
058	7.0	B	.04	363	9.0	R	.05
059	7.0	C	.04	364	9.0	S	.05
060	7.0	D	.04	449	9.0	T	.02
061	7.0	E	.07	078	10.0	A	.02
062	7.0	F	.07	079	10.0	B	.02
063	7.0	G	.07	080	10.0	C	.02
210	7.0	H	.04	081	10.0	D	.02
211	7.0	I	.04	082	10.0	E	.04
212	7.0	J	.07	083	10.0	F	.04
344	7.0	K	.04	084	10.0	G	.04
345	7.0	L	.04	219	10.0	H	.02
346	7.0	M	.04	220	10.0	I	.02
347	7.0	N	.04	221	10.0	J	.04
348	7.0	P	.07	365	10.0	K	.02
349	7.0	R	.07	366	10.0	L	.02

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics. - Continued.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max.)	Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max.)
367	10.0	M	.02	387	20.0	L	.007
368	10.0	N	.02	388	20.0	M	.007
369	10.0	P	.04	389	20.0	N	.007
370	10.0	R	.04	390	20.0	P	.01
371	10.0	S	.04	391	20.0	R	.01
450	10.0	T	.02	392	20.0	S	.01
085	12.5	A	.013	453	20.0	T	.007
086	12.5	B	.013	106	25.0	A	.006
087	12.5	C	.015	107	25.0	B	.006
088	12.5	D	.015	108	25.0	C	.006
089	12.5	E	.03	109	25.0	D	.006
090	12.5	F	.03	110	25.0	E	.007
091	12.5	G	.03	111	25.0	F	.007
222	12.5	H	.013	112	25.0	G	.007
223	12.5	I	.013	231	25.0	H	.006
224	12.5	J	.03	232	25.0	I	.006
372	12.5	K	.013	233	25.0	J	.007
373	12.5	L	.013	393	25.0	K	.006
374	12.5	M	.015	394	25.0	L	.006
375	12.5	N	.015	395	25.0	M	.006
376	12.5	P	.03	396	25.0	N	.006
377	12.5	R	.03	397	25.0	P	.007
378	12.5	S	.03	398	25.0	R	.007
451	12.5	T	.015	399	25.0	S	.007
092	15.0	A	.01	454	25.0	T	.006
093	15.0	B	.01	113	30.0	A	.005
094	15.0	C	.011	114	30.0	B	.005
095	15.0	D	.011	115	30.0	C	.005
096	15.0	E	.02	116	30.0	D	.005
097	15.0	F	.02	117	30.0	E	.006
098	15.0	G	.02	118	30.0	F	.006
225	15.0	H	.013	119	30.0	G	.006
226	15.0	I	.015	234	30.0	H	.005
227	15.0	J	.03	235	30.0	I	.005
379	15.0	K	.01	236	30.0	J	.006
380	15.0	L	.01	400	30.0	K	.005
381	15.0	M	.011	401	30.0	L	.005
382	15.0	N	.011	402	30.0	M	.005
383	15.0	P	.02	403	30.0	N	.005
384	15.0	R	.02	404	30.0	P	.006
385	15.0	S	.02	405	30.0	R	.006
452	15.0	T	.011	406	30.0	S	.006
099	20.0	A	.007	455	30.0	T	.005
100	20.0	B	.007	120	35.0	A	.004
101	20.0	C	.007	121	35.0	B	.004
102	20.0	D	.007	122	35.0	C	.004
103	20.0	E	.01	123	35.0	D	.004
104	20.0	F	.01	124	35.0	E	.005
105	20.0	G	.01	125	35.0	F	.005
228	20.0	H	.007	126	35.0	G	.005
229	20.0	I	.007	237	35.0	H	.004
230	20.0	J	.01	238	35.0	I	.004
386	20.0	K	.007	239	35.0	J	.005

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics. - Continued.

Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max.)		Dash no.	Current rating (amperes)	Voltage frequency and tripping time delay code letter (see table II, III, or V)	Resistance or impedance ohms (max.)
407	35.0	K	.004		127	50.0	A	.003
408	35.0	L	.004		128	50.0	B	.003
409	35.0	M	.004		129	50.0	C	.003
410	35.0	N	.004		130	50.0	D	.003
411	35.0	P	.005		131	50.0	E	.004
412	35.0	R	.005		132	50.0	F	.004
413	35.0	S	.005		133	50.0	G	.004
456	35.0	T	.004		250	50.0	H	.003
240	40.0	A	.0038		251	50.0	I	.003
241	40.0	B	.0038		252	50.0	J	.004
243	40.0	C	.0038		421	50.0	K	.003
244	40.0	D	.0038		422	50.0	L	.003
246	40.0	E	.0052		423	50.0	M	.003
247	40.0	F	.0052		424	50.0	N	.003
248	40.0	G	.0052		425	50.0	P	.004
242	40.0	H	.0038		426	50.0	R	.004
245	40.0	I	.0038		427	50.0	S	.004
249	40.0	J	.0052		458	50.0	T	.003
414	40.0	K	.0038		428	65	A	.003
415	40.0	L	.0038		429	65	B	.003
416	40.0	M	.0038		430	75	A	.0025
417	40.0	N	.0038		431	75	B	.0025
418	40.0	P	.0052		432	85	A	.0025
419	40.0	R	.0052		433	85	B	.0025
420	40.0	S	.0052		134	100	A	.002
457	40.0	T	.0038		135	100	B	.002

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE II. Tripping-time, standard delay. 1/, 2/

Time delay percent rated current	Tripping-time delay at 25°C ±2°C (tripping time in seconds)													
	50 V dc				240 V ac, 60 Hz				240 V ac, 400 Hz					
	A		B		C		D		E		F		G	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour	
125	70	7	7	.5	120	10	17	.7	N/A	N/A	N/A	N/A	N/A	N/A
150	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	60	5	5.8	.50	400	40
200	8	.6	1.4	.13	20	2.2	1.6	.13	20	2.1	1.9	.15	150	9.5
400	1.5	.15	.25	.031	2.3	.3	.25	.03	3.2	.4	.19	.02	19	1.9
600	.5	Inst	.12	Inst	.75	Inst	.13	Inst	.19	Inst	.08	Inst	1.6	Inst
800	.051	Inst	.051	Inst	.16	Inst	.07	Inst	.06	Inst	.05	Inst	.4	Inst
1,000	.026	Inst	.026	Inst	.04	Inst	.04	Inst	.045	Inst	.036	Inst	.043	Inst

See footnotes at end of table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE III. Tripping-time, high-inrush design. 1/ 3/

Time delay percent rated current	Tripping-time delay at 25°C ±2°C (tripping time in seconds)															
	50 V dc				240 V ac, 60 Hz						240 V ac, 400 Hz					
	K		L		M		N		T		P		R		S	
	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour	
125	100	10	12	.5	120	10	18	1	700	50	N/A	N/A	N/A	N/A	N/A	N/A
150	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	350	32	60	6	5.8	.6	500	60
200	20	2.5	1.5	.13	20	3	1.6	.16	70	10	20	2.1	2	.2	160	20
400	2	.36	.29	.031	2.3	.3	.3	.04	15	1.5	4	.4	.35	.035	19	2
600	1	.13	.15	Inst	1		.17	Inst	7	.7	.6	Inst	.125	Inst	5	.250
800	.6	Inst	.06	Inst	.6	.13	.09	Inst	3	.1	.06	Inst	.05	Inst	.5	.025
1,000	.29	Inst	.05	Inst	.29	Inst	.043	Inst	2	.01	.045	Inst	.036	Inst		Inst
						Inst									.043	
1,800 4/	no trip		no trip		no trip		no trip		no trip		no trip		no trip		no trip	

See footnotes at end of table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE IV. Tripping-time, high-low temperature, high-inrush and standard delay. 1/

Time delay percent rated current	Tripping-time delay at high and low temperature °C (tripping time in seconds) 5/															
	50 V dc				240 V ac, 60 Hz						240 V ac, 400 Hz					
	A and K		B and L		C and M		D and N		T		E and P		F and R		G and S	
	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min	-40° Max	+85° Min
100	no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour		no trip one hour	
125	500	5	100	.1	500	1	100	.1	8000	25	N/A	N/A	N/A	N/A	N/A	N/A
150	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	900	12	500	.5	100	.1	1500	5
200	100	.1	10	.05	100	.05	10	.05	500	5	100	.1	10	.5	500	.5
400	20	Inst	3	Inst	20	Inst	3	Inst	100	.8	20	Inst	3	Inst	100	Inst
600	5	Inst	1	Inst	5	Inst	1	Inst	40	.1	6	Inst	1	Inst	5	Inst
800	2	Inst	.5	Inst	.5	Inst	.5	Inst	10	.05		Inst		Inst	.5	Inst
1,000	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	3	.01	.5 N/A	N/A	.5 N/A	N/A	N/A	N/A

See footnotes at end of table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE V. Tripping-time, standard nondelay. 1/ 2/

	Tripping-time delay at -40°C ±2°C, +25°C ±2°C, and +85°C ±2°C (tripping time in seconds)					
Time delay percent rated current	50 V dc		240 V ac, 60Hz		240 V ac, 400 Hz	
	H (nondelay)		I (nondelay)		J (nondelay)	
	Max	Min	Max	Min	Max	Min
100	no trip one hour		no trip one hour		no trip one hour	
125	0.15	Inst	0.15	Inst	---	---
150	---	---	---	---	0.150	Inst
200	0.07	Inst	0.05	Inst	0.070	Inst
400	0.032	Inst	0.02	Inst	0.032	Inst
600	0.02	Inst	0.017	Inst	0.020	Inst
800	0.02	Inst	0.017	Inst	0.020	Inst

1/ Circuit breakers shall not trip at 100 percent rated current. Characteristics A, B, C, D, H, I, K, L, M, and N must trip at 125 percent rated current; E, F, G, J, P, R, and S at 150 percent. Any characteristic may trip between 100 percent and the must-trip value. Instantaneous (Inst) is defined as less than 15 milliseconds.

2/ Voltage, frequency, and tripping-time delay codes A, B, C, D, E, F, G, H, I, and J are standard delays without the high-inrush feature.

3/ Voltage, frequency, and time delay codes K, L, M, N, P, R, and S incorporate the high-inrush or transient suppression feature.

4/ High-inrush test shall be performed using one alternation which has a peak value of 1,800 percent of rated current. 400 Hz and dc delays are subjected to a 400 Hz waveform, 60 Hz delays shall be subjected to a 60 Hz waveform.

5/ High and low test temperature tolerances are ±2°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

TABLE III. Supersession and substitution data.

Circuit breakers covered by this specification sheet are substitutable for the manufacturer's part numbers as shown below. This information in no way implies that the manufacturer's part number is substitutable for the military part number.

Superseding military part number	Superseded manufacturers part number	
M55629/1-XXX	FSCM 81541	FSCM 74193
	Type APL-1 UPL-1	Type AM1
	The complete part number consists of the type (above) plus identification codes for comparable internal connections, voltage, frequency, time delay and current rating.	

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force -85

Review activities:
Army - AV, CR4, MI
Navy - AS, MC, OS
Air Force - 17, 19, 99
DLA - CC

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5925-0266-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.