
MIL-C-55681/1A
21 March 1972
SUPERSEDING
MIL-C-55681/1(EL)
3 August 1970

MILITARY SPECIFICATION SHEET

CAPACITORS, CHIP, MULTIPLE LAYER, FIXED, UNENCAPSULATED, CERAMIC DIELECTRIC, ESTABLISHED RELIABILITY STYLES CDR01, CDR02, CDR03, AND CDR04

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-55681.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

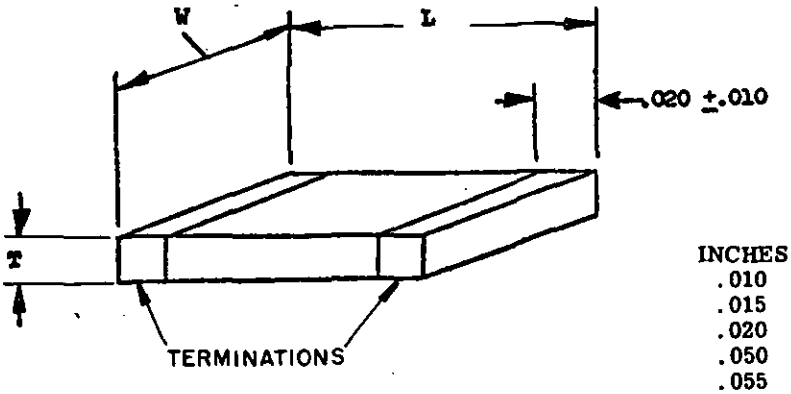

INCHES	MM
.010	.25
.015	.38
.020	.51
.050	1.27
.055	1.40
.080	2.03
.125	3.18
.180	4.57

Dimensions				
			T	
Style	L ±.015	W ±.015	Min.	Max.
CDR01	.080	.050	.020	.055
CDR02	.180	.050	.020	.055
CDR03	.180	.080	.020	.080
CDR04	.180	.125	.020	.080

NOTE: Dimensions are in inches.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:54Z
Check the source to verify that this is the current version before use.

TABLE I.

Type designation 1/	Capacitance	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage
	pF			volts, dc
CDR01BP100B---	10	J, K	BP	100
CDR01BP120BJ--	12	J	BP	100
CDR01BP150B---	15	J, K	BP	100
CDR01BP180BJ--	18	J	BP	100
CDR01BP220B---	22	J, K	BP	100
CDR01BP270BJ--	27	J	BP	100
CDR01BP330B---	33	J, K	BP	100
CDR01BP390BJ--	39	J	BP	100
CDR01BP470B---	47	J, K	BP	100
CDR01BP560BJ--	56	J	BP	100
CDR01BP680B---	68	J, K	BP	100
CDR01BP820BJ--	82	J	BP	100
CDR01BP101B---	100	J, K	BP	100
CDR01B-121B---	120	J, K	BP, BX	100
CDR01B-151B---	150	J, K	BP, BX	100
CDR01B-181B---	180	J, K	BP, BX	100
CDR01BX221B---	220	K, M	BX	100
CDR01BX271BK--	270	K	BX	100
CDR01BX331B---	330	K, M	BX	100
CDR01BX391BK--	390	K	BX	100
CDR01BX471B---	470	K, M	BX	100
CDR01BX561BK--	560	K	BX	100
CDR01BX681B---	680	K, M	BX	100
CDR01BX821BK--	820	K	BX	100
CDR01BX102B---	1,000	K, M	BX	100
CDR01BX122BK--	1,200	K	BX	100
CDR01BX152B---	1,500	K, M	BX	100
CDR01BX182BK--	1,800	K	BX	100
CDR01BX222B---	2,200	K, M	BX	100
CDR01BX272BK--	2,700	K	BX	100
CDR01BX332B---	3,300	K, M	BX	100
CDR01BX392AK--	3,900	K	BX	50
CDR01BX472A---	4,700	K, M	BX	50
CDR02BP221B---	220	J, K	BP	100
CDR02BP271BJ--	270	J	BP	100
CDR02BX392BK--	3,900	K	BX	100
CDR02BX472B---	4,700	K, M	BX	100
CDR02BX562BK--	5,600	K	BX	100
CDR02BX682B---	6,800	K, M	BX	100
CDR02BX822BK--	8,200	K	BX	100
CDR02BX103B---	10,000	K, M	BX	100
CDR02BX123AK--	12,000	K	BX	50
CDR02BX153A---	15,000	K, M	BX	50
CDR02BX183AK--	18,000	K	BX	50
CDR02BX223A---	22,000	K, M	BX	50

1/ See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:54Z
Check the source to verify that this is the current version before use.

TABLE I. - Continued

Type designation 1/	Capacitance	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage
	pF			volts, dc
CDR03BP331B---	330	J, K	BP	100
CDR03BP391BJ--	390	J	BP	100
CDR03BP471B---	470	J, K	BP	100
CDR03BP561BJ--	560	J	BP	100
CDR03BP681B---	680	J, K	BP	100
CDR03BP821BJ--	820	J	BP	100
CDR03BP102B---	1,000	J, K	BP	100
CDR03BX123BK--	12,000	K	BX	100
CDR03BX153B---	15,000	K, M	BX	100
CDR03BX183BK--	18,000	K	BX	100
CDR03BX223B---	22,000	K, M	BX	100
CDR03BX273BK--	27,000	K	BX	100
CDR03BX333B---	33,000	K, M	BX	100
CDR03BX393AK--	39,000	K	BX	50
CDR03BX473A---	47,000	K, M	BX	50
CDR03BX563AK--	56,000	K	BX	50
CDR03BX683A---	68,000	K, M	BX	50
CDR04BP122CJ--	1,200	J	BP	200
CDR04BP152C---	1,500	J, K	BP	200
CDR04BP182CJ--	1,800	J	BP	200
CDR04BP222C---	2,200	J, K	BP	200
CDR04BP272CJ--	2,700	J	BP	200
CDR04BP332C---	3,300	J, K	BP	200
CDR04BX393BK--	39,000	K	BX	100
CDR04BX473B---	47,000	K, M	BX	100
CDR04BX563BK--	56,000	K	BX	100
CDR04BX823AK--	82,000	K	BX	50
CDR04BX104A---	100,000	K, M	BX	50
CDR04BX124AK--	120,000	K	BX	50
CDR04BX154A---	150,000	K, M	BX	50
CDR04BX184AK--	180,000	K	BX	50

1/ Complete type designation will include additional symbol(s) to indicate capacitance tolerance, rated voltage, and voltage-temperature limits, as applicable.

REQUIREMENTS:

Dimensions and configuration: See figure and table I.

Case type: Multi-layer, unencapsulated, monolithic.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature range: -55°C to +125°C.

Marking: Full marking, except style CDR01, in accordance with MIL-C-55681. Style CDR01 shall have minimum marking in accordance with MIL-C-55681.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:54Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL
Navy - AS, OS
Air Force - 11, 17, 80
DSA - ES

User activities:
Army -
Navy - MC, SH
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5910-1016-1)

* U.S. GOVERNMENT PRINTING OFFICE: 1974—713-153/4701

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:54Z
Check the source to verify that this is the current version before use.