
INCH-POUND

MIL-P-55149/1D
16 July 1991
Superseding
MIL-P-55149/1C
17 August 1990

MILITARY SPECIFICATION SHEET

POSTS, BINDING, ELECTRICAL (INSULATED), TYPES PB01FA01 TO PB01FA04, INCLUSIVE

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-P-55149.

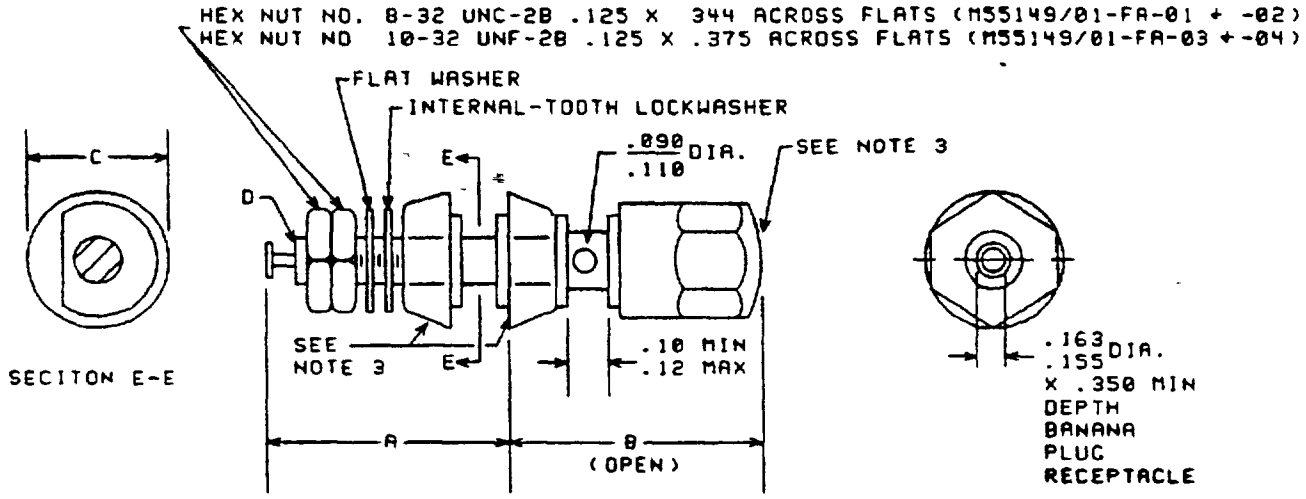

PART NUMBER	INSULATION COLOR	A	B MAX	C	D	USED ON PANEL THICKNESS (REF INFO.)
M55149/01-FA-01	RED	0.690	0.98	0.468	8-32 UNC-2A	.062 TO .188
M55149/01-FA-02	BLACK					
M55149/01-FA-03	RED	0.870 MIN 0.910 MAX	1.05	0.640	10-32 UNF-2A	.062 TO .250
M55149/01-FA-04	BLACK					

FIGURE 1. CONFIGURATION AND DIMENSIONS.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is .xxx±.015 inch.
3. These are insulated portions.
4. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes. However, parts shall remain interchangeable. Shape of insulated portions is optional as long as function of the binding post is not affected.
5. The wire hole shall be perpendicular to the flat on the nonturn feature, and the OD of this hole shall be no more than 0.005 inch above the base washer.

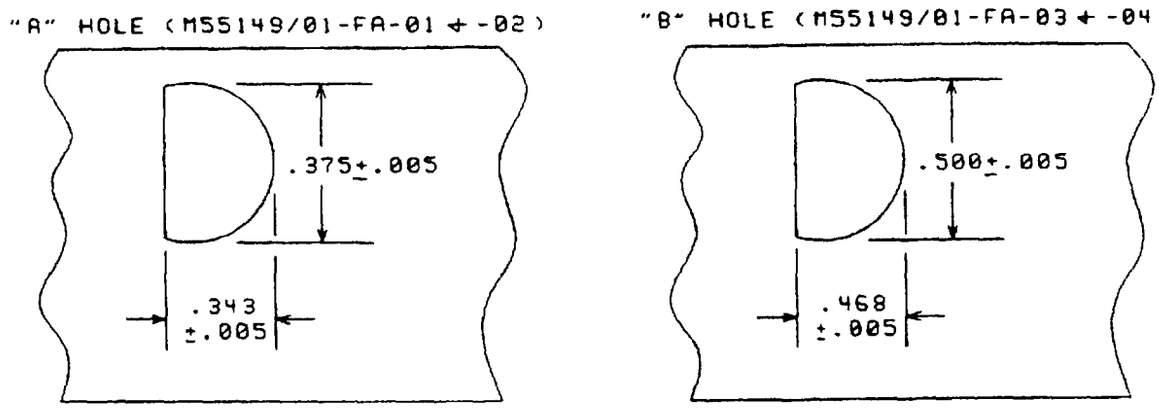


FIGURE 2. TEST-MOUNT HOLE.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Metal finish: Gold plate.

Dielectric withstanding voltage:

(a) Special preparations or conditions - See figure 2.
(b) Magnitude of test voltage - 1,500 Vac rms.

Solderability of solder terminal end: Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.

Insulation resistance: Applicable.

Contact resistance: Applicable.

Substitution data: See table 1.

TABLE 1. Substitution data.

Part Number in MIL-P-55149/1D	Part Number in MIL-P-55149/1B
M55149/01-FA-01	PB01FA01
M55149/01-FA-02	PB01FA02
M55149/01-FA-03	PB01FA03
M55149/01-FA-04	PB01FA04

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army-ER
Navy-EC
Air Force-85

Review activities:
Army-MI
Air Force-99
DLA-GS

Preparing activity:
Army-ER

(Project 5940-1124)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:28Z
Check the source to verify that this is the current version before use.