MIL-T-55164/3F
28 January 1987
SUPERSEDING
MIL-T-55164/3E
15 December 1983

MILITARY SPECIFICATION SHEET

TERMINAL BOARDS, MOLDED, BARRIER,

SCREW TYPE, CLASS 39TB

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the terminal boards described herein shall consist of this document and the latest issue of Specification MIL-T-55164.

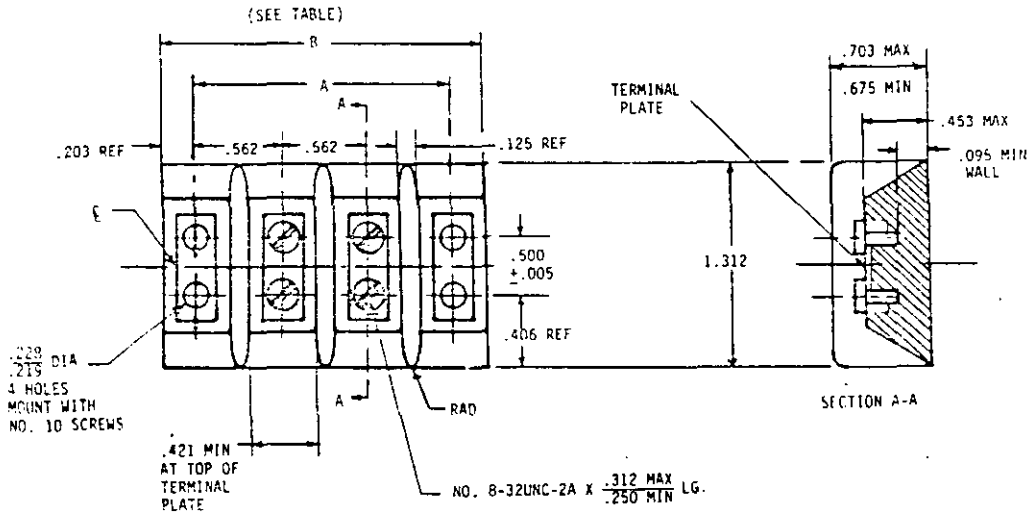


Figure 1 Terminal Board.

INCHES	MM	INCHES	MM
.005	0.13	.406	10.31
.095	2.41	.421	10.69
.125	3.18	.453	11.51
.203	5.16	.500	12.70
.219	5.56	.562	14.27
.228	5.79	.675	17.15
.250	6.35	.703	17.86
.312	7.92	1.312	33.32

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

NOTES

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only.
3. Unless otherwise specified, tolerance is ±.016 inch.
4. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

TABLE I Dimensions.

Terminal Board Type Designation 2/	Dimensions 1/ A		B	
	inches	(mm)	inches	(mm)
39TB2_	1.688	(42.88)	2.109	(53.57)
39TB3_	2.250	(57.15)	2.688	(68.28)
39TB4_	2.812	(71.42)	3.250	(82.55)
39TB5_	3.375	(85.73)	3.812	(96.82)
39TB6_	3.938	(100.03)	4.375	(111.13)
39TB7_	4.500	(114.30)	4.938	(125.43)
39TB8_	5.062	(128.57)	5.500	(139.70)
39TB9_	5.641	(143.28)	6.062	(153.97)
39TB10_	6.203	(157.56)	6.625	(168.28)
3/ 39TB11_	6.750	(171.45)	7.188	(182.58)
39TB12_	7.328	(186.13)	7.750	(196.85)
3/ 39TB13_	7.891	(200.43)	8.312	(211.12)
39TB14_	8.453	(214.71)	8.875	(225.43)
3/ 39TB15_	9.016	(229.01)	9.438	(239.73)
39TB16_	9.578	(243.28)	10.000	(254.00)
3/ 39TB17_	10.141	(257.58)	10.562	(268.27)
39TB18_	10.703	(271.86)	11.141	(282.98)
39TB19_	11.265	(286.13)	11.703	(297.26)
39TB20_	11.827	(300.14)	12.265	(311.53)
39TB21_	12.389	(314.68)	12.827	(325.81)
39TB22_	12.951	(328.96)	13.389	(340.08)
39TB23_	13.513	(343.23)	13.951	(354.36)

1/ Tolerances on terminal boards up to and including 6 inches in length:

for A dimension: +.031, -.016
for B dimension: +.031, -.062

Over 6 inches in length:

for A dimension: +.047, -.031
for B dimension: +.047, -.062

These tolerances are not meant to affect the nominal .562 inch dimension between terminal rows. The nominal .562 inch dimension shall be maintained to permit use of such auxiliary hardware as fanning strips, identification plates, etc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

2/ Add letter B, F or H for temperature range to complete type designation.

3/ Not to be used for new design.

REQUIREMENTS

Terminal Boards:

Dimensions and Configuration: See Figure 1 and Table I.
Voltage rating (maximum): 600 volts.
Current rating: 30 amps.
Plastic material - Terminal Boards: See Table II.

Table II. Requirements for Plastics.

Terminal Board Class 1/	Maximum Temperature (°C)	Materials	Applicable Specification
B	130	GPT-30F	MIL-M-24519
F	155	GDI-30F SDG-F MAI-60	MIL-M-14
H	220	MSI-30	MIL-M-14

1/ Terminal boards of a higher temperature classification may be substituted for a lower temperature classification terminal board.

Dielectric withstanding test voltage: 4,000 volts rms.

Terminal Board Lug Connector: TBLD 39 or TBLS 39.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

Custodians:

Army - ER
Navy - SH
Air Force - 85

Review Activities:

Army - AV, AR, MI
Navy - OS, EC
Air Force - 17, 99

User Activities:

Army - ME, AT
Navy - MC, AS
Air Force -

Preparing Activity:

Army - ER

(Project 5940-0993-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.