MIL-C-20006F(NU)
4 May 1979
Superseding
MIL-C-20006E(SA)
9 October 1970

MILITARY SPECIFICATION

CLOTHES STOP

This specification is approved for use by Navy Clothing & Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type of clothes stop.

2. APPLICABLE DOCUMENTS

* 2.1 Issues of Documents. The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

T-T-881	Twine, Cotton, Seine
QQ-S-698	Steel, Sheet and Strip, Low Carbon

MILITARY

MIL-B-17757	Boxes, Shipping, Fiberboard (Modular Sizes)

STANDARDS

FEDERAL

FED-STD-191	Textile Test Methods

MILITARY

MIL-STD-105	Sampling Procedures and Tables for inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

Beneficial Comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Navy Clothing and Textile Research Facility, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:12Z
Check the source to verify that this is the current version before use.

(Copies of specifications, drawings, standards, and publications required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Law and Regulations

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402).

2.2 Other Publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on the date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A-90 WEIGHT OF COATING ON ZINC-COATED (GALVANIZED) IRON OR STEEL ARTICLES

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

NATIONAL MOTOR FREIGHT CLASSIFICATION

(Application for copies should be addressed to American Trucking Associations, Attn: Traffic Department, 1616 P. Street, N. W. Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606).

3. REQUIREMENTS

3.1 Guide Sample. Samples, when furnished, are solely for guidance and information to the Contractor (see 6.3). Variations from this specification may appear in the sample, in which case the specification shall govern.

3.2 First Article Approval. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Material.

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:12Z
Check the source to verify that this is the currentversion before use.

* 3.3.1 Twine, Cotton, Seine. The twine shall conform to type I size 48 of T-T-881. As an alternate the twine may be a blend of polyester/cotton which contains no more than 50% or less than 30% polyester with a minimum breaking strength of 77 lbs. A certificate of compliance shall be submitted for these requirments.

* 3.3.2 Tips, Steel. The tips shall be fabricated from steel strip, cold rolled, conforming to No. 2 or 3 finish, dead soft temper, with either No. 1, 2, 3, 4, 5 or 6 edge of QQ-S-698; zinc electroplated no less than 0.061 ounces per square foot, and the plating thickness of 0.010 (± 0.001) inch. The tips shall be 9/32 to 11/32 inch long and sufficiently wide to completely encircle the twine. All edges shall be smooth and free from burrs, slivers and sharp edges. The plated surface shall show no evidence of peeling, blistering or corrosion.

3.4 Design. The clothes stop shall be one piece construction with zinc plated steel tips securely clinched and encircling the twine close to each end.

3.5 Construction. Twenty-five (25) clothes stops shall be manufactured in a continuous length. The steel tips shall be securely clinched and shall completely encircle the twine at alternate intervals with first 19-1/2 to 20-1/2 inches and then 3/8 to 5/8 inch of twine between succeeding tips. The first and last tips of the continuous length shall be 3/16 to 5/16 inch from each end.

3.6 Performance Testing of End Item. The minimum force to remove the steel tips from the twine shall be 19 lbs. when tested as specified in 4.4.

3.7 Figure. Figure 1 is furnished for information only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.8 Workmanship. The finish clothes stops shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for Inspection. Unless otherwise specified in the contract, contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:12Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of Compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of Inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First Article Inspection. When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

* 4.4 Quality Conformance Inspection. Inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4.1 Component and Material Inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, materials listed in table I shall be tested for the characteristics specified and in accordance with the referenced test methods. The lot size shall be expressed in pounds and the sample unit shall be a 4 foot length of zinc coated strip steel. The inspection level shall be S-1 and the acceptable quality level shall be 6.5 test failures per hundred units.

Table I. - Testing of Components

Component	Characteristic	Requirement reference	Test Method
Zinc coated strip steel	Weight of coating	3.3.2	ASTM 1/ Method A90
	Thickness	3.3.2	Micrometer 2/
	Identification of coating	3.3.2	3/

1/ Three determinations shall be made from each sample unit and the average of the results obtained reported to the nearest 0.001 ounce.
2/ Five determinations shall be made from each sample unit and the average of the results obtained reported to the nearest 0.001 inch.
3/ A certificate of compliance shall be submitted for this characteristic.

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:12Z
Check the source to verify that this is the current version before use.

4.4.2 Examination of the End Item. Examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQLs) shall be as indicated in 4.4.2.3. The sample unit and lot size shall be expressed in terms of one continuous length of 25 clothes stops each.

4.4.2.1 Visual Examination. The clothes stops shall be examined for defects classified in accordance with the list below:

Defect	Classification Major	Minor
Twine:		
a. Not type or size specified	X	
b. Any cut or broken ply	X	
c. Any chafed area	X	
d. Not continuous length		X
e. Soiled or stained		X
Tips:		
a. Any missing, broken or not securely clinched	X	
b. Any burrs, slivers or sharp edges	X	
c. Plating missing or discontinuous		X
d. Any evidence or corrosion, peeling or blistering		X
e. Not completely encircling twine		X

4.4.2.2 Dimensional Examination. The clothes stops shall be examined for the dimensional defects listed below:

a. Length of tips more or less than specified
b. Spacing between tips more or less than specified
c. End tips spaced more or less than specified from the cut ends of twine

4.4.2.3 Inspection Levels and Acceptable Quality Levels. The inspection levels and acceptable quality levels (AQLs) expressed in defects per 100 units (DHU) shall be as follows:

	AQL's	Inspection level
For examination in 4.4.2.1:		
Major	1.5	I
Total (Major and Minor combined)	6.5	I
For examination in 4.4.2.2:		
One class	6.5	S-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:12Z
Check the source to verify that this is the current version before use.

4.4.3 Examination of Packaging Requirements. An examination shall be made to determine that packaging, packing and marking complies with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per one hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: Incomplete closure of container flaps loose strapping, inadequate stapling, incorrect application of tape.
	Bulging or distortion of containers.
Content	Number of packages per container more or less than specified. Number of clothes stops per package more or less than specified. 1/

1/ For this defect only one package per container shall be examined.

4.5 Testing of the End Item. The end item shall be tested to determine the gripping strength of the steel tips in accordance with the method specified in 4.6. The physical value specified in Section 3 applies to the average of the determinations made on a sample unit. The sample unit shall be one continuous length of 25 clothes stops. The lot size shall be expressed in units of one continuous length of 25 clothes stops. The inspection level shall be S-1 and the acceptable quality level shall be 6.5 test failures per hundred units.

4.6 Test for Gripping Strength of Tips.

4.6.1 Test Specimens. Five specimens shall be tested from each sample unit. The specimen shall consist of a length of twine with a tip at one end. The specimens shall be selected so that the tips to be tested are a minimum of 6 feet apart.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:12Z
Check the source to verify that this is the current version before use.

4.6.2 Apparatus.

4.6.2.1 Testing Machine. The testing machine shall be described in Method 5100 of FED-STD-191. In addition, a slotted metal plate shall be positioned horizontally and placed flat in or on the top jaw assembly. The distance between the upper jaw (slotted metal plate) and the lower jaw shall be 3-15/16 to 4-1/16 inches.

4.6.2.2 Metal Plate. The metal plate shall be approximately 5 inches long by 1-1/2 inches. The plate shall have a 4 inch tapered, smoothly finished slot, centered and running lengthwise from an inside dimension of 1/32 inch in width, increasing to a width of 1/4 inch at the outside edge (see figure 1). It is not required that the plate be of a single piece of metal. The slot may be formed by a clamped or bolted assembly of two metal bars of plates properly spaced apart.

4.6.3 Procedure. The clothes stop shall be passed upward, tip first, through the jaw assembly and through the wide end of the slot until the tip clears the plate and then moved horizontally toward the narrow end of the slot until the end of the tip rests on top of the metal plate. The free end of the specimen shall be fastened in the lower jaw or clamp. Tips that slip through the slot without being removed from the twine shall be discarded and replaced with another specimen. Should any tip buckle at the base without being removed from the twine, it shall be discarded and replaced with another specimen.

4.6.4 Report. The gripping strength of the sample unit shall be the average of the results obtained from the specimens tested and shall be reported to the nearest pound.

5. Packaging.

5.1 Preservation-Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. One (1) continuous length of 25 clothes stops shall be evenly folded or coiled to form a bundle having an approximate length of 23 inches. Each bundle shall be secured by any suitable commercial method.

5.1.2 Level C (Commercial) Packaging. Clothes stops shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as normally used by the contractor for retail distribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:12Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Two hundred bundles of clothes stops, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class weather-resistant, grade V2s, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.2 Level B. Two hundred bundles of clothes stops, packaged as specified in 5.1 shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 275, size 2A of MIL-B-17757. Fiberboard for the liner shall conform to type CF, class domestic, variety DW, grade 200 of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.2.1 Weather-resistant Fiberboard Container. When specified (see 6.2), the shipping container shall be grade V2s, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Level C (Commercial) Packing. Clothes stops, packaged as specified in 5.1, shall be packed in a manner to insure service acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended Use. The clothes stops are intended for use by Navy personnel for tieing rolled clothing and for hanging clothing to dry.

6.2 Ordering Data. Procurement documents should specify the following:

a. Title, number and data of this specification.
b. Whether first article sample is required (see 3.2)
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2)
d. When weather-resistant grade fiberboard shipping container are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:12Z
Check the source to verify that this is the currentversion before use.

6.3 Samples. For access to samples, address the procuring activity issuing the invitation for bids.

* 6.4 The margin of this specification are marked with an asterisk (*) to indicate where changes (additions, modification corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assume no liability whatsoever for any inaccuracies in these notations. Bidders are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian
Navy - NU

Preparing Activity
Navy - NU

Project No. 8465-N667

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:12Z
Check the source to verify that this is the current version before use.

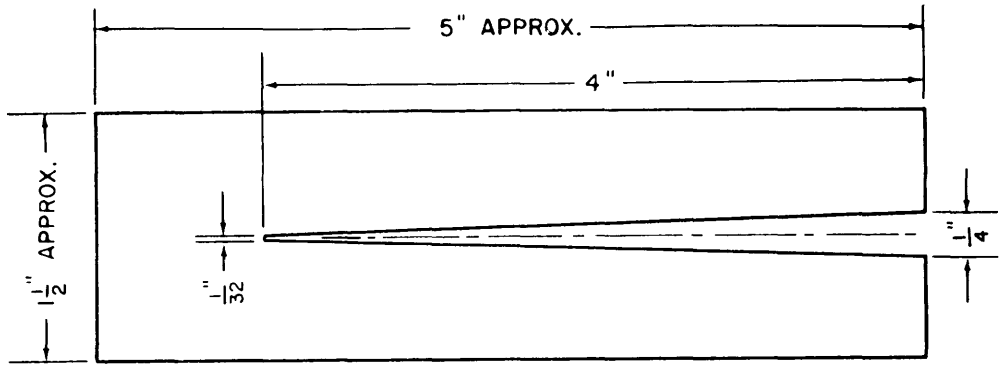


FIGURE 1 - SLOTTED METAL PLATE

☆U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/2089

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-20006F(NU) CLOTHES STOP

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:12Z
Check the source to verify that this is the current version before use.

FOLD

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:12Z
Check the source to verify that this is the current version before use.