INCH-POUND
MIL-DTL-19984F
w/AMENDMENT 2
28 April 2023
SUPERSEDING
MIL-DTL-19984F
w/AMENDMENT 1
13 September 2022

DETAIL SPECIFICATION

SHIRT, MAN'S: KHAKI; WITH QUARTER-LENGTH SLEEVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a khaki, quarter-length sleeve, man's shirt made of polyester/wool tropical material (see 6.1).

1.2 Classification. The shirts are of the following classes and sizes, as specified (see 6.2).

1.2.1 Classes.

Class 1 - Shirt, polyester/wool (standard)

Class 2 - Shirt, polyester/wool (optional)

1.2.2 Schedule of sizes. The shirt will be available in neck sizes 13-1/2 inches through 18-1/2 inches inclusive, in 1/2-inch increments.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

COMMERCIAL ITEM DESCRIPTIONS

A-A-50199	-	Thread, Polyester Core, Cotton or Polyester-Covered
A-A-59992	-	Cloth, Interfacings: Woven, Cotton and Synthetic
A-A-59994	-	Button, Sewing Hole, and Button, Staple, (Plastic)

Comments, suggestions, or questions on this document should be addressed to Marine Corps Systems Command, 2200 Lester Street, Quantico, VA 22134 ATTN: SEAL-SE-STDS or emailed to USMC_STDZ@usmc.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-21115 - Cloth, Tropical: Wool, Polyester/Wool

MIL-C-29404 - Cloth, Tropical: Polyester and Wool

MIL-DTL-32075 - Label: For Clothing, Equipage, and Tentage, (General Use)

MIL-C-44296 - Cloth, Fusibles

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-1492 - Provisions for Evaluating Quality of Men's Shirts

(Copies of these documents are available online at https://quicksearch.dla.mil/.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC TM117 - Colorfastness to Heat: Dry (Excluding Pressing)

AATCC TM132 - Colorfastness to Drycleaning

(Copies of these documents are available online at www.aatcc.org.)

ASTM INTERNATIONAL

ASTM D6193 - Standard Practice for Stitches and Seams

(Copies of this document are available online at www.astm.org.)

SAE INTERNATIONAL

AMS-STD-595 - Colors Used in Government Procurement

(Copies of this document are available online at www.sae.org.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Inspections.

3.1.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.1.2 Conformance inspection. When specified (see 6.2), a sample shall be subjected to conformance inspection in accordance with 4.4.

3.2 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.3 Materials and components.

3.3.1 Basic material. The basic material for each class of shirt shall be as specified in 3.3.1.1 and 3.3.1.2. The shade of parts cut from ends (see table IV, operation 1.b) shall be a good match to the shade of the main assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

3.3.1.1 Class 1 shirt. The basic material for the class 1 shirt shall be polyester/wool tropical cloth conforming to MIL-C-29404, type I, when tested as specified in 4.5.1. The shade shall be khaki USMC M-1.

3.3.1.2 Class 2 shirt. The basic material for the class 2 shirt shall be 55 percent polyester/45 percent wool tropical cloth conforming to MIL-DTL-21115, type III, class 3, when tested as specified in 4.5.1. The shade shall be khaki USMC M-1.

3.3.2 Interlining (interfacing) facing. The material for interfacing the collar, pocket flaps, and front shall be polyester cloth conforming to A-A-59992, type II, class 4 when tested as specified in 4.5.1. As an alternate, a non-woven fusible conforming to MIL-C-44296, type V, class 2 or 3, style B may be used. The color of the interfacing shall be natural.

NOTE: The terms interlining and interfacing are used interchangeably in this specification.

3.3.3 Thread. The threads used in the construction of the shirt shall conform to the requirements of A-A-50199, type I when tested as specified in 4.5.1. Threads shall match the shade requirement specified in table I.

TABLE I. Thread requirements.

Use (seam type)	Tex	Ply	Shade
General seaming and overedging	31-35 for needle and bobbin	2	Good match to the shade of the basic material (see 3.3.1 and 6.5)
Button and buttonhole	46-60 for needle and bobbin	2 or 3	

3.3.4 Buttons. The buttons shall conform to A-A-59994, type I, class 1, style 24, 20 ligne when tested as specified in 4.5.1. The color of the buttons (see 6.3.1) shall match Khaki 475, color chip 23420 of AMS-STD-595, with a glossy finish.

3.3.5 Labels.

3.3.5.1 Combination identification and instruction label. Each shirt shall have a combination identification and instruction label conforming to MIL-DTL-32075, type VI, class 15 when tested as specified in 4.5.1. The label shall measure not less than 2-1/2 inches wide by 1-1/2 inches long. The label shall be legibly printed with the following information:

SHIRT, MAN'S, KHAKI

QUARTER-LENGTH SLEEVES

CONTRACT NO. SPO-100-00-0-0000 (EXAMPLE)

NAME OF CONTRACTOR:

FIBER CONTENT: 55% POLYESTER/45% WOOL (EXAMPLE)

DRYCLEAN OR LAUNDER BY HAND.

CAUTION: BLEACH, FABRIC SOFTENER, DRYER SHEETS, STARCH AND/OR HOT WATER (EXCEEDING 100 °F) WILL HARM THE FABRIC OF THE SHIRT.

3.3.5.2 Alternate combination identification and instruction label and alternate size label. As an alternate to the printed labels, the identification and instruction information and the size information may be marked on the shirt by heat transfer, direct printing, or stamping. The marking shall conform to MIL-DTL-32075, type III or IV, class 15 when tested as specified in 4.5.1. The printing shall have a rating of 3.5 minimum for colorfastness to laundering and dry cleaning when tested in accordance with MIL-DTL-32075.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

3.3.5.3 Size label, cloth, printed. The size label shall conform to MIL-DTL-32075, type VI, class 2 and shall measure not less than 1-1/4 inches wide by 1-1/2 inches long. The size designation, consisting of the neck size and the National Stock Number (NSN), shall be indicated on the label as shown in the following example. The NSN may be omitted from the size label, but when omitted, the NSN shall be included in the combination identification and instruction label.

15-1/2

8405-01-196-1768

3.3.5.4 Barcode label. Each shirt shall be individually barcoded with a paper label/tag conforming to MIL-DTL-32075, type VIII, class 17 when tested as specified in 4.5.1. The tag shall be attached to the item by a fastener. The label's location and attachment method shall cause no damage to the item. The barcoding element shall be a 13-digit NSN and the appropriate 12-digit Universal Product Code (UPC) assigned to the NSN by the Government. The initials "UPC" shall appear beneath the code. The barcodes for the NSN and UPC shall be a medium to high density and shall be located so that they are completely visible on the item when the item is folded or packaged as specified herein.

3.4 Design. The shirts are in the United States Marine Corps design (see figure 1 and figure 2). The shirt is semi-form fitting at the waist and has a five-button front placket, two patch-type chest pockets with buttoned flaps, a two-piece back yoke, an open collar, and quarter-length sleeves. Both classes of shirts have sharp, permanent creases on the front and back of the shirts (see 3.4.1).

3.4.1 Permanent creases. Each shirt shall have three sharp, vertical, permanent creases on the shirt back (excluding the yoke) and two sharp, vertical, permanent creases on the shirt front including sharp, permanent creases through the front pockets and front pocket flaps. The sleeves shall also have a permanent crease along the top, opposite the seam. Each permanent crease shall be a single, continuous line formed by applying a 1/16-inch (nominal) non-staining, silicone adhesive bead to the back side of the basic material. The silicone bead shall be applied to the following cut parts prior to assembly: back, fronts, pockets, sleeves, and top pocket flaps. Each bead shall be applied evenly and equally in a straight, vertical line from the top to the bottom of each cut part. The finished permanent creases shall show no evidence of flaking, decomposition, failure to retain creases, cracking, staining, strike back onto face of material, or increased stiffness. The creases shall have a minimum rating of "3" when evaluated for permanent crease resistance to dry heat (3 exposures) and steam pressing (3 exposures) and perchloroethylene solvent when tested as specified in 4.5.5.1, and shall have a minimum rating of "pass" for resistance to hot water when tested as specified in 4.5.5.2.

3.5 Figures. Figure 1 and figure 2 are provided for information only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.6 Patterns. Standard patterns will be furnished by the Government (see 6.2). Government patterns show size, seam allowances, and directional lines for cutting, and are marked or notched for proper placement and assembly of component parts. The directional lines indicate the warp direction of the cloth unless otherwise indicated on the patterns. The list of pattern parts and computer nomenclature in 3.6.1 is provided to ensure that the pattern set provided is complete. The Government patterns shall not be altered in any way and shall only be used for cutting the contractor's working patterns. The working patterns shall be identical to the Government patterns, except that additional notching, if needed to facilitate manufacture, is permitted on the contractor's working patterns. Minor modifications are permitted where necessary to accommodate the manufacturer's processes and the use of automated equipment, provided the modifications do not alter the dimensional, serviceability, or appearance requirements cited in this document or governed by the Government pattern.

3.6.1 Pattern parts. Component parts shall be cut from the materials specified and in accordance with the number of parts specified in table II. Requirements for cutting component parts that are not included in table II are included in 3.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

TABLE II. Pattern parts.

Material	Nomenclature	Pattern abbreviation	Cut parts
Basic material (see 3.3.1)	Front	S19984-FRONT	2
	Back	S19984-BACK	1
	Yoke	S19984-YOKE	2
	Sleeve	S19984-SLEEVE	2
	Collar	S19984-COLLAR	2
	Pocket	S19984-POCKET	2
	Flap	S19984-FLAP	4
Interfacing 1/ (see 3.3.2)	Collar interfacing	S19984-COLLAR INTRLN	1
	Pocket flap interfacing	S19984-FLAP	2
	Front interfacing	S19984-FRONT INTLIN	2
Shaper	Finish pocket	S19984-FINISH POCKET	2
	Finish flap	S19984-FINISH FLAP	4

NOTE:

1/ Pattern part abbreviations for interlining continue to be used in this specification and will be changed to interfacing in the next pattern change.

3.7 Construction. Construction of the shirt shall conform to the requirements specified in table III and be manufactured in accordance with 3.8. Stitch and seam types shall be as specified in ASTM D6193.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

TABLE III. Construction requirements.

Construction feature	Requirement
1. Thread	
a. Thread type and size	Table I
b. Thread tension	Maintained so that there is no tight, loose, or unbalanced stitching.
c. Thread shade on outside of shirt	Consistent thread shade on the outside of the shirt. Multiple shades of thread on the outside of the shirt are not allowed.
d. Thread breaks (all stitch types)	Secured by stitching back of the break not less than 1/2 inch.
	If 401 stitch type, repaired using 301 stitch type.
2. Stitches and seams	
a. Stitch and seam types	See 3.8
b. Stitches per inch	See 3.8
c. 401 stitch type	Loops of the chain finish on the inside of the shirt.
d. Overedging	Knife set to trim the loose threads and raveled edge without cutting the material.
e. Seams and seam allowances	Maintained with seam uniformly sewn so that no raw edges, runoffs, twists, pleats, puckers, gathers, other distortions, or open seams result.
f. Beginning and ending of seams	Start and finish evenly (see 2.h and 2.i).
g. Joined components	Lie smooth and flat.
h. Ends of seams and stitching – 301 stitch type	If not caught in another line of stitching: backstitched not less than 1/4 inch.
	If the end of a continuous line of stitching (except label): overlapped not less than 1/2 inch.
	If label stitching: overlapped not less than 3 stitches.
i. Ends of seams and stitching – 401 stitch type	Caught in other seams or stitching.
j. Skipped stitches (301 or 401)	Repaired by using 301 stitch type.
k. Edge, raise, or topstitching	Positioned 1/16 inch from the edge.
l. Additional bastings	Acceptable provided the basting thread does not show on the outside of the finished item.

3.8 Manufacturing operations requirements. Following the exact sequence of operations specified in table IV is not required provided the finished shirts meet the finished form, fit, and function requirements as those produced by following the sequence of operations as specified in table IV. Stitch and seam types shall be as specified in ASTM D6193. Minor modifications are permitted where necessary when using automated equipment provided the finished shirts meet the finished form, fit, and function requirements as those produced by following the operations as specified in table IV. Pressing shall be accomplished with a heated pressing iron or pressing machine to obtain the desired appearance in accordance with manufacturer suggested procedures. A steam-inflated bag-type machine shall not be used. Any additional underpressing to facilitate manufacturing is permissible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Table of operations.

No.	Operation	Stitch type	Seam type	Stitches per inch
1.	Cut and shade mark.			
	a. Cut the parts (see 3.6.1) as indicated on the patterns provided and in the material specified. Additional cutting requirements are provided below for those components not controlled by a furnished pattern piece.			
	b. Cut all basic material (see 3.3.1) parts from one piece of material except for the under ply of collar and under ply of pocket flaps, which may be cut from ends.			
	c. Cut the interfacing parts (see 3.3.2). As an alternate, a fusible interfacing (see 3.3.2) is allowed for the interfacing parts. The interfacing for the collar is cut on the straight (warp or filling) direction in accordance with the patterns. The fusible is applied in accordance with the manufacturer's recommended practice.			
	d. The use of drill holes is prohibited.			
	e. Mark or ticket the component parts of the shirt to ensure a uniform shade and size throughout the garment. Ensure the numbering does not show on the outside of the finished garment and, wherever possible, is covered by the seam allowance. The use of an ink pad numbering machine, rubber stamp, or pencil is allowed. The following methods are not allowed: corrosive metal fastening devices, sew-on shade tickets, any means of attachment that leaves a hole after removal, and adhesive-type tickets which discolor or leave adhesive on the material upon removal of tickets.			
2.	Replace defective or damaged parts.			
	a. During cutting, replace all parts containing defects such as a hole, cut, tear, smash, mend, burn, scorched area, open place, loose yarn, snagged thread, area of no dye penetration, dye streak, missing yarn, broken yarn, thin place, shade bar, or woven in waste.			
	b. During the manufacturing process, replace all parts with damage such as, but not limited to: needle chews, scissor or knife cuts, tears, holes, mends, or burns.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
3.	Make pockets and permanent creases on pockets.			
	a. Finished appearance. The hem of the pocket is uniformly stitched and finishes smooth and flat. The chest pockets are uniform in size and shape in accordance with the patterns. The permanent crease is a sharp, continuous, even line centered in the pocket width and is uniform in appearance.			
	b. Hard press and crease the pocket from the top of the pocket to the bottom of the pocket in a straight, vertical line centered in the pocket width as indicated by the marks on the patterns.			
	c. Apply an even, continuous, 1/16-inch wide silicone bead to the crease in the pocket on the back side of the basic material.			
	d. Fold the pocket hem in accordance with the fold line indicated on the pattern and hem with two rows of stitching, 1/4-inch gage, with the outer row 1/16 inch from the folded edge.	301 or 401	EFa-2	12-16
	e. Turn under and crease the side and bottom edges of the pocket in an edge creasing machine in accordance with the finished shaper. The creased pocket shall conform to the finished pocket shaper.			
4.	Make pocket flaps and permanent creases on pocket flaps.			
	a. Finished appearance. The pocket flap is uniformly stitched with the seams worked out to the edges. The flap finishes smooth and flat without twists, pleats, puckers, or raw edges. The flaps are uniform in shape and size in accordance with the patterns. The buttonholes are securely tacked at each end. The sharp, permanent crease is a continuous, even line, centered in the pocket flap width and is uniform in appearance.			
	b. The flap is made of two plies of basic material and one ply of interfacing. If used, the alternate fusible interfacing is applied to the underside of the outer ply.			
	c. Hard press and crease the outer ply of the pocket flap from the top to the bottom of the pocket flap in a straight, vertical line, centered in the pocket flap width, as indicated by the marks on the pattern.			
	d. Apply an even, continuous, 1/16-inch wide silicone bead to the crease on the back side of the outer ply pocket flap.			
	e. Seam all plies together 1/4 inch from the side and bottom edges. Trim the corners and points for turning.	301	SSe-2(a)	12-16
	f. Turn the flap, working the corners and points out completely, and working the seams out to the edges in accordance with the finished pocket flap shaper. Edgestitch the flap uniformly 1/8 inch from the seamed edges. The seam finishes at the edges of the flap.	301	SSe-2(b)	12-16
	g. Trim the top edge of the flap evenly.			
	h. Make a vertical, straight-type buttonhole, cut 5/8 inch long, through the center of each flap, securely tacking each end. The lower end of the buttonhole finishes 5/8 to 1/2 inch above the center point. The buttonhole purling finishes on the outside of the flap.	Buttonhole		55 per buttonhole including tack

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
5.	Make collar.			
	a. Finished appearance. The collar is uniformly stitched and finishes smooth and flat without twists, puckers, pleats, or other distortions. The points are worked out completely and are uniform in length. The seams are worked to the edge of the collar.			
	b. The collar consists of two plies of basic material with a single ply of interfacing between them. As an alternate, the topcollar may be fused and the topcollar shall be sewn such that the basic material is to the outside.			
	c. Properly position the undercollar, interfacing, and topcollar together and seam with a 1/4-inch seam from the top and side edges.	301	SSe-2(a)	12-16
	d. Trim the points and turn collar on a heated collar point turning and pressing machine, working the points out completely and working the seams to the edges.			
	e. Edgestitch the collar uniformly 1/8 inch from the seamed edge.	301	SSe-2(b)	12-16
6.	Attach interfacing to front facing.			
	a. Position interfacing on the respective front facing with the edges even. Stitch the two plies together at the gorge, shoulder, back edge of facing, and across the bottom of the interfacing. OR	301	SSe-2(b)	12-16
	If alternate interfacing is used, position interfacing on the respective front facing with the edges even. Press the interfacing to the front piece.			
	b. Overedge stitch shoulder and back edge of facing.	502 or 503	SSa-1	6-8
7.	Join yoke to back and make permanent creases in back.			
	a. Finished appearance. The yoke is seamed to the back without pleats, puckers, twists, raw edges, or other distortions, and is uniform in appearance and placement. Each permanent crease is a continuous even line of uniform appearance.			
	b. Hard press and crease the back from the top to the bottom of back with three straight vertical creases positioned in accordance with the marks on the pattern (one crease at the center of the back and one on each side of the center equidistant from the center crease and side seams).			
	c. Apply an even, continuous 1/16-inch bead of silicone to the center of each of the three pre-pressed creases on the back side of the basic material.			
	d. Position the top edge of the back between the two lower plies of the yoke with the edge even and stitch together with a 1/2-inch seam. Turn the yoke to the finished position and topstitch the yoke with 1/4-inch gage. The outer row of the stitching shall be 1/16 inch from the folded edge.	301	SSq-3(a) and SSq-3(b)	12-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
8.	Make permanent creases in fronts.			
	a. Hard press and crease each front from the top to the bottom with a straight vertical crease in accordance with the marks on the pattern.			
	b. Apply an even, continuous, 1/16-inch silicone bead to the center of the pre-pressed crease in each front on the back side of the basic material.			
9.	Attach label.			
	a. The combination identification and instruction label is attached on the inside of the shirt approximately 3/4 inch from the front folded edge and 2 to 3 inches up from the bottom finished edge of the shirt on the left side as worn. Stitch the label on all four sides 1/16 to 3/32 inch from the edges. The stitching shall not be through the printing. As an alternate, the label may be marked directly on the shirts (see 3.3.5.2).	301	LSbj-1	8-12
10.	Set pockets and pocket flaps.			
	a. Finished appearance. The pockets and pocket flaps are uniform in appearance and placement and lie smooth and flat without pleats, puckers, twists, or raw edges. The pockets and pocket flaps are parallel to the front edge of shirt when buttoned. The pockets and flaps, on left and right sides respectively, shall be in alignment with each other. The permanent crease on the pocket flaps, pockets, and fronts are vertically aligned and exhibit a single, continuous, unbroken line on each front. The pockets and flaps conform to the measurement shown in table VI.			
	b. Mark the fronts for position of the pockets and pocket flaps, as indicated by the patterns.			
	c. Position the raw edge of the pocket flap in line with the mark on the front. Seam the pocket flap to the front 1/8 inch from the raw edge.	301	LSbl-2(a)	12-16
	d. Turn down the flap at the seam and topstitch 1/4 inch from the raised edge.	301	LSbl-2(b)	12-16
	e. Position the pre-creased pocket at the mark on the front. Seam the pocket to the front uniformly 1/16 inch from the side and bottom turned edges, securely tacking the top corners.	301	LSd-1	12-16
11.	Seam shoulders.			
	a. Finished appearance. The shoulder seam is uniformly stitched and finishes evenly without pleats, puckers, twists, or raw edges. The back is lapped on the fronts.			
	b. With a 1/2-inch seam allowance, join the yoke and front together at the shoulders with a double-lapped and double-stitched seam, 1/4-inch gage, with the outer row 1/16 inch from the folded edge.	301 or 401	LSc-2	12-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
12.	Set collar and attach size label.			
	a. Finished appearance. The collar is uniformly stitched to the shirt without pleats, puckers, twists, or raw edges. On the finished shirt, the ends of the collar shall be 3-3/8 (+3/16, -1/8) inches long when the collar is turned up and measured from the juncture point of the collar to the collar point. The seam joining the collar to the body of the shirt is not visible below the finished edge of the collar when the collar is properly folded and pressed at the breakline. The cloth size label, when used, is properly positioned and caught in the seam joining the collar to the shirt.			
	b. Seam the collar to the neck of the shirt on the outside, catching the interfacing in the stitching.	301	SSa-1	12-16
	c. Turn in the bottom edge of the collar and single stitch through the shirt, catching the top edge of the label. Continue the stitching with the stitching superimposed on the raised stitching of the collar (operation 7.d).	301	LSd-1 and SSe-2(b)	
13.	Set sleeves.			
	a. Finished appearance. The sleeve is set properly and uniformly stitched without pleats, puckers, twists, or raw edges.			
	b. Trim the yoke even with the back part at the armhole, if necessary.			
	c. With a 3/8-inch seam allowance, join the sleeves to the shirt body by overedging and seaming the raw edges together in one operation.	515, 516, 517, 518, or 519	SSa-2	10-14
	d. Topstitch around the armhole with two rows of topstitching 1/16-inch from the edge, 1/4-inch gage.	301 or 401	LSq-2	12-16
14.	Close sides and sleeves.			
	a. Finished appearance. The sleeve and side seams are uniformly stitched without pleats, puckers, twists, or raw edges. The seams start and finish evenly. The ends of the armhole seams are not staggered more than 3/8 inch. The back is lapped on the fronts, or the fronts on the back, but not both within the same shirt.			
	b. With a 1/2-inch seam allowance, join the fronts to the back part at the sides and close the sleeve underarm with a double lapped, double-stitched seam, staggering the ends of the armhole seam. The double row of stitching is 1/4-inch gage with the outer row 1/4 inch from the folded edge.	301 or 401	LSc-2	12-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
15.	Hem bottom of shirts.			
	a. Finished appearance. The bottom hems are uniformly stitched without twists, puckers, pleats, or other distortions, and finish 3/16 to 1/4 inch wide.	301	EFb-1	12-16
	b. Hem the sleeves of the shirt by folding the material to the inside and sew with a 1-inch (±1/8 inch) hem.			
	c. Turn the bottom of the fronts and back of the shirt with the raw edge turned in and single stitched through the shirt 1/4 inch from the upper folded edge, forming the hem.			
16.	Make buttonholes.			
	a. Finished appearance. The buttonholes are clean-cut, well-made, and correctly positioned. The buttonholes are straight-type, cut 5/8 inch long, and fit a 20-ligne sewing hole button. The purling is on the outside of the shirt. The stitching is securely caught in the fabric.			
	b. The front buttonholes are positioned according to the marks on the patterns. The bottom front buttonhole may be sewn either in accordance with the pattern marks or sewn equidistant in relation to the other front buttonholes.			
	c. Make vertical straight-type buttonholes in accordance with the marks on the pattern, securely tacking each end of the buttonhole.	Buttonhole or 101 (zigzag)		55 per buttonhole including tack
17.	Attach buttons.			
	a. The buttons are securely sewn and properly engage the buttonholes in the buttonhole and pocket flaps.			
	b. Sew five 20-ligne sewing hole buttons through the right front, with the center of the buttons 5/8 to 3/4 inch from the front edge of the button stand.	1 Crossover, C Style		21-24 per button 16-18 per button
	c. Sew one 20-ligne sewing hole button to each pocket through the hem.	1 Crossover, C Style		21-24 per button 16-18 per button
18.	Identification and instruction marking and size marking.			
	a. When marking is used in lieu of a cloth identification and instruction label and a size label, the identification and instruction marking is applied to the shirt at the location specified for the cloth label (see operation 13), and the size is marked on the inner collar at the center back.			
19.	Cleaning.			
	a. Trim all ends of stitching and remove the loose ends from the shirt or basting stitches.			
	b. Remove all spots, stains, and shared tickets or markings without injury to the material.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Table of operations – Continued.

No.	Operation	Stitch type	Seam type	Stitches per inch
20.	Pressing.			
	a. Finished appearance. The entire shirt is hard-pressed.			
	b. Press collar on a collar machine, creasing on the breakline and shaping to obtain the proper contour while pressing.			
	c. Press buttonhole placket and button stand smooth and flat.			
	d. Hard press entire shirt (fronts, back, sleeves, pocket flaps, and pockets). Button the fronts and pocket flaps.			

3.9 Finished dimensions. The shirts shall conform to the measurements in table V and table VI as defined in table VII.

TABLE V. Finished shirt measurements (inches).





Neck size	Collar length (A)	Chest (B)	Back length (C)	(Sleeve length (D)
13-1/2	16	37	30-3/4	7
14	16-1/2	39	30-3/4	7
14-1/2	17	41	30-3/4	7
15	17-1/2	43	31-1/4	7
15-1/2	18	45	31-1/4	7
16	18-1/2	47	31-1/4	7
16-1/2	19	49	31-1/4	7
17	19-1/2	51	31-3/4	7
17-1/2	20	53	31-3/4	7
18	20-1/2	55	31-3/4	7
18-1/2	21	57	31-3/4	7
Tolerance	+1/4, -1/8	±1/2	+1, -1/2	±1/4

TABLE VI. Pocket and flap measurements (inches).

Neck size	13-1/2 to 14-1/2 (inclusive)	15 to 18-1/2 (inclusive)
Pocket width	4-1/2	5-1/8
Pocket length	5-3/4	6
Flap width	4-3/4	5-3/8
Flap length at sides	1-7/8	1-7/8
Flap length at center	2-7/8	2-7/8
Overall length of pocket and flap	6-1/4	6-1/2
Tolerance	±1/8	±1/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

TABLE VII. Methods of measure.

Letter	Measurement	Method	Guidance [1/]
A	Collar length	With the collar laid flat, collar joining seam from end to end	
B	Chest	Twice the measurement from folded edge to folded edge in line with the pit of the armhole with the shirt buttoned and laid flat	
C	Back length	From the lower collar joining seam to the bottom edge of the shirt at the center back	
D	Sleeve length	From sleeve joining seam to the hem of the sleeve at the inseam	
E	Pocket width	From side edge to side edge across the top of the pocket	
F	Pocket length	From the top edge to the bottom edge of the pocket	
G	Flap width	From side edge to side edge across the top edge of the flap	
H	Flap length at sides	From the top edge to the bottom edge of the flap at the side edge	
J	Flap length at center	From the top edge to the bottom point of the flap at the center	
K	Overall length of pocket and flap	From the top edge of the flap to the bottom edge of the pocket at the center of the pocket	

NOTE:

[1/] Illustration depicts suggested guidance and the text method governs in the event of a conflict.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

3.10 Workmanship. Each finished shirt shall conform to the quality of product established by this document. Defects shall not exceed the established maximum acceptance quality limits (see 6.2) and shall not adversely affect the serviceability, appearance, and uniformity of the product.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Conformance inspection (see 4.4).

4.2 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in applicable test method documents.

4.3 First article inspection. The first article, in accordance with 3.3.1, shall be examined in accordance with 4.5.1 through 4.5.5.2 for compliance with design, configuration, workmanship, dimensional requirements, and testing as specified in this document.

4.3.1 First article samples and acceptance criteria. Unless otherwise specified in the contract (see 6.2), first article samples shall be provided. The sample size shall be as specified (see 6.2). The sample unit shall be one finished shirt. The lot size shall be expressed in units of shirts. The presence of excessive defects or failure of any testing (see 6.2) shall be cause for rejection of the first article.

4.4 Conformance inspection. Unless otherwise specified in the contract (see 6.2), conformance inspection, in accordance with 3.1.2, shall consist of the examinations and tests as specified in 4.5.1 through 4.5.5.2.

4.4.1 Component and material sampling and acceptance criteria. Unless otherwise specified in referenced documents or procurement documents (see 6.2), component and material sampling shall be in accordance with table VIII. The component lot shall be unacceptable if one or more sample units fail to meet any examination or test requirements specified in this document (see 6.2). The unit for expressing lot size and sample unit shall be in accordance with the applicable referenced documents. For the lining, the lot size shall be expressed as yards, and the sample unit for testing shall be 3 yards, full width.

TABLE VIII. Component and material sampling.

Lot size	Sample size (sample unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

4.4.2 End item sampling and acceptance criteria. Unless otherwise specified in the contract (see 6.2), sampling for inspection shall be performed for Dress/Semidress (“D/S”) shirts in accordance with the provisions of MIL-STD-1492. The sample shall be one finished shirt. The lot size shall be expressed in units of shirts. The presence of excessive defects or failure of any testing as specified (see 6.2) shall be cause for rejection of the lot.

4.5 Inspection methods.

4.5.1 Component and material examinations and tests. In accordance with 4.1, components and materials shall be examined and tested in accordance with the specified examinations and tests specified in table IX unless otherwise excluded, amended, or modified in this document or applicable procurement documents (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

TABLE IX. Component and material verification.

Material	Requirement	Verification
Basic material – class 1	3.3.1.1	MIL-C-29404
Basic material – class 2	3.3.1.2	MIL-DTL-21115
Interfacing	3.3.2	A-A-59992
Interfacing, fusible - alternate	3.3.2	MIL-C-44296
Threads	3.3.3	Per specific thread specification listed in table I
Thread, shade	3.3.3	Visual 1/
Buttons	3.3.4	A-A-59994
Buttons, shade	3.3.4	Visual 1/
Label	3.3.5	MIL-DTL-32075

NOTE:
1/ Results recorded as pass or fail.

4.5.2 In-process examination. Visual and dimensional examinations shall be made at any point or during any phase of the manufacturing process to determine whether construction details, which cannot be examined in the finished product, are in accordance with the requirements specified in section 3. Materials and components that contain defects and damages, as defined in the visual examination of 4.5.3, shall be removed from production. Any in-process nonconformance remaining in the finished shirt shall be classified as a defect in accordance with the visual examination of 4.5.3.

4.5.3 Visual examination of the end item. Before the formation of a lot, each shirt shall be buttoned and examined on an inspection table for the Dress/Semidress defects identified as "D/S" specified in MIL-STD-1492. Any shirt containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1492, which are indicated by an asterisk (*) and defects specified in table X.

TABLE X. Permanent crease defects.

Defect	Category
1. Permanent crease omitted, incorrectly positioned, not continuous, misaligned, crooked, wavy, angled, or not positioned vertically straight.	Major *
2. Front, pocket, and pocket flap crease lines do not create the appearance of a single, continuous line.	Major
3. Silicone bead is less than or greater than 1/16 inch.	Major
4. Evidence of flaking, decomposition, failure to retain crease, or cracking.	Major
5. Silicone not within the crease line, excessive silicone, missing silicone, voids, or not uniform application or appearance of silicone bead, staining or strike back through to the face of the material.	Major

4.5.4 Dimensional examination. The shirts shall be examined for conformance to the dimensions specified in table V and table VI when measured in accordance with table VII (see 6.2).

4.5.5 Permanent crease testing. Shirt lots shall be tested as specified in 4.5.5.1 and 4.5.5.2 prior to the presentation of each lot. The sample unit for each specified test shall be one shirt selected at random from the end item lot. Four test specimens shall be cut for testing from each shirt: three used for testing and one used as the standard sample for comparison to determine "pass" or "fail" results of 4.5.5.2. A single result of failure in any of the specified tests shall be recorded as a lot failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

4.5.5.1 Permanent crease resistance tests. The shirt samples shall be tested for permanent crease resistance to dry heat (3 exposures) in accordance with AATCC TM117 at a minimum of 400 °F and to steam pressing and perchloroethylene solvent (3 exposures) in accordance with AATCC TM132.

4.5.5.2 Permanency of crease test. The permanently creased test specimens shall be soaked for 30 minutes in water containing a minimum amount of wetting agent to thoroughly wet out the cloth. The temperature of the water shall be 165 °F (±5 °F). The wet out test specimens shall be removed without squeezing and shall be air dried or dried at a temperature not exceeding 180 °F while lying flat on an absorbent surface such as paper hand toweling or kitchen type tissue. The wet out and dried test specimens shall be compared with the standard sample. The sharpness of the crease on the test specimen shall be not less than that of the unwetted sample. Results shall be recorded as “pass” or “fail”.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point’s packaging activities within the Military Service or Defense Agency, or within the military service’s system commands. Packaging data retrieval is available from the managing Military Department’s or Defense Agency’s automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The shirts are intended for wear by male personnel of the United States Marine Corps.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. NSNs.
c. Class and neck size required (see 1.2).
d. When first article is required (see 3.1.1).
e. When conformance inspection is required (see 3.1.2).
f. Applicable Government patterns (see 3.6).
g. Acceptance quality limits and inspection conditions (see 3.10, 4.5.3, and 4.5.4).
h. First article sampling and acceptance criteria (see 4.3.1).
i. Conformance inspection (4.4).
j. Component and material sampling and acceptance criteria (see 4.4.1).
k. End item sampling and acceptance criteria (see 4.4.2).
l. Packaging requirements (5.1).

6.3 Information requests. For access to information such as purchase descriptions, patterns, drawings, and standard shade samples of cloth, go to https://www.dla.mil/TroopSupport/ClothingandTextiles/SpecRequest.aspx for the Defense Logistics Agency Troop Support’s Clothing and Textile Specification/Drawing/Pattern Request Form. Complete the request form and then submit the form. Requests to use equivalent materials or components or to make changes to the pattern should be sent to the contracting officer for approval by the military services.

6.3.1 Button color samples. Button color samples can be obtained through a request to the contracting agency.

6.4 Thread shade. Khaki shade P-1, Cable No. 66019 of the Department of Defense (DoD) Standard Color Card for Sewing Threads (no longer updated, but still in use) or equivalent is recommended to meet the shade match requirements (see 3.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

6.5 Button shade. Khaki AL, Cable No. 62026 of the DoD Standard Shades for Buttons (no longer updated, but still in use) is equivalent to shade M-2409 of the United States Marine Corps Button Shade Standard (no longer updated, but still in use) or Khaki 475 color chip 23420 of AMS-STD-595 (see 3.3.4).

6.6 NSNs. For informational purposes only, representative NSNs for items in this specification are listed in table XI. Table XI is not intended to be a comprehensive list of all NSNs associated with this specification.

TABLE XI. NSNs.

NSN	Neck size
8405-01-196-1764	13-1/2
8405-01-196-1765	14

6.7 Subject term (key word) listing.

Dress

Enlisted

Male

Marine Corps

Officer

Uniform

6.8 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

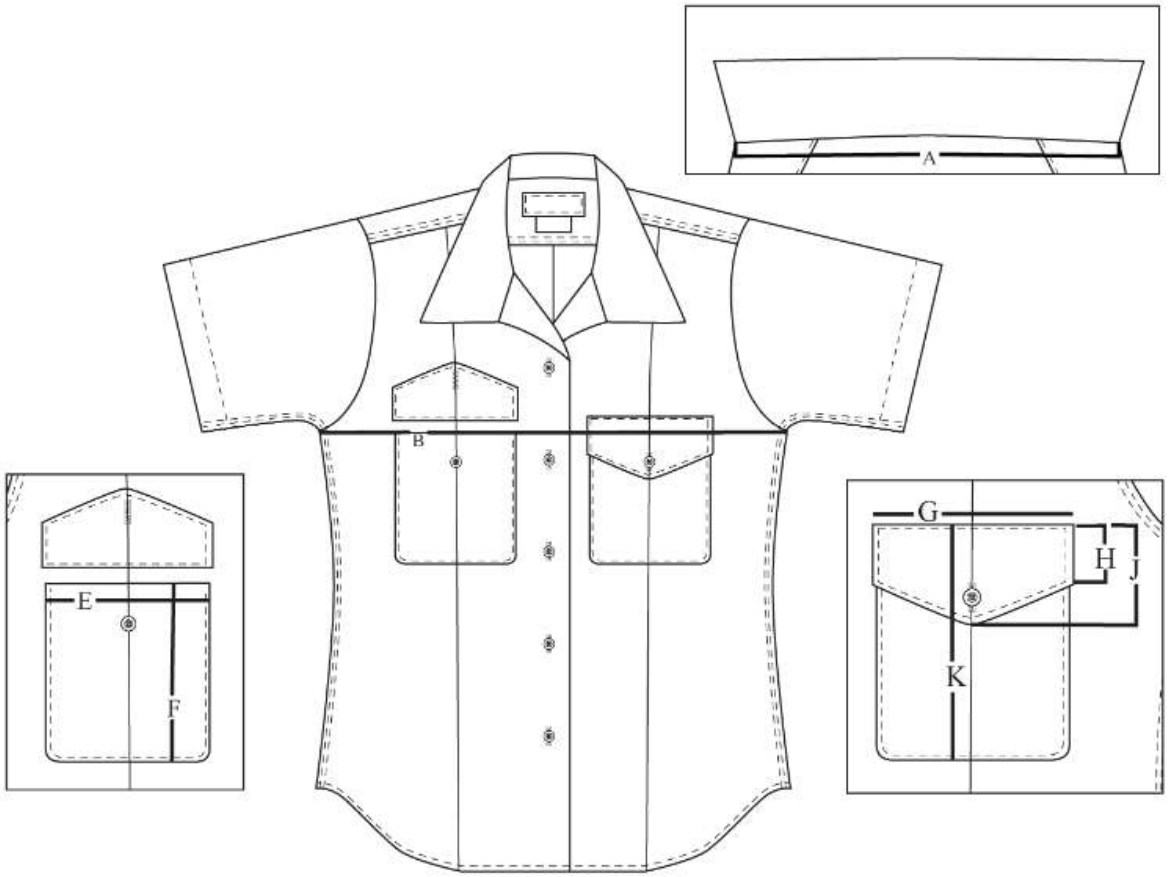


FIGURE 1. Men's quarter-sleeve khaki shirt – front (with measurement guidance).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

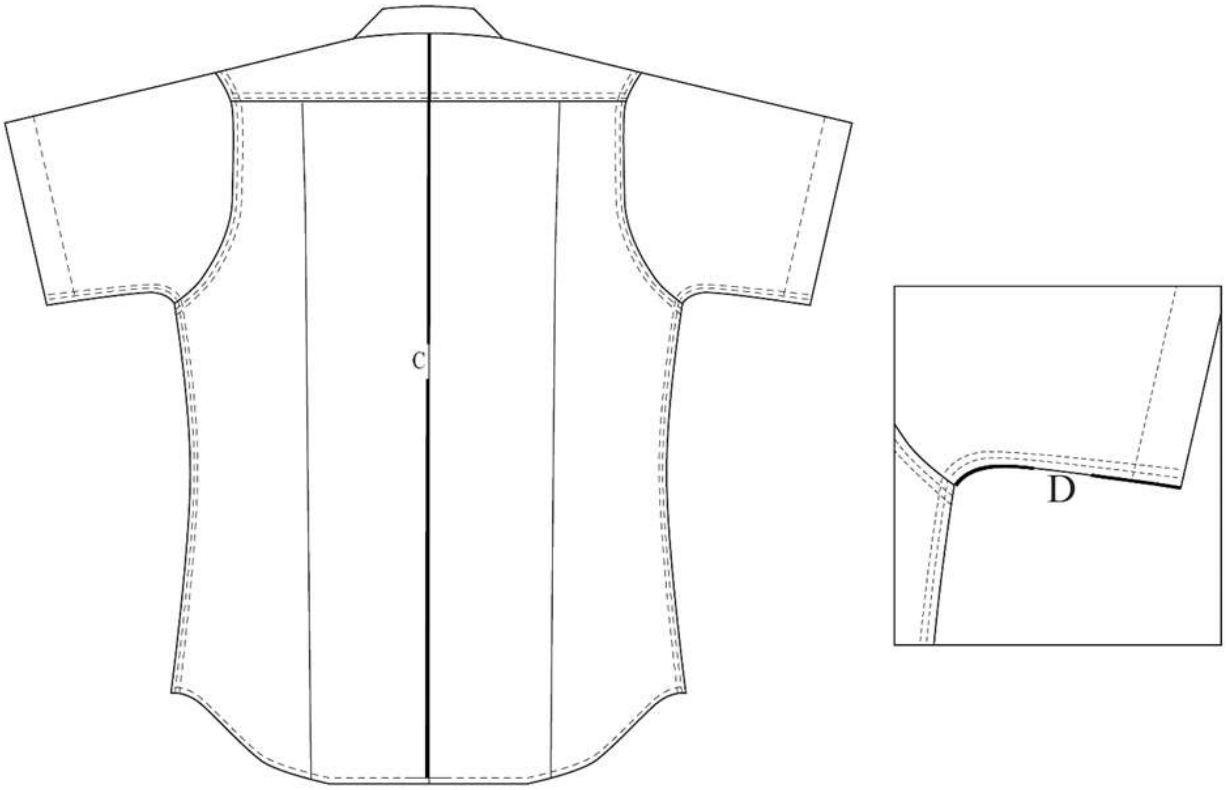


FIGURE 2. Men's quarter-sleeve khaki shirt – back (with measurement guidance).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy – MC
Air Force – 11

Review activities:
Navy – SA
DLA – CT

Preparing activity:
Navy – MC
(Project 8405-2023-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:10Z
Check the source to verify that this is the current version before use.