
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, PLASTIC DIELECTRIC, AXIAL-WIRE TERMINAL, THREADED-STUD RETAINER, TUBULAR (UNINSULATED) (HERMETICALLY SEALED IN METAL CASES), ESTABLISHED RELIABILITY, STYLE CQR33

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-19978.

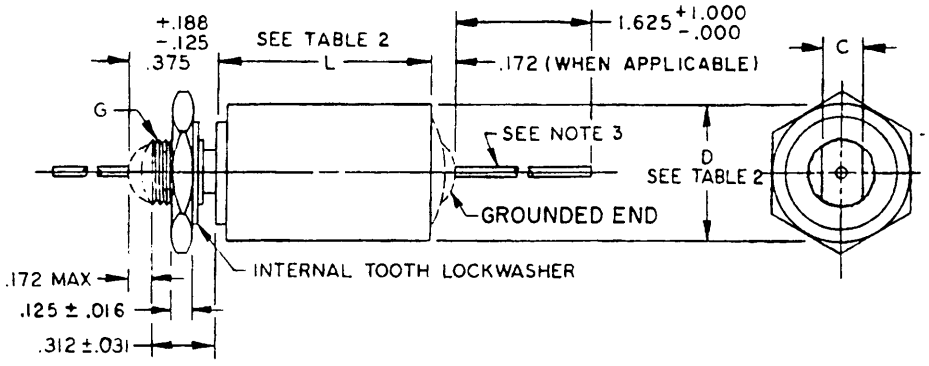

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.125	3.18	.437	11.10
.004	.10	.172	4.37	.562	14.27
.005	.13	.188	4.78	.670	17.02
.016	.41	.250	6.35	.750	19.05
.031	.79	.312	7.92	1.000	25.40
.032	.81	.375	9.53	1.625	41.28

Case dimension D	C±.005	G
.562 or less	.250	5/16-24UNF-2A
.670	.375	7/16-28UNEF-2A
.750 and up	.437	1/2-28UNEF-2A


NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Leads shall be of tinned solidwire , .032 +.004, -.001 (No. 20 AWG).
4. Mounting nuts and lockwashers shall be supplied.

FIGURE 1. Style CQR33 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Design and construction:
Dimensions and configuration - See figure 1 and table II.
Case material - Nonmagnetic (screwneck and end seal may be of magnetic material).
Dielectric material - Polyethelene terephthalate (M).
Terminals - Axial-wire lead (see figure 1).
Circuit diagram - 1

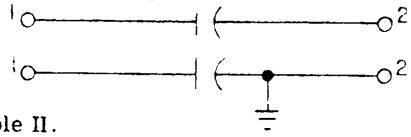

Rated voltage - See table II.
Rated temperature - -65° to +85°C.
Capacitance (cap.) (nom) - See table II.
Capacitance tolerance - See table II.
Dissipation factor (DF) (max) - 0.6 percent.
Failure rate level - In accordance with MIL-C-19978.
Reliability - In accordance with MIL-C-19978.

Burn-in - In accordance with MIL-C-19978.

Radiographic inspection: In accordance with MIL-C-19978.

Seal: Method 112 of MIL-STD-202, test condition letter - A.

Barometric pressure: In accordance with MIL-C-19978.
Test points:
Circuit diagram 1 - Between terminals and case.
Circuit diagram 3 - Between ungrounded terminal and case.

Insulation resistance (IR):
Terminal to terminal - See table I.

TABLE I. Terminal-to-terminal insulation resistance.

Capacitance rating	Minimum insulation resistance
Characteristic M	At 25°C
0 to 0.68 microfarad	100,000 megohms
Greater than 0.68 microfarad	68,000 megohm-microfarads 1/
	At 85°C
0 to 0.2 microfarad	25,000 megohms
Greater than 0.2 microfarad	5,000 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance to megohms.

Vibration high frequency: Method 204 of MIL-STD-202, test condition B, with the following exception:
Direction and duration of motion - 4 hours in each of two mutually perpendicular directions (total of 8 hours), one parallel and the other perpendicular to the cylindrical axis.

Salt spray: In accordance with MIL-C-19978.

Solderability: In accordance with MIL-C-19978.

Terminal strength: Method 211 of MIL-STD-202, test condition letter - D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:07Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQR33 capacitors.

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions Circuit 1 L ±.031	Circuit 1 D +.015 -.005	Circuit 3 L ±.031	Circuit 3 D +.015 -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR33A-MZ155-3-	30	1.5	G, J, K	L, M, P, R, S	1.625	.562	1.531	.562
CQR33A-MZ225-3-	30	2.2	G, J, K		1.875	.670	1.781	.670
CQR33A-MZ335-3-	30	3.3	G, J, K		1.875	.750	1.781	.750
CQR33A-MZ475-3-	30	4.7	G, J, K		2.625	.750	2.531	.750
CQR33A-MZ685-3-	30	6.8	G, J, K		2.125	1.000	2.031	1.000
CQR33A-MZ106-3-	30	10.0	G, J, K		2.375	1.000	2.281	1.000
CQR33A-MA102-3-	50	.0010	G, J, K		.500	.400	.406	.400
CQR33A-MA122-3-	50	.0012	G, J, K		.500	.400	.406	.400
CQR33A-MA152-3-	50	.0015	G, J, K		.500	.400	.406	.400
CQR33A-MA182-3-	50	.0018	G, J, K		.500	.400	.406	.400
CQR33A-MA222-3-	50	.0022	G, J, K		.500	.400	.406	.400
CQR33A-MA272-3-	50	.0027	G, J, K		.500	.400	.406	.400
CQR33A-MA332-3-	50	.0033	G, J, K		.500	.400	.406	.400
CQR33A-MA392-3-	50	.0039	G, J, K		.500	.400	.406	.400
CQR33A-MA472-3-	50	.0047	G, J, K		.500	.400	.406	.400
CQR33A-MA562-3-	50	.0056	G, J, K		.500	.400	.406	.400
CQR33A-MA682-3-	50	.0068	G, J, K		.500	.400	.406	.400
CQR33A-MA822-3-	50	.0082	G, J, K		.500	.400	.406	.400
CQR33A-MA103-3-	50	.010	G, J, K		.500	.400	.406	.400
CQR33A-MA123-3-	50	.012	G, J, K		.500	.400	.406	.400
CQR33A-MA153-3-	50	.015	G, J, K		.500	.400	.406	.400
CQR33A-MA183-3-	50	.018	G, J, K		.500	.400	.406	.400
CQR33A-MA223-3-	50	.022	G, J, K		.500	.400	.406	.400
CQR33A-MA273-3-	50	.027	G, J, K		.500	.400	.406	.400
CQR33A-MA333-3-	50	.033	G, J, K		.500	.400	.406	.400
CQR33A-MA393-3-	50	.039	G, J, K		.500	.400	.406	.400
CQR33A-MA473-3-	50	.047	G, J, K		.500	.400	.406	.400
CQR33A-MA563-3-	50	.056	G, J, K		.562	.400	.468	.400
CQR33A-MA683-3-	50	.068	G, J, K		.562	.400	.468	.400
CQR33A-MA124-3-	50	.12	G, J, K		.875	.400	.781	.400
CQR33A-MA154-3-	50	.15	G, J, K		.875	.400	.781	.400
CQR33A-MA184-3-	50	.18	G, J, K		.875	.400	.781	.400
CQR33A-MA224-3-	50	.22	G, J, K		.875	.400	.781	.400
CQR33A-MA274-3-	50	.27	G, J, K		.875	.400	.781	.400
CQR33A-MA334-3-	50	.33	G, J, K		1.000	.400	.906	.400
CQR33A-MA394-3-	50	.39	G, J, K		1.125	.400	1.031	.400
CQR33A-MA474-3-	50	.47	G, J, K		1.125	.400	1.031	.400
CQR33A-MA564-3-	50	.56	G, J, K		1.375	.400	1.281	.400
CQR33A-MA684-3-	50	.68	G, J, K		1.375	.400	1.281	.400
CQR33A-MA824-3-	50	.82	G, J, K		1.125	.562	1.031	.562
CQR33A-MA105-3-	50	1.0	G, J, K		1.125	.562	1.031	.562
CQR33A-MA125-3-	50	1.2	G, J, K		1.375	.562	1.281	.562
CQR33A-MB125-3-	100	1.2	G, J, K		1.625	.670	1.531	.670
CQR33A-MB155-3-	100	1.5	G, J, K		1.625	.670	1.531	.670
CQR33A-MB185-3-	100	1.8	G, J, K		1.625	.670	1.531	.670
CQR33A-MB225-3-	100	2.2	G, J, K		1.875	.750	1.781	.750
CQR33A-MB275-3-	100	2.7	G, J, K		2.125	.750	2.031	.750
CQR33A-MB335-3-	100	3.3	G, J, K	L, M, P, R, S	2.375	.750	2.281	.750

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:07Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQR33 capacitors. - Continued

Part number 1/	DC voltage rating	Capacitance rate	Capacitance tolerance	Failure rate level	Case dimensions			
					Circuit 1		Circuit 3	
					L ±.031	D +.015 -.005	L ±.031	D +.015 -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR33A-MB395-3-	100	3.9	G, J, K	L, M, P, R, S	1.875	1.000	1.781	1.000
CQR33A-MB475-3-	100	4.7	G, J, K		2.125	1.000	2.031	1.000
CQR33A-MB565-3-	100	5.6	G, J, K		2.375	1.000	2.281	1.000
CQR33A-MB685-3-	100	6.8	G, J, K		2.625	1.000	2.531	1.000
CQR33A-MC102-3-	200	.0010	G, J, K		.750	.400	.656	.400
CQR33A-MC122-3-	200	.0012	G, J, K		.750	.400	.656	.400
CQR33A-MC152-3-	200	.0015	G, J, K		.750	.400	.656	.400
CQR33A-MC182-3-	200	.0018	G, J, K		.750	.400	.656	.400
CQR33A-MC222-3-	200	.0022	G, J, K		.750	.400	.656	.400
CQR33A-MC272-3-	200	.0027	G, J, K		.750	.400	.656	.400
CQR33A-MC332-3-	200	.0033	G, J, K		.750	.400	.656	.400
CQR33A-MC392-3-	200	.0039	G, J, K		.750	.400	.656	.400
CQR33A-MC472-3-	200	.0047	G, J, K		.750	.400	.656	.400
CQR33A-MC562-3-	200	.0056	G, J, K		.750	.400	.656	.400
CQR33A-MC682-3-	200	.0068	G, J, K		.750	.400	.656	.400
CQR33A-MC822-3-	200	.0082	G, J, K		.750	.400	.656	.400
CQR33A-MC103-3-	200	.010	G, J, K		.750	.400	.656	.400
CQR33A-MC123-3-	200	.012	G, J, K		.719	.400	.625	.400
CQR33A-MC153-3-	200	.015	G, J, K		.719	.400	.625	.400
CQR33A-MC183-3-	200	.018	G, J, K		.719	.400	.625	.400
CQR33A-MC223-3-	200	.022	G, J, K		.719	.400	.625	.400
CQR33A-MC273-3-	200	.027	G, J, K		.719	.400	.625	.400
CQR33A-MC333-3-	200	.033	G, J, K		.719	.400	.625	.400
CQR33A-MC393-3-	200	.039	G, J, K		.719	.400	.625	.400
CQR33A-MC473-3-	200	.047	G, J, K		.719	.400	.625	.400
CQR33A-MC563-3-	200	.056	G, J, K		.844	.400	.750	.400
CQR33A-MC683-3-	200	.068	G, J, K		.844	.400	.750	.400
CQR33A-MC823-3-	200	.082	G, J, K		.844	.400	.750	.400
CQR33A-MC104-3-	200	.10	G, J, K		.844	.400	.750	.400
CQR33A-MC124-3-	200	.12	G, J, K		.812	.400	.719	.400
CQR33A-MC154-3-	200	.15	G, J, K		.812	.400	.719	.400
CQR33A-MC184-3-	200	.18	G, J, K		1.062	.400	.969	.400
CQR33A-MC224-3-	200	.22	G, J, K		1.062	.400	.969	.400
CQR33A-MC274-3-	200	.27	G, J, K		1.250	.400	1.156	.400
CQR33A-MC334-3-	200	.33	G, J, K		1.250	.400	1.156	.400
CQR33A-MC394-3-	200	.39	G, J, K		1.188	.500	1.094	.500
CQR33A-MC474-3-	200	.47	G, J, K		1.188	.500	1.094	.500
CQR33A-MC564-3-	200	.56	G, J, K		1.375	.562	1.281	.562
CQR33A-MC684-3-	200	.68	G, J, K		1.375	.562	1.281	.562
CQR33A-MC824-3-	200	.82	G, J, K		1.875	.562	1.781	.562
CQR33A-MC105-3-	200	1.0	G, J, K		1.875	.562	1.781	.562
CQR33A-ME102-3-	400	.0010	G, J, K		.812	.400	.719	.400
CQR33A-ME122-3-	400	.0012	G, J, K		.812	.400	.719	.400
CQR33A-ME152-3-	400	.0015	G, J, K		.812	.400	.719	.400
CQR33A-ME182-3-	400	.0018	G, J, K		.812	.400	.719	.400
CQR33A-ME222-3-	400	.0022	G, J, K		.812	.400	.719	.400
CQR33A-ME272-3-	400	.0027	G, J, K		.812	.400	.719	.400
CQR33A-ME332-3-	400	.0033	G, J, K		.812	.400	.719	.400
CQR33A-ME392-3-	400	.0039	G, J, K		.812	.400	.719	.400
CQR33A-ME472-3-	400	.0047	G, J, K	L, M, P, R, S	.812	.400	.719	.400

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:07Z
Check the source to verify that this is the currentversion before use.

TABLE II. Style CQR33 capacitors. - Continued

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions Circuit 1 L ±.031	Circuit 1 D +.015 -.005	Circuit 3 L ±.031	Circuit 3 D +.015 -.005
	Volts	µF			Inches	Inches	Inches	Inches
CQR33A-ME562-3-	400	.0056	G, J, K	L, M, P, R, S	.938	.400	.844	.400
CQR33A-ME682-3-	400	.0068	G, J, K		.938	.400	.844	.400
CQR33A-ME822-3-	400	.0082	G, J, K		.938	.400	.844	.400
CQR33A-ME103-3-	400	.010	G, J, K		.938	.400	.844	.400
CQR33A-ME123-3-	400	.012	G, J, K		.938	.400	.844	.400
CQR33A-ME153-3-	400	.015	G, J, K		.938	.400	.844	.400
CQR33A-ME183-3-	400	.018	G, J, K		1.062	.400	.969	.400
CQR33A-ME223-3-	400	.022	G, J, K		1.062	.400	.969	.400
CQR33A-ME273-3-	400	.027	G, J, K		.938	.400	.844	.400
CQR33A-ME333-3-	400	.033	G, J, K		.938	.400	.844	.400
CQR33A-ME393-3-	400	.039	G, J, K		1.062	.400	.969	.400
CQR33A-ME473-3-	400	.047	G, J, K		1.062	.400	.969	.400
CQR33A-ME563-3-	400	.056	G, J, K		1.250	.400	1.156	.400
CQR33A-ME683-3-	400	.068	G, J, K		1.250	.400	1.156	.400
CQR33A-ME823-3-	400	.082	G, J, K		1.562	.400	1.469	.400
CQR33A-ME104-3-	400	.10	G, J, K		1.562	.400	1.469	.400
CQR33A-ME124-3-	400	.12	G, J, K		1.281	.562	1.188	.562
CQR33A-ME154-3-	400	.15	G, J, K		1.281	.562	1.188	.562
CQR33A-ME184-3-	400	.18	G, J, K		1.531	.562	1.438	.562
CQR33A-ME224-3-	400	.22	G, J, K		1.531	.562	1.438	.562
CQR33A-ME274-3-	400	.27	G, J, K		1.906	.562	1.812	.562
CQR33A-ME334-3-	400	.33	G, J, K		1.906	.562	1.812	.562
CQR33A-ME394-3-	400	.39	G, J, K		1.906	.670	1.812	.670
CQR33A-ME474-3-	400	.47	G, J, K		1.906	.670	1.812	.670
CQR33A-ME564-3-	400	.56	G, J, K		2.156	.750	2.062	.750
CQR33A-ME684-3-	400	.68	G, J, K		2.156	.750	2.062	.750
CQR33A-ME824-3-	400	.82	G, J, K		2.656	.750	2.562	.750
CQR33A-ME105-3-	400	1.0	G, J, K		2.656	.750	2.562	.750
CQR33A-MF102-3-	600	.0010	G, J, K		.812	.400	.719	.400
CQR33A-MF122-3-	600	.0012	G, J, K		.812	.400	.719	.400
CQR33A-MF152-3-	600	.0015	G, J, K		.812	.400	.719	.400
CQR33A-MF182-3-	600	.0018	G, J, K		.812	.400	.719	.400
CQR33A-MF222-3-	600	.0022	G, J, K		.812	.400	.719	.400
CQR33A-MF272-3-	600	.0027	G, J, K		.812	.400	.719	.400
CQR33A-MF332-3-	600	.0033	G, J, K		.938	.400	.844	.400
CQR33A-MF392-3-	600	.0039	G, J, K		.938	.400	.844	.400
CQR33A-MF472-3-	600	.0047	G, J, K		.938	.400	.844	.400
CQR33A-MF562-3-	600	.0056	G, J, K		.938	.400	.844	.400
CQR33A-MF682-3-	600	.0068	G, J, K		.938	.400	.844	.400
CQR33A-MF822-3-	600	.0082	G, J, K		1.062	.400	.969	.400
CQR33A-MF103-3-	600	.010	G, J, K		1.062	.400	.969	.400
CQR33A-MF123-3-	600	.012	G, J, K		.938	.400	.844	.400
CQR33A-MF153-3-	600	.015	G, J, K		.938	.400	.844	.400
CQR33A-MF183-3-	600	.018	G, J, K		1.062	.400	.969	.400
CQR33A-MF223-3-	600	.022	G, J, K		1.062	.400	.969	.400
CQR33A-MF273-3-	600	.027	G, J, K		1.312	.400	1.219	.400
CQR33A-MF333-3-	600	.033	G, J, K		1.312	.400	1.219	.400
CQR33A-MF393-3-	600	.039	G, J, K		1.562	.400	1.469	.400
CQR33A-MF473-3-	600	.047	G, J, K	L, M, P, R, S	1.562	.400	1.469	.400

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:07Z
Check the source to verify that this is the current version before use.

TABLE II. Style CQR33 capacitors. - Continued

Part number 1/	DC voltage rating	Capacitance rating	Capacitance tolerance	Failure rate level	Case dimensions			
					Circuit 1		Circuit 3	
					L ±.031	D +.015 -.005	L ±.031	D +.015 -.005
	Volts	μF			Inches	Inches	Inches	Inches
CQR33A-MF563-3-	600	.056	G, J, K	L, M, P, R, S	1.250	.562	1.156	.562
CQR33A-MF683-3-	600	.068	G, J, K		1.250	.562	1.156	.562
CQR33A-MF823-3-	600	.082	G, J, K		1.500	.562	1.406	.562
CQR33A-MF104-3-	600	.10	G, J, K		1.500	.562	1.406	.562
CQR33A-MF124-3-	600	.12	G, J, K		1.875	.562	1.781	.562
CQR33A-MF154-3-	600	.15	G, J, K		1.875	.562	1.781	.562
CQR33A-MF184-3-	600	.18	G, J, K		1.875	.670	1.781	.670
CQR33A-MF224-3-	600	.22	G, J, K		1.875	.670	1.781	.670
CQR33A-MF274-3-	600	.27	G, J, K		2.125	.750	2.031	.750
CQR33A-MF334-3-	600	.33	G, J, K		2.125	.750	2.031	.750
CQR33A-MF394-3-	600	.39	G, J, K		2.265	.750	2.531	.750
CQR33A-MF474-3-	600	.47	G, J, K		2.265	.750	2.531	.750
CQR33A-MF564-3-	600	.56	G, J, K		2.125	1.000	2.031	1.000
CQR33A-MF684-3-	600	.68	G, J, K		2.125	1.000	2.031	1.000
CQR33A-MG823-3-	1000	.082	G, J, K		2.125	.750	2.031	.750
CQR33A-MG104-3-	1000	.10	G, J, K		2.125	.750	2.031	.750
CQR33A-MG124-3-	1000	.12	G, J, K		1.875	1.000	1.781	1.000
CQR33A-MG154-3-	1000	.15	G, J, K		1.875	1.000	1.781	1.000
CQR33A-MG184-3-	1000	.18	G, J, K		2.375	1.000	2.281	1.000
CQR33A-MG224-3-	1000	.22	G, J, K	L, M, P, R, S	2.375	1.000	2.281	1.000

1/ Complete part number shall include additional symbols to indicate circuit, capacitance tolerance, and failure rate level, as applicable.

TABLE III. Millimeter equivalents of decimal inches.

INCHES	MM	INCHES	MM	INCHES	MM
0.005	0.13	0.938	23.72	1.531	38.89
0.015	0.38	0.969	24.61	1.562	39.67
0.031	0.79	1.000	25.40	1.625	41.27
0.400	10.16	1.031	26.19	1.781	45.24
0.406	10.31	1.062	26.97	1.812	46.02
0.468	11.89	1.094	27.79	1.875	47.63
0.500	12.70	1.125	28.57	1.906	48.41
0.562	14.27	1.156	29.36	2.031	51.59
0.625	15.88	1.188	30.17	2.062	52.37
0.656	16.66	1.219	30.96	2.125	53.97
0.670	17.02	1.250	31.75	2.156	54.76
0.719	18.26	1.281	32.54	2.265	57.53
0.750	19.05	1.312	33.32	2.281	57.94
0.781	19.84	1.375	34.93	2.375	60.33
0.812	20.62	1.406	35.71	2.531	64.29
0.844	21.44	1.438	36.53	2.562	65.07
0.875	22.23	1.469	37.31	2.625	66.67
0.906	23.01	1.500	38.10	2.656	67.46

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:07Z
Check the source to verify that this is the current version before use.

Dielectric absorption (not applicable to values of 0.01 μF or less): 0.60 percent maximum.

Stability at low and high temperature:
Low temperature:
Test temperature - $-65^{\circ}\ ^{+0}_{-5}{}^{\circ}$C.
Capacitance change (max) - -7 percent.
High temperature:
Test temperature - $+85^{\circ}\ ^{+5}_{-0}{}^{\circ}$C.
Capacitance change (max) - +5 percent.

Life:
Capacitance change (max) - ±5 percent of initial measured value.

Resistance to soldering heat: In accordance with MIL-C-19978.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - MI, MU
Navy - AS
Air Force - 11, 17
DSA - ES

User activities:
Army - ME, AT, AV
Navy - MC, AS, OS, SH
Air Force -

Preparing activity:
Air Force - 80

Agent:
DSA - ES

(Project 5910-1072-14)

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:07Z
Check the source to verify that this is the currentversion before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

DET 21
SMAMA (MMRE)
WPAFB OH

Source: https://assist.dla.mil -- Downloaded: 202610-19T07:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 20261 0-19T07:07Z
Check the source to verify that this is the current version before use.