INCH-POUND

MIL-C-19978/17A
19 June 1990
SUPERSEDING
MIL-C-19978/17
20 OCTOBER 1972


MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, PLASTIC (OR PAPER-PLASTIC) DIELECTRIC, AXIAL-WIRE TERMINAL, TANGENTIAL RETAINER, TUBULAR (UNINSULATED) (HERMETICALLY SEALED IN METAL CASES), ESTABLISHED RELIABILITY, STYLE CQR42

INACTIVE FOR NEW EQUIPMENT DESIGN AFTER 20 OCTOBER 1972.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-19978.

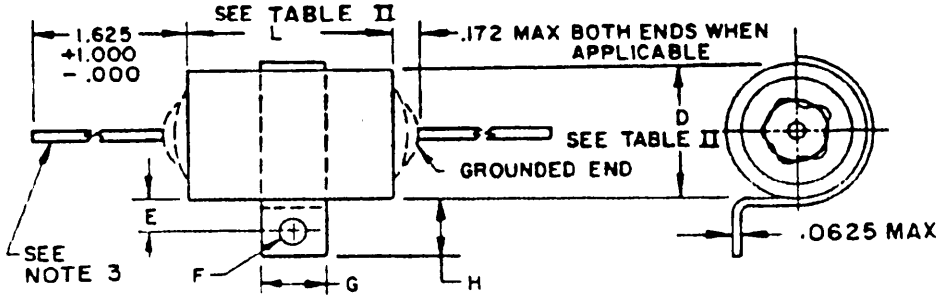

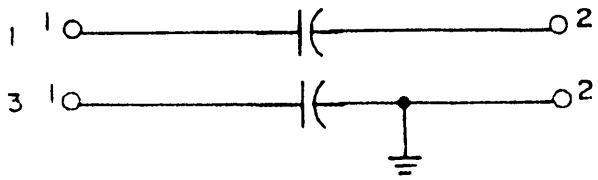

CIRCUIT DIAGRAM

FIGURE 1. Style CQR42 capacitors.

(A) denotes changes.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:08Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.0625	1.59	.312	7.92
.004	0.10	.144	3.66	.400	10.16
.005	0.13	.156	3.96	.438	11.13
.025	0.64	.172	4.37	.500	12.70
.031	0.79	.188	4.78	1.000	25.40
.032	0.81	.235	5.97	1.625	41.28
.062	1.57	.250	6.35		

Case dimension D	H*.062	G*.062	E*.031	F*.005
Less than .500	.312	.250	.188	.144
.500 and up	.438	.500	.250	.156

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Leads shall be of tinned solid wire, .025 (No. 22 AWG) for cases .235 and .312 in diameter; and .032 (No. 20 AWG) for cases .400 diameter and above. Tolerance on all lead wire diameters shall be +.004, -.001.

FIGURE 1. Style CQR42 capacitors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table II.

Case material: Nonmagnetic (end seal may be of magnetic material).

Dielectric material: Paper and polyethelene terephthalate (K).

Terminals: Axial-wire lead (see figure 1).

Rated voltage: See table II.

Rated temperature: -65°C to +125°C.

Capacitance (Cap.) (nom): See table II.

Capacitance tolerance: K, ±10 percent.

Dissipation factor (DF) (max): 1.0 percent.

Failure rate level: In accordance with MIL-C-19978.

Reliability: In accordance with MIL-C-19978.

Burn-in: In accordance with MIL-C-19978.

Radiographic inspection: In accordance with MIL-C-19978.

Seal: Method 112 of MIL-STD-202, test condition letter A.

Barometric pressure: In accordance with MIL-C-19978.

Test points (see figure 1, circuit diagram):

Circuit diagram 1: Between terminals and case.

Circuit diagram 3: Between ungrounded terminal and case.

Insulation resistance (IR):

Terminal to terminal: See table I.

TABLE I. Terminal-to-terminal insulation resistance.

Capacitance rating	Minimum insulation resistance
Characteristic K	
	At 25°C
0 to 0.6 microfarad	25,000 megohms
Greater than 0.6 microfarad	15,000 megohm-microfarads 1/
	At 125°C
0 to 0.08 microfarad	250 megohms
Greater than 0.08 microfarad	20 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance in megohms.

Terminal to case: Greater than 10,000 megohms.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T07:08Z
Check the source to verify that this is the current version before use.

Vibration, high frequency: Method 204 of MIL-STD-202, test condition B, with the following exception:

Direction and duration of motion: 4 hours in each of two mutually perpendicular directions (total of 8 hours), one parallel and the other perpendicular to the cylindrical axis.

Salt spray: In accordance with MIL-C-19978.

Solderability: In accordance with MIL-C-19978.

Terminal strength: Method 211 of MIL-STD-202, test condition letter D.

Stability at low and high termparature:

Low temperature:

Test temperature: -65°C +0°C, -5°C.

Capacitance change (max): -10 percent.

High temperature:

Test temperature: +125°C +5°C, -0°C.

Capacitance change (max): +10 percent.

Life:

Capacitance change (max): ±5 percent.

Resistance to soldering heat: In accordance with MIL-C-19978.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T07:08Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE II. Style CQR42 capacitors.

Part or Identifying Number (PIN) 1/	DC voltage rating	Capacitance rating	Failure rate level	Case dimensions			
				Characteristic K			
				Circuit 1		Circuit 3	
				L±.031	D +.015 −.005	L±.031	D +.015 −.005
	Volts	µF		Inches	Inches	Inches	Inches
CQR42A-KB822K3-	100	.0082	L, M, P, R, S	.750	.235	.688	.235
CQR42A-KB103K3-	100	.010	"	.750	.235	.688	.235
CQR42A-KB123K3-	100	.012	"	.750	.235	.688	.235
CQR42A-KB153K3-	100	.015	"	.750	.235	.688	.235
CQR42A-KB393K3-	100	.039	"	.875	.312	.812	.312
CQR42A-KB473K3-	100	.047	"	.875	.312	.812	.312
CQR42A-KB823K3-	100	.082	"	.875	.400	.812	.400
CQR42A-KB104K3-	100	.10	"	.875	.400	.812	.400
CQR42A-KB124K3-	100	.12	"	1.125	.400	1.062	.400
CQR42A-KB154K3-	100	.15	"	1.125	.400	1.062	.400
CQR42A-KB184K3-	100	.18	"	1.375	.400	1.312	.400
CQR42A-KB224K3-	100	.22	"	1.375	.400	1.312	.400
CQR42A-KB274K3-	100	.27	"	1.125	.562	1.062	.562
CQR42A-KB334K3-	100	.33	"	1.125	.562	1.062	.562
CQR42A-KB394K3-	100	.39	"	1.375	.562	1.312	.562
CQR42A-KB474K3-	100	.47	"	1.375	.562	1.312	.562
CQR42A-KB564K3-	100	.56	"	1.625	.562	1.562	.562
CQR42A-KB684K3-	100	.68	"	1.625	.562	1.562	.562
CQR42A-KB824K3-	100	.82	"	1.625	.670	1.562	.670
CQR42A-KB105K3-	100	1.0	"	1.625	.670	1.562	.670
CQR42A-KC392K3-	200	.0039	"	.750	.235	.688	.235
CQR42A-KC472K3-	200	.0047	"	.750	.235	.688	.235
CQR42A-KC562K3-	200	.0056	"	.750	.235	.688	.235
CQR42A-KC682K3-	200	.0068	"	.750	.235	.688	.235
CQR42A-KC183K3-	200	.018	"	.875	.312	.812	.312
CQR42A-KC223K3-	200	.022	"	.875	.312	.812	.312
CQR42A-KC273K3-	200	.027	"	.875	.312	.812	.312
CQR42A-KC333K3-	200	.033	"	.875	.312	.812	.312
CQR42A-KC393K3-	200	.039	"	.875	.400	.812	.400
CQR42A-KC473K3-	200	.047	"	.875	.400	.812	.400
CQR42A-KC563K3-	200	.056	"	.875	.400	.812	.400
CQR42A-KC683K3-	200	.068	"	.875	.400	.812	.400
CQR42A-KC823K3-	200	.082	"	1.125	.400	1.062	.400
CQR42A-KC104K3-	200	.10	"	1.125	.400	1.062	.400
CQR42A-KC124K3-	200	.12	"	1.375	.400	1.312	.400
CQR42A-KC154K3-	200	.15	"	1.375	.400	1.312	.400
CQR42A-KC184K3-	200	.18	"	1.125	.562	1.062	.562
CQR42A-KC224K3-	200	.22	"	1.125	.562	1.062	.562
CQR42A-KC274K3-	200	.27	"	1.375	.562	1.312	.562
CQR42A-KC334K3-	200	.33	"	1.375	.562	1.312	.562
CQR42A-KC394K3-	200	.39	"	1.625	.562	1.562	.562
CQR42A-KC474K3-	200	.47	"	1.625	.562	1.562	.562
CQR42A-KC564K3-	200	.56	"	1.625	.670	1.562	.670
CQR42A-KC684K3-	200	.68	"	1.625	.670	1.562	.670
CQR42A-KC824K3-	200	.82	"	2.125	.750	2.062	.750
CQR42A-KC105K3-	200	1.0	"	2.125	.750	2.062	.750

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:08Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE II. Style CQR42 capacitors - Continued.

Part or Identifying Number (PIN) 1/	DC voltage rating	Capacitance rating	Failure rate level	Case dimensions			
				Characteristic K			
				Circuit 1		Circuit 3	
				L±.031	D +.015 -.005	L±.031	D +.015 -.005
	Volts	µF		Inches	Inches	Inches	Inches
CQR42A-KE272K3-	400	.0027	L, M, P, R, S	.750	.235	.688	.235
CQR42A-KE332K3-	400	.0033	"	.750	.235	.688	.235
CQR42A-KE123K3-	400	.012	"	.875	.312	.812	.312
CQR42A-KE153K3-	400	.015	"	.875	.312	.812	.312
CQR42A-KE273K3-	400	.027	"	.875	.400	.812	.400
CQR42A-KE333K3-	400	.033	"	.875	.400	.812	.400
CQR42A-KE393K3-	400	.039	"	1.125	.400	1.062	.400
CQR42A-KE473K3-	400	.047	"	1.125	.400	1.062	.400
CQR42A-KE563K3-	400	.056	"	1.375	.400	1.312	.400
CQR42A-KE683K3-	400	.068	"	1.375	.400	1.312	.400
CQR42A-KE823K3-	400	.082	"	1.125	.562	1.062	.562
CQR42A-KE104K3-	400	.10	"	1.125	.562	1.062	.562
CQR42A-KE124K3-	400	.12	"	1.375	.562	1.312	.562
CQR42A-KE154K3-	400	.15	"	1.375	.562	1.312	.562
CQR42A-KE184K3-	400	.18	"	1.625	.562	1.562	.562
CQR42A-KE224K3-	400	.22	"	1.625	.562	1.562	.562
CQR42A-KE274K3-	400	.27	"	1.625	.670	1.562	.670
CQR42A-KE334K3-	400	.33	"	1.625	.670	1.562	.670
CQR42A-KE394K3-	400	.39	"	2.125	.750	2.062	.750
CQR42A-KE474K3-	400	.47	"	2.125	.750	2.062	.750
CQR42A-KF102K3-	600	.0010	"	.750	.235	.688	.235
CQR42A-KF122K3-	600	.0012	"	.750	.235	.688	.235
CQR42A-KF152K3-	600	.0015	"	.750	.235	.688	.235
CQR42A-KF182K3-	600	.0018	"	.750	.235	.688	.235
CQR42A-KF222K3-	600	.0022	"	.750	.235	.688	.235
CQR42A-KF272K3-	600	.0027	"	.875	.312	.812	.312
CQR42A-KF332K3-	600	.0033	"	.875	.312	.812	.312
CQR42A-KF392K3-	600	.0039	"	.875	.312	.812	.312
CQR42A-KF472K3-	600	.0047	"	.875	.312	.812	.312
CQR42A-KF562K3-	600	.0056	"	.875	.312	.812	.312
CQR42A-KF682K3-	600	.0068	"	.875	.312	.812	.312
CQR42A-KF822K3-	600	.0082	"	.875	.312	.812	.312
CQR42A-KF103K3-	600	.010	"	.875	.312	.812	.312
CQR42A-KF123K3-	600	.012	"	.875	.400	.812	.400
CQR42A-KF153K3-	600	.015	"	.875	.400	.812	.400
CQR42A-KF183K3-	600	.018	"	.875	.400	.812	.400
CQR42A-KF223K3-	600	.022	"	.875	.400	.812	.400
CQR42A-KF273K3-	600	.027	"	1.125	.400	1.062	.400
CQR42A-KF333K3-	600	.033	"	1.125	.400	1.062	.400
CQR42A-KF393K3-	600	.039	"	1.375	.400	1.312	.400
CQR42A-KF473K3-	600	.047	"	1.375	.400	1.312	.400
CQR42A-KF563K3-	600	.056	"	1.125	.562	1.062	.562
CQR42A-KF683K3-	600	.068	"	1.125	.562	1.062	.562
CQR42A-KF823K3-	600	.082	"	1.375	.562	1.312	.562
CQR42A-KF104K3-	600	.10	"	1.375	.562	1.312	.562

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:08Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE II. Style CQR42 capacitors - Continued.

Part or Identifying Number (PIN) 1/	DC voltage rating	Capacitance rating	Failure rate level	Case dimensions			
				Characteristic K			
				Circuit 1		Circuit 3	
				L±.031	D +.015 -.005	L±.031	D +.015 -.005
	Volts	µF		Inches	Inches	Inches	Inches
CQR42A-KF124K3-	600	.12	L, M, P, R, S	1.625	.562	1.562	.562
CQR42A-KF154K3-	600	.15	"	1.625	.562	1.562	.562
CQR42A-KF184K3-	600	.18	"	1.625	.670	1.562	.670
CQR42A-KF224K3-	600	.22	"	1.625	.670	1.562	.670
CQR42A-KF274K3-	600	.27	"	2.125	.750	2.062	.750
CQR42A-KF334K3-	600	.33	"	2.125	.750	2.062	.750
CQR42A-KF394K3-	600	.39	"	2.375	.750	2.312	.750
CQR42A-KF474K3-	600	.47	"	2.375	.750	2.312	.750
CQR42A-KG102K3-	1000	.001	"	.875	.400	.812	.400
CQR42A-KG122K3-	1000	.0012	"	.875	.400	.812	.400
CQR42A-KG152K3-	1000	.0015	"	.875	.400	.812	.400
CQR42A-KG182K3-	1000	.0018	"	.875	.400	.812	.400
CQR42A-KG222K3-	1000	.0022	"	.875	.400	.812	.400
CQR42A-KG272K3-	1000	.0027	"	.875	.400	.812	.400
CQR42A-KG332K3-	1000	.0033	"	.875	.400	.812	.400
CQR42A-KG392K3-	1000	.0039	"	.875	.400	.812	.400
CQR42A-KG472K3-	1000	.0047	"	.875	.400	.812	.400
CQR42A-KG562K3-	1000	.0056	"	.875	.400	.812	.400
CQR42A-KG682K3-	1000	.0068	"	.875	.400	.812	.400
CQR42A-KG822K3-	1000	.0082	"	.875	.400	.812	.400
CQR42A-KG103K3-	1000	.01	"	.875	.400	.812	.400
CQR42A-KG123K3-	1000	.012	"	1.125	.400	1.062	.400
CQR42A-KG153K3-	1000	.015	"	1.125	.400	1.062	.400
CQR42A-KG183K3-	1000	.018	"	1.375	.400	1.312	.400
CQR42A-KG223K3-	1000	.022	"	1.375	.400	1.312	.400
CQR42A-KG273K3-	1000	.027	"	1.125	.562	1.062	.562
CQR42A-KG333K3-	1000	.033	"	1.125	.562	1.062	.562
CQR42A-KG393K3-	1000	.039	"	1.375	.562	1.312	.562
CQR42A-KG473K3-	1000	.047	"	1.375	.562	1.312	.562
CQR42A-KG563K3-	1000	.056	"	1.625	.562	1.562	.562
CQR42A-KG683K3-	1000	.068	"	1.625	.562	1.562	.562
CQR42A-KG823K3-	1000	.082	"	1.625	.670	1.562	.670
CQR42A-KG104K3-	1000	.10	"	1.625	.670	1.562	.670
CQR42A-KG124K3-	1000	.12	"	1.875	.670	1.812	.670
CQR42A-KG154K3-	1000	.15	"	1.875	.670	1.812	.670
CQR42A-KG184K3-	1000	.18	"	2.125	.750	2.062	.750
CQR42A-KG224K3-	1000	.22	"	2.125	.750	2.062	.750
CQR42A-KG274K3-	1000	.27	"	2.125	1.000	2.062	1.000
CQR42A-KG334K3-	1000	.33	"	2.125	1.000	2.062	1.000
CQR42A-KG394K3-	1000	.39	"	2.375	1.000	2.312	1.000
CQR42A-KG474K3-	1000	.47	"	2.375	1.000	2.312	1.000

1/ Complete PIN shall include additional symbols to indicate circuit and failure rate level, as applicable. The term Part or Identifying Number (PIN) is equivalent to the term part number which was previously used in the specification.

Source: https://assist.dla.mil -- Downloaded: 20260-19T07:08Z
Check the source to verify that this is the current version before use.

TABLE III. Millimeter equivalents to decimal inches for table II.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.400	10.16	.812	20.62	1.312	33.32	2.062	52.37
.015	0.38	.562	14.27	.875	22.23	1.375	34.93	2.125	53.98
.031	0.79	.670	17.02	1.000	25.40	1.562	39.67	2.312	58.72
.235	5.97	.688	17.48	1.062	26.97	1.625	41.28	2.375	60.33
.312	7.92	.750	19.05	1.125	28.58	1.812	46.02		

NOTE: Style CQR42 Capacitors are substitutable for style CP12 capacitors formerly covered in MIL-C-25/1K as shown in table IV.

TABLE IV. Substitutability data.

From MIL-C-25/1K (CP12)	To MIL-C-19978/17 (CQR42)	From MIL-C-25/1K (CP12)	To MIL-C-19978/17 (CQR42)	From MIL-C-25/1K (CP12)	To MIL-C-19978/17 (CQR42)
CP12A-KB822K-	CQR42A-KB822K3-	CP12A-KC824K-	CQR42A-KC824K3-	CP12A-KF683K-	CQR42A-KF683K3-
CP12A-KB103K-	CQR42A-KB103K3-	CP12A-KC105K-	CQR42A-KC105K3-	CP12A-KF823K-	CQR42A-KF823K3-
CP12A-KB123K-	CQR42A-KB123K3-	CP12A-KE272K-	CQR42A-KE272K3-	CP12A-KF104K-	CQR42A-KF104K3-
CP12A-KB153K-	CQR42A-KB153K3-	CP12A-KE332K-	CQR42A-KE332K3-	CP12A-KF124K-	CQR42A-KF124K3-
CP12A-KB393K-	CQR42A-KB393K3-	CP12A-KE123K-	CQR42A-KE123K3-	CP12A-KF154K-	CQR42A-KF154K3-
CP12A-KB473K-	CQR42A-KB473K3-	CP12A-KE153K-	CQR42A-KE153K3-	CP12A-KF184K-	CQR42A-KF184K3-
CP12A-KB823K-	CQR42A-KB823K3-	CP12A-KE273K-	CQR42A-KE273K3-	CP12A-KF224K-	CQR42A-KF224K3-
CP12A-KB104K-	CQR42A-KB104K3-	CP12A-KE333K-	CQR42A-KE333K3-	CP12A-KF274K-	CQR42A-KF274K3-
CP12A-KB124K-	CQR42A-KB124K3-	CP12A-KE393K-	CQR42A-KE393K3-	CP12A-KF334K-	CQR42A-KF334K3-
CP12A-KB154K-	CQR42A-KB154K3-	CP12A-KE473K-	CQR42A-KE473K3-	CP12A-KF394K-	CQR42A-KF394K3-
CP12A-KB184K-	CQR42A-KB184K3-	CP12A-KE563K-	CQR42A-KE563K3-	CP12A-KF474K-	CQR42A-KG474K3-
CP12A-KB224K-	CQR42A-KB224K3-	CP12A-KE683K-	CQR42A-KE683K3-	CP12A-KG102K-	CQR42A-KG102K3-
CP12A-KB274K-	CQR42A-KB274K3-	CP12A-KE823K-	CQR42A-KE823K3-	CP12A-KG122K-	CQR42A-KG122K3-
CP12A-KB334K-	CQR42A-KB334K3-	CP12A-KE104K-	CQR42A-KE104K3-	CP12A-KG152K-	CQR42A-KG152K3-
CP12A-KB394K-	CQR42A-KB394K3-	CP12A-KE124K-	CQR42A-KE124K3-	CP12A-KG182K-	CQR42A-KG182K3-
CP12A-KB474K-	CQR42A-KB474K3-	CP12A-KE154K-	CQR42A-KE154K3-	CP12A-KG222K-	CQR42A-KG222K3-
CP12A-KB564K-	CQR42A-KB564K3-	CP12A-KE184K-	CQR42A-KE184K3-	CP12A-KG272K-	CQR42A-KG272K3-
CP12A-KB684K-	CQR42A-KB684K3-	CP12A-KE224K-	CQR42A-KE224K3-	CP12A-KG332K-	CQR42A-KG332K3-
CP12A-KB824K-	CQR42A-KB824K3-	CP12A-KE274K-	CQR42A-KE274K3-	CP12A-KG392K-	CQR42A-KG392K3-
CP12A-KB105K-	CQR42A-KB105K3-	CP12A-KE334K-	CQR42A-KE334K3-	CP12A-KG472K-	CQR42A-KG472K3-
CP12A-KC392K-	CQR42A-KC392K3-	CP12A-KE394K-	CQR42A-KE394K3-	CP12A-KG562K-	CQR42A-KG562K3-
CP12A-KC472K-	CQR42A-KC472K3-	CP12A-KE474K-	CQR42A-KE474K3-	CP12A-KG682K-	CQR42A-KG682K3-
CP12A-KC562K-	CQR42A-KC562K3-	CP12A-KF102K-	CQR42A-KF102K3-	CP12A-KG822K-	CQR42A-KG822K3-
CP12A-KC682K-	CQR42A-KC682K3-	CP12A-KF122K-	CQR42A-KF122K3-	CP12A-KG103K-	CQR42A-KG103K3-
CP12A-KC183K-	CQR42A-KC183K3-	CP12A-KF152K-	CQR42A-KF152K3-	CP12A-KG123K-	CQR42A-KG123K3-
CP12A-KC223K-	CQR42A-KC223K3-	CP12A-KF182K-	CQR42A-KF182K3-	CP12A-KG153K-	CQR42A-KG153K3-
CP12A-KC273K-	CQR42A-KC273K3-	CP12A-KF222K-	CQR42A-KF222K3-	CP12A-KG183K-	CQR42A-KG183K3-
CP12A-KC333K-	CQR42A-KC333K3-	CP12A-KF272K-	CQR42A-KF272K3-	CP12A-KG223K-	CQR42A-KG223K3-
CP12A-KC393K-	CQR42A-KC393K3-	CP12A-KF332K-	CQR42A-KF332K3-	CP12A-KG273K-	CQR42A-KG273K3-
CP12A-KC473K-	CQR42A-KC473K3-	CP12A-KF392K-	CQR42A-KF392K3-	CP12A-KG333K-	CQR42A-KG333K3-
CP12A-KC563K-	CQR42A-KC563K3-	CP12A-KF472K-	CQR42A-KF472K3-	CP12A-KG393K-	CQR42A-KG393K3-
CP12A-KC683K-	CQR42A-KC683K3-	CP12A-KF562K-	CQR42A-KF562K3-	CP12A-KG473K-	CQR42A-KG473K3-
CP12A-KC823K-	CQR42A-KC823K3-	CP12A-KF682K-	CQR42A-KF682K3-	CP12A-KG563K-	CQR42A-KG563K3-
CP12A-KC104K-	CQR42A-KC104K3-	CP12A-KF822K-	CQR42A-KF822K3-	CP12A-KG683K-	CQR42A-KG683K3-
CP12A-KC124K-	CQR42A-KC124K3-	CP12A-KF103K-	CQR42A-KF103K3-	CP12A-KG823K-	CQR42A-KG823K3-
CP12A-KC154K-	CQR42A-KC154K3-	CP12A-KF123K-	CQR42A-KF123K3-	CP12A-KG104K-	CQR42A-KG104K3-
CP12A-KC184K-	CQR42A-KC184K3-	CP12A-KF153K-	CQR42A-KF153K3-	CP12A-KG124K-	CQR42A-KG124K3-
CP12A-KC224K-	CQR42A-KC224K3-	CP12A-KF183K-	CQR42A-KF183K3-	CP12A-KG154K-	CQR42A-KG154K3-
CP12A-KC274K-	CQR42A-KC274K3-	CP12A-KF223K-	CQR42A-KF223K3-	CP12A-KG184K-	CQR42A-KG184K3-
CP12A-KC334K-	CQR42A-KC334K3-	CP12A-KF273K-	CQR42A-KF273K3-	CP12A-KG224K-	CQR42A-KG224K3-
CP12A-KC394K-	CQR42A-KC394K3-	CP12A-KF333K-	CQR42A-KF333K3-	CP12A-KG274K-	CQR42A-KG274K3-
CP12A-KC474K-	CQR42A-KC474K3-	CP12A-KF393K-	CQR42A-KF393K3-	CP12A-KG334K-	CQR42A-KG334K3-
CP12A-KC564K-	CQR42A-KC564K3-	CP12A-KF473K-	CQR42A-KF473K3-	CP12A-KG394K-	CQR42A-KG394K3-
CP12A-KC684K-	CQR42A-KC684K3-	CP12A-KF563K-	CQR42A-KF563K3-	CP12A-KG474K-	CQR42A-KG474K3-

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:08Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC, OS, SH

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5910-1697)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:08Z
Check the source to verify that this is the current version before use.