INCH-POUND
MIL-PRF-19978/20B
9 December 2021
SUPERSEDING
MIL-C-19978/20A
18 June 2001


PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, PLASTIC (OR PAPER-PLASTIC) DIELECTRIC, AXIAL-WIRE TERMINAL, TANGENTIAL RETAINER, TUBULAR (UNINSULATED), (HERMETICALLY SEALED IN METAL CASES), STYLE CQ10

INACTIVE FOR NEW DESIGN
AFTER 30 AUGUST 1974

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19978.

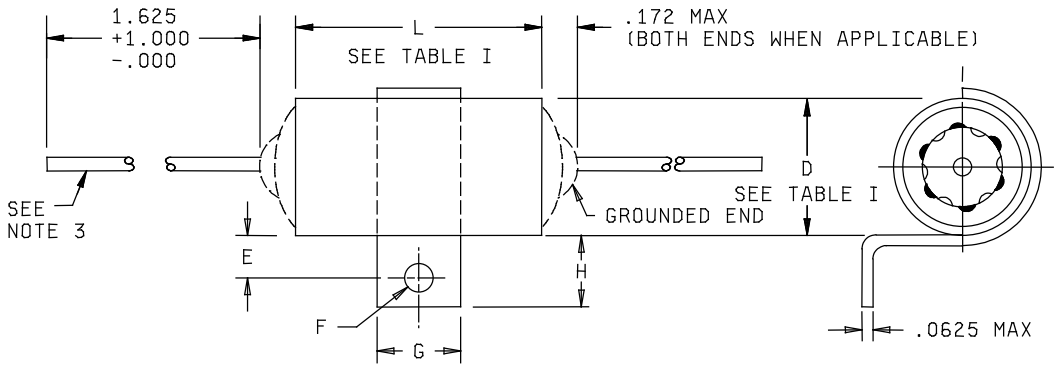

Case dimension D	H ± .062	G ± .062	E ± .031	F ± .005
Less than .500	.312	.250	.188	.144
.500 and up	.438	.500	.250	.156

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.032	0.81	.172	4.37	.400	10.16
.004	0.10	.062	1.57	.188	4.78	.438	11.13
.005	0.13	.0625	1.59	.235	5.97	.500	12.70
.025	0.64	.144	3.66	.250	6.35	1.000	25.40
.031	0.79	.156	3.96	.312	7.92	1.625	41.28

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for general information only.
3. Leads shall be of tinned solid wire, .025 inch (No. 22 AWG) for cases .235 inch and .312 inch in diameter; and .032 inch (No. 20 AWG) for cases .400 inch diameter and above. Tolerance on all lead wire diameters shall be + .004 inch, -.001 inch.

FIGURE 1. Style CQ10 capacitors.

AMSC N/A
FSC 5910
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: See figure 1 and table I.

Case material: Nonmagnetic (end seal may be of magnetic material).

Dielectric material: Paper and polyethelene terephthalate (K).

Terminals: Axial-wire lead (see figure 1).

Circuit diagram:



Rated voltage: See table I.

Rated temperature: -65° to +125°C.

Capacitance (nominal): See table I.

Capacitance tolerance: ±10 percent (symbol K).

Vibration grade: 3.

Dissipation factor (DF) (max): 1.0 percent.

Seal: MIL-STD-202-112, test condition letter A.

Barometric pressure, qualification only: In accordance with MIL-PRF-19978.

Test points:

Circuit diagram 1: Between terminals and case.

Circuit diagram 3: Between ungrounded terminal and case.

Vibration, high frequency: MIL-STD-202-204, test condition B, with the following exception:

Direction and duration of motion: 4 hours in each of two mutually perpendicular directions (total of 8 hours), one parallel and the other perpendicular to the cylindrical axis.

Salt atmosphere: In accordance with MIL-PRF-19978.

Solderability: In accordance with MIL-PRF-19978.

Terminal strength: MIL-STD-202-211, test condition letter D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style CQ10 capacitors.

Part or identifying number (PIN) 1/	DC voltage rating (volts)	Capacitance (µF)	Case dimensions (inches) 2/		
				Circuit 1	Circuit 3
			D+.010, -.020	L ± .015	L ± .015
CQ10A-KB333K3	100	.033	0.235	0.750	0.688
CQ10A-KB823K3	100	.082	0.312	0.875	0.812
CQ10A-KB104K3	100	.10	0.312	0.875	0.812
CQ10A-KB124K3	100	.12	0.400	0.875	0.812
CQ10A-KB154K3	100	.15	0.400	0.875	0.812
CQ10A-KB184K3	100	.18	0.400	1.125	1.062
CQ10A-KB224K3	100	.22	0.400	1.125	1.062
CQ10A-KB274K3	100	.27	0.400	1.375	1.312
CQ10A-KB394K3	100	.39	0.562	1.125	1.062
CQ10A-KB474K3	100	.47	0.562	1.125	1.062
CQ10A-KB684K3	100	.68	0.562	1.375	1.312
CQ10A-KB105K3	100	1.0	0.562	1.875	1.812
CQ10A-KC123K3	200	.012	0.235	0.750	0.688
CQ10A-KC153K3	200	.015	0.235	0.750	0.688
CQ10A-KC223K3	200	.022	0.235	0.750	0.688
CQ10A-KC473K3	200	.047	0.312	0.875	0.812
CQ10A-KC563K3	200	.056	0.312	0.875	0.812
CQ10A-KC683K3	200	.068	0.312	0.875	0.812
CQ10A-KC823K3	200	.082	0.400	0.875	0.812
CQ10A-KC104K3	200	.10	0.400	0.875	0.812
CQ10A-KC124K3	200	.12	0.400	1.125	1.062
CQ10A-KC154K3	200	.15	0.400	1.125	1.062
CQ10A-KC184K3	200	.18	0.400	1.375	1.312
CQ10A-KC224K3	200	.22	0.400	1.375	1.312
CQ10A-KC274K3	200	.27	0.562	1.125	1.062
CQ10A-KC334K3	200	.33	0.562	1.125	1.062
CQ10A-KC474K3	200	.47	0.562	1.375	1.312
CQ10A-KC564K3	200	.56	0.562	1.875	1.812
CQ10A-KC684K3	200	.68	0.562	1.875	1.812
CQ10A-KC824K3	200	.82	0.670	1.875	1.812
CQ10A-KC105K3	200	1.0	0.670	1.875	1.812
CQ10A-KE822K3	400	.0082	0.235	0.750	0.688
CQ10A-KE103K3	400	.010	0.235	0.750	0.688
CQ10A-KE333K3	400	.033	0.312	0.875	0.812
CQ10A-KE393K3	400	.039	0.400	0.875	0.812
CQ10A-KE473K3	400	.047	0.400	0.875	0.812
CQ10A-KE563K3	400	.056	0.400	1.125	1.062
CQ10A-KE683K3	400	.068	0.400	1.125	1.062
CQ10A-KE104K3	400	.10	0.400	1.375	1.312
CQ10A-KE154K3	400	.15	0.562	1.125	1.062
CQ10A-KE184K3	400	.18	0.562	1.375	1.312
CQ10A-KE224K3	400	.22	0.562	1.375	1.312
CQ10A-KE274K3	400	.27	0.562	1.875	1.812
CQ10A-KE334K3	400	.33	0.562	1.875	1.812
CQ10A-KE394K3	400	.39	0.670	1.875	1.812

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style CQ10 capacitors - Continued.

(PIN) 1/	DC voltage rating (volts)	Capacitance (µF)	Case dimensions (inches) 2/		
				Circuit 1	Circuit 3
			D+.010, -.020	L ± .015	L ± .015
CQ10A-KE474K3	400	.47	0.670	1.875	1.812
CQ10A-KE564K3	400	.56	0.750	2.125	2.062
CQ10A-KE684K3	400	.68	0.750	2.125	2.062
CQ10A-KE824K3	400	.82	1.000	1.875	1.812
CQ10A-KE105K3	400	1.00	1.000	1.875	1.812
CQ10A-KF102K3	600	.001	0.235	0.750	0.688
CQ10A-KF152K3	600	.0015	0.235	0.750	0.688
CQ10A-KF222K3	600	.0022	0.235	0.750	0.688
CQ10A-KF332K3	600	.0033	0.235	0.750	0.688
CQ10A-KF472K3	600	.0047	0.235	0.750	0.688
CQ10A-KF562K3	600	.0056	0.235	0.750	0.688
CQ10A-KF682K3	600	.0068	0.235	0.750	0.688
CQ10A-KF103K3	600	.010	0.312	0.875	0.812
CQ10A-KF153K3	600	.015	0.312	0.875	0.812
CQ10A-KF223K3	600	.022	0.312	0.875	0.812
CQ10A-KF333K3	600	.033	0.400	0.875	0.812
CQ10A-KF473K3	600	.047	0.400	1.125	1.062
CQ10A-KF683K3	600	.068	0.400	1.375	1.312
CQ10A-KF104K3	600	.10	0.562	1.125	1.062
CQ10A-KF124K3	600	.12	0.562	1.375	1.312
CQ10A-KF154K3	600	.15	0.562	1.875	1.312
CQ10A-KF184K3	600	.18	0.562	1.875	1.812
CQ10A-KF224K3	600	.22	0.562	1.875	1.812
CQ10A-KF274K3	600	.27	0.670	1.875	1.812
CQ10A-KF334K3	600	.33	0.670	1.875	1.812
CQ10A-KF394K3	600	.39	0.750	2.125	2.062
CQ10A-KF474K3	600	.47	0.750	2.125	2.062
CQ10A-KF684K3	600	.68	1.000	1.875	1.812
CQ10A-KG153K3	1000	.015	0.400	0.875	0.812
CQ10A-KG223K3	1000	.022	0.400	1.125	1.062
CQ10A-KG273K3	1000	.027	0.400	1.375	1.312
CQ10A-KG333K3	1000	.033	0.400	1.375	1.312
CQ10A-KG473K3	1000	.047	0.562	1.125	1.062
CQ10A-KG563K3	1000	.056	0.562	1.375	1.312
CQ10A-KG823K3	1000	.082	0.562	1.625	1.562
CQ10A-KG104K3	1000	.10	0.562	1.625	1.562
CQ10A-KG154K3	1000	.15	0.670	1.625	1.562
CQ10A-KG224K3	1000	.22	0.750	2.125	2.062
CQ10A-KG274K3	1000	.27	0.750	2.625	2.562
CQ10A-KG334K3	1000	.33	0.750	2.625	2.562
CQ10A-KG474K3	1000	.47	1.000	2.125	2.062

1/ Complete part number shall include an additional symbol to indicate circuit.
2/ Dimensions are in inches. See table II for metric equivalents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:09Z
Check the source to verify that this is the current version before use.

TABLE II. Millimeter equivalent of decimal inches.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
0.010	0.25	0.670	17.02	1.125	28.58	2.062	52.37
0.015	0.38	0.688	17.48	1.312	33.32	2.125	53.98
0.020	0.51	0.750	19.05	1.375	34.93	2.562	65.07
0.235	5.97	0.812	20.62	1.562	39.67	2.625	66.68
0.312	7.92	0.875	22.23	1.625	41.28		
0.400	10.16	1.000	25.40	1.812	46.02		
0.562	14.27	1.062	26.97	1.875	47.63		

Insulation resistance (IR):

Terminal to terminal: See table III.

Terminal to case: Greater than 10,000 megohms.

TABLE III. Terminal-to-terminal insulation resistance.

Capacitance rating	Minimum insulation resistance
	At +25°C
0 to 0.6 microfarad	25,000 megohms
Greater than 0.6 microfarad	15,000 megohm-microfarads 1/
	At +125°C
0 to 0.08 microfarad	250 megohms
Greater than 0.08 microfarad	20 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance in megohms.

Stability at low and high temperature:

Low temperature:

Test temperature: -65°C +0°C, -5°C.

Capacitance change (max): -10 percent.

High temperature:

Test temperature: +125°C +5°C, -0°C.

Capacitance change (max): +10 percent.

Life:

Capacitance change (max): ± 5 percent.

Resistance to soldering heat: In accordance with MIL-PRF-19978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:09Z
Check the source to verify that this is the current version before use.

NOTE: Style CQ10 capacitors are substitutable for style CP10 capacitors formerly covered in MIL-C-25/1K as shown in the following:

From	To	From	To
MIL-C-25/1K (CP10)	MIL-PRF-19978/20 (CQ10)	MIL-C-25/1K (CP10)	MIL-PRF-19978/20 (CQ10)
CP10A-KB333K-	CQ10A-KB333K3-	CP10A-KE334K-	CQ10A-KE334K3-
CP10A-KB823K-	CQ10A-KB823K3-	CP10A-KE394K-	CQ10A-KE394K3-
CP10A-KB104K-	CQ10A-KB104K3-	CP10A-KE474K-	CQ10A-KE474K3-
CP10A-KB124K-	CQ10A-KB124K3-	CP10A-KE564K-	CQ10A-KE564K3-
CP10A-KB154K-	CQ10A-KB154K3-	CP10A-KE684K-	CQ10A-KE684K3-
CP10A-KB184K-	CQ10A-KB184K3-	CP10A-KE824K-	CQ10A-KE824K3-
CP10A-KB224K-	CQ10A-KB224K3-	CP10A-KE105K-	CQ10A-KE105K3-
CP10A-KB274K-	CQ10A-KB274K3-	CP10A-KF102K-	CQ10A-KF102K3-
CP10A-KB394K-	CQ10A-KB394K3-	CP10A-KF152K-	CQ10A-KF152K3-
CP10A-KB474K-	CQ10A-KB474K3-	CP10A-KF222K-	CQ10A-KF222K3-
CP10A-KB684K-	CQ10A-KB684K3-	CP10A-KF332K-	CQ10A-KF332K3-
CP10A-KB105K-	CQ10A-KB105K3-	CP10A-KF472K-	CQ10A-KF472K3-
CP10A-KC123K-	CQ10A-KC123K3-	CP10A-KF562K-	CQ10A-KF562K3-
CP10A-KC153K-	CQ10A-KC153K3-	CP10A-KF682K-	CQ10A-KF682K3-
CP10A-KC223K-	CQ10A-KC223K3-	CP10A-KF103K-	CQ10A-KF103K3-
CP10A-KC473K-	CQ10A-KC473K3-	CP10A-KF153K-	CQ10A-KF123K3-
CP10A-KC563K-	CQ10A-KC563K3-	CP10A-KF223K-	CQ10A-KF223K3-
CP10A-KC683K-	CQ10A-KC683K3-	CP10A-KF333K-	CQ10A-KF333K3-
CP10A-KC823K-	CQ10A-KC823K3-	CP10A-KF473K-	CQ10A-KF473K3-
CP10A-KC104K-	CQ10A-KC104K3-	CP10A-KF683K-	CQ10A-KF683K3-
CP10A-KC124K-	CQ10A-KC124K3-	CP10A-KF104K-	CQ10A-KF104K3-
CP10A-KC154K-	CQ10A-KC154K3-	CP10A-KF124K-	CQ10A-KF124K3-
CP10A-KC184K-	CQ10A-KC184K3-	CP10A-KF154K-	CQ10A-KF154K3-
CP10A-KC224K-	CQ10A-KC224K3-	CP10A-KF184K-	CQ10A-KF184K3-
CP10A-KC274K-	CQ10A-KC274K3-	CP10A-KF224K-	CQ10A-KF224K3-
CP10A-KC334K-	CQ10A-KC334K3-	CP10A-KF274K-	CQ10A-KF274K3-
CP10A-KC474K-	CQ10A-KC474K3-	CP10A-KF334K-	CQ10A-KF334K3-
CP10A-KC564K-	CQ10A-KC564K3-	CP10A-KF394K-	CQ10A-KF394K3-
CP10A-KC684K-	CQ10A-KC684K3-	CP10A-KF474K-	CQ10A-KF474K3-
CP10A-KC824K-	CQ10A-KC824K3-	CP10A-KF684K-	CQ10A-KF684K3-
CP10A-KC105K-	CQ10A-KC105K3-	CP10A-KG153K-	CQ10A-KG153K3-
CP10A-KE822K-	CQ10A-KE822K3-	CP10A-KG223K-	CQ10A-KG223K3-
CP10A-KE103K-	CQ10A-KE103K3-	CP10A-KG273K-	CQ10A-KG273K3-
CP10A-KE333K-	CQ10A-KE333K3-	CP10A-KG333K-	CQ10A-KG333K3-
CP10A-KE393K-	CQ10A-KE393K3-	CP10A-KG473K-	CQ10A-KG473K3-
CP10A-KE473K-	CQ10A-KE473K3-	CP10A-KG563K-	CQ10A-KG563K3-
CP10A-KE563K-	CQ10A-KE563K3-	CP10A-KG823K-	CQ10A-KG823K3-
CP10A-KE683K-	CQ10A-KE683K3-	CP10A-KG104K-	CQ10A-KG104K3-
CP10A-KE104K-	CQ10A-KE104K3-	CP10A-KG154K-	CQ10A-KG154K3-
CP10A-KE154K-	CQ10A-KE154K3-	CP10A-KG224K-	CQ10A-KG224K3-
CP10A-KE184K-	CQ10A-KE184K3-	CP10A-KG274K-	CQ10A-KG274K3-
CP10A-KE224K-	CQ10A-KE224K3-	CP10A-KG334K-	CQ10A-KG334K3-
CP10A-KE274K-	CQ10A-KE274K3-	CP10A-KG474K-	CQ10A-KG474K3-

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:09Z
Check the source to verify that this is the current version before use.

Referenced documents: In addition to MIL-PRF-19978, this document references the following:

MIL-STD-202-112
MIL-STD-202-204
MIL-STD-202-211

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2022-006)

Review activities:
Army - AR, MI
Navy – AS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:09Z
Check the source to verify that this is the current version before use.