MIL-S-20008E(SA)
20 December 1977
SUPERSEDING
MIL-S-20008D(SA)
20 September 1973

MILITARY SPECIFICATION

SWEATER, MAN'S

This specification is approved for use by Naval Supply Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for a knitted pullover man's sweater, made of wool.

1.2 Classification The sweater shall be of one type, and shall be procured in the following sizes as specified (see 6.2):

Schedule of sizes

Extra-Small	Small	Medium	Large	Extra-Large
(32-34)	(36-38)	(40-42)	(44-46)	(48-50)

2. APPLICABLE DOCUMENTS

* 2.1 Issue of documents The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276 - Thread, Cotton
DDD-L-20 - Label; for Clothing, Equipage, and Tentage (General Use)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Navy Clothing & Textile Research Facility, 21 Strathmore Road, Natick, MA 01760, by using the self-addressed standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-43665 - Cloth Wool: Mothproofing Treatment of

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1491 - Glossary of Knitting Imperfections

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2 Other publications The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

US DEPARTMENT OF AGRICULTURE

Methods of Test for Grades of Wool Top

(Application for copies should be addressed to the US Department of Agriculture, Agricultural Marketing Service, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Guide samples Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 Standard sample The finished sweater shall match the standard sample for shade, and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.3).

* 3.3 First article When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2).

3.4 Materials

3.4.1 Wool yarn The yarn for knitting and for the sewing (lower cover) thread when applicable, shall be of a 2-ply worsted made of fleece or pulled sheep's wool or a combination of both, not lower in grade than 56's US Standard. The use of reprocessed, reused, or waste wool is prohibited (see 4.3.1).

3.4.1.1 Mothproofing The wool shall be mothproofed in accordance with MIL-C-43665 (see 4.3.1).

3.4.2 Knitted fabrics The knitted fabrics for the component parts of the sweater, constructed as specified in 3.4.2.1 through 3.4.2.3, shall conform to the physical requirements shown in Table I when tested as specified in 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

Table I - Physical requirements of knitted component parts

Component	Stitch Type	Wales per inch (Minimum)	Courses per inch (Minimum)
Body	Jersey	6	9
Skirt	2X2 rib	6	11
Sleeves	Jersey	6	9
Wristlets	2X2 rib	6	11
Collarette	1X1 rib	13	21

* 3.4.2.1 Body and skirt The body and skirt shall be continuously knitted together to applicable body width (circular knit without side seams) or with two full side seams (see Table III, operation 4). The skirt shall finish not less than 3 1/4 inches (8.3cm) nor more than 3 3/4 inches (9.5cm) in height (wale) direction.

* 3.4.2.2 Sleeves and wristlets The sleeves and wristlets shall be continuously knitted together. The wristlets shall finish not less than 2 3/8 inches (6.0cm) nor more than 2 7/8 inches (7.3cm) in height (wale) direction.

* 3.4.2.3 Collarette The collarette shall be of a circular knit seamless tubing or flat knit in one piece, to finish as specified in Table III, operation 6.

3.4.3 Thread The thread for seaming and stitching the sweater shall be cotton, conforming to type IC2, ticket no A, 3-ply, of V-T-276. The thread shall be dyed Black AA, Cable No. 66043 or Blue AB, Cable No. 66044.

3.4.3.1 Colorfastness The dyed thread shall show fastness to light, laundering (after 3 cycles), wet-dry cleaning, and perspiration equal to or better than the standard sample. When a standard sample is not available, the dyed thread shall show a minimum of "good" fastness to light, laundering (after 3 cycles), wet-dry cleaning, and perspiration. Testing shall be performed as specified in V-T-276.

* 3.4.4 Label Each finished sweater shall have a combination identification, size, and instruction label conforming to type I, classes 1, 2, and 3, of DDD-L-20, except that the inscription shall be as shown below and shall show fastness to laundering and dry cleaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

SWEATER, MAN'S (100% Wool)
CONTRACT NO: DLA100-00-0-0000 (EXAMPLE)
STOCK NO: 8405-00-000-0000 (EXAMPLE)
SIZE: MEDIUM (40-42) (EXAMPLE)
NAME OF CONTRACTOR:

DRY CLEAN FOR BEST RESULTS

OR

HAND LAUNDER IN LUKEWARM WATER USING A MILD SOAP. DO NOT WRING OR TWIST. RINSE IN CLEAR COLD WATER, RESHAPE, AND DRY FLAT.

3.5 Color The color of the finished sweater shall match Blue Shade 3346.

3.5.1 Matching The color shall match the standard sample under artificial daylight having a color temperature of 7500°K and shall be a good approximation to the standard sample under incandescent lamplight at 2800°K.

3.5.2 Colorfastness The dyed finished sweater shall show fastness to light, laundering, wet-dry cleaning, perspiration, and crocking equal to or better than the standard sample when tested as specified in 4.4.

3.6 Nonfibrous material content The starch and protein content, including chloroform-soluble and water-soluble material of the finished dyed sweater, shall not exceed 3.0 percent when tested as specified in 4.4.

3.7 pH The pH value of the water extract of the finished dyed sweater, shall be not less than 5.0 nor more than 8.5 when tested as specified in 4.4.

* 3.8 Weights The weights of the finished sweaters shall be in accordance with Table II when tested as specified in 4.4.

Table II - Finished weights of sweaters

Wgt/dozen (min.) conditioned lbs	Extra-Small (32-34)	Small (36-38)	Medium (40-42)	Large (44-46)	Extra-Large (48-50)
	8 lbs 4 ozs. (3.7Kg)	9 lbs 8 ozs. (4.3Kg)	10 lbs 8 ozs. (4.7Kg)	12 lbs (5.4Kg)	14 lbs (6.3Kg)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

* 3.9 Design The sweater shall be of a pull-over style, with a one piece mock-turtle (crew) neck collarette; rib-knit skirt; and set-in long sleeves with rib-knit wristlets (see Figure 1). The skirt and wristlets shall be an integral part of the body and sleeves respectively (not seamed or looped).

3.9.1 Figure Figure 1 is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

* 3.10 Patterns The patterns for cutting all component parts of the sweater shall be furnished by the contractor, and shall be of the proper proportions to provide good fitting sweaters conforming to the finished measurements specified in 3.13.

3.11 Construction

3.11.1 Stitches, seams, and stitching Stitch, seam, and stitching types specified in Table III shall conform to FED-STD-751. Whenever two or more stitch types are given for the same operation, either type may be used. Seam allowances shall be maintained with seams properly sewn so that no raw edges, runoffs, twists, pleats, or open seams will result.

3.11.2 Stitches per inch The minimum and maximum number of stitches per inch shall be as specified in Table III.

3.11.3 Thread breaks and ends of seams Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be securely tacked or backstitched not less than 1/4 inch (6.4mm). Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch (12.7mm).

3.12 Manufacturing operations requirements The sweater shall be manufactured in accordance with operation requirements specified in Table III. The contractor is not required to follow the exact sequence of operations listed, provided the finished sweater is identical to that produced by following the exact sequence as shown.

* 3.12.1 Shade marking The component parts of the sweater shall be shade marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

a. Corrosive metal fastening devices.
b. Sew-on shade tickets.
c. Adhesive type tickets which show discoloration or the adhesive mass adheres to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

Table III - Construction of sweater

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread		
					Needle	Bobbin or Looper	Cover
1.	Cutting a. Cut the cloth component parts of the sweater in strict accordance with the contractor's patterns, which shall show size; shape; and directional lines for proper assembly and applicable matching of all parts.						
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in 4.3.2.1, shall be removed from production and replaced with non-defective and properly matched components.						
3.	Shade and size marking (see 3.12.1) All component parts shall be marked, ticketed, or bundled to insure a uniform shade; size; and proper assembly throughout the sweater.						
4.	Side seams - optional for body and skirt a. Join and close cut sides of the continuously knitted body and skirt, to form two (2) full side seams.	504 or 505	SSh-2(a)	8-10	A/3	A/3	A/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

Table III - Construction of sweater (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper/Cover
4.	Side seams - optional for body and skirt (cont'd)					
	b. Cover stitch side seams.	402 or 406	SSh-2(b)	12-14	A/2	2 ply wool yarn (see 3.4.1)
	c. Turn under the stitching chain at bottom edge of each side seam, and position a 1/4 inch (6.4mm) horizontal bartack across seam 1/16 to 3/16 inch (1.6 to 4.8mm) from finished bottom edge of skirt.	Bartack	-	21 per bartack	A/3	A/3
5.	Join shoulders					
	a. Join fronts to back along shoulder edges.	504 or 505	SSh-2(a)	8-10	A/3	A/3 A/3
	b. Cover stitch each seam.	402 or 406	SSh-2(b)	12-14	A/3	2 ply wool yarn (see 3.4.1)
6.	Attach collarette					
	a. Circular knit seamless tubing, when applicable:					
	1. Cut and fold the collarette to finish in the length (wale) direction.					
	2. Join and close raw edges of the collarette to raw edge of sweater neckline opening.	504 or 505	SSh-2(a)	8-10	A/3	A/3 A/3
	3. Cover stitch seam.	402 or 406	SSh-2(b)	12-14	A/3	2 ply wool yarn (see 3.4.1)
	OR					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

Table III - Construction of sweater (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread		
					Needle	Bobbin or Looper	Cover
6.	Attach collarette (cont'd) b. Flat knit collarette piece, when applicable:						
	1. Cut the material to finish in the length (wale) direction. 2. Join and close raw edges of the material.	504 or 505	SSa-1	8-10	A/3	A/3	A/3
	3. Fold to finish with the merrow (overedge) stitch on the inside and raw edges along the bottom.	504 or 505	SSh-2(a)	8-10	A/3	A/3	A/3
	4. Join and close raw edges of collarette material to raw edge of sweater neckline opening. 5. Cover stitch seam.	402 or 406	SSh-2(b)	12-14	A/3	2 ply wool yarn (see 3.4.1)	
	c. Regardless of the applicable knitting process and size sweater being procured, the collarette when measured on a straight line at the center from the top folded edge to bottom edge at sweater neckline shall finish 2 to 2 1/2 inches (5.1 to 6.4cm) in length (wale) direction.						
7.	Attach sleeves to armholes a. Set and stitch sleeves to armholes.	504 or 505	SSh-2(a)	8-10	A/3	A/3	A/3
	b. Cover stitch each seam.	402 or 406	SSh-2(b)	12-14	A/3	2 ply wool yarn (see 3.4.1)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

Table III Construction of sweater (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Close sleeves					
	a. Close sleeves and wristlets at inseams.	504 or 505	SSh-2(a)	8-10	A/3	A/3
	b. Cover stitch each seam.	402 or 406	SSh-2(b)	12-14	A/3	2 ply wool yarn (see 3.4.1)
	c. Turn under stitching chain at bottom edge of each wristlet inseam, and position a 1/4 inch (6.4mm) horizontal bartack across seam 1/16 to 3/16 inch (1.6 to 4.8mm) from finished bottom edge of the wristlet.	Bartack		21 per bartack	A/3	A/3
9.	Attach label (see 3.4.4) Position the label on inside of sweater at center back, 1/4 to 3/4 inch (6.4 to 19.1mm) below collarette seam. Stitch the label vertically along both ends, 1/8 to 1/4 inch (3.2 to 6.4mm) from the edges adjusting label slack so that the material on the underside may stretch fully when worn.	301		12-14	A/3	A/3
10.	Cleaning a. All ends of thread shall be trimmed and loose thread removed throughout sweater. b. Remove all spots and stains. c. Remove all shade tickets.					

Source: https://assist.dla.mil - Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

* 3.13 Measurements The sizes and measurements of the finished sweater shall conform to the dimensions specified in Table IV. All measurements are expressed in inches and the metric equivalent, and shall be made with the sweater in a fully relaxed state and placed smooth and flat.

Table IV - Finished measurements

Measurement	SIZES Extra-Small (32-34)	Small (36-38)	Medium (40-42)	Large (44-46)	Extra-Large (48-50)	Tolerance
Neck width (A)	7 1/2(19.1cm)	7 1/2(19.1cm)	8 (20.3cm)	8 (20.3cm)	9 (22.9cm)	± 1/2(12.7mm)
Chest (B)	12 (38.1cm)	17 (43.2cm)	19 (48.3cm)	21 (53.3cm)	23(58.4cm)	± 1 (2.5cm)
Length (C)	23 1/2(59.7cm)	24 1/2(62.2cm)	25 1/2(64.8cm)	27 (68.6cm)	28 1/2(72.4cm)	± 1 (2.5cm)
Overarm sleeve length (D)	20 1/2(52.1cm)	21 (53.3cm)	22 (55.9cm)	23 1/2(59.7cm)	24 1/2(62.2cm)	± 1 (2.5cm)
Armhole length(E)	7 1/2(19.1cm)	7 3/4(19.7cm)	8 (20.3cm)	8 1/2(21.6cm)	9 1/4(23.5cm)	+ 1/2(12.7mm) - 1/4(6.4mm)
Wristlet width(F)	3 (7.6cm)	3 (7.6cm)	3 (7.6cm)	3 1/2 (8.9cm)	3 1/2(8.9cm)	± 1/4(6.4mm)

NOTE: A through F refer to figure 1.

A. Measurement shall be taken from the intersection of the collarette seam and shoulder seam across neck front to similar intersection on opposite side.
B. Measurement shall be taken across front approximately 1 inch (2.5cm) below armhole seams, folded edge to folded edge. When two full side seams are used, measure from seam to seam.
C. Measurement shall be taken from the intersection of the collarette seam and shoulder seam perpendicular to bottom edge of skirt.
D. Measurement shall be taken along outside folded edge of sleeve from the intersection of the armhole seam and shoulder seam to bottom edge of wristlet.
E. Measurement shall be taken from the intersection of the armhole seam and shoulder seam on a straight line to the intersection of the armhole seam and sleeve inseam.
F. Measurement shall be taken at center of wristlet on a straight line, folded edge to seamed edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

3.14 Workmanship The finished sweater shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection When required, the first article submitted in accordance with 3.3, shall be inspected as specified in 4.3.2.1 and 4.3.2.2 for compliance with design, construction, workmanship and dimensional requirements.

* 4.3 Quality conformance inspection Sampling for inspection shall be in accordance with MIL-STD-105, except where otherwise indicated herein.

* 4.3.1 Component and material inspection In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. A certificate of compliance shall be submitted for the ply of yarn (2-ply) used for the knitting and sewing (lower cover) thread when applicable, that worsted yarn made of fleece or pulled sheep's wool or a combination of both has been used, and that the yarn has been mothproofed in accordance with MIL-C-43665.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

*4.3.1.1 Wool grade The wool shall be visually examined for grade in top form by comparison with the applicable US Standard (see 2.2). In the event of a dispute resulting from this examination, the wool grade shall be determined by the width (wedge) method approved by the government. The sample unit shall be one yard (0.92m) of undyed top. The sample size shall be as shown in Table V. The lot size shall be expressed in units of pounds, and shall be unacceptable if a single unit of product fails to meet the required grade.

Table V - -Sample size

Lot Size	Sample Size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

4.3.2 Examination of the end item The defects found during the examination of the end item shall be classified in accordance with 4.3.2.1 and 4.3.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.2.3. The lot size shall be expressed in units of sweaters. The sample unit shall be one finished sweater.

* 4.3.2.1 Visual examination

Defect	Classification Major	Minor
Material Defects and Damages		
a. Any hole, cut, tear, smash, burn, needle chew, missing yarn, drop stitch, broken yarn	X	
b. Loose yarn, knot protruding from surface, thin place or uneven knitting, barre or cockled (ridgy) fabric, slubby yarn more than twice the size of the normal diameter of the yarn, knitted in waste, visible mend, pulled thread or yarn, shade bar, dye streak, area of no dye penetration; more than 1/2 inch (12.7mm) (largest dimensions in any direction)		
1. On outside		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Material Defects and Damages (cont'd)		
c. Color not as specified	X	
NOTE: For knitted fabric defect definitions, see MIL-STD-1491.		
Cleanness		
a. Any spot or stain on outside		X
b. Thread or yarn ends on outside not trimmed or loose thread or yarn ends not removed		X
c. Any marking exposed or visible on outside		X
d. Two or more shade or size tickets not removed		X
Shaded parts		
a. Any part shaded or variation in shade within a part		
1. On outside		X
Components and Assembly		
a. Any component part or operation omitted (unless otherwise classified herein)	X	
b. Any component not as specified, i.e., type, color etc	X	
c. Any component part tight, twisted, distorted, pleated, or full (unless otherwise classified herein)		X
d. Any operation not as specified (unless otherwise classified herein)		X
Seams and Stitching		
a. Accuracy of seaming:		
1. Seam puckered		X
2. Seam irregular, twisted, pleated, or wavy		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Seams and Stitching (cont'd)		
a. Accuracy of seaming: (cont'd)		
3. Any part of sweater caught in an unrelated operation	X	
4. Ends of seams or stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch (6.4mm)		X
5. Thread breaks not secured or stitching back of the break less than 1/2 inch (12.7mm)		X
b. Gage of stitching:		
1. Irregular, not within range specified, or varies more than 1/16 inch (1.6mm) when no range is specified (score only when the condition exists on more than 1/2 the length of seam)		X
c. Seam and stitch type:		
1. Not specified seam or stitch type		X
2. Any line of stitching omitted		X
3. Any line of stitching misplaced or not beginning or ending where specified		X
d. Any open seam	X	
NOTE: The seam shall be classified open when one or more stitches joining a seam are broken or when two or more continuous skipped or runoff stitches occur.		
e. Stitch tension		
1. Loose tension resulting in a loose seam	X	
2. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X	
f. Stitches per inch more or less than specified		X
g. Bartack		
1. Any omitted	X	
2. Any insecure, not as specified, or misplaced		X
3. Any having one or more skipped or broken stitches		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Label		
a. Omitted, incorrect, or illegible	X	
b. Misplaced, not attached as specified, or stitching through the printing		X

* 4.3.2.2 Dimensional examination The sweater shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from nominal dimensions and tolerances specified in Table IV, shall be scored as a size measurement defect (see 3.13).
b. Sleeve lengths unequal in length by 1/2 inch (12.7mm) or more shall be scored as a size measurement defect.
c. Finished height (wale) direction of skirt less than 3 1/4 inches (8.3cm) or more than 3 3/4 inches (9.5cm), shall be scored as a size measurement defect.
d. Finished height (wale) direction of wristlet less than 2 3/8 inches (6.0cm) or more than 2 7/8 inches (7.3cm), shall be scored as a size measurement defect.
e. Finished height of collarette (wale) direction less than 2 inches (5.1cm) or more than 2 1/2 inches (6.4cm), shall be scored as a size measurement defect (see Table III, operation 6).

4.3.2.3 Inspection levels and acceptable quality levels (AQL's) The inspection levels and the acceptable quality levels, expressed in defects per 100 units for visual and dimensional examination, shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

	Inspection level	AQL's Major	Total
For defects applicable to 4.3.2.1	I	2.5	6.5
For defects applicable to 4.3.2.2	S-3	-	4.0

4.3.3 Examination of packaging requirements An examination shall be made to determine that packaging, packing, and marking complies with the Section 5 requirements of this specification. The sample unit shall be one shipping container fully prepared for delivery except that it need not be closed. Examination for the closure defects listed below shall be made. The lot size shall be the number of shipping containers in the production inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling, bulging or distortion of container, open and non-continuous heat sealed seams of polyethylene bag, or incorrectly fabricated bag.
Content	Number of sweaters per shipping container is more or less than specified 1/

1/ For this defect, one shipping container in the sample shall be examined.

4.4 Testing of the end item The methods of testing specified in FED-STD-191 shall be used whenever applicable, and as listed in Table VI, shall be followed. The physical and chemical values specified in Section 3 apply to the average of the determinations made on a sample unit for test purposes as specified in the applicable test methods. The lot size shall be expressed in units of one (1) sweater each. With the exception of weight per dozen, the sample size shall be as specified in Table V. The sample unit shall be as follows:

For Weight - One dozen (12) sweaters of each size in the lot with a sample size of one (1) regardless of lot size.

All other tests - Two sweaters

The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

Table VI - End item tests

Characteristics	Requirement paragraph	method
Type of knit stitch:		
Body	3.4.2	Visual 1/
Skirt	3.4.2	Visual 1/
Sleeves	3.4.2	Visual 1/
Wristlets	3.4.2	Visual 1/
Collarette	3.4.2	Visual 1/
Wales per inch:		
Body	3.4.2	5070
Skirt	3.4.2	5070
Sleeves	3.4.2	5070
Wristlets	3.4.2	5070
Collarette	3.4.2	5070
Courses per inch:		
Body	3.4.2	5070
Skirt	3.4.2	5070
Sleeves	3.4.2	5070
Wristlets	3.4.2	5070
Collarette	3.4.2	5070
Colorfastness to:		
Light	3.5.2	5660
Laundering	3.5.2	5614
Wet-dry cleaning	3.5.2	5622
Perspiration	3.5.2	5680
Crocking	3.5.2	5651
Nonfibrous material content	3.6	2611
pH	3.7	2811
Weight per dozen	3.8	2/

1/ One determination shall be performed in each area of the sample unit, and the results reported as "pass" or "fail".

2/ The twelve (12) sweaters of each size encompassing the sample unit for testing, shall be allowed to reach equilibrium under standard conditions as defined in FED-STD-191. When under standard conditions, the sweater shall be weighed as a unit to the nearest 1.0 ounce. The entire lot of the applicable size shall be rejected if the weight per dozen is below the minimum weight specified.

5. PACKING

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

* 5.1 Preservation-packaging Preservation-packaging shall be level A or Commercial as specified (see 6.2).

* 5.1.1 Level A Each sweater shall be neatly folded to measure approximately 14 1/2 inches (36.8cm) in length by 11 1/2 inches (29.2cm) in width. EAch folded sweater face side up shall be inserted into a snug-fitting, flat style, clear polyethylene film bag of 0.0015 inch (0.04mm) thickness (+ 25 percent tolerance). The bag may be fabricated from polyethylene film tubing or sheeting, and shall be not less than 1 inch (2.5cm) greater in length than the folded garment. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed, with the heat seal made as close as possible to the open end. A 1/4 inch (6.4mm) diameter hole shall be made at one corner of the bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

* 5.1.2 Commercial packaging Sweaters shall be preserved-packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A Twenty (20) sweaters, of one size only and packaged as specified in 5.1, shall be packed in a solid fiberboard shipping container conforming to type SF, class weather-resistant, grade V2s, size 3A, of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c, of MIL-B-17757. Level A packages shall be packed flat, two in length, one in width, and ten in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.2 Level B Twenty (20) sweaters, of one size only and packaged as specified in 5.1, shall be packed in a corrugated fiberboard shipping container conforming to type CF, class domestic, grade 275, size 3A, of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 200, of MIL-B-17757. Level A packages shall be packed flat two in length, one in width, and ten in depth within the shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

Each container shall have the content completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard container When specified (see 5.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

* 5.2.3 Level C Sweaters, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

* 5.3.1 Polyethylene bagged packages Polyethylene bagged packages shall have the following information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification:

SWEATER, MAN'S (100% WOOL)
STOCK NO.:
SIZE
QUANTITY

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side directly under the printing or stenciling, a white paper label 5 by 4 inches (12.7 by 10.2cm) with the words "MIXED SIZES" plainly printed or stenciled thereon and under these words shall be legibly printed or stamped the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The sweater covered by this specification is intended for use by male military personnel of the Department of the Navy.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Sizes required (see 1.2).
c. First article requirements (see 3.3).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples. For access to samples, address the procuring office stating the invitation for bids.

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccurancies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - SA

Preparing Activity:
Navy - SA

Project No. 8405-N598.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

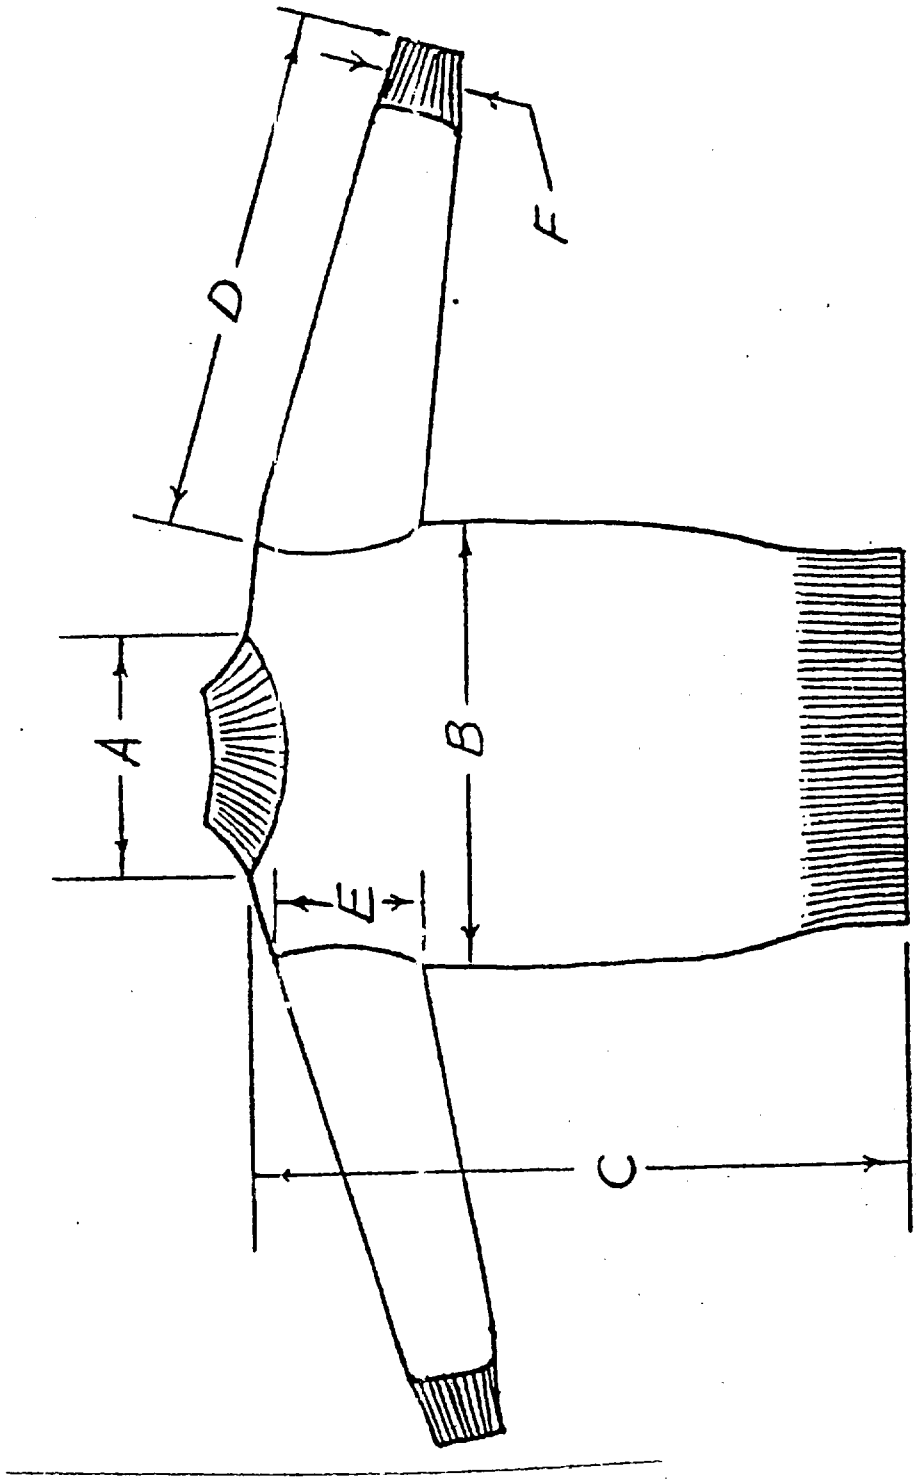


FIGURE 1 - SWEATER MEN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

[illegible] to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgment will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
(Code 50)
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:13Z
Check the source to verify that this is the current version before use.