2 December 1971
SUPERSEDING
MIL-P-38199A
14 April 1966

MILITARY SPECIFICATION

PAD, PARACHUTE HARNESS, QUICK RELEASE

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of pad, fabricated of leather, felt and nylon fabric, used with the parachutist's harness quick release.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

*	PPP-B-26	-	Bag, Plastic, Polyethylene
	PPP-B-566	-	Boxes, Folding, Paperboard
*	PPP-B-601	-	Boxes, Wood, Cleated Plywood
	PPP-B-636	-	Boxes, Shipping, Fiberboard
	PPP-B-676	-	Boxes, Setup

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

DRAWINGS

USAF

44B9637	-	Pad, Assembly - Parachute Harness, Quick Release

FSC 1670

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:03Z
Check the source to verify that this is the current version before use.

(Miniature copies of sheets 1 and 2 of USAF Drawing 44B9637, identified as figures 1 and 2, are attached for information only).

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202, Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

3. REQUIREMENTS

* 3.1 First article.- When specified, the supplier shall furnish a sample for first article inspection and approval (see 4.2, 6.2 and 6.3).

3.2 Materials.- Materials shall conform to the requirements specified on USAF Drawing 44B9637 and to subsidiary specifications, standards and drawings applicable thereto.

3.3 Construction.- Construciton details shall be in accordance with the requirements specified on USAF Drawing 44B9637.

3.3.1 Machine stitching.- Thread breaks, bobbin runouts, or two or more consecutive skipped stitches shall be over-stitched not less than 1/2 inch beyond ends of defect. Runoffs shall be restitched to conform to the required stitch pattern. Thread tension shall be maintained so that there will be no loose stitching and the locks will be imbedded in the materials sewed. All thread ends shall be trimmed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:03Z
Check the source to verify that this is the current version before use.

3.4 Workmanship.- The workmanship shall conform to the quality established by this specification.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.2 First article inspection.- When required (see 6.2), inspection of the first article shall be made of a completely fabricated item for all provisions of this document applicable to end item inspection.

4.3 Material and component inspection.- In accordance with 4.1 above, materials and components shall be inspected in accordance with all the requirements of referenced specifications, standards and drawings, unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.1 In-process inspection.- Inspection shall be made of components and subassemblies at appropriate stages of fabrication to determine conformance to the requirements of this document. The Government reserves the right to exclude from consideration for acceptance any materials or components for which in-process inspection has indicated non-conformance.

* 4.4 Inspection of the end item.- Lots shall be expressed in units of pads.

* 4.4.1 Inspection levels and acceptable quality levels (AQL's).- Inspection levels and AQL's, expressed in defects per hundred units, shall be as follows:

	Inspection levels	AQL's
For examination in 4.4.2	II	2.5 - Major 6.5 - Total
For examination in 4.4.3	S-3	2.5 - One class
For examination in 4.4.4	S-2	4.0 - One class

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:03Z
Check the source to verify that this is the current version before use.

4.4.2 Examination of visual characteristics.- The sample unit for this examination shall be one complete pad assembly. Characteristics to be examined and classification of defects shall be as follows:

Examine	Defect	Classification Major	Classification Minor
Materials	Component not specified color		X
	Component not finished as specified		X
Construction and workmanship	Component missing, not assembled or joined as specified	X	
Stitches and stitching	Not type of stitch specified	X	
	Stitch pattern not as specified		X
	One stitch less than minimum specified		X
	Two stitches less than minimum specified	X	
	One or more stitches in excess of the maximum specified		X
NOTE:	Variation in number of stitches per inch, caused by the operator speeding up the machine or pulling the material in order to sew over heavy places, heavy sesms or in turning corners, shall be classified as follows:		
	(a) Within the major defect classification - Minor defect.		
	(b) Within the minor defect classification - No defect.		
	Thread breaks, bobbin runouts, or two or more consecutive skipped stitches not oversticched a minimum of 1/2 inch		X
	Ends of stitching not backstitched a minimum of 1/2 inch		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:03Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Stitches and stitching (cont'd)	Loose tension, resulting in loosely exposed top or bobbin thread; or tight tension resulting in tightness or puckering of material at stitch line		X
	Thread ends not trimmed throughout		X
	Any row of stitching missing	X	
	Needle chews	X	
	Stitching run off at edge and not restitched in accordance with the required stitch pattern		X
Leather	Cut, torn, scarred, brand mark or edges cut by runoff of stitching	X	
	Smooth side of leather not placed as specified		X
Webbing and cloth	Cut, tear, hole, thin or weak place, or abrasion or seared area on nylon	X	
	Edges of webbing cut, frayed, raveled, or torn	X	
Thread	Not specified type or size	X	
	Color not as specified		X
Cementing	Cement on buffer more than 3/8 inch from edge		X
	Applied in areas other than specified	X	
Cleanness	Grease, dirt, or oil stains, or cement smears		X
Hardware	Component fractured or malformed	X	
	Sharp burr or metal sliver	X	
	Finish omitted, peeling, flaking, blistered, or not otherwise adherent	X	
	Any area or rust or corrosion	X	
Identification	Missing, illegible, incomplete, incorrect, improper location, or not applied as specified		X
	Wrong color		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:03Z
Check the source to verify that this is the current version before use.

4.4.3 Dimensional examination.- The sample unit for this examination shall be one complete pad assembly. Examination shall be made of dimensional characteristics. Any deviation from specified dimensional requirements shall constitute a defect.

4.4.4 Examination of preparation for delivery.- An examination shall be made to determine compliance with the packaging, packing and marking requirements specified in section 5. The sample unit for this examination shall be one shipping container fully prepared for delivery except that it need not be sealed. Characteristics to be examined and defects applicable thereto shall be as specified below. Examination shall be made in two phases; first, an interior examination; and second, an examination of the container sealed or closed for delivery.

Examine	Defect
* Marking (exterior container and intermediate package)	Omitted; incorrect, illegible; improper size, or not as specified.
Materials	Component missing, damaged, defective, or not as specified.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping or taping; bulging or distortion of containers; improper closure of polyethylene bag or expelling of air; contents loose or not snug fitting.
* Contents (container and intermediate package)	Number per intermediate package and exterior container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.-

* 5.1.1.1 Unit packaging.- Each pad shall have the attached safety strap neatly folded and positioned in such a manner as not to obstruct the readability of the identification marking. Each pad shall then be unit packaged

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:03Z
Check the source to verify that this is the current version before use.

in a close-fitting 0.002-inch thick polyethylene film bag conforming to type I or II, grade A, style 1 of PPP-B-26. Prior to or during the heat sealing closure operation, excess air within the bag shall be expelled.

* 5.1.1.2 Intermediate packaging.- Twenty pads, unit packaged as specified in 5.1.1.1, shall be packaged in a folding paperboard box conforming to variety 2, style III, type G, class 1 of PPP-B-566; or setup paperboard box conforming to type I, variety 2, class A, style 4 of PPP-B-676. The pads shall be packaged on edge two in length, ten (nested) in width, and one in depth within a paperboard box. Inside dimensions of each paperboard box shall be 9-1/4 inches in length, 6-1/4 inches in width and 4-5/8 inches in depth. Each box shall be securely closed with pressure-sensitive tape in accordance with the appendix of the applicable box specification.

5.1.2 Level C.- Pads shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

* 5.2.1 Level A.- Three hundred pads, packaged as specified in 5.1, shall be packed in a shipping container conforming to style RSC, V2s or V3s of PPP-B-636. Alternatively, shipping containers shall conform to overseas type, style A or I, grade A or B, type 2 load of PPP-B-601, as specified (see 6.2). Level A packages shall be packed on end, five in length, three in width, and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 24-1/4 inches in length, 20 inches in width, and 9-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed and reinforced in accordance with the appendix of the applicable container specification.

* 5.2.2 Level B.- Three hundred pads, packaged as specified in 5.1, shall be packed in a shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed on end, five in length, three in width, and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 24-1/4 inches in length, 20 inches in width, and 9-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:03Z
Check the source to verify that this is the current version before use.

* 5.2.2.1 When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification.

* 5.2.3 Level C.- Pads, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery to destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, intermediate packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The pad covered by this specification is a protective cushion for use with the quick release device of the harness component of troop-type personnel parachutes.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When a first article is required (see 3.1, 4.2 and 6.3).
(c) Stock number.
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) Type of shipping container desired for level A packing (see 5.2.1).
(f) When V-board shipping containers are required for level B shipments (see 5.2.2.1).

* 6.3 First article.- When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample. The first article should consist of one unit. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Custodians:

Army - GL
Navy - AS
Air Force - 82

Review activities:

Army - AV
Air Force - 11

User activity:


Navy - MC

Preparing activity:

Army - GL

Project No. 1670-0445

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:03Z
Check the source to verify that this is the current version before use.

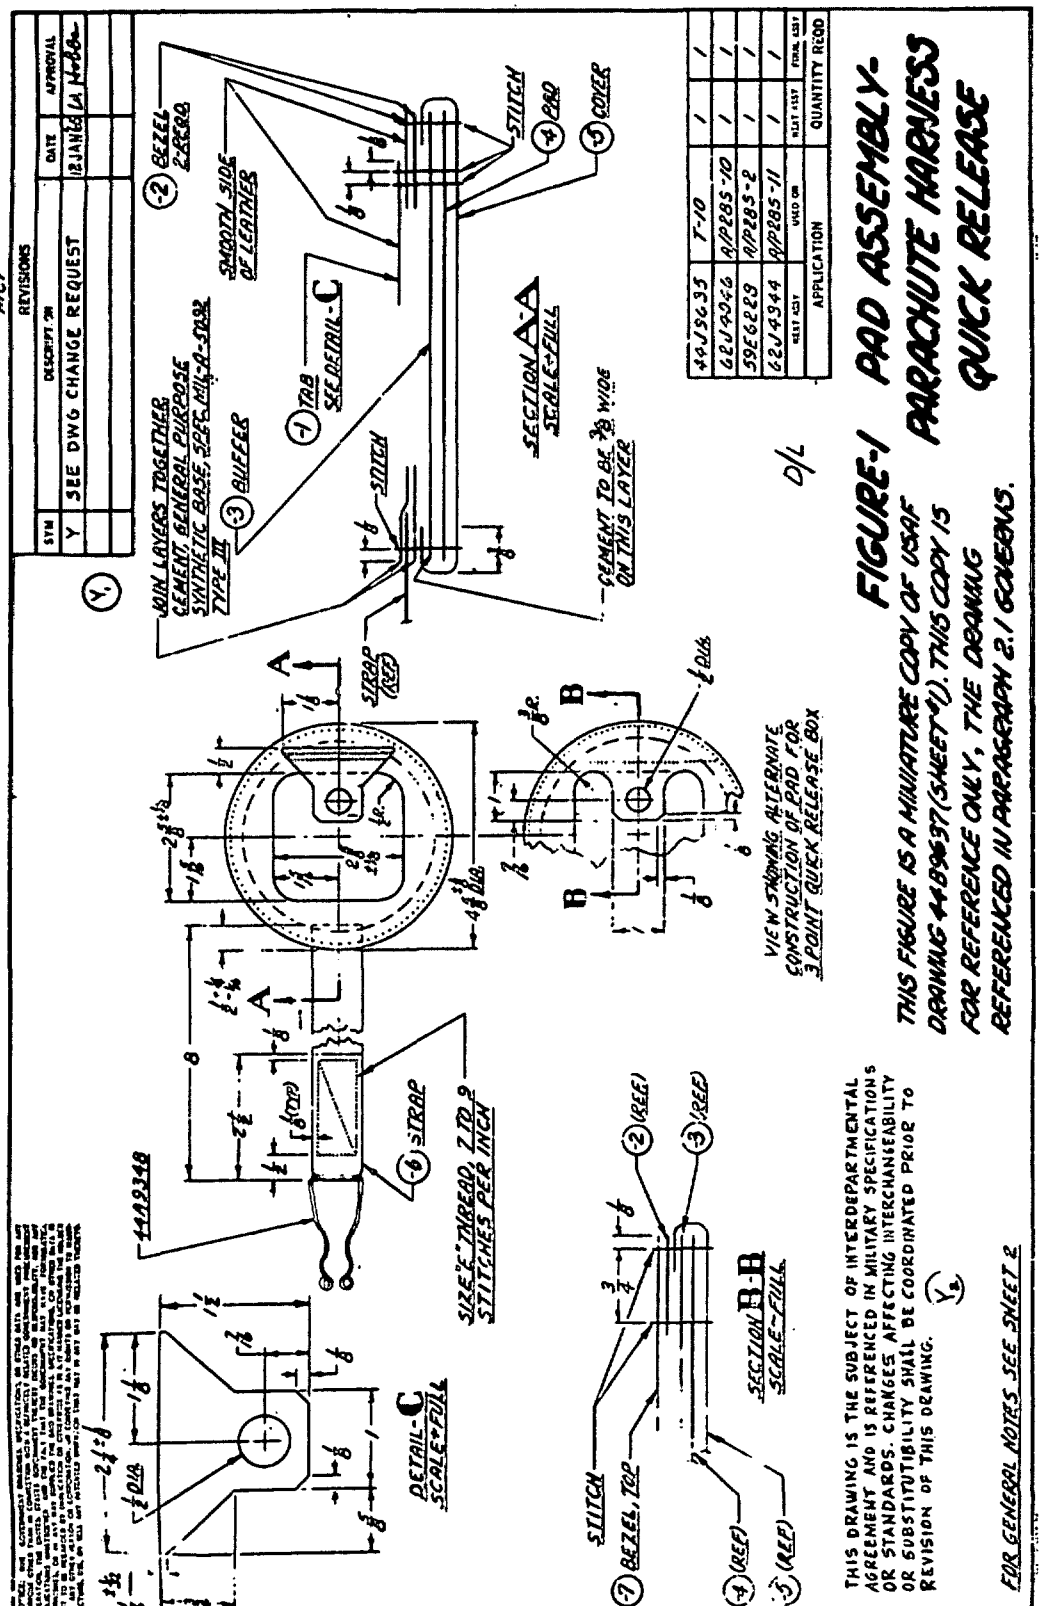

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:03Z
Check the source to verify that this is the current version before use.

NOTICE: WHEN GOVERNMENT DRAWINGS, SPECIFICATIONS, OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE UNITED STATES GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATIONS WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY PUBLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE, OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

MCP

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
V	REDRAWN, SEE DWG. CHANGE NOTICE.	26 APRIL 63	MUMFORD
W	SEE DWG CHANGE REQUEST	15 JAN 1965	Hobbs
X	ADDED NOTE 12	27 FEB 1968	Wilhite

12 MARKING- THE PART NO. SHALL BE PLACED ON THE FABRIC SIDE OF THE PAD ASSEMBLY WITH CHARACTERS NOT LESS THAN 1/4 INCH HIGH, COLOR BLUE #15102, MIL-T-6903. (X1)

11 -6 NYLON WEBBING, SPEC. MIL-T-5038, TYPE IV, 1" WIDE, COLOR-YELLOW NO. 1365 MATCHING THE STANDARD SAMPLE.

10 -5 CLOTH NYLON, DUCK, PLIED YARNS, SPEC. MIL-C-7219, TYPE III, COLOR-OLIVE GREEN NO. 106 MATCHING THE STANDARD SAMPLE. (W3)

9 -4 FELT, SPEC. C-F-206, TYPE I, CLASS 8RS, 1/8 THICK.

8 -1, -2, -3 & -7 LEATHER, SPEC. KK-L-271, GRADE "A", CLASS 1, COLOR RUSSET, 1/16 THICK. (V)

7 UNLESS OTHERWISE SPECIFIED STITCH WITH THREAD, NYLON, SIZE 6, SPEC. V-T-295, TYPE I OR II, CLASS 1, COLOR O.D. 5-1. (W2)

6 SIZE "E" STITCHING SHALL BE WITH THREAD, NYLON, SPEC. V-T-295, TYPE I OR II, CLASS 1, COLOR TO MATCH STRAP.

5 -ENDS OF ALL STITCHING SHALL BE BACKSTITCHED 1/2 MIN.

4 STITCHING SHALL BE IN ACCORDANCE WITH FED. STD NO. 751, TYPE 301 AND UNLESS OTHERWISE SPECIFIED 5 TO 7 STITCHES PER INCH.

3 -STITCHING INDICATED BY DOTTED LINES .....

(W1)

1 -SAMPLES REFERENCED MAY BE OBTAINED FROM THE PROCURING ACTIVITY.

NOTES:-

(W4) THIS DRAWING IS THE SUBJECT OF INTERDEPARTMENTAL AGREEMENT AND IS REFERENCED IN MILITARY SPECIFICATIONS OR STANDARDS. CHANGES AFFECTING INTERCHANGEABILITY OR SUBSTITUTIBILITY SHALL BE COORDINATED PRIOR TO REVISION OF THIS DRAWING.

SEE SHEET-1			
NEXT ASSY	USED ON	NEXT ASSY	FINAL ASSY
APPLICATION		QUANTITY REQD	

THIS FIGURE IS A MINIATURE COPY OF USAF DRAWING 4489637 (SHEET #2). THIS COPY IS FOR REFERENCE ONLY, THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

FIGURE-2 PAD ASSEMBLY-PARACHUTE HARNESS QUICK RELEASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:03Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

PAD, PARACHUTE HARNESS, QUICK RELEASE MIL-P-38199B

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:03Z
Check the source to verify that this is the current version before use.