MIL-T-38186B(USAF)
13 September 1977
SUPERSEDING
MIL-T-38186A(USAF)
25 February 1965

MILITARY SPECIFICATION

TROUSERS, EXTREME COLD WEATHER CWU-6/P

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of extreme cold weather insulated trousers designated CWU-6/P and furnished in the following sizes as specified (see 6.2).

Size	Equivalent Size
Small	34 - 36
Medium	36 - 40
Large	38 - 44
Extra large	40 - 48

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

V-F-106	Fasteners, Slide, Interlocking
V-T-276	Thread, Cotton
V-T-295	Thread, Nylon
UU-P-268	Paper, Kraft, Wrapping
CCC-C-440	Cloth, Cheesecloth, Cotton, Bleached And Unbleached
DDD-L-20	Label; For Clothing, Equipage, And Tentage, (General Use)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: HQ AFLC CASO/LODS, Federal Center, Battle Creek MI 49016 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

Military

MIL-B-371	Braid, Textile, Tubular
MIL-W-530	Webbing, Textile, Cotton, General Purpose, Natural Or In Colors
MIL-F-10884	Fasteners, Snap
MIL-B-17757	Boxes, Shipping, Fiberboard, Corrugated (Modular Sizes)
MIL-C-18387	Twill, Cotton, Fire Retardant Treated
MIL-C-83008	Cloth, Coated, Cotton And Nylon, Polyurethane (Microporous) Coated

STANDARDS

Federal

FED-STD-191	Textile Test Methods
FED-STD-751	Stitches, Seams, And Stitchings

Military

MIL-STD-105	Sampling Procedures And Tables For Inspections By Attributes
MIL-STD-129	Marking For Shipment And Storage

DRAWING

Air Force

63B4406	Trousers, Insulated, Extreme Cold Weather CWU-6/P, Assembly Of

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials.

* 3.1.1 Outer shell. The base fabric for the outer shell, the left and the right fly, the fronts and the backs the pass-through protective fly, the back take-up straps, the pocket flaps, and the patch pockets shall conform to Type I of MIL-C-83008. The color shall be sage green USAF color shade No. 1509 (see 6.3).

* 3.1.2 Interlining (insulation). The interlining material shall be a batting comprised of polypropylene fibers quilted between cotton cheesecloth. The polypropylene filling shall be high crimped, 6-denier fibers 2 inches (plus or minus 1/8 inch) in length. The fibers shall be processed by the "Curlator" method. The cheesecloth shall conform to type I, class 2 of CCC-C-440. The three layers of the interlining shall be connected by quilting made with stitch type 301 of FED-STD-751, using 10 stitches (plus or minus 2 stitches) per inch. The quilting pattern shall conform to the design and the dimensions shown on Figure 1. The fibers in the assembled batt shall be 1/2 inch (plus or minus 1/32 inch) thick before quilting and 1/4 inch (plus or minus 1/32

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

A = 3-3/4 ± 1/4 INCHES C = 7/8 ± 1/4 INCH
B = 5 ± 1/4 INCHES D = 1/4 ± 1/8 INCH

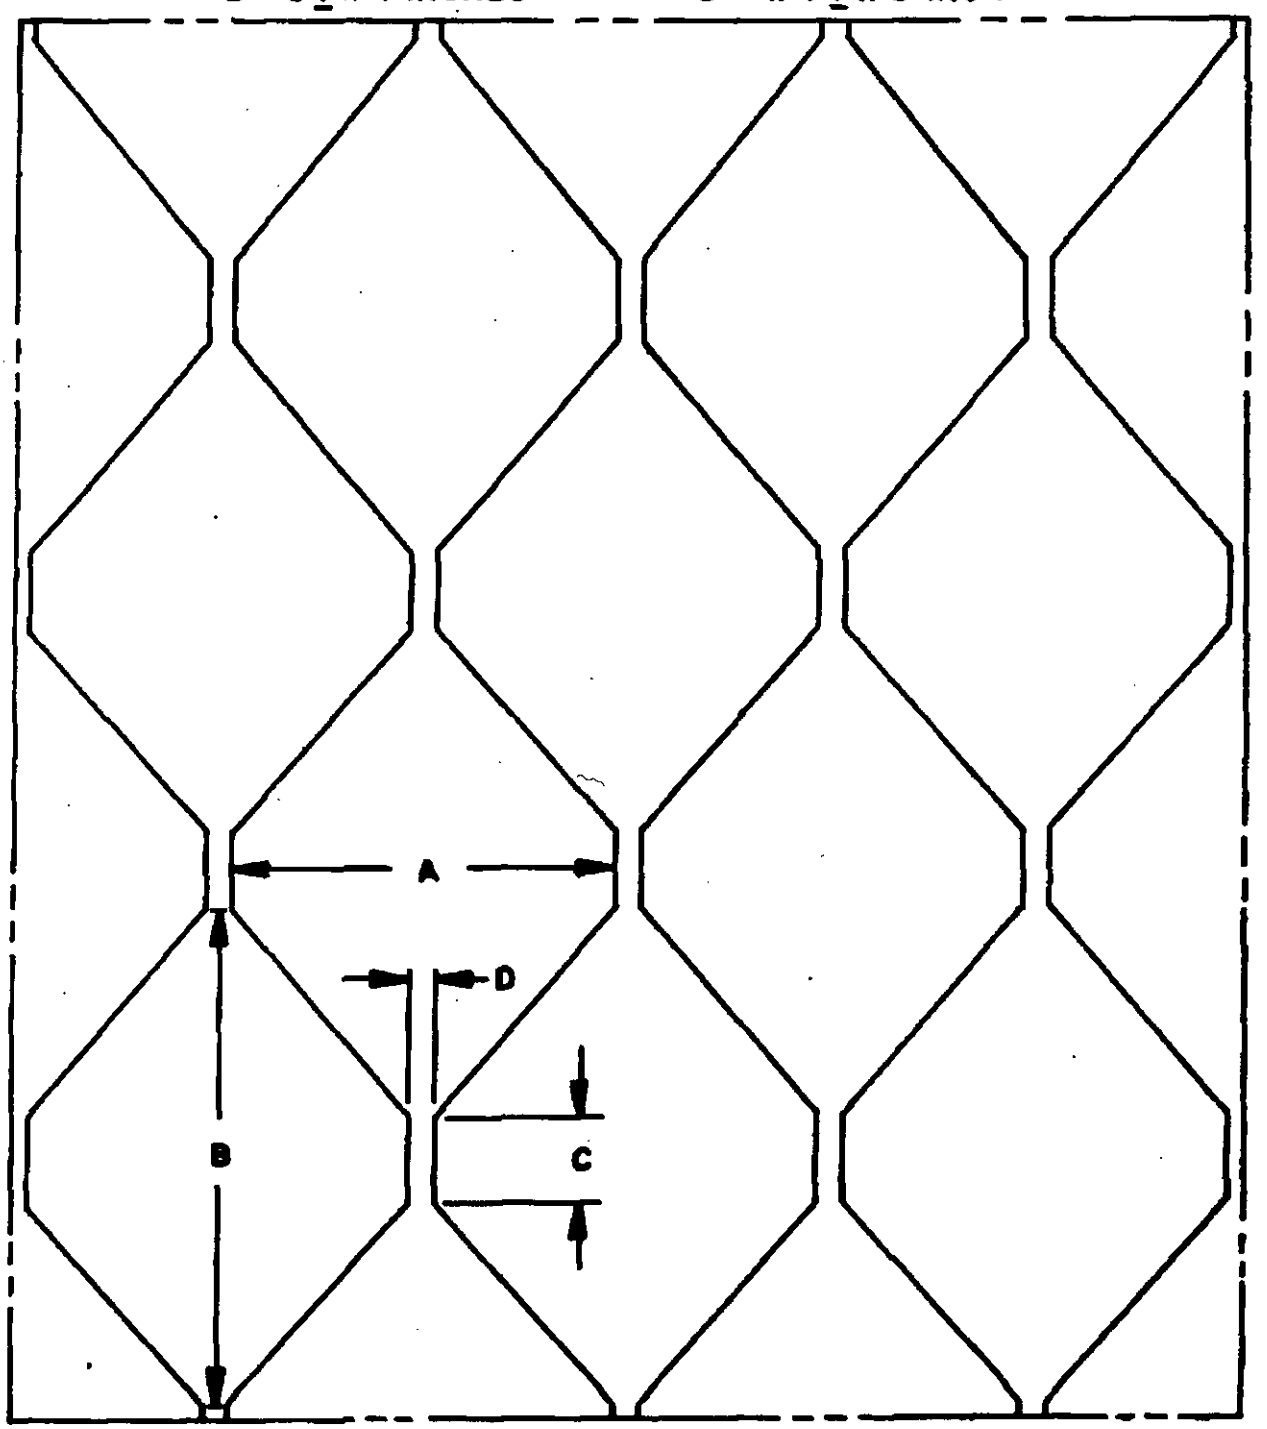


FIGURE 1 - QUILTING PATTERN

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

inch) after quilting. The fibers shall be evenly distributed between the two layers of cheesecloth to obtain the required finished thickness the full length and width of the batt. The finished unbonded batt shall weigh not less than 5 nor more than 6.25 ounces per running yard for 38-1/2 inches (plus or minus 1/2 inch) with batt. In order to facilitate processing the polypropylene fibers may be bonded with an approved durable bonding agent (see 6.5) uniformly applied. The maximum concentration of the applied bonding agent shall be in addition to the weight specified for the unbonded batt, but shall not increase the weight of the unbonded batt by more than 10 percent.

* 3.1.2.1 A certificate of compliance stating which bonding agent was used must be submitted with each lot. The use of the elected bonding agent may not be changed without the consent of the contracting officer. Failure to submit the certificate may result in rejection of the bid.

* 3.1.3 Lining. The fabric for the lining shall conform to MIL-C-18387, except fire retardent treatment shall not apply. The color of the lining shall be sage green USAF shade No. 1524.

* 3.1.4 Thread. Except for quilting, the thread used for the fabrication of the trousers shall conform to type IC2, 3 ply, ticket No. 8 of V-T-276. The color of the thread shall be sage green approximately matching the color of the outer-shell fabric. The thread shall be vat dyed and shall have good color-fastness to laundry, bleaching, and light.


* 3.1.4.1 Quilting. The thread used for quilting shall conform to type X, class 2, size 00 of V-T-295. The color of the quilting thread shall be natural or white.

3.1.5 Snap fasteners. The snap fasteners shall conform to style 2, finish 2 of MIL-F-10884. The color of the exposed portion of the fastener shall match the shade of the outer-shell fabric.

* 3.1.6 Slide fasteners. The slide fasteners shall conform to type IV, style 3 or 4, size LM of V-F-106 for the fly opening and to type I, style 7, size LM of V-F-106 for the side pass-throughs. The chain shall be brass or zinc alloy with a short pull tab furnished with a 3/8 inch webbing conforming to type I, class 3 of MIL-W-530. The tape shall be cotton or cotton warp and nylon filling and shall be 3/4 inch (plus or minus 1/32 inch) wide. The finish of the metal parts shall be natural cronak finish or equal if zinc alloy and black chemical finish if brass. The chain portion of the slide fastener for the fly shall be of sufficient length to extend from the lower fly notch to 3/4 inch (plus or minus 1/8 inch) from the finished top end of the trousers. The length of the chain for the pass-throughs shall be of sufficient length to extend with 1/8 inch (plus or minus 1/16 inch) of the top and bottom edge of the side cut out on the finished trousers. The shade of the tape and the webbing shall approximate the shade of the outer-shell material.

* 3.1.7 Slider buckle. A four-bar, friction-type slider buckle with lip manufactured from brass or steel with a dark oxidized finish suitable for a 1-inch wide strap shall be provided for the back waist adjustment. The slider shall conform to Figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

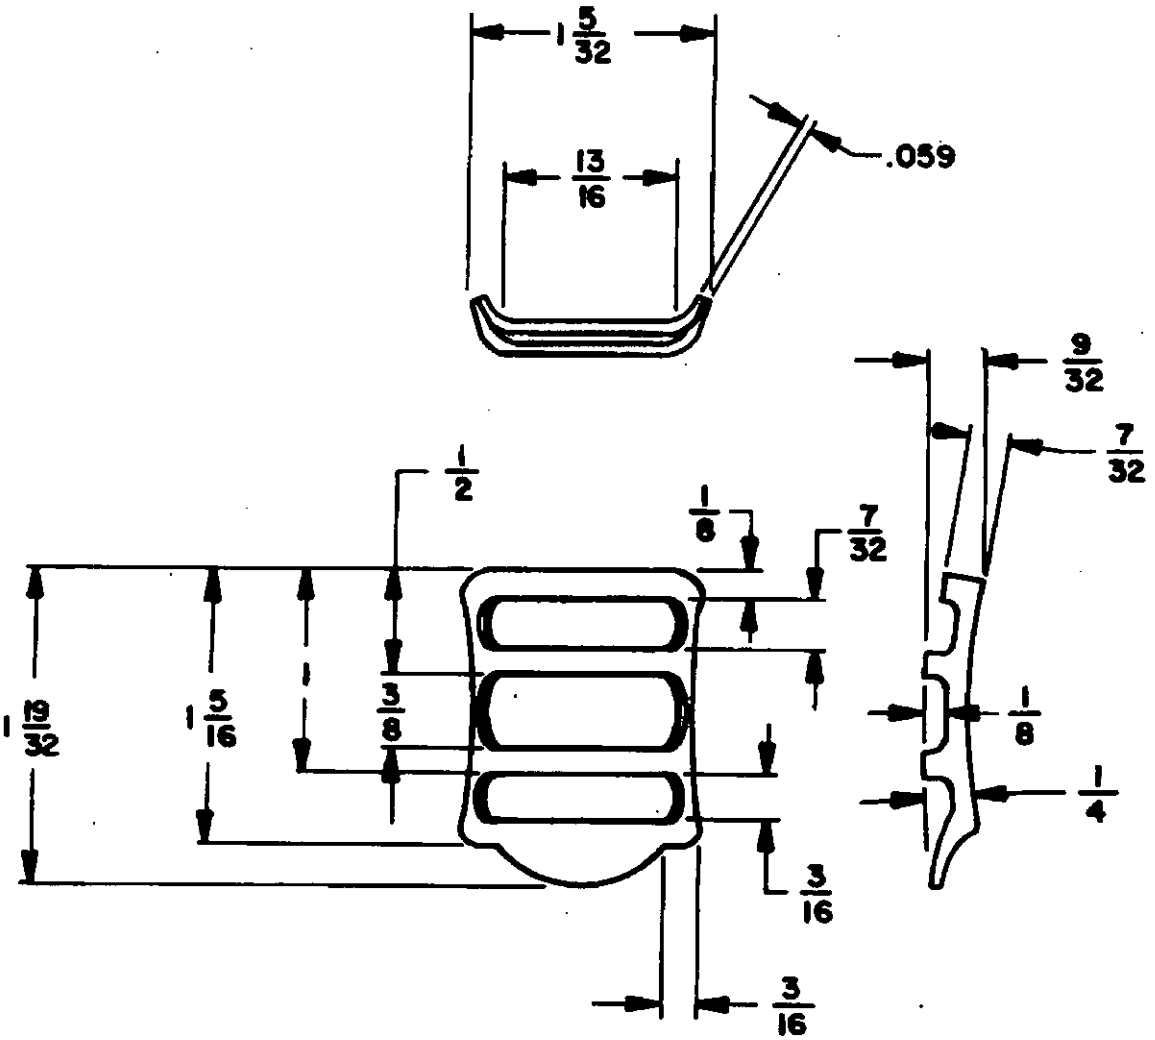

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
TOLERANCE: FRACTIONS ± 1/64

DECIMALS ± .005

FIGURE 2 - BUCKLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

3.1.8 Braid. The braid for the trouser loops shall conform to type V, class 1 of MIL-B-371 except that the dyed yarn shall not be required to be colorfast to bleaching, laundering, and light. The dyed braid shall show good colorfastness to dry cleaning, perspiration, and crocking when tested as specified herein. The color of the braid shall be USAF color shade No. 1509 (see 6.3).

3.2 Design. The trousers shall be a high-rise style, constructed of a cotton coated outer shell, interlined with a polypropylene quilted batting, and lined with an uncoated cotton cloth. Each pair of trousers shall have two hip pockets and two thigh pockets. All pockets shall have flap and snap-fastener closures. A four-bar, friction-type slider buckle and take-up strap shall be positioned at the back waist for size adjustment. A braid loop shall be installed on each side. Each pair of trousers shall have side pass-through slide-fastener openings with a protective flap under the fastener. The fly opening shall have a slide-fastener closure with a protective flap under the fastener.

3.3 Construction. The trousers shall be constructed in accordance with Table I, but the manufacturer is not required to follow the exact sequence of operations as listed therein.

3.3.1 Stitches, seams, and stitchings. Stitches, seams, and stitchings used in the construction of the trousers shall conform to FED-STD-751. Wherever two or more methods, seams, or stitches are specified for the same operations, any one of them may be used.

3.3.1.1 Stitches per inch. Unless otherwise specified, a tolerance of plus or minus 1 stitch per inch shall be permitted.

3.3.1.2 Thread breaks, skipped stitches, and ends of seams and stitchings. Ends of all seams and stitchings produced with stitch type 301, when not caught in other seams or stitchings, shall be backtacked. Thread breaks (all stitch types) shall be secured by stitching back of the end of the break not less than 1/2 inch. Skipped stitches or thread breaks (stitch type 401) may be repaired by using stitch type 301.

3.3.2 Patterns. The manufacturer's marking patterns shall be identical in size and shape to the patterns referenced on 63B4406.

* 3.3.2.1 Pattern parts. The pattern parts shall be as follows:

Parts	Quantity to be cut
Outer shell (coated fabric)	
Fronts	2
Backs	2
Plies	3 (1 left and 2 right)
Access slit facings for backs	2
Access slit facings for fronts	2
Pass-through protective fly	2
Back take-up strap (short)	1
Back take-up strap (long)	1
Pocket flaps	8
Patch pockets	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
1.	CUTTING. The trousers shall be cut in accordance with patterns that show size, shape, placement of pockets, and notches for proper assembling of all parts. a. Except for the flap linings, the strap linings, the left and the right fly, the access slit facing for the fronts and the backs, and the patch pocket linings, which may be cut from ends, all component parts of the outer shell and the linings shall be cut from one piece of material. The interlining (batt material) may be cut in either the warp or the filling direction; however, all parts of the interlining in each completed shell shall be cut in the same direction. b. The uncoated side of the material shall be to the outside and coated side shall be the inside toward the interlining. c. Patterns shall be laid in accordance with directional lines indicated on the patterns for each component part of the trousers. The directional lines shall be placed in the warp direction of the material.			
2.	SHADE MARKING. Except for the interlining (insulation and those parts cut from ends as indicated in No. 1.a, all component parts shall be marked or ticketed to insure a uniform shade throughout the trousers.			
	OUTER SHELL			
3.	BACK STRAPS a. Back buckle strap. Fold along centerline lengthwise. Turn each edge under 1/4 inch to inside and sew with a row of stitches 1/16 inch from folded edges. Also, sew the opposite folded edge 1/16 inch from edge with a single row of stitching.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (Cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	b. Back take-up strap. Fold along centerline lengthwise. Turn each edge under 1/4 inch to inside and sew with a row of stitches 1/16 inch from folded edges leaving an approximate 3/4 inch open on one end. Turn unstitched end edges to inside forming a right triangle fold. Stitch 1/16 inch from the folded end edge.	301	SSC-1	12
4.	BACK. Sew the back darts, with a 3/8 inch seam, catching the back straps approximately 2 inches from the top of the trousers and tapering to zero at the end. The 9-1/4-inch pointed strap shall be caught in the right back side of the trousers.	301	LSq-2(a)	12
	a. Turn and raise seam of the darts, with the seam allowance toward the side seams on the inside, with a single row of stitching, 1/16 inch from the edge.	301	LSq-2(b)	12
	b. Bartack the top and the bottom edges of both back straps through the outer shell.	bartack		42 per bartack
	c. Insert the square end of the take-up strap (left) through the bar at the back end of the buckle approximately 1 inch, and stitch with a double row of stitching, 1/4-inch gage, 1/16 inch from the edge.	301		12
5.	HIP AND THIGH POCKETS. Stitch the lining material to the pockets with a single row of stitching 1/16 to 1/8 inch from the side and the bottom edges.	301	SSa-1	8-10
	a. Fold the top of the patch pockets as indicated by the notches on the patterns, and stitch 1/16 to 1/8 inch from the edge. Turn under the raw edges of the hem 1/4 to 3/8 inch and stitch 1/16 to 1/8 inch from the edge.	301	EFt-2 shows finished seam	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (Cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
6.	POCKET FLAPS. Each finished pocket flap shall have a snap fastener button and socket installed.			
	a. Stitch flap pieces together, uncoated side to uncoated side, with a single row of stitching around each end and shaped side of the flap. The stitching shall be 1/4 to 3/8 inch from the edge.	301	SSe-2(a)	10-12
	b. Turn and raise around stitched edges, with a single row of stitching 1/4-inch to 5/16-inch gage.	301	SSe 2(b)	10-12
	c. Attach the socket and the cap of the snap fastener to the pocket flap 3/4 to 1 inch directly above the point of the flap.			
	INSTALL POCKETS AND FLAPS			
7.	FRONT POCKETS AND BACK POCKETS. Turn the raw edges of the lined and hemmed pocket under 1/2 inch and stitch to the right or the left front and back at the drill marks, with two rows of stitching, 1/4-inch gage, 1/16 inch from the edge. Repeat for the other front and back.	301	LSd-2	10-12
	a. Position the raw edges of the flap 3/8 inch above the pocket opening, and stitch through the flap and the outer shell, with a single row of stitching, 1/8 to 3/16 inch from the raw edge.	301	LSs-2(a)	10-12
	b. Turn the flap down over the pocket, and raise with a single row of stitching, 1/4 to 5/16 inch from the top edge.	301	LSs-2(b)	10-12
	c. Attach the stud and the eyelet, through the pockets, corresponding to the socket and the cap in the flaps. The stud and the eyelet shall be reinforced with a 1-inch-diameter reinforcement piece of the outer-shell material on the inside of each pocket.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT'D)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	d. Bartack each corner of the pocket through the outer shell only. The bartack shall be even with the top edge of the pocket, and the bartack shall be superimposed on the inner row of double stitching.	bartack		42 per bartack
8.	OUTER SHELL - MAKE PASS-THROUGH OPENING			
	a. Stitch the corresponding access facings to the fronts and backs with a 1/4-inch seam across the steps and the sides. Clip diagonally at the corners of the steps; turn and edge stitch the seamed edges 1/16 to 1/8 inch from the edge. The side (steps) raw edges of the access facings may be stitched along the side seam of the fronts and the backs to facilitate a double-needle joining operation.	301	SSe-2	10-12
		301 or 401	SSa-1	10-14
9.	JOINING THE LINING TO THE INTERLINING (INSULATION)			
	a. Stitch the corresponding lining to the interlining to the fronts (pass-through) and backs across the steps and the sides with a 1/4-inch seam. Clip diagonally at the corners of the steps; turn and edge stitch the seamed edges approximately 1/8 inch from the edge.	301	SSe-2	10-12
	b. Stitch the linings and the interlinings together along all raw edges including the cut-out darts 1/8 to 1/4 inch from the edge. In the finished trousers, the interlining shall be between the lining and the outer shell.	301	SSa-1	8-10
	c. Stitch the back darts of the lining and interlining.	301	LSq-2	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT'D)

No.	Description of Operation	Stitches Type	Seam and Stitching Type	Stitches Per Inch
10.	MAKE LEFT FLY			
	a. Position the left fly piece to the left front as indicated by the notch, and stitch 1/8 to 1/4 inch across the top and the front edges of the fly through the lining and the interlining.	301	SSa-1	8-10
	b. Turn under the back edge of the fly, and stitch through the lining and the interlining 1/16 to 1/8 inch from the edge.	301	LSd-1	8-10
	NOTE: The back edge of the fly may be pre-hemmed prior to performing No. 10.b.			
	c. Stitch the slide fastener to the left fly through the lining-interlining, with a double row of stitching 1/4-inch to 3/8-inch gage. The bottom of the slide-fastener stop shall be positioned approximately 1/2 inch above the fly, and the top end of the slide fastener tape shall be caught in the top joining seam of the inner and the outer shells. The scoops of the slide fastener shall be positioned so that the right portion of the slide-fastener tape will not be exposed when the slide fastener of the fly is closed.	301		10-12
	d. The thongs shall be formed and assembled to the pulls as follows: Fold the length of webbing at the center. Insert the loop end through the end of the pull. Pass the two free ends through the loop and pull up tight. The finished length of the thong shall be 3 inches (plus or minus 1/4 inch) long.			
11.	MAKE RIGHT FLY AND PASS-THROUGH PROTECTIVE			
	a. Stitch the fly interlining to the fly pieces across the top and along the front edge, with a single row of stitching 1/4 to 3/8 inch from the edge.	301	SSe-2(a)	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT'D)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	b. Turn the fly and edge stitch the seamed edge 1/8 to 1/4 inch from the edge.	301	SSe-2(b)	10-12
	c. Fold the outer-shell material for the side pass-through protective flies; add a ply of the interlining material (insulation) and stitch together on three sides, with a single row of stitching 3/8 inch from the edge, leaving an opening for turning.	301	SSe-2(a)	10-12
	d. Trim corners; turn and edge stitch 1/8-inch to 3/16-inch, closing the opening in the edge stitching.	301	SSe-2(b), OSf-1, and SSc-1	10-12
	e. Quilt the right fly and the side protective flies with diagonal stitching, with the points of the stitching approximately 3 inches apart.	301		10-12
	f. Stitch the assembled right fly to the right front lining interlining as indicated by the notch on the patterns; continue the stitching to the bottom end of the assembled fly, 3/8 inch from the raw edge.	301	LSq-2(a)	10-12
	g. Raise stitch the seamed edge of the right fly with the front over the fly 1/16 to 1/8 inch from the edge. The raise stitching shall be from the top of the fly to approximately 1-1/2 inches above the bottom end of the fly.	301	LSq-2(b)	10-12
12.	ASSEMBLE FRONTS AND FLIES			
	a. Join the left front (outer shell) to the assembled lining-interlining from from the fly notch to approximately 5 inches beyond the back edge of the left fly at the top of the trousers 3/8-inch gage. Trim the top corner of the trousers; turn and edge stitch, from the bottom notch to approximately 3 inches beyond the back edge of the left fly at the top of the trousers, 1/4-inch gage.	301	SSe-2	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT'D)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	b. Stitch the back edge of the left fly from the fly notch to the top of the trousers through the inner and the outer shell 1-3/4 inch to 2 inches from the edge. The line of stitching shall follow the contour of the bottom of the fly.	301		10-12
	c. Stitch the right portion of the slide-fastener tape to the right front outer shell 3/8 inch from the edge. The bottom of the slide-fastener stop shall be positioned approximately 1/2 inch above the fly notch, and the top of the tape shall be caught in the top joining seam of the trousers.	301	SSa-1	10-12
	d. Join the crotch of the outer shell with a double row of stitching 1/4-inch to 5/16-inch gage, 1/16 inch from the edge with the left front over the right front.	301	LSb-2	10-12
	e. Place a double row of stitches in the center of fly and side protective flys, through all plies of material.	301	SSa-1	10-12
13.	JOIN OUTER SHELL			
	a. Join the backs (seat seam) with a double-lapped seam, with a double row of stitching 1/4 inch to 5/16-inch gage, 1/16 inch from the outside folded edge, left back overlapping right.	301 or 401	LSc-2	10-12
	b. Join the side seam above and below the side pass-through opening an/htyinseam of the trousers with a double-lapped seam, with a double row of stitching 1/4-inch to 5/16-inch gage, 1/16 inch from the outside folded edge, backs overlapping fronts.	301	LSc-2	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT'D)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
14.	ATTACH SIDE LOOPS			
	a. Securely stitch the ends of the braid loops 3-1/4 inch (plus or minus 1/4-inch) cut length to the outside at the top of the trousers, one on each side, with the ends of the loops spread 2 inches (plus or minus 1/4 inch). The ends of the loops shall be spaced equidistance on each side of the side seams.	301	SSa-1	10-12
15.	JOIN BACK OF INNER SHELL			
	a. Join the backs (seat seam), with a single row of stitching, 3/8 inch from the raw edge.	301 or 401	SSa-1	10-12
16	ATTACH LABEL			
	a. The label shall be securely sewn through the lining and the interlining along the four edges, with a single row of stitching 1/16 to 1/8 inch from the edges. The label shall be positioned at the center of the back with the top edge of the label 2 to 3 inches below the top edge of the trousers.	301	SSa-1	10-12
17.	JOIN SIDE SEAM OF INNER SHELL			
	a. Join the side seams above and below the side pass-through opening with 3/8-inch gage.	301 or 401	SSa-1	10-12
	b. Sew the slide fastener to the pass-through openings, through the lining-interlining. The seamed edge of the opening shall be approximately 1/4 inch from the scoops on each side of the opening. The slider shall be at the bottom and on the outside of the finished trousers when the fastener is closed.	301		10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT'D)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	c. Place the protective fly on the back of the trousers at the pass-through opening 3/4 inch from the finished side edge of the opening, and stitch 1/16-inch to 1/8-inch gage along the side edge of the protective fly to the back part of the inner shell with the ends of the stitching securely backstitched. The side of the protective fly facing and the front of the trousers shall be left free.	301		10-12
	d. The thongs shall be formed and assembled to the pulls as follows: Fold the length of webbing at the center. Insert the loop end through the end of the pull. Pass the two free ends through the loop and pull up tight. The finished length of the thong shall be 3 inches (plus or minus 1/4 inch) long.			
18.	JOIN INSEAM			
	a. Join the inseam of the trousers, matching the crotch seam and the seat seam (plus or minus 1/4 inch) at the base of the crotch, with a single row of stitching 3/8-inch gage.	301 or 401	SSa-1	10-12
19.	FINISH SEWING OUTER SHELL IN INNER SHELL			
	a. Stitch the inner shell to the outer shell at the top of the trousers, starting beyond the end of the stitching performed in No. 12.a and finishing at the back edge of the right fly. The gage of stitching shall be 3/8 inch	301 or 401	SSe-2(a)	10-12
	b. Join the inner shell to the outer shell at the bottom of the trousers with a single row of stitching 3/8 inch from the edge with their respective seams matching.	301 or 401	SSe-2(a)	10-12
	c. Turn the trousers right side out through any of the openings.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT'D)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
20.	EDGE STITCH TOP AND BOTTOM OF TROUSERS			
	a. Edge stitch the top of the trousers 1/4-inch gage from the back edge of the right fly to 1/2 to 1 inch beyond the edge stitching on the left front performed in No. 12.a.	301	SSe-2(b)	10-12
	b. Edge stitch 1/4 inch around the bottom of the trousers.	301	SSe-2(b)	10-12
	c. Place a second row of stitching around the bottom 1-1/4 to 1-1/2 inches from the bottom edge of the trousers.	301		10-12
21.	CLOSE RIGHT FLY AND PASS-THROUGH OPENINGS			
	a. Turn under the right trouser front over the right fly joining seams with the slide fastener between the front and the fly. Top stitch the right trouser front edge through all plies, 1/16 to 1/8 inch from the seamed edge.	301		10-12
	b. Stitch the outer shell through the inner shell at the side protective fly opening all around, with a double row of stitching 1/4-inch gage, 1/16 inch from the sides and the top and the bottom edges of the opening. The slide-fastener tape shall be exposed approximately 1/4 inch from each side of the scoops and approximately 1/4 inch from the slides and the stop of the fastener at each end.	301		10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE I - SEWING OPERATIONS (CONT'D)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
22.	BARTACKING. In addition to the bartacking in the preceding operations, the following locations shall be bartacked with a 1/2-inch bartack:			
	a. Bartack the top and the bottom of the pass-through opening, through the outer-inner shell and the protective fly.	bartack		42 per bartack
	b. Bartack the base of the fly through all plies with a 1/2 inch horizontal bartack.	bartack		42 per bartack
23.	SNAP FASTENERS			
	a. Attach one snap fastener with the center 1/2 inch from the front edge of the left fly and 3/4 inch from the top waist edge. Attach a second snap fastener 1-1/2 inches inward from the first snap fastener measured from center to center and 3/4 inch from the top waist edge.			
	b. Install a stud and an eyelet on the right front and on the right fly to correspond with the sockets of the snap fasteners on the left front.			
24	CLEANING			
	a. All thread ends shall be trimmed, and loose ends shall be removed.			
	b. Remove all spots, stains, and shade tickets.			
	c. Shade tickets shall be removed without harming the fabric.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

Lining (uncloated fabric)	
Front	2
Back	2
Patch pockets	4
Interlining (insulation)	
Front	2
Back	2
Pass-through protective fly	2
Right fly	1

* 3.4 Finished measurements. The finished measurements of the trouser shall be in accordance with Table II.

TABLE II - FINISHED MEASUREMENTS IN INCHES

Measurement*	Size				Tolerance
	Small	Medium	Large	Extra Large	Plus or Minus
1/2 waist	18-1/2	19-1/2	20-1/2	21-1/2	1/2
Inseam	30-1/2	31-1/2	32-1/2	33-1/2	1/2
Side length	44-1/4	45-3/4	47-1/4	48-3/4	1/2

* NOTES:
The slide fastener shall be closed, and the front shall be smoothed out; the measurement of the one-half waist shall then be taken across the top of the front from side facing to side facing.
The inseam shall be measured, along the inseams, from the crotch joining seam to the bottom of the leg.
The side length shall be measured from the top, along the side, to the bottom of the leg.

* 3.5 Identification of product. A 1-5/16-inch wide by 3-inch long, printed label conforming to type I, class 1 of DDD-L-20 shall be securely sewn to the lining of the trousers. The trousers are intended to be laundered or dry cleaned. The label shall contain the following specific information:

Trousers, Insulated, Extreme Cold Weather CWU-6/P
MIL-T-38186B(USAF)
Size *
Stock No. *
Contract No. *
Manufacturer's name or trademark *
Launder or dry clean
Do not subject to heat in excess of 200°F.

* The manufacturer shall include the applicable information.

3.6 Workmanship. The trousers shall be constructed in a thoroughly workmanlike manner and shall be clean and free from any defects that might affect appearance or functionability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection for acceptance. Unless otherwise specified, inspection shall be in accordance with MIL-STD-105.

* 4.2.1 Testing of components. Testing shall be performed on components listed in Table III for the characteristics noted therein. The sample unit for testing interlining shall be one linear yard and for tubular textile braid shall be three linear yards.

* 4.2.1.1 Lot size and sample size. Unless otherwise specified in the applicable subsidiary specification, the lot size and the sample size for testing components and material shall conform to Table IV. A lot shall be unacceptable if one or more units fail to meet any specified requirements.

TABLE III - TESTING OF COMPONENTS

Component and Characteristic	Test Method	No. of Determinations Per Sample Unit
INTERLINING (See 3.1.2)		
Thickness	Para 4.3.1	5
Weight	5041 of FED-STD-191	
Material identification 1/	standard commercial	1
Type	Visual	1
Bonding agent 3/	Resin (Tradename)	
Color	Visual	1
TUBULAR TEXTILE BRAID (See 3.1.8)		
Color fastness to dry cleaning	5651 of FED-STD-191	
Colorfastness to perspiration	5680 of FED-STD-191	
Colorfastness to crocking 2/	5651 of FED-STD-191	

1/ A certificate of compliance will be acceptable for this requirement.
2/ The contractor shall indicate on his laboratory report the crock cloth used in performing this test.
3/ A certificate of compliance is mandatory for this requirement when used, and it shall include a certified statement of the tradename of the resin used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

TABLE IV - LOT SIZE AND SAMPLE SIZE

Lot Size (Units)	Sample Size
800 or less	2
801 to 22,000	3
22,001 and over	5

4.2.2 Examination of end item. Each end item shall be examined for defects. Except for defects with an asterisk (*) in the classification, defects found during examination shall be classified as indicated in 4.2.2.1, 4.2.2.2, and 4.2.2.3. Defects with an asterisk in the classification column shall be classified as a major defect when affecting appearance or serviceability seriously and as minor A defects when affecting appearance or serviceability but not seriously.

* 4.2.2.1 General defects. General defects shall be classified as follows:

	Classification		
		Minor	
	Major	A	B
1. BARTACKS			
a. Missing or insecure			
-one bartack			X
-two bartacks		X	
-three or more bartacks	X		
2. CUTTING			
a. Spot or stain of a permanent nature		•	
b. Removable spot or stain, clearly noticeable		X	
c. Thread ends not trimmed or loose threads or one or more shade tickets not removed			X
d. Shade stamp marking exposed on outside		•	
3. COMPONENT AND ASSEMBLY			
a. Any defective component		•	
b. Any component part omitted		•	
c. Any required operation omitted or improperly performed		•	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
4. CUTTING			
a. Any component part not cut in accordance with directional lines indicated on pattern or specified requirements	X		
5. SLIDE FASTENERS			
a. Any part of assembly omitted, bent, broken, or otherwise defective affecting function	X		
b. Stitching too close to metal chain, not permitting slider to pass	X		
6. SNAP FASTENERS			
a. One or both missing, mismated, not securely clinched, or defective, affecting function		X	
b. One or more parts clinched too tightly, i.e., surrounding fabric cut	X		
c. Rough or sharp edges on button, socket, stud, or eyelet parts		X	
7. LABEL			
a. Omitted or size missing or incorrect	X		
b. Information, other than size, missing or incorrect			X
c. Not stitched on one or more sides			X
d. Stitching exposed on outside of trousers		X	
e. Off-center of trouser back lining by more than 1 inch or top corners of label less than 2 inches or more than 3 inches below top edge of trousers			X
f. Size shown on label not agreeing with size shown on intermediate or outer container as applicable			X
8. MATERIAL DEFECTS AND WORKMANSHIP DAMAGES. Material defects and workmanship damages that are inconspicuous and do not weaken the fabric shall not be classified as defects. When the material defects or workmanship damages definitely weaken the fabric or when the material defects and workmanship damages do not weaken the fabric but are conspicuous when the item is worn, they shall be classified as indicated.			
a. Any weakening defect such as a hole or a smash, multiple float, and loose slub, that may develop into a hole			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
b. Shade bar, slub, dye, or finishing streak or any other material defect			
c. Scissors or knife cut, tear, mend, or burn or needle chew that may develop into a hole			
d. Ruptured fibers in the line of sewing (usually caused by broken, blunt, or hooked needles) affecting appearance or serviceability		X	
9. POLYETHYLENE BAG			
a. Not completely sealed			X
10. SEAMS AND STITCHINGS			
a. Accuracy of seaming			
(1) Seam twisted, puckered, or pleated			
(2) Part of trousers caught in any unrelated operation or stitching			
(3) Thread break(s) not stitched back of break or end(s) of seam or stitching (when not caught in other seams or stitching) not backtacked		X	
(4) Thread(s) used on outside not same or not satisfactorily matching shade of garment		X	
b. Gage of stitching (edge, top, or raise stitching)			
(1) Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged, affecting appearance (to be scored only when the condition exists on major portion of seam)		X	
(2) Not within range of gage specified or varies more than 1/16 inch when no range is specified			X
c. Open seam. A break in a line of stitching or continuous skipped or run-off stitches (except on edge, top, or raise stitching) shall constitute an open seam.			
(1) On dart(s) or joining seam(s) except top end of inside crotch seam			
-over 1/8 inch to and including 1/4 inch			X
-over 1/4 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(2) On top end of inside crotch seam			
-over 1/4 inch to and including 1/2 inch			X
-over 1/2 inch		X	
(3) On inner edge of left fly over 1/4 inch			X
d. Stitches skipped or broken (on edge, top, or raise stitching when seam is seamed, turned, and stitched)			
-over 1/4 inch to and including 1/2 inch			X
-over 1/2 inch		X	
e. Raw edges. A raw edge is classified as such when it occurs along an edge required to be turned under but the edge is securely caught in the stitching. If the edge is not securely caught in the stitching, it shall be scored as an open seam.			
(1) On outside			
-over 1/8 inch to and including 1/4 inch			X
-over 1/4 inch			
(2) On inside			
-over 1/2 inch to and including 2 inches			X
-over 2 inches		X	
(3) Raw edge protruding from folded edge of double-lapped, double-needle seaming (when used) more than 2 inches on outside of trousers			
f. Run-Offs			
(1) On joining seams, when resulting in an open seam, score as open seam.			
(2) On edge, top, or raise stitching when not resulting in open seam (outside only)			
-over 1/2 inch to and including 1 inch			X
-over 1 inch		X	
g. Seam or stitch type			
(1) Not type specified		X	
(2) Looper thread on outside when stitch type 401 is used	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
h. Stitch tension. Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in the lengthwise direction of seam or stitching.			
(1) Loose tension, resulting in a loose seam	X		
(2) Loose tension on edge, top, or raise stitching, recognized by loosely exposed loops of top or lower thread		X	
(3) Tight tension (stitches break when normal strain is applied to seam or stitching), score as open seam.			
i. Stitches per inch (to be scored only when the condition exists on major portion of seam or stitching)			
(1) Less than minimum number			
-one or two stitches			X
-three stitches		X	
-four or more stitches	X		
(2) One or more stitches in excess of maximum number specified			X
11. SHADED PARTS			
a. Badly shaded outside parts (except parts permitted to be cut from ends)			
b. Inside parts or parts permitted to be cut from ends badly shaded			X

* 4.2.2.2 Detailed defects applicable to specific parts. Detailed defects applicable to specific parts shall be classified as specified:

	Classification		
		Minor	
	Major	A	B
OUTSIDE OF TROUSERS			
1. TOP OF TROUSERS			
a. Lining exposed at top of trousers, affecting appearance		X	
b. Outer shell full, twisted, or puckered in stitching at top of trousers, affecting appearance		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
c. One or both braid loops			
(1) Omitted	X		
(2) Not centered across side seams by more than 1/2 inch			X
(3) Outside length measurement less than 2-1/8 inches or more than 2-3/8 inches			X
(4) End(s) not securely caught in seaming at top of trousers		X	
(5) Ends spread apart less than 1-3/4 inches or more than 2-1/4 inches		X	
d. Edge stitching omitted		X	
2. FLY CLOSING			
a. Left front puckered or twisted on fly stitching, bulging, or left fly exposed beyond left front edge, affecting appearance		X	
b. Fly openings uneven in length at top of trousers by more than 1/4 inch		X	
c. Raise stitching on right fly joining seam or fastener tape exposed beyond left front edge when fly is closed (to be scored when condition exists on major portion of fly)		X	
d. Studs and sockets of snap fasteners not aligned causing a bulge or twist when fastened, affecting appearance		X	
e. Center(s) of snap fasteners less than 5/8 inch or more than 7/8 inch from top of trousers			X
f. Center of first snap fastener less than 3/8 inch or more than 5/8 inch from edge of left front fly or centers of first and second snap fasteners less than 1-3/8 inches or more than 1-5/8 inches apart			X
g. Edge stitching on left front fly edge omitted		X	
h. Stitching at back edge of left front fly less than 1-3/4 inches or more than 2-1/4 inches from front edge		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
i. Bottom of left front fly edge not stitched to right front through all plies or stitched more than 1/2 inch below or less than 1/4 inch below stop at bottom of slide-fastener chain		X	
j. Edge stitching or row of diagonal quilting stitching on right fly omitted		X	
k. Points of diagonal quilting stitching on right fly less than 2-3/4 inches or more than 3-1/4 inches apart			X
l. Bartack at bottom of fly more than 1/4 inch above or below top of vertical stitching on left front fly edge			X
m. Slide fastener			
(1) Tapes set on too loosely or too tightly, causing buldge, twist, or fullness or closed fly			
(2) Top end of tape on left fly not caught in seaming at top of trousers or top end of tape on right fly not turned under		X	
(3) Ends of metal chain uneven at bottom of fly			
-more than 1/4 inch but not more than 1/2 inch			X
-more than 1/2 inch		X	
(4) Staple not securely clinched to bottom ends of chain	X		
(5) Tape stitched to left fly with less than two rows of stitching		X	
(6) Stops at top end of chain uneven or spaced unevenly from top of trousers by 1/4 inch or more when fastener is closed			X
3. PASS-THROUGH OPENINGS			
a. Out of horizontal alignment by more than 3/4 inch		X	
b. Outer shell stitched to slide-fastener tape with less than two rows of stitching		X	
c. Openings uneven in length by more than 1/2 inch		X	
d. Ends of opening puckered or twisted, affecting appearance		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
e. Slider not at bottom of opening when fastener is closed	X		
f. Space between back edge of protective fly and joining seam of slide fastener to lining-interlining less than 1/2 inch or more than 1 inch			X
g. Front edge of protective fly not left free		X	
h. Protective fly not stitched through interlining or stitching exposed on outside of outer shell		X	
i. End(s) of protective fly not completely covering top or lower ends of opening or not securely caught in bartack(s)		X	
j. Edge stitching or row of diagonal quilting stitching on protective fly omitted		X	
k. Points of diagonal quilting stitching on protective fly less than 2-3/4 inches or more than 3-1/4 inches apart			X
l. Bartack at top or bottom misplaced not serving intended purpose		X	
4. FRONT AND BACK POCKETS (HIP AND THIGH)			
a. Corresponding flaps on pockets			
(1) Set on crookedly or not uniformly positioned, affecting appearance		X	
(2) Out of horizontal alignment by more than 1/2 inch		X	
b. Flaps			
(1) Edge not single stitched		X	
(2) Flap lining tight or short, causing flap to curl or fullness on outside, affecting appearance		X	
(3) Flap poorly shaped or corresponding flaps not uniformly shaped, affecting appearance		X	
(4) Button of snap fastener off-center of flap by more than 3/8 inch			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(5) Socket of snap fastener not aligned with pocket stud causing a noticeable bulge or twist on flap or pocket when fastened, affecting appearance		X	
(6) End(s) of flap not extending, or extending unevenly, beyond sides of pocket by 1/4 inch or more		X	
(7) Raw edge exposed on underside of flap			X
(8) Raise stitching at top of flap less than 3/16 inch or more than 5/16 inch above top of pocket			X
c. Pockets			
(1) Top edge of pocket hem not edge stitched		X	
(2) Bottom row of stitching on pocket hem less than 7/8 or more than 1-1/8 inches from top folded edge of pocket			X
(3) Stud of snap fastener off-center of pocket by more than 3/8 inch		X	
(4) Reinforcement piece of outer-shell material between stud and eyelet on inside of pocket omitted		X	
(5) Top end of bartack uneven with top of pocket by more than 1/8 inch or misplaced not serving intended purpose		X	
(6) Poorly shaped or corresponding pockets not uniformly shaped, affecting appearance		X	
5. BACK DARTS			
a. Not uniformly positioned, affecting appearance		X	
b. Raise stitching omitted		X	
c. Dart seam not turned toward side seams			X
d. End of dart(s) not properly tapered, causing unsightly bulge or fullness			X
e. Uneven in length by more than 1/2 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
6. BACK STRAPS			
a. Raise stitching			
(1) Omitted		X	
(2) Not single stitched			X
b. Uneven in width by 1/4 inch or more		X	
c. Unevenly positioned from top of trousers by 3/8 inch or more		X	
d. Pointed strap			
(1) Less than 7 inches in length		X	
(2) End poorly shaped, affecting appearance			X
(3) Not caught in right back dart		X	
e. End of buckle strap			
(1) Inserted through buckle less than 3/4 inch or more than 1-1/4 inches			X
(2) Not double stitched at end after insertion through buckle			X
(3) Stitching at end after insertion through buckle insecure		X	
7. SEAMS			
a. Raise stitching omitted (when double-lapped seams are not used)		X	
b. Crotch seam lapped with right front over left front		X	
c. Side seam(s) lapped with front over back			X
d. Seat seam lapped with right back over left back			X
e. Inseam lapped with front over back			X
f. Staggered crotch and seat seam at inseam more than 1/2 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
8. BOTTOM OF TROUSER LEGS			
a. Edge (raise) stitching omitted		X	
b. Inner (top) row of stitching			
(1) Omitted		X	
(2) Less than 1-1/4 inches or more than 1-3/4 inches from edge (raise) stitching			X
INSIDE OF TROUSERS			
9. LINING			
a. Tight, short, or twisted causing fullness or twist on outside of garment, affecting appearance		X	

4.2.2.3 Finished measurement defects. Any measurement deviating from the nominal measurements and tolerances specified in the Table II shall be scored as a finished measurement defect. Inseam lengths uneven by 1/2 inch or more shall be scored as a finished measurement defect.

4.2.2.4 Inspection levels and acceptable quality levels. The inspection levels shall be II of MIL-STD-105 for 4.2.2.1 and 4.2.2.2 and S-3 of MIL-STD-105 for 4.2.2.3. The acceptable quality level expressed in defects per 100 units for 4.2.2.1 and 4.2.2.2 shall be 2.5 for major defects, 15.0 for major and minor A defects, and 40.0 for total (major, minor A, and minor B combined) defects. The acceptable quality level expressed in defects per 100 units for 4.2.2.3 shall be 4.0 for defects (one class).

* 4.2.3 Examination of preparation for delivery requirements. An examination shall be made to determine if packaging, packing, and marking requirements have been met. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-3 of MIL-STD-105, and the acceptable quality level shall be 2.5 defects per 100 units. Shipping containers fully prepared for delivery shall be examined for the following defects:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application
Materials	Any component missing Any component damaged, affecting serviceability
Workmanship	Adequate application of components, such as: incomplete closure of case liners, container flaps, loose strapping, inadequate stapling Bulging or distortion of containers
Content	Number per intermediate package is more or less than required. 1/

1/ For this defect one intermediate package from each container in the sample shall be examined.

* 4.3 Test methods. Testing shall be in accordance with the methods of FED-STD-191, wherever applicable. Unless otherwise specified, all testing requirements apply to the sample unit.

* 4.3.1 Apparatus. The test apparatus shall consist of a base plate and a circular pressure plate with a bearing surface of 20 square inches, and means of applying 0.01 pounds per square inch loading on the sample. This pressure shall be evenly distributed over the 20 square inch area. The thickness measuring device shall be capable of measuring the thickness of the sample (distance between base and pressure plate) to an accuracy of 0.01 inch.

* 4.3.1.1 Procedure. The 0.01 pound per square inch pressure shall be applied to the test specimen, and the thickness reading shall be taken and recorded as "initial thickness."

5. PACKAGING

* 5.1 Packaging - Level A. Each pair of trousers shall be folded as follows: Close the fasteners, fold in half lengthwise with the fly inside the fold, and fold in half by bringing the bottom to the top of the trousers. The approximate size of the folded trousers shall be 14-1/2 inches by 23 inches.

* 5.2 Packing - Level B. Ten pair of trousers of the same size shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 275, size 3A of MIL-B-17757. The fiberboard used for fabricating the liner shall conform to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. Each container shall have the contents completely covered on top and bottom with a sheet of 30-pound minimum basic weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract or order, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

* 5.3 Marking. In addition to any special marking required by contract or order, shipping containers shall be marked in accordance with MIL-STD-129, except Contract Data Marking shall be composed of the following:

a. Contract number

b. Name and address of contractor

c. Shipment number

d. Name and address of manufacturer, if other than contractor

e. Container number (consecutively numbered, from each shipping point, for duration of contract)

6. NOTES

6.1 Intended use. The trousers covered by this specification are intended to be worn in extreme cold weather.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

b. Size required (see 1.1)

6.3 Color shades. Samples of USAF color shades may be obtained from the procuring activity or as directed by the contracting officer.

6.4 Figures. Figures 2 and 3 show general style and are for information only.

* 6.5 Approved bonding agents. The following bonding agents, when properly applied have been found satisfactory and to this extent are approved when procuring items under this specification:

Bonding Agent	Manufacturer
Aerotex M-3	American Cyanamid Co.
Colab CR-205	Colab Resin Corp. (Tewksbury MA)
Hanflex T-15	Hyanza, Inc (Lawrence MA)
Paisley 75-5547-0	Paisley Products, Inc
Paisley 75-5675-0	Paisley Products, Inc
Resyn 2802F	National Starch and Chemical Corp
Resyn 25-2812	National Starch and Chemical Corp
Rhoplex HA-16	Rohm and Haas Co
Rhoplex HA-20	Rohm and Haas Co.
Rhoplex HA-407	Rohm and Haas Co
S.T.A.R. Resin ST-340	Star (Cohoes NY)
460X-1	The Goodrich Co

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

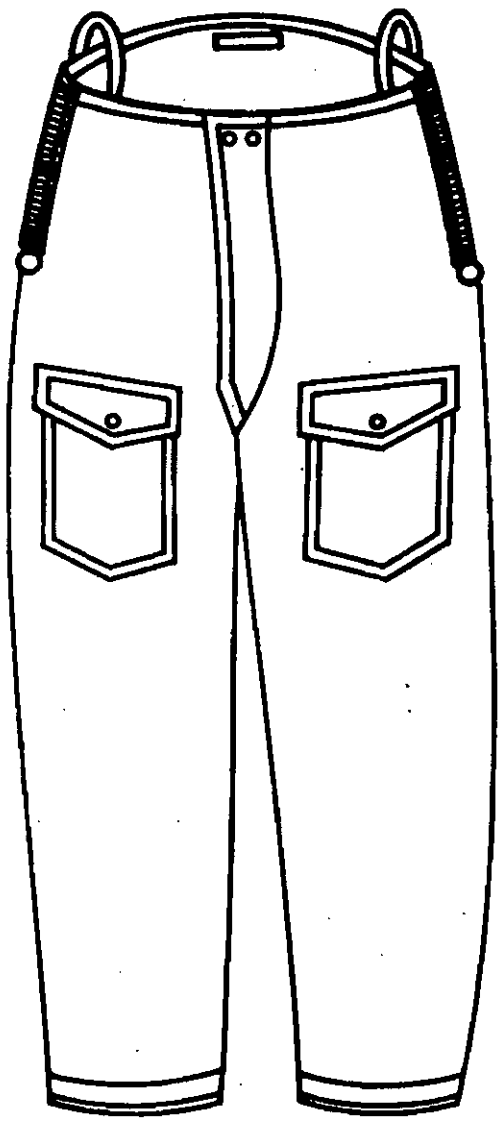


FIGURE 3 - TROUSERS, FRONT VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

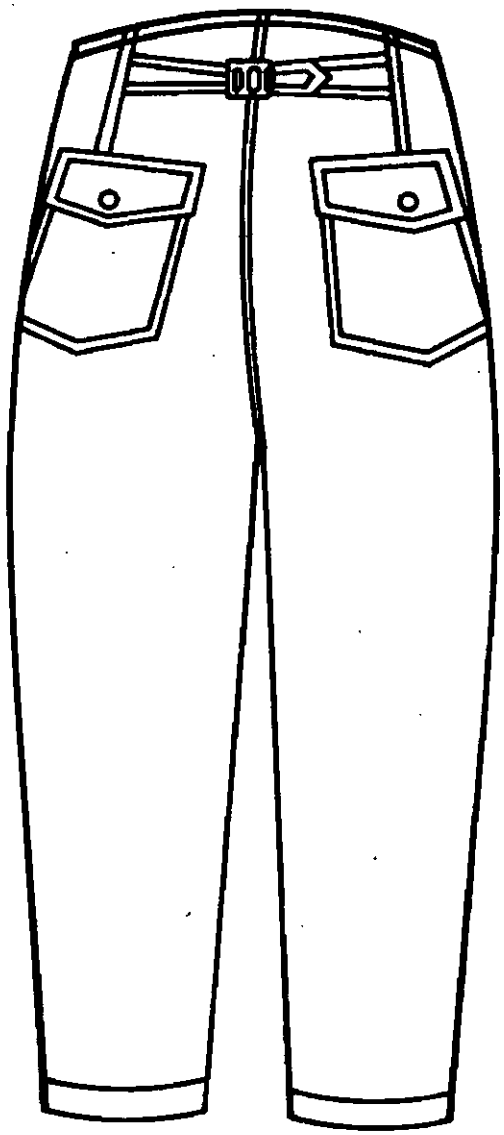


FIGURE 4 – TROUSERS , BACK VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 99

Review Activity
Air Force - 11

Preparing Activity:
Air Force - 99

Project No. 8415-F927

☆U.S. GOVERNMENT PRINTING OFFICE: 1977-703-030/5781

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T12:02Z
Check the source to verify that this is the current version before use.