MILITARY SPECIFICATION

GLOVES, WOMEN'S

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for women's dress gloves.

1.2 Classification. The gloves shall be procured in the following type, classes, and sizes as specified (see 6.2):

Type II - Nylon

Class 1 - White 3059
Class 2 - Black 3231

Schedule of Sizes

6, 6-1/2, 7, 7-1/2, 8, 8-1/2, 9

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8445

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:35Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

NN-P-71	- Pallets, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial)
DDD-L-20	- Label; For Clothing, Equipage, and Tentage (General Use)
PPP-B-566	- Boxes, Folding, Paperboard
PPP-B-676	- Boxes, Set-up

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard, (Modular Sizes)
MIL-C-29135	- Cloth, Knitted, Nylon, Simplex
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, Or Polyester-Covered
MIL-T-43624	- Thread, Polyester, Spun

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1612	- Provisions for Evaluating Quality of Gloves, Cloth, Dress

(Copies of the Federal Information Processing Standard (FIPS) are available to Department of Defense activities from the Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, Pa 19120-5099. Others must request copies of FIPS from National Technical Information Service, 5285 Port Royal Road, Springfield, Va 22161-2171.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:35Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402-0001)

2.2 Non-Government. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issue of documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the documents cited in the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

THE COLOR ASSOCIATION OF THE UNITED STATES

DOD Standard Color Card of Official Standardized Shades for Sewing Threads

(Applications for copies of color cards should be addressed to the Color Association of the U.S, 343 Lexington Avenue, New York, NY 10016-0926)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:35Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material shall conform to class 1 or 2 as applicable, of MIL-C-29135.

3.3.2 Thread. The thread for seaming and stitching the gloves, shall be either a spun polyester or cotton-covered or rayon-covered polyester core. The use of polyester-covered polyester core thread is prohibited. The spun polyester thread shall conform to class 1 or 2, ticket no. 70, 2 or 3 ply of MIL-T-43624. The polyester core thread shall conform to ticket number 70, 2 or 3 ply, of MIL-T-43548. The thread for class 1 shall match White shade AG, Cable no. 66049 when spun polyester is used, and Cable no. 66050 when polyester core is used. The thread for class 2 gloves shall be dyed to match Black shade AA, Cable no. 66043. All Cable numbers shall conform to the Department of Defense Color Card of Official Standardized Shades for Sewing Threads.

3.3.2.1 Colorfastness. The dyed thread of 3.3.2 shall show colorfastness to laundering (after 3 cycles) and perspiration equal to or better than the standard sample when tested as specified in MIL-T-43624, or MIL-T-43548, whichever is applicable. As a limit of acceptability or when no standard sample is available, the dyed thread of 3.3.2 shall show a minimum of "good" colorfastness to laundering and perspiration when tested as specified in MIL-T-43624, or MIL-T-43548, as applicable.

3.3.3 Identification and size label. Each glove shall be marked with a combination identification and size label, conforming to type III or IV, class 4, of DDD-L-20, except that the color of the marking medium shall be any contrasting color to that of the applicable glove. The printing on the label is required to show fastness to laundering only. The label shall bear the following inscription:

Gloves, Women's
Contract No: DLA-100-00-0-0000 (example)
Material: 100% Nylon
Stock No: 8445-00-000-0000 (example)
Size: 8 (example)
Name of Contractor:
Name of Mfg (if other than contractor):

3.3.3.1 Instructions label. The instruction label may be inserted in either glove of the pair and shall be a suitable lightweight, white paper measuring not less than 2-1/2 inches in width by 5 inches in length. The instruction label shall bear the following inscription, legibly printed in black indelible ink:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:35Z
Check the source to verify that this is the current version before use.

WARNING - DO NOT USE HOT WATER OR BLEACH

Hand Wash
1. Soak gloves 5 minutes in a warm soap or synthetic detergent solution
2. Wash gloves by rubbing together
3. Rinse thoroughly with warm water
4. Hang dry

Machine Wash
1. Machine wash, delicate cycle, using soap or synthetic detergent in warm water
2. Hang dry

3.4 Design. The gloves shall be of a slip-on type with a Bolton thumb, hand trimmed, a continuous fourchette, blind stitched hem, and pique stitched back of fingers. (see Figure 1).

3.4.1 Figures Figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written document shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns.

3.5.1 Pattern parts. The component parts shall be cut from the materials as specified, and in accordance with the following list of pattern parts:

Nomenclature of pattern parts	Cut parts per pair
Body	2
Fourchette	2
Thumb	2

3.6 Construction.

3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation any one may be used. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the gloves.

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:35Z
Check the source to verify that this is the current version before use.

3.6.2 Thread breaks and end of seams. End of all seams and stitching when not caught in other seams or stitching shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch type) shall be repaired by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operation requirements. The gloves shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations shown, provided the finished gloves are identical to that produced by following the sequence as shown in Table I.

3.7.1 Marking. The component parts of the gloves shall be marked, ticketed, or bundled to insure a uniform shade and size throughout the pair. Any method may be used except:

a. Corrosive metal fastening devices
b. Sew-on shade tickets or metal fastening devices
c. Adhesive type tickets which show discoloration, or the adhesive mass adheres to the material upon removal of the tickets.

NOTE: The use of ink pad numbering machine, rubber stamp, or pencil is allowed, provided the numbering does not show on the outside of the glove and wherever possible, is covered by the seam allowance.

3.7.3 Abbreviations in table of operations. The abbeviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:35Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GLOVES

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
1.	Cutting. The component parts of the gloves shall be die cut in accordance with the patterns. All the component parts shall be cut from the same piece of material, with the length of the part running in the wale direction.				
2.	Replacement of defective components. During the cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1612, shall be removed from production and replaced with non-defective and properly matched components.				
3.	Marking. Mark, ticket, or bundle all component parts to insure a uniform shade and size for proper assembly throughout the gloves (see 3.7.1).				
4.	Attach thumb. Inseam thumb piece to the body of glove (palm side) in one continuous operation, simultaneously closing the thumb seam 1/16 to 3/32 inch from the raw edge.	301 or 401	SSa-1	10-14	
5.	Join continuous fourchette to fingers and close side seam.				
	a. Pique stitch the back of fingers to the continuous fourchette, 1/16 to 3/32 inch from the raw edge.	301 or 401	LSa-1	10-14	
	b. Inseam the fourchette diagonally across the base of each finger from palm to back, 1/16 to 1/8 inch from the edge. Trim off excess material at base if necessary.	301 or 401	OSf-1	10-14	
	c. Inseam the front of fingers to continuous fourchette, simultaneously closing the side seam. Check while stitching to insure that the curved tops of each finger are even, and that the base of each finger meets at the gore.	301 or 401	SSa-1	10-14	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:35Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GLOVES

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
6.	Hemming. Turn under top of glove 1/2 to 5/8 inch, and blindstitch bottom edge of hem.	103	EFl-1	6-8	
NOTE:	Hemming operation must be performed after the closing operation.				
7.	Labeling. Mark the inside center back of each glove as specified in 3.3.3, commencing approximately 1/2 inch below edge of hem. The marking shall not show on the outside of the gloves.				
8.	Finishing. Turn gloves right side out and form or lay-off gloves on proper size, fingered, heated, laying-off boards.				
9.	Trimming and cleaning. Remove all spots, stains, and loose thread. Trim thread ends. NOTE: Care shall be taken when trimming thread ends, that damage to the fabric does not result.				
10.	Pairing. The gloves shall be matched, paired, and tacked together palm to palm, 1-1/4 to 1-3/4 inches from the top edge of the gloves and approximately 1/8 inch in from the closing side seam. Tacking shall be done with not less than 2 stitches, using a cord thread which will permit the gloves to be separated without tearing the fabric.				
11.	Instruction label insert. Insert instruction label as specified in 3.3.3.1, into glove.				

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:35Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished gloves shall conform to the dimensions specified in Table II. All measurements and tolerances are expressed in inches, and shall be taken without pulling or stretching.

Table II - Finished measurements

Size	Overall length (A)	Width of palm (B)	Length from base of thumb to top edge of glove (C)
6	9-5/8	2-3/4	2-1/2
6-1/2	9-13/16	2-7/8	2-1/2
7	10	3	2-1/2
7-1/2	10-3/16	3-1/8	2-1/2
8	10-3/8	3-1/4	2-1/2
8-1/2	10-9/16	3-3/8	2-1/2
9	10-3/4	3-1/2	2-1/2
Tolerance	(±3/16)	(±1/8)	(±1/8)

NOTE: A,B, and C refer to Figure 1.

A. Measurement taken from the tip of middle finger to top edge of glove.
B. Measurement taken across palm, approximately 1/4 inch below the crotch of the fourth (little) finger.
C. Measurements taken from the base of thumb to top edge of glove.

3.9 Workmanship. The finished gloves shall conform to the quality established by this specification. The occurance of defects shall not exceed the applicable point values specified in MIL-STD-1612.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:36Z
Check the source to verify that this is the current version before use.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 and 4.4.3 for compliance with design, construction, workmanship, appearance and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with MIL-STD-1612.

4.4.3. Dimensional examination. The dimensional examination provisions for the finished gloves shall be specified in MIL-STD-1612.

4.4.4 Packing examination. The examination for compliance with the packaging, packing, and marking requirements shall be as specified in MIL-STD-1612.

*4.4.5 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the acceptable quality level, expressed in terms of defects per hundred units, shall be 6.5 as specified in MIL-STD-105.

Examine	Defect
Finished dimension requirements.	Length, width, or height exceeds specified maximum
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:35Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each pair of gloves shall be inserted in a flat style clear polyethylene film bag. The bag shall measure approximately 12 by 5 inches. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The opening shall be at the smaller dimension of the bag. The bag may be fabricated from polyethylene film tubing or sheeting.

5.1.1.2 Intermediate packaging. Ten (10) pairs of gloves of one class, and size, bagged as specified, shall be placed flat in a paperboard box conforming to type I or II, variety 1, class A, type 4 of PPP-B-676; or variety 1, style III, type G, class i or j, of PPP-B-566. Outside dimensions or each box shall be 11-1/2 inches in length, 5 inches in width, and 2-1/4 inches in depth. Box closure shall be secured along the center of the length opening and extending along the bottom and up the sides approximately 2 inches.

5.1.2 Level C. Gloves shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. One hundred eighty pairs of gloves, of one class, and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class weather-resistant, grade V2s, variety DW, size 2, of MIL-B-17757. Level A packages shall be arranged flat, two in length, three in width, and three in depth within the shipping container.

5.2.2 Level B. One hundred eighty pairs of gloves, of one class, and size only, packaging as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 200, variety DW, size 2, of MIL-B-17757. Level A packages shall be arranged flat, two in length, three in width, and three in depth within the shipping container.

5.2.3 Level C. Gloves, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:35Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or order, intermediate packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information listed below, legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag, so as to permit ready identification:

NOMENCLATURE
STOCK NO.
TYPE, CLASS, AND SIZE
QUANTITY

*5.4 Palletization. When specified (see 6.2), item, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be banded with primary and secondary straps in accordance with the banding means C, K and L, or O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type IV; Type V, class 1, size 2; or Type VIII, fabricated from wood groups I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contacting officer.

6. NOTES

6.1 Intended use. The gloves covered by this specification are intended for use by female Military personnel of the Department of Defense as a dress wear item.

6.2 Acquisition data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Type, class, and size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specified issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article sample is required, (see 3.2) the item will be tested and should be a first article sample. The contracing officer should include specific instructions in acquision documents regarding arrangements for examination, quality, and approval of the first article.
e. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
f. When palletization is required (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:35Z
Check the source to verify that this is the current version before use.

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

*6.4 Subject term (key word) listing.

Bolton thumb
Dress glove
Knit, simplex
Nylon, 100%
Slip-on type glove

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - GL
Navy - NU
Air Force - 11

Review Activity:
Navy - MC
Army - MD
Air Force - 99, 82
DLA - CT

User activity:
Navy - CG
Air Force - 45

Preparing Activity:
Navy - NU

Project No.8445-0104

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:35Z
Check the source to verify that this is the current version before use.

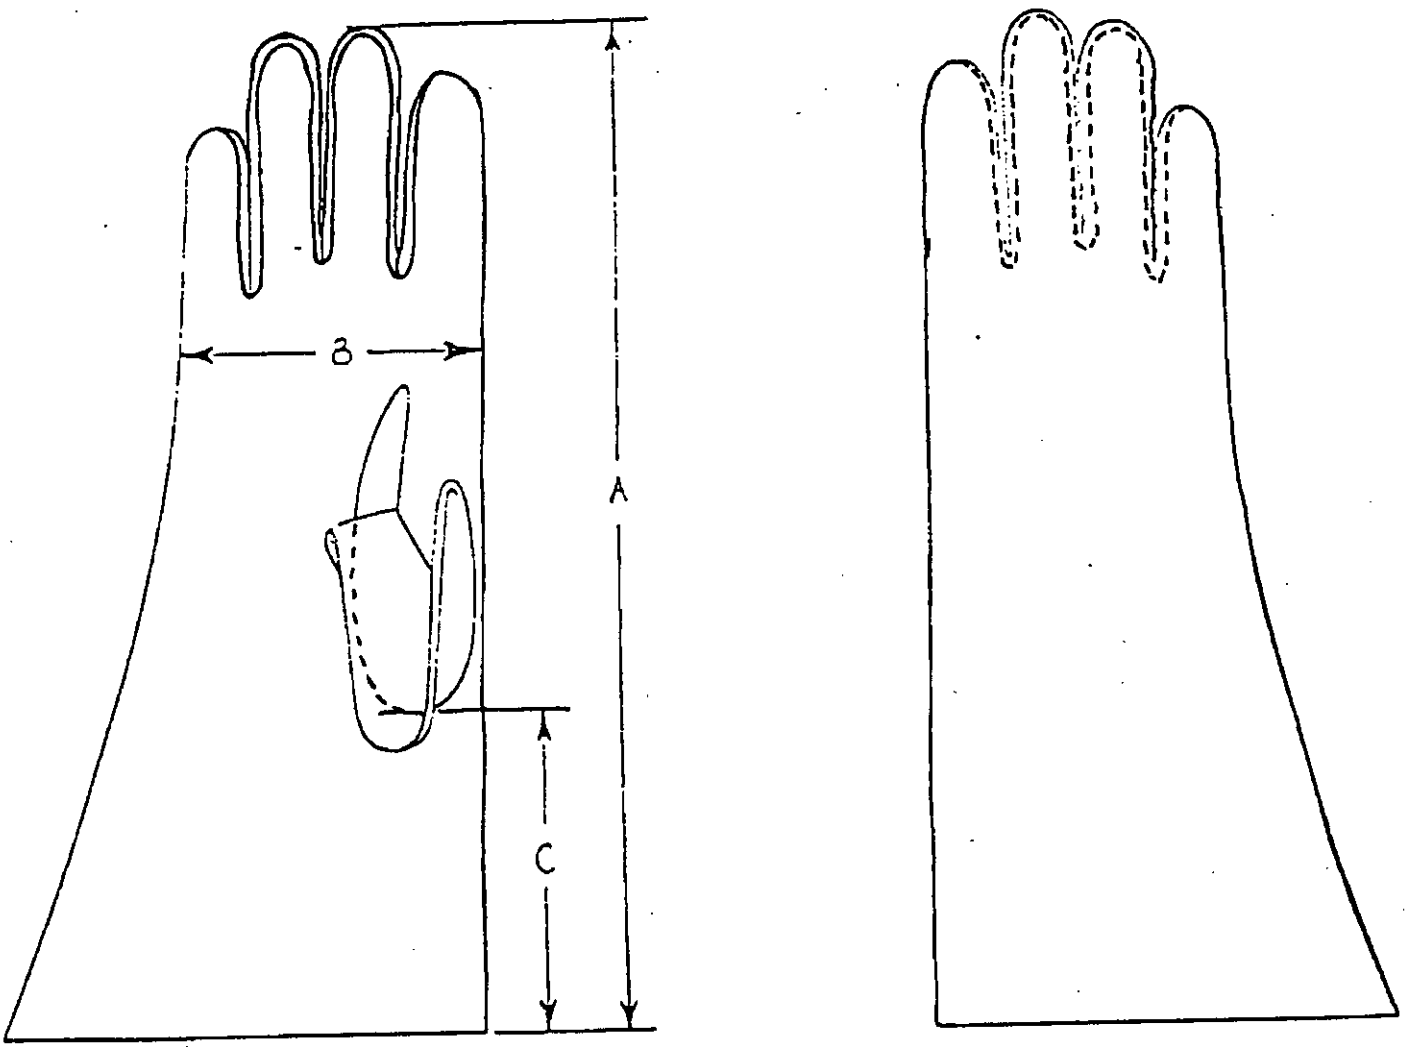


FIGURE 1 - GLOVES, WOMEN'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:35Z
Check the source to verify that this is the current version before use.