INCH-POUND

MIL-G-1007H
INT. AMENDMENT 1
11 December 1995

MILITARY SPECIFICATION

GLOVES, WOMEN'S

This interim amendment is approved for use within the Department of the Navy, with MIL-G-1007H dated 14 October 1988.

PAGE 1

1.2: Delete "Class 2 - Black 3231"

PAGE 2

2.1.1, under "Specifications, Military": Delete "MIL-C-29135 - Cloth, Knitted, Nylon, Simplex"

2.1.1, under "Specifications, Military": Delete "MIL-T-43548 - Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered"

2.1.1, under "Specifications, Federal": Add "A-A-50199 - Thread, Polyester Core, Cotton- or Polyester-Covered"

PAGE 3

2.2, lines 17 to 20: Delete in their entirety

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:35Z
Check the source to verify that this is the current version before use.

3.3.1: Delete and substitute:

"3.3.1 Basic material. The basic material shall be a white bleached nylon simplex jersey cloth and may have a fluorescent optical brightener added. The finished cloth shall have a smooth sueded finish on both sides of the material. The fully heat set cloth shall conform to the requirements cited under Table I-1.

Table I-1. Physical requirements

Characteristic	Requirement	Test method 1/
Yarn:		
Denier	40-70	4021 2/
Multifilament		Visual 2/
Luster	semi-dull or dull	Visual 2/
Discoloration (class 1)		
Light	"fair" ("3")	5660 3/
Weight (oz./sq. yard) (min/max)	5.5-8.0	5041
Wales per inch (min.)	52	5070
Courses per inch (min.)	40	5070
Bursting strength (pounds min.)	100	5120
Stretch (percent)		
Length direction (max.)	30	4/ 5/
Width direction (min/max)	45-75	4/ 5/
Type of knit	simplex jersey	Visual 2/
Dimensional stability (percent shrinkage)		
Length (max.)	10	5552
Width (max.)	10	5552
Nonfibrous Material (max. percent)	2.0	2611
pH (min/max)	5.0-8.5	2811

1/ FED-STD-191

2/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:35Z
Check the source to verify that this is the current version before use.

3/ Method 5660 shall be used except that exposure of the specimen and standard sample shall be for 20 standard fading hours. Any specimen showing discoloration less than or equal to that of the standard sample shall be rated "pass." Any specimen showing discoloration greater than that of the standard sample shall be rated "fail." One determination shall be made for each sample unit and the results reported as "pass" or "fail."

4/ Test specimen. The test specimen shall be a rectangle, 4 inches by not less than 5 inches. The long dimension shall be parallel to the length (wales) of the cloth for length tests and parallel to the width (courses) for width tests. The test specimen shall be taken no nearer the selvage than 1/10 the width of the cloth. Two parallel lines, 3 inches apart, shall be drawn at right angles to the long dimension of the specimen. In addition, a line shall be drawn parallel to the long dimension of the specimen and 1 inch in from either edge for properly aligning the specimen in the jaws.

5/ Test apparatus. The test device (Figure 2) shall be an apparatus wherein the specimen is held between two clamps. The design of the upper clamp shall be such that one gripping surface or jaw shall be an integral part of the rigid frame of the clamp. The face of the movable jaw shall measure 1 inch by 1 inch, and the face of the fixed jaw shall measure 1 inch by 1-1/2 inch or more with the long dimension perpendicular to the direction of application of the load. The lower clamp shall have similar jaws and, when weight is attached, shall weigh a total of 6 pounds. The jaws shall have smooth gripping surfaces, sufficiently flat and parallel to prevent slipping of the specimen during the test. The specimen shall be placed symmetrically in the clamps of the apparatus with the long dimension parallel and the short dimension at right angles to the direction of the application of the load. Using the specified guidelines, the specimen shall be aligned with one outside edge of the front jaws of each clamp. The proper weight shall be added to insure a total of 6 pounds (including the weight of the lower jaws). The load shall be applied for 15 seconds and the distance between jaws measured by a pair of dividers or other suitable instrument. The elongation at the required load shall be expressed as the percent increase in the length of the specimen between the jaws. The percent stretch shall be calculated as follows:

$$\text{Percent stretch} = \frac{\text{Stretch dimension - Original 3-inch dimension}}{\text{Original dimension (3 inches)}} \times 100$$

One specimen each from the length (wales) and width (courses) direction shall be tested from each sample, and the results obtained shall be reported separately to the nearest percent."

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:35Z
Check the source to verify that this is the currentversion before use.

PAGE 4

3.3.2: Delete and substitute:

"3.3.2 Thread. The thread for seaming and stitching the gloves shall be cotton-covered polyester core thread, ticket number 70, 2 ply, white, conforming to A-A-50199, type I."

3.3.2.1: Delete

PAGE 5

3.5, after line 5: Add "Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification."

PAGE 6

3.7, after line 5: Add "Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification."

PAGE 11

5.1.1.1: Delete and substitute:

"5.1.1.1 Unit packing. Each pair of gloves shall be wrapped in a commercially acceptable grade of undyed tissue paper."

5.1.1.2, line 2: Delete "bagged" and substitute "wrapped"

PAGE 12

5.3, line 2, after "order": Delete the remainder of the paragraph and substitute "unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129."

5.3.1: Delete

PAGE 15

After page 14: Add Figure 2 (page 15) "Fabric Stretch Apparatus"

Preparing activity:
DLA-CT

(Project 8445-0134)

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:35Z
Check the source to verify that this is the current version before use.

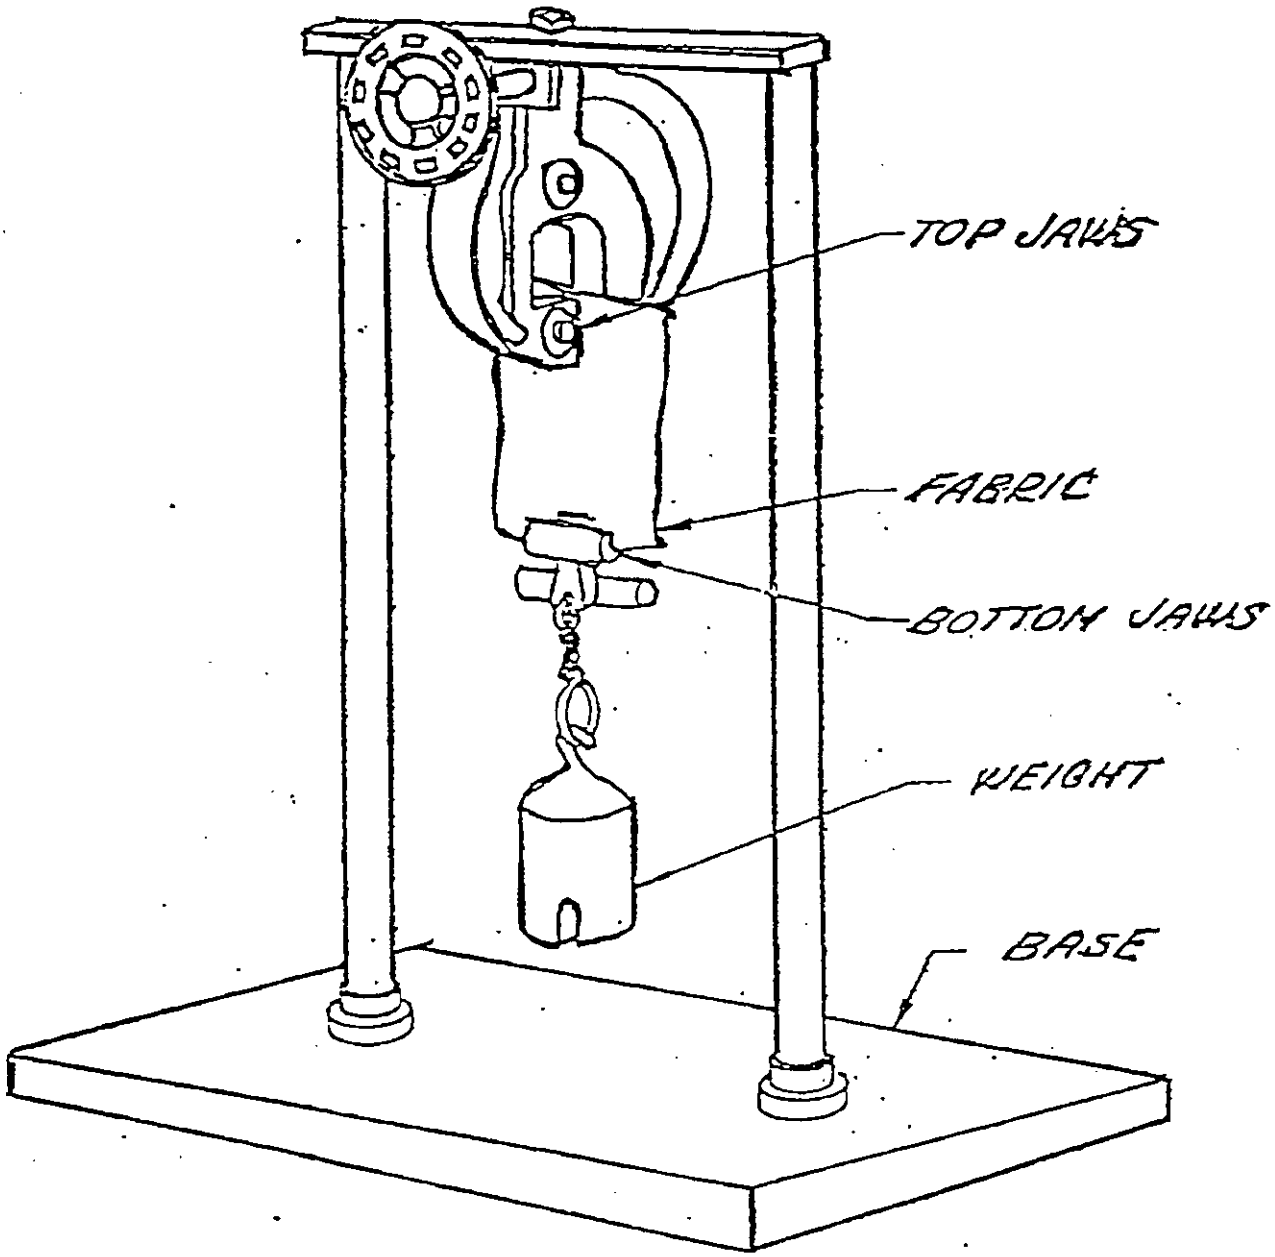


FIGURE 2. FABRIC STRETCH APPARATUS

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:35Z
Check the source to verify that this is the current version before use.