MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, 90°, SHIELD TERMINATION, CATEGORY 1A
(FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

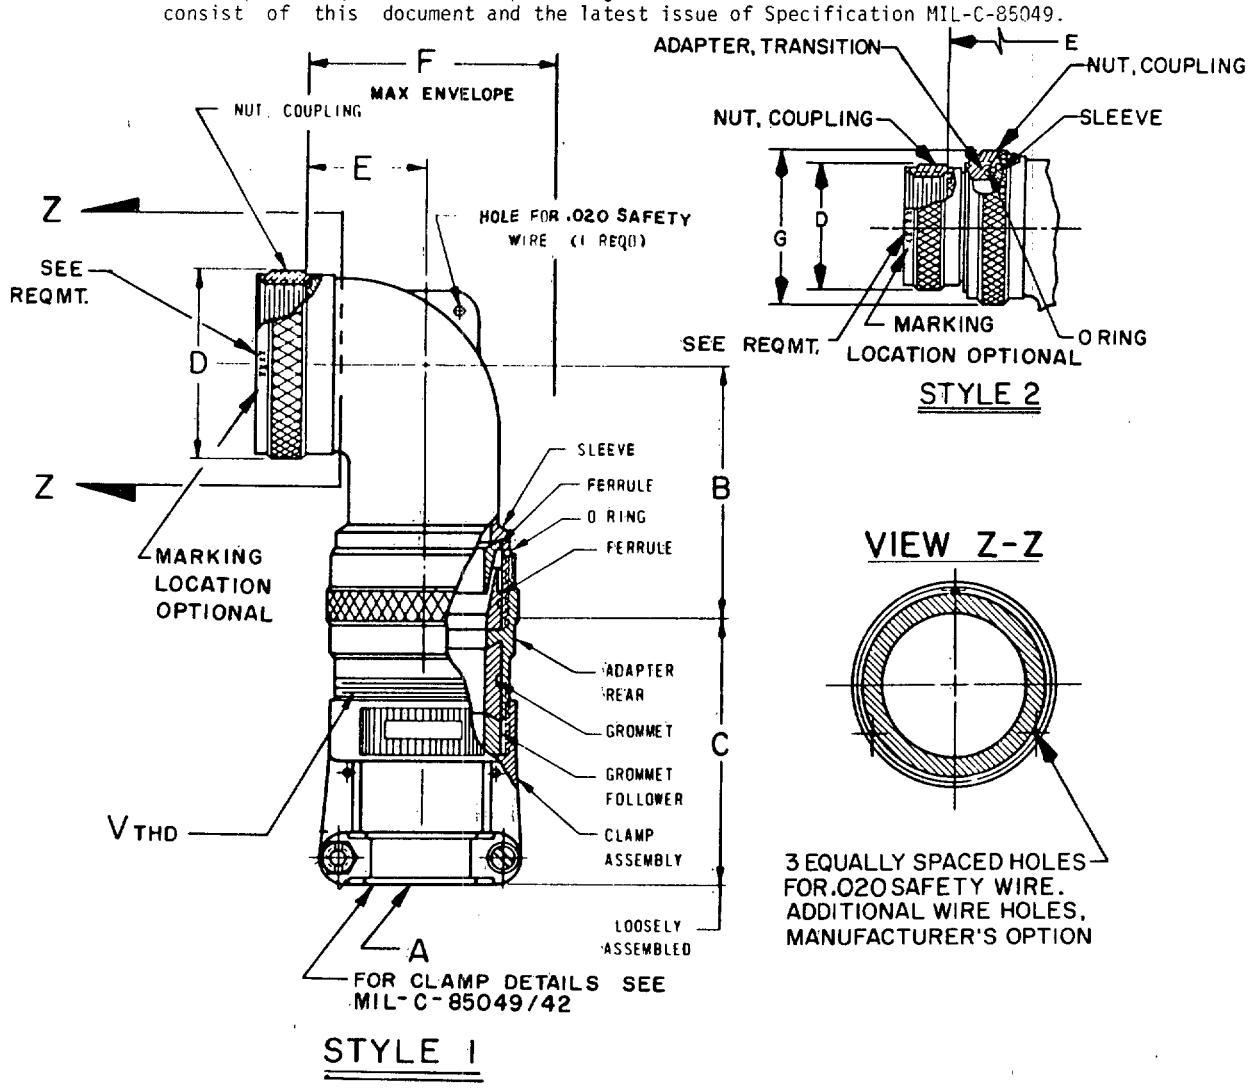


FIGURE 1. Configurations and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ± .062	C REF	D DIA MAX
1	3	X	X	X	4	.125	.250	1	1.800	1.544	.669
2					6	.250	.437	2	1.320	1.544	.669
3	X	8	8S	8	4	.125	.250	1	1.200	1.544	.617
4	X	10	10S, 10SL	10	4	.125	.312	1	1.920	1.544	.734
5	X				6	.250	.375	1	1.320	1.544	.734
6	7	12	12, 12S	12	4	.125	.312	1	1.940	1.544	.858
7					6	.250	.437	1	1.940	1.544	.858
8					10	.350	.500	1	1.335	1.844	.858
9	12	14	14, 14S	14	6	.250	.437	1	2.010	1.544	.984
10					10	.350	.575	1	1.655	1.844	.984

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
1	.636	.625-24 UNEF	1.18	—
2	1.386	.750-20 UNEF	2.02	.858
3	.541	.625-24 UNEF	1.09	—
4	.636	.625-24 UNEF	1.18	—
5	.636	.750-20 UNEF	1.27	—
6	.641	.625-24 UNEF	1.18	—
7	.641	.750-20 UNEF	1.28	—
8	.641	1.000-20 UNEF	1.37	—
9	.741	.750-20 UNEF	1.38	—
10	.741	1.000-20 UNEF	1.47	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
11	19	16	16,16S	16	6	.250	.437	1	2.100	1.544	1.112
12					12	.500	.700	1	1.745	1.916	1.112
13	27	18	18	18	10	.350	.625	1	2.270	1.844	1.218
14					16	.625	.779	1	1.920	2.000	1.218
15	37	20	20	20	10	.350	.625	1	2.270	1.844	1.345
16					16	.625	.904	1	1.920	2.000	1.345
17	X	22	22	22	12	.500	.750	1	2.380	1.916	1.468
18					20	.875	1.029	1	2.025	2.230	1.468
19		24	24	24	12	.500	.750	1	2.380	1.916	1.593
20					20	.875	1.144	1	2.025	2.230	1.593

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
11	.926	.750-20 UNEF	1.59	—
12	.926	1.187-18 UNEF	1.77	—
13	1.016	1.000-20 UNEF	1.80	—
14	1.016	1.437-18 UNEF	1.97	—
15	1.016	1.000-20 UNEF	1.80	—
16	1.016	1.437-18 UNEF	1.97	—
17	1.166	1.187-18 UNEF	2.11	—
18	1.166	1.750-18 UNS	2.29	—
19	1.166	1.187-20 UNEF	2.11	—
20	1.166	1.750-18 UNS	2.29	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
21			28		16	.625	.937	1	2.550	2.000	1.969
22					24	1.000	1.375	1	2.195	2.024	1.969
23			32		16	.625	.937	1	2.800	2.000	2.219
24					20	.875	1.250	1	2.800	2.230	2.219
25					28	1.250	1.625	1	2.445	2.550	2.219
26			36		16	.625	.937	1	2.770	2.000	2.469
27					24	1.000	1.375	1	2.770	2.024	2.469
28					32	1.437	1.840	1	2.415	2.600	2.469
29			40		16	.625	.937	1	2.770	2.000	2.719
30					24	1.000	1.375	1	2.770	2.024	2.719

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
21	1.266	1.437-18 UNEF	2.33	—
22	1.266	2.000-18 UNS	2.51	—
23	1.616	1.437-18 UNEF	2.81	—
24	1.616	1.750-18 UNS	2.81	—
25	1.616	2.250-16 UN	3.07	—
26	1.816	1.437-18 UNEF	3.13	—
27	1.816	2.000-18 UNS	3.13	—
28	1.816	2.500-16 UN	3.39	—
29	2.566	1.437-18 UNEF	3.88	—
30	2.566	2.000-18 UNS	3.88	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
31			40		32	1.437	1.875	1	2.415	2.600	2.719
32			44		16	.625	.937	1	2.770	2.000	2.969
33					24	1.000	1.375	1	2.770	2.024	2.969
34					32	1.437	1.875	1	2.415	2.600	2.969
35			48		16	.625	.937	1	2.770	2.000	3.219
36					24	1.000	1.375	1	2.770	2.024	3.219
37					32	1.437	1.875	1	2.415	2.600	3.219
38	61				12	.500	.750	1	2.380	1.916	1.653
39					20	.875	1.184	1	2.025	2.230	1.653
40	19	16	16,16S	16	10	.350	.625	1	2.100	1.844	1.112

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
31	2.566	2.500-16 UN	4.14	—
32	2.566	1.437-18 UNEF	3.88	—
33	2.566	2.000-18 UNS	3.88	—
34	2.566	2.500-16 UN	4.14	—
35	2.566	1.437-18 UNEF	3.88	—
36	2.566	2.000-18 UNS	3.88	—
37	2.566	2.500-16 UN	4.14	—
38	1.166	1.187-18 UNEF	2.11	—
39	1.166	1.750-18 UNS	2.29	—
40	.926	1.000-20 UNEF	1.66	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
41	27	18	18	18	4	.125	.312	1	2.270	1.544	1.218
42					6	.250	.437	1	2.270	1.544	1.218
43	37	20	20	20	6	.250	.437	1	2.270	1.544	1.345
44		22	22	22	4	.125	.312	1	2.380	1.544	1.468
45					6	.250	.437	1	2.380	1.544	1.468
46		24	24	24	10	.350	.625	1	2.380	1.844	1.593
47			36		12	.500	.750	1	2.770	1.916	2.469
48			40		12	.500	.750	1	2.770	1.916	2.469
49		10	10S,10SL	10	6	.250	.437	2	1.940	1.544	.734
50	12	14	14,14S	14	12	.500	.750	2	2.270	1.916	.984

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
41	1.016	.625-24 UNEF	1.80	—
42	1.016	.750-20 UNEF	1.80	—
43	1.016	.750-20 UNEF	1.80	—
44	1.166	.625-24 UNEF	2.11	—
45	1.166	.750-20 UNEF	2.11	—
46	1.166	1.000-20 UNEF	2.11	—
47	1.816	1.187-18 UNEF	3.13	—
48	1.816	1.187-18 UNEF	3.88	—
49	1.391	.750-20 UNEF	2.03	.858
50	1.766	1.187-18 UNEF	2.61	1.218

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C 81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
51	19	16	16,16S	16	16	.625	.937	2	2.380	2.000	1.112
52	27	18	18	18	12	.500	.750	1	2.270	1.916	1.218
53	61				16	.625	.937	1	2.025	2.000	1.653
54	37	20	20	20	12	.500	.750	1	2.270	1.916	1.345
55					20	.875	1.250	2	2.550	2.230	1.345
56		22	22	22	10	.350	.625	1	2.380	1.844	1.468
57					16	.625	.937	1	2.380	2.000	1.468
58					20	875	1.250	2	2.550	2.230	1.468
59		24	24	24	16	.625	.937	1	2.380	2.000	1.593
60			28		12	.500	.750	1	2.550	1.916	1.969

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
51	1.916	1.437-18 UNEF	2.87	1.468
52	1.016	1.187-18 UNEF	1.86	—
53	1.166	1.437-18 UNEF	2.14	—
54	1.016	1.187-18 UNEF	1.86	—
55	2.016	1.750-18 UNS	3.14	1.969
56	1.166	1.000-20 UNEF	2.11	—
57	1.166	1.437-18 UNEF	2.12	—
58	2.016	1.750-18 UNEF	3.14	1.969
59	1.166	1.437-18 UNEF	2.14	—
60	1.266	1.187-18 UNEF	2.33	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR: MIL C 81703 SER 3	MIL C 26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ± .062	C REF	D DIA MAX
61			28		20	.875	1.250	1	2.550	2.230	1.969
62			32		24	1.000	1.375	1	2.800	2.024	2.219
63			36		20	.875	1.250	1	2.770	2.230	2.469
64					28	1.250	1.625	1	2.770	2.550	2.469
65			40		20	.875	1.250	1	2.770	2.230	2.719
66					28	1.250	1.625	1	2.770	2.550	2.719
67			44		20	.875	1.250	1	2.770	2.230	2.969
68					28	1.250	1.625	1	2.770	2.550	2.969
69			48		20	.875	1.250	1	2.770	2.230	3.219
70					28	1.250	1.625	1	2.770	2.550	3.219

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
61	1.266	1.750-18 UNS	2.39	—
62	1.616	2.000-18 UNS	2.86	—
63	1.816	1.750-18 UNS	3.13	—
64	1.816	2.250-16 UN	3.27	—
65	2.566	1.750-18 UNS	3.88	—
66	2.566	2.250-16 UN	4.02	—
67	2.566	1.750-18 UNS	3.88	—
68	2.566	2.250-16 UN	4.02	—
69	2.566	1.750-18 UNS	3.88	—
70	2.566	2.250-16 UN	4.02	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR				CLAMP SIZE	A CABLE RANGE		STYLE	B	C	D DIA
	MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III		MIN	MAX		±.062	REF	MAX
71	7	12	12,12S	12	10	.350	.625	2	2.100	1.844	.858
72	27	18	18	18	16	.625	.937	2	2.380	2.000	1.218
73	X	24	24	24	20	.875	1.250	2	2.550	2.230	1.593
74	12	14	14,14S	14	4	.125	.312	1	2.010	1.544	.984
75	19	16	16,16S	16	4	.125	.312	1	2.100	1.544	1.112

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
71	1.686	1.000-20 UNEF	2.42	1.112
72	1.926	1.437-18 UNEF	2.88	1.468
73	2.026	1.750-18 UNS	3.15	1.969
74	.741	.625-24 UNEF	1.31	—
75	.926	.625-24 UNEF	1.59	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
.617	15.67	1.655	42.04	2.219	56.36
.669	16.99	1.745	44.32	2.230	56.64
.734	18.64	1.800	45.72	2.270	57.66
.858	21.79	1.844	46.84	2.380	60.45
.984	24.99	1.916	48.67	2.415	61.34
1.112	28.24	1.920	48.77	2.445	62.10
1.200	30.48	1.940	49.28	2.469	62.71
1.218	30.94	1.969	50.01	2.550	64.77
1.320	33.53	2.000	50.80	2.600	66.04
1.335	33.91	2.010	51.05	2.719	69.06
1.345	34.16	2.024	51.41	2.770	70.36
1.468	37.29	2.025	51.44	2.800	71.12
1.544	39.22	2.100	53.34	2.969	75.41
1.593	40.46	2.195	55.75	3.219	81.76
1.653	41.99				

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Unless otherwise specified, tolerances shall be: .XX = ±.01: .XXX ±.005: angular; X° = ±1° X°XX' = ±0°30'.
4. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MS3155 (design standard).

Material and finish:
Accessory components shall be as shown in table I.
Grommet and O-Ring: Silicone per ZZ-R-765, class 3A or 3B.
Clamp assembly screws: 316 series corrosion resistant steel.

Cable sealing ranges: See table II.

TABLE I. Material and finish.


Component	Material	Finish
Body	Aluminum alloy in accordance with MIL-C-85049	W 1/ N
Body	Corrosion resistant steel 316 series per QQ-S-763	B, S

1/ Not for Navy use.

TABLE II. Cable sealing ranges.

Dash number	Cable sealing range		Test plug diameter (inches)	
	Minimum Dia (inches)	Maximum Dia (inches)	Min	Max
03	.125	.250	.109	.125
05	.250	.375	.234	.250
10	.350	.575	.334	.350
12	.500	.700	.484	.500
14	.625	.779	.609	.625
18	.875	1.029	.859	.875
22	1.000	1.375	.984	1.000
25	1.250	1.625	1.234	1.250
28	1.437	1.875	1.421	1.437
31	1.437	1.875	1.421	1.437
34	1.437	1.875	1.421	1.437
37	1.437	1.875	1.421	1.437

Part number: See example below:

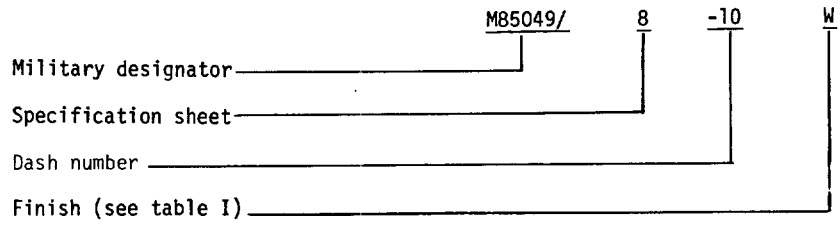

Simplified assembly instructions shall be packaged with each accessory.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

Applications:
a. These accessories are for shield termination and environmental applications. Armor shield termination and environmental applications may be achieved by reversing the ferrules and grommets.
b. Style 2 applies when the cable diameter exceeds the E diameter of MS3155.
c. For assembly instructions see figure 2 of MIL-C-85049/25.

Qualification:
See MIL-C-85049, category 1A.

QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, IN 47522.

Supersession data:

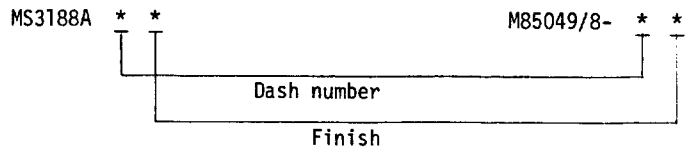

old	new
A and C	W
N	N
D	W
S	S
	B

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Systems Engineering Standardization Department
(SESD), Code 93
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Systems Engineering Standardization Department
(SESD). Code 93
Lakehurst, NJ 08733

ATTN: TJM (9322)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.