MILITARY SPECIFICATION

RACK, BOMB EJECTOR, AIRCRAFT; BRU-20, BRU-21, BRU-22, BRU-23, BRU-24 AND BRU-25 SERIES

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for the manufacture and inspection of two types of bomb ejector racks capable of- carrying and releasing stores having suspension lugs spaced 355.6 millimeters (14 inches) apart and weighing from 45 kilograms (100 pounds) to 660 kilograms (1,450 pounds). The test limits in this specification define minimum acceptable capabilities.

1.2 Classification. Bomb ejector racks, hereinafter called ejector units, covered by this specification shall be of the following types:

Type I BRU-20, BRU-21, BRU-22, BRU-23 Bomb Ejector Racks

Type II BRU-24, BRU-25 Bomb Ejector Racks

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Engineering Specifications and Standards Department (Code 93) Naval Air Engineering Center, Lakehurst, N.J. 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1095

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-I-6866	-Inspection, Penetrant Method of
MIL-T-7743	-Testing, Store Suspension and Release Equipment; General Specification for
MIL-C-81842	-Connector Assemblies for Bomb Rack Electric Fuzing Provisions

STANDARDS

MILITARY

MIL-STD-100	-Engineering Drawing Practices
MIL-STD-129	-Marking for Shipment and Storage
MIL-STD-130	-Identification Marking for U.S. Military Property
MIL-STD-143	-Standards and Specifications, Order of Precedence for the Selection of
MIL-STD-704	-Electric Power, Aircraft, Characteristics and Utilization of
MIL-STD-794	-Parts and Equipment, Procedure for Packaging and Packing of.
MIL-STD-831	-Test Reports, Preparation of
MS3314	-Lug, Suspension, 450 Kg {1,000 lb.} class, Airborne Equipment

DRAWINGS

NAVAL AIR SYSTEMS COMMAND

2 9 2 A S 1 0 1	-Hanger, Ejector Assembly

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence of specifications and standards. Should a conflict exist between any requirement in this specification and any requirement in the applicable documents referenced herein, the requirements of this specification shall take precedence over the referenced (applicable) document.

3. REQUIREMENTS

3.1 First article. The ejector units furnished under this specification shall be a product which has been inspected and passed the first article inspection specified herein (see 4.3).

3.2 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.3 Interchangeability. All parts having the same part number shall be directly and completely interchangeable with each other with respect to installation and performance.

3.4 Identification of parts. All parts shall be specified on. the drawings listed in the data list for the ejector unit being procured, or in accordance with MIL-STD-130, if not specified on the drawings. The item identification and part number requirements of MIL-STD-100 shall govern the part number and changes thereto.

3.5 Ejector unit.

3.5.1 Construction. The construction of the ejector unit shall be in accordance drawings listed in the data list for the ejector unit being procured and as specified herein (see 6.2.1f}.

3.5.2 Performance. The ejector units shall satisfy all performance requirements when subjected to the following inspections in the order specified in Tables I and II.

a. Ejector Unit Inspection (see 4.6.3)

b. Functional Test (see 4.6.4)

c. Arming Mechanism (see 4.6.5)

d. Electric Fuze Arming (see 4.6.6)

e. Electrical Characteristics (see 4.6.8a)

f. Lag Time or Time of Release Determination (see 4.6.8b)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

g. Icing (see 4.6.8c)

h. Sand (see 4.6.8d)

i. Life (see 4.6.7)

j. Salt Spray (see 4.6.8e)

k. Shock (see 4.6.8f)

l. Vibration (see 4.6.8g)

m. Static (see 4.6.8h)

n. Lock Shut Firing (see 4.6.8i)

3.6 Electric fuze arming unit. The construction and inspection of the electric fuze arming unit shall be in accordance with MIL-C-81842.

3.7 Workmanship. The workmanship displayed in fabrication and assembly of the ejector units shall be such as to assure, within design limitations, the ability of the ejector units to meet their performance. requirements under all applicable environmental conditions specified herein. Unauthorized repair, welding, heavy burrs, or parts assembled by introduction of high stresses not prescribed in the drawings, are typical signs of inferior workmanship and shall be cause for rejection. The standards of workmanship exhibited in the approved first article sample subject to any qualification stated in the governments notice of approval, shall be determinative of the requirements of the contract relative to workmanship.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspections. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved 'by the government. The government reserves the right to perfom any of the inspections set forth in the specification, where such inspections are deemed necessary to assure that the supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection of the ejector units shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

a. First article inspection (see 4.3)

b. Quality conformance inspection (see 4.4)

4.3 First article inspection. First article inspection shall consist of all of the inspections listed in Table I. First article inspection report format shall be in accordance with MIL-STD-831 (see 6.3).

4.3.1 Sampling for the first article inspection. First article ejector unit samples shall consist of the first two ejector units manufactured on contract. The ejector units shall be permanently labeled A and B for ease of identification. Failure of the ejector units to pass any of the first article inspections shall be cause *for* rejection (see 6.3).

4.4 (Quality conformance inspection. Quality conformance inspection shall consist of the following inspections:

a. Individual Inspections (see 4.4.1)

b. Sampling Inspections (see 4.4.2)

Quality conformance inspection report format shall be in accordance with MIL-STD-831 (see 6.3).

4.4.1 Individual inspections. Individual inspections are those inspections conducted on each ejector unit. Individual inspections for the ejector units are shown in Table II, Group I. Failure to pass any of these inspections shall be cause for rejection of the ejector unit.

4.4.2 Sampling inspections. A random sampling of the ejector units shall be selected by the procuring activity from each production lot in accordance with Table III and shall be subjected to the inspections listed in Table II, Group 1 and Group 2. Group I inspections shall be conducted prior to Group 2. inspections. Failure to pass any of these inspections shall be cause for rejection of the entire lot (see 6.2.le and 6.3).

4.5 Inspection conditions. Unless otherwise specified, all inspections shall be performed under the following conditions:

a. Room temperature. Room ambient of 25 ±10°C (77 ±18°F) indicated.

b. Test temperature. All parts of the test item shall be stabilized at the specified temperature ±2.8°C. (±5°F) indicated prior to conducting any tests. Unless otherwise specified, temperature stabiliza-

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

tion will have been attained when the indicated temperature of the surface of the largest mass of the test item does not change by more than ±2.8°C (±5°C) in a period of 1 hour.

c. Swaybraces. Whenever tests require that a store be mounted to the ejector unit, swaybraces shall be used. The swaybraces shall be adjusted as described in 4.6.4f.

d. Test fixture. During any test requiring that the ejector unit be supported, a fixture manufactured in accordance with Figure 1 shall be used. assemblies (Drawing 292AS101) shall be furnished bv the procuring activity (see 6.2.11).

e. Test stores. The stores, as referenced herein by weight, shall conform to the following parameters. The store suspension lugs shall be in-accordance with MS3314.

1. The 113 kilogram (250 pound) store shall utilize applicable suspension lugs, spaced 355.6 millimeters (14 inches) apart. Its center of gravity shall be based on the MK 81 L.D.G.P. bomb.


2. The 450 kilogram (1,000 pound) store shall Utilize applicable Suspension lugs, spaced 355.6 millimeters (14 inches) apart. Its center of gravity shall be based on the MK 83 L.D.G.P. bomb.

f. Special condition. Any time a store is loaded onto any station of the ejector unit, the piston of each loaded ejector shall be pulled down so that it contacts the test store.

g. Input power requirements. The ejector unit shall perform satisfactorily under all applicable conditions specified herein from a 28 VDC rated voltage power source with characteristics and limits as defined in MIL-STD-704, except that the ejector unit shall operate over a range of 20 to 30 VDC, measured at the ejector unit's input connector(s).

h. Breech cap. A breech cap (P/N 292AS110, or equivalent MER/TER cap), supplied by the procuring activity, shall be used to ignite the ejector unit's impulse cartridges (see 6.2.1k and 6.2.11). When

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

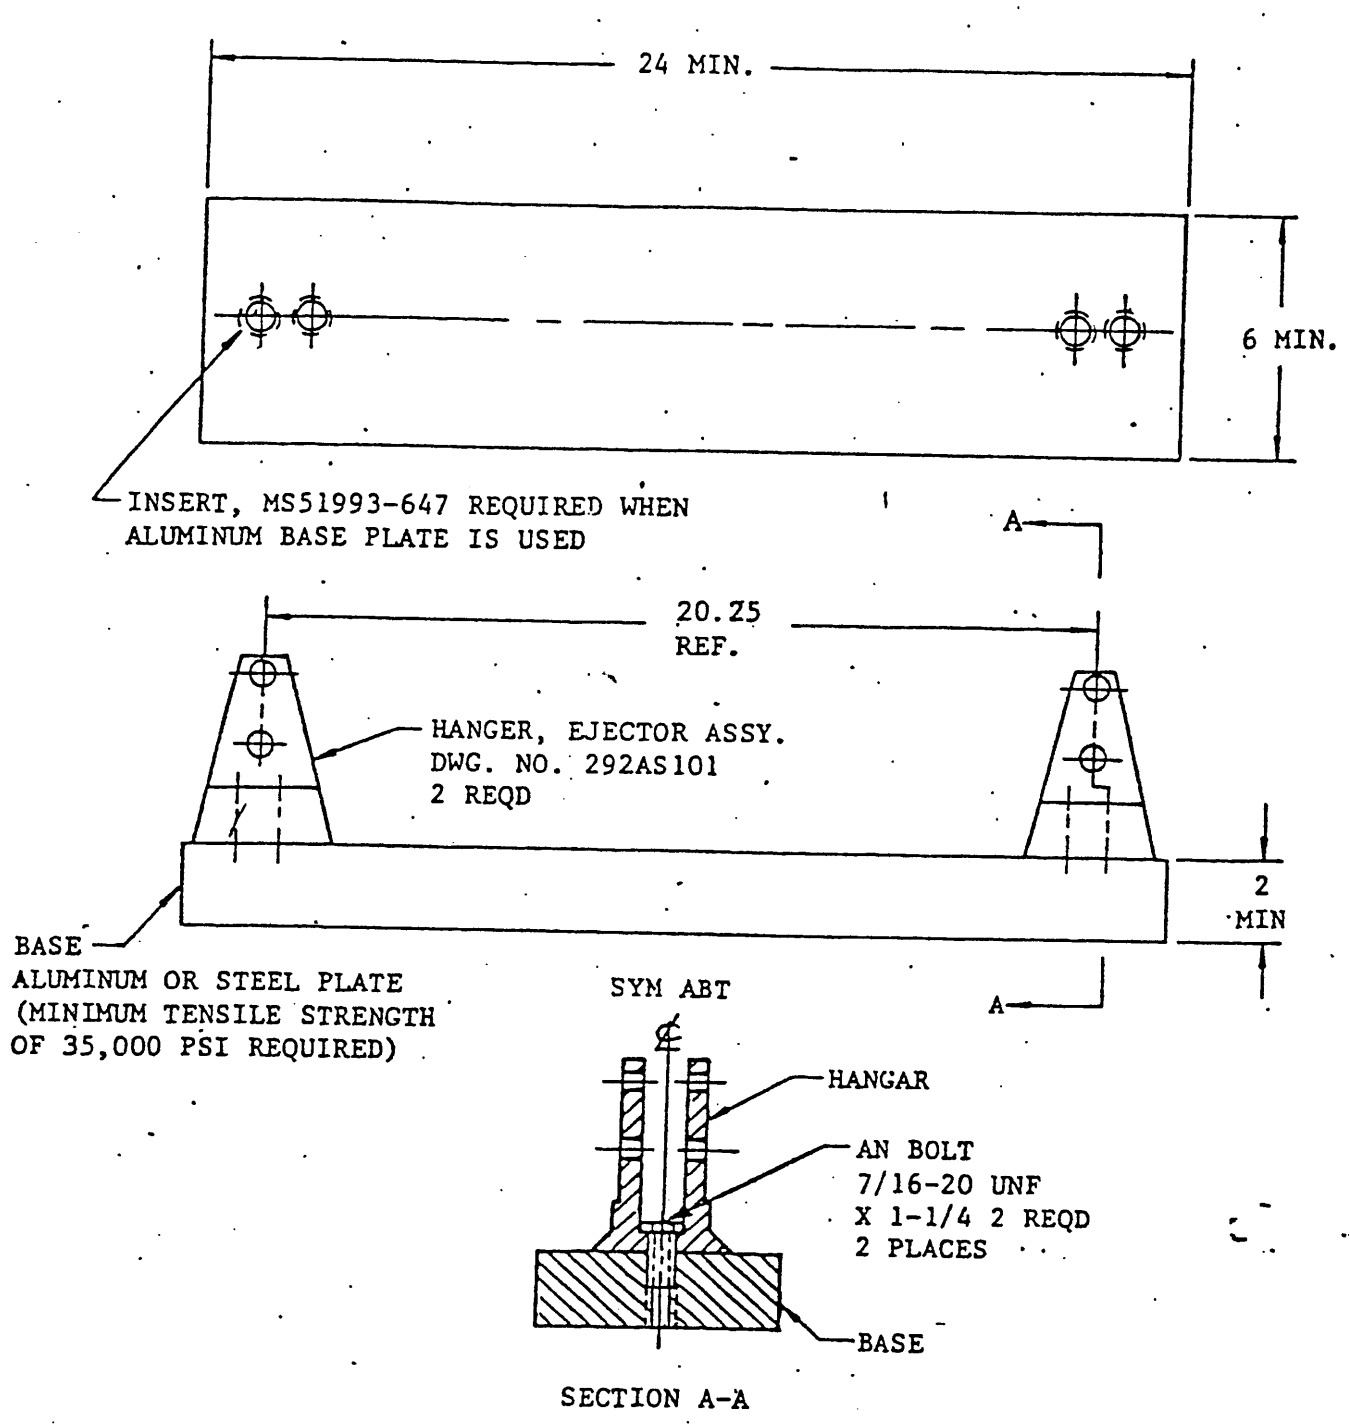

NOTE: DIMENSIONS ARE IN INCHES

FIGURE 1. Ejector unit mounting fixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

used, the breech cap shall be electrically connected in series to a 2 ohm, 50 watt resistor to provide current limiting protection.

4.6 Inspection.

4.6.1 Qualification by analysis, inspection, and demonstration. All requirements, for the bomb rack not riot qualified testing shall be qualified by analysis, inspections or testing approved by the procuring activity.

4.6.2 Packaging inspection. Each bomb rack shall be examined to ensure that the preparation for delivery conforms to this specification (see section 5).

4.6.3 Ejector unit. Each ejector unit shall be inspected to insure that it has been properly assembled and adjusted, that the cal connections are secure, and that the workmanship specified herein. (see 3.7].

4.6.3.1 Hooks. Prior to installation in the ejector unit, each hook shall be subjected to the following inspections:

a. Each hook shall be subjected to dye penetrant inspections in-accordance with MIL-I-6866. Dye penetrant inspections shall be performed after final processing. Special attention shall be given to the throat and pivot hole areas of the hooks. There shall be no evidence of cracks, seams, discontinuity of surface or other detrimental defects in any area of the hook.

b. Each hook shall be thoroughly examined to determine conformance to all the requirements of the drawings listed in the data list for the ejector unit being procured (see 6.2.1f). As a minimum, all hooks shall be inspected and tested to determine if any of. the following major defects exist.

1. One or more dimensions out of tolerance.

2. Finish not in accordance with specified values.

4.6.4 Functional test. Each ejector unit mounted in a horizontal position, shall complete the following tests:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

CAUTION

The ejector unit shall not be fired without a reactive store load imposed on the ejector foot.

a. The hooks of the ejector unit shall be closed and it shall be verified that the hooks latch.

b. Rotate the safety stop lever to “locked”. Attempt to release the ejector unit using the manual release lever. The maximum force applied shall be Newtons (45 pounds). The release mechanism shall not actuate.

c. Rotate the safety stop lever to “unlocked”. Release the ejector unit using the manual release lever. Release force shall be between 67 and 200 Newtons (15 and 45 pounds). The release mechanism shall operate smoothly and the hooks shall open.

d. The hooks of the ejector unit shall be latched and a total down load of 22,240 Newtons (5,000 pounds) (11,120 Newtons, 2,500 pounds per hook) applied to the ejector unit. There shall be no damage to the ejector unit. Rotate the safety stop lever to the “locked” then “unlocked” position. There shall be no interference or binding.

e. The load on the ejector unit shall be reduced to 3,558 Newtons (800 pounds) 1,779 Newtons, (400 pounds per hook). Release the ejector unit using the manual release lever. The release force shall be between 67 and 200 Newtons (15 and 45 pounds). The release mechanism shall operate smoothly and the hooks shall open.

f. Suspend a 113 kilogram (250 pound) store from the ejector unit, rotate the safety stop lever to “locked", and adjust the swaybraces as follows:

1. Hand tighten all braces until the pads lightly contact the store.

2. Tighten the forward starboard pad 1/4 turn.

3. Tighten the aft port pad 1/4 turn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

4. Tighten the forward port pad 1/4 turn

5. Tighten the aft starboard pad 1/4 turn.

6. Repeat tightening in order of 2. through 5. to attain 3/8 total turn on each swaybrace.

g. Load the ejector unit with the applicable impulse cartridge (see 6.2.1k). Rotate the safety stop lever to "blocked". Apply 28 VDC to the ejector unit's electrical input connector(s). The impulse cartridge shall ignite and the store shall be ejected. The time of release or lag time, as defined in MIL-T-7743, shall be measured. Lag time shall not exceed 0.1 second.

h. Remove, disassemble clean and inspect the ejector unit as indicated in the applicable manuals (see 6.2.1g). There shall be no damage to the ejector unit.

4,6.5 Arming mechanism. A MK-9 or MK-11 bomb arming wire assembly shall be inserted in the tail and nose arming units of the ejector unit (see 6.2.11). With each arming unit not energized, pull each arming wire slowly, in a vertically downward direction, parallel to the side of the ejector unit. Each arming unit shall support a 40 Newton (9 pound) load but release the wire at any load in excess of 58 Newtons (13 pounds). A minimum of three successive measurements shall be obtained OR each non-energized arming unit. With each arming unit energized, pull on each arming wire in the same direction as specified above. Each arming unit shall support a load of 667 Newtons (150 pounds).

4.6.6 Electric fuze arming. The 0° pull-out force for the electric fuze connector assembly and the pull test fixture shall be in accordance with MIL-C-81842. Three successive measurements shall be made. In addition, the interlock switch shall be verified to be open when the ejector unit is latched and closed when the ejector unit is released.

4.6.7 Life test. The ejector unit shall be life tested a-total of 250 ejections. Each ejection shall be performed with a vertical down load of 22,240 Newtons (5,000 pounds) per hook 44,480 Newtons, (10,000 pounds total- per ejection unit) and the applicable impulse cartridge (see 6.2.1k). The ejector foot shall be opposed by a device which simulates the force-time characteristics of an ejected MK 83 L.D.G.P. store 450 kilograms, (1,000 pounds). Time of release or lag times shall be measured in accordance with 4.6.4g on the following ejections:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

a. Ejections 1 through 10.

b. Ejections 126 through 135.

c. Ejections 241 through 250.

4.6.8 Additional tests. The ejector unit shall pass the following tests of MIL-T-7743 as specified, except as modified herein. Applicable impulse cartridges shall be used when required (see 6.2.lk). When arming units or electric fuzes are required to be tested, only the tests of 4.6.5 and 4.6.6, respectively, shall apply.

a. Electrical Characteristics (see 4.6.8.1)

b. Lag Time or Time of Release Determination (see 4.6.8.2)

c. Icing (see 4.6.8.3)

d. Sand

e. Salt Spray (see 4.6.8.4)

f. Shock (see 4.6.8.5)

Vibration (see 4.6.8.6)

h. Static (see 4.6.8.7)

i. Lock Shut Firing

4.6.8.1 Electrical characteristics. The electrical unit shall be subjected to the electrical characteristics test, except that the test temperature shall be 70°C (158°F). The minimum operating voltage be demonstrated on the arming units only, which shall operate when 20 VDC is applied.

4.6.8.2 Lag time or time of release determination. The ejection unit shall be subjected to this test with the following exceptions:

a. Only horizontal releases shall be conducted.

b. All ejections shall be performed with a 113 kilogram (250 pound) simulated store suspended from the ejector unit and swaybraced in accordance with 4.5c.

c. The firing voltage shall be 20 VDC.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T10:40Z
Check the source to verify that this is the currentversion before use.

d. The high temperature test temperature shall be 93°C (200°F) for Type I ejector units and 70°C (158°F) for Type II ejector units.

4.6.8.3 Icing. The ejector unit shall be subjected to the Navy and Air Force portion of the icing test.

4.6.8.4 Salt spray. This test shall be conducted under the following conditions. Store release shall be effected by applying non-pulsed 28 VDC: to the ejector unit. Minimum operating voltage shall be demonstrated by applying 20 VDC to the ejector unit.

4.6.8.5 Shock. This test shall be conducted under the following conditions. The applied shock yield loads shall be specified in Table IV. There shall be two shocks in each direction of the three axes shown in the table for a total of 12 shocks. The ejector unit shall be loaded with a 113 kilogram (250 pound) store for the yield load tests. After the yield load test in each direction of the axis, stores shall be manually released to ensure proper functioning of the ejector units. The light load test shall not be conducted. Only yield loads shall be applied during catapult and arrested loading tests.

4.6.8.6 Vibration. This test shall be conducted in accordance with the vibration test, Procedure I. A 450 kilogram (1000 pound) store shall be used for loaded vibration.

4.6.8.7 Static. This test shall be conducted with the following conditions. The design limit load shall be as specified in Table V. The ejector unit shall be loaded to limit, yield and ultimate loads. The combined loads and moments shall be applied to rigid simulated stores of negligible weight (45 kilograms, 100 pounds maximum), such that they act at each store center of gravity.

4.7 Qualification cross reference. Table VI identifies each requirement in Section 3 and correlates the Section 4 paragraphs that qualify it.

5. PACKAGING

5.1 Ejector unit preservation and packaging. Presentation and packaging shall be in accordance with Level A, B, or C as specified in MIL-STD-794, as specified in the contract, without the use of preservation compound.

5.2 Packing. Shipping containers shall contain one each packaged ejector unit. The container shall be suitable for Level A. B or C as specified in MIL-STD-794.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

5.3 Unitized loading. Unitized loading for the ejector units is authorized as specified in MIL-STD-794.

5.4 Marking. All shipping containers shall be marked in accordance with the requirements of MIL-STD-129 with the following information:

RACK, BOMB, EJECTOR, BRU-
MILITARY SPECIFICATION NO. MIL-R-85320(AS)
PRESERVED (DATE)
DOMESTIC OR EXPORT PACKED (AS APPLICABLE)
GOVERNMENT ORDER NO. (OR CONTRACT NO. IF-ORDER NO. IS NOT ASSIGNED)
NAME OF SUPPLIER (AND NAME OF MANUFACTURER IF NOT THE SAME)
MANUFACTURER'S CODE IDENTIFICATION NUMBER

6. NOTES

6.1 Intended use. Type I ejector units covered by this specification are intended for use in helicopters. Type II units covered by this specification are intended for use in all types of bombing. They are mounted externally in the aircraft wing pylon or fuselage. They are intended for use on either land-based or carrier-based aircraft.

6.2 Ordering data. Procurement documents shall specify the following:

6.2.1 Procurement requirements

a. Title, number and date of this specification.

b. Selection of applicable levels of preservation, packaging and packing required (see 5.1 and 5.2).

c. Samples subjected to sampling inspection shall not be considered or accepted as part of the contract (see 4.4.2).

d. Sampling inspection selection (see 4.4.2).

e. Number of samples and inspection sequence for production lots in excess of 300 units (see Table III).

f. Applicable drawing package for type of ejector unit required (see 3.5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

g. Applicable maintenance manuals for type of ejector unit required (see 4.6.4).

h. Name and location of government representative responsible for random selection of inspection samples (see 4.4.2).

i. Items of data required (see 6.3).

j. Name and location of government approved test laboratory.

k. Number and designation of impulse cartridges required for testing (see 4.6.4, 4.6.7 and 4.6.8).

l. Name and location of government activities responsible for supplying breech cap, arming wire assemblies and hangar assemblies (see 4.5d).

6.2.2 Contract Provision. Contracts shall specify the following provision for first article inspection.

6.2.2.1 First article. When a first articale is required for inspection and approval (see 3.1, 4.3, 6.2 and 6.3) the contract shall specify the following provision for first article inspection. When a contractor is in continuous production of ejector units from contract to contract, consideration should be given to waive the first article inspection. If inspection is required indicate:

a. If first article inspections are conducted at the contractor's plant or a government approved laboratory, an inspection report shall be forwarded to the procuring activity for verification.

b. That the approval of first article samples or the waiving of the first article inspection shall not relieve the contractor of his obligation to fulfill all other requirements of the specification and contract.

6.3 Contract data requirements. When this specification is used in a procurement which incorporates a DD Form 1423 and invokes the provisions of 7-104.9(n) of the Armed Services Procurement Regulations, the data requirements identified below will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with approved Contract Data Requirements List (DD Form 1423) incorporated into the contract. When the provisions of ASPR-7-104.9 (n) are not invoked, the data specified below will be delivered by the contractor in accordance with the contract requirements. Deliverable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

data required by this specification is cited in the following paragraphs:

Paragraph	Data Requirement	Applicable DID
4.3	First Article Inspection Reports	DI-T-5329-Inspection Test Reports
4.4	Quality Conformance Inspection Reports	DI-T-5329-Inspection Test Reports

(Copies of the data item descriptions required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

6.4 Quality assurance definitions. Definitions for quality assurance terms are in accordance with MIL-STD-109.

6.5 International standardization agreement. Certain provisions (3.5.1) of this specification are the subject of international standardization agreements STANAG 3575, AIR STD 20/10 and AIR STD 20/17. When amendment, revision, or cancellation of this specification is proposed which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels including departmental standardization offices, if required.

Preparing Activity
NAVY-AS
DoD Proj. No. 1095-N113

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspections-schedule and sequence. 1/

Tests	Test Paragraph	Sample	
		A	B
Ejector unit inspection	4.6.3	1	1
Functional test	4.6.4	2	2
Arming mechanism	4.6.5	3	3
Electric fuze arming 2/	4.6.6	4	4
Electrical characteristics	4.6.8a	5	x
Lag time *or* time of release determination	4.6.8b	x	5
icing	4.6.8c	x	6
Sand	4.6.8d	x	7
Life	4.6.7	x	8
Salt spray	4.6.8e	x	9
Shock	4.6.8f	6	x
Vibration	4.6.8g	7	x
Static	4.6.8h	8	x
Lock shut firing	4.6.8i	x	10

1/ Inspection sequence is denoted by the numbers in the sample columns. An X denotes inspection not required.

2/ This inspection shall only be conducted on Type II ejector units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

TABLE II. Quality conformance inspections-schedule and sequence. 1/

Tests	Test paragraph	Sample			
Group 1		All Samples			
Ejector unit inspection	4.6.3	1			
Functional test	4.6.4	2			
Arming mechanism	4.6.5	3			
Electric fuze arming 2/	4.6.6	4			
Group 2		A	B	C	D
Electrical characteristics	4.6.8a	1	X	1	x
Lag time or time of release determination	4.6.8b	X	1	2	x
Icing .	4.6.8c	x	2	x	1
Sand	4.6.8d	x	3	x	2
Life	4.6.7	x	4	3	x
Salt spray	4.6.8e		x	x	3
Shock	4.6.8f	3	x	x	4
Vibration	4.6.8g	4	x	x	5
Static	4.6.8h	5	x	x	6
Lock shut firing.	4.6.8i	x	5	4	x

1/ Inspection sequence is denoted by the numbers in the sample columns. An X denotes inspection not required.

2/ This inspection shall only be conducted on Type 11 ejector units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

TABLE III. Sampling test items. 1/

1/ The procuring activity shall specify the number of samples, and the sequence of inspections each unit shall be subjected to for lots in excess of 300 units (see 6.2.le).

TABLE IV. Applied shock yield loads.

Direction	Applied shock yield load (g's) for 133 kilogram (250 pound) store
Vertical up	17.3
Vertical down	17.3
Transverse port	8.6
Transverse starboard	8.6
Longitudinal forward	10.3
Longitudinal aft	10.3

TABLE V. Static test limit loads. 1/

Combined design limit loads and moments about reference point (store C.G.) 1/					
Pz Vertical	Py Side	Px Longitudinal	Mzz Yaw moment	Myy Pitch moment	Mxx Roll moment
-12,899N (-2,900 lbs.)	10,853N (2,440 lbs.)	3,412N (767 lbs.)	-3,111 N·m (-27,533 inch-lbs.)	4,911 N·m (43,467 inch-lbs.)	365 N·m (3,233 inch-lbs.)
Sign Convention					
+Px = Longitudinal aft +Py = Side to port +Pz = Vertical up				+Mxx = Roll clockwise looking forward +Myy = Pitch nose up +Mzz = Yaw nose to port	

1/ The store C.G. shall be on the longitudinal centerline of the store midway between the suspension lugs and 203 millimeters (8 inches) below the hook bearing surface of the lug.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T10:40Z
Check the source to verify that this is the currentversion before use.

TABLE VI. Qualification cross reference.

Paragraph title	Requirement paragraph	Test paragraph
First article		4.3
Selection of spec's & std's	3.2	4.6.1
Interchangeability	3.3	4.6.1
Identification of parts	3.4	4.6.1
Construction	3.5.1	4.6.1
Ejector unit inspection	3.5.2a	4.6.3
Functional test	3.5.2b	4.6.4
Arming mechanism	3.5.2c	4.6.5
Electric fuze arming	3.5.2d	4.6.6
Electrical characteristics	3.5.2e	4.6.8a
Lag time or time of release Determination	3.5.2f	4.6.8b
Icing	3.5.2g	4.6.8c
Sand	3.5.2h	4.6.8d
Life		4.6.7
Salt spray	3.5.2j	4.6.8e
Shock	3.5.2k	4.6.8f
Vibration	3.5.2l	4.6.8g
Static	3.5.2m	4.6.8h
Lock shut firing	3.5.2n	4.6.8i
Electric fuze arming unit	3.6	4.6.1
Workmanship	3.7	4.6.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

TRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use i
nitting comments and suggestions for improvements. All users of military standardization documents are invited to provid
estions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, an
led. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, w
rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the
blems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an
nowledgement will be mailed to you within 30 days to let you know that your comments were received and are being
sidered.

TE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of
ification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization
waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

RTMENT OF THE ARMY

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATE

CIAL BUSINESS
LTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armement Research and Development Command
ATTN: DRDAR-TST-S
Dover, NJ 07801

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify):*

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(In Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil – Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.

MILITARY SPECIFICATION

RACK, BOMB EJECTOR, AIRCRAFT; BRU-20, BRU-21, BRU-22, BRU-24 AND BRU-25 SERIES

This amendment forms a part of Military Specification MIL-R-85320(AS) dated 25 April 1980 and is approved for use by the Naval Air Systems Command, Department of the Navy.

PAGE 2

Paragraph 2.1, Military Standards; Delete "MIL-STD-100" and substitute "DoD-STD-100."

PAGE 3

Paragraph 3.4, Identification of parts, Delete "MIL-STD-100" and substitute "DoD-STD-100."

Preparing activity:
Navy - AS
DoD Proj. No. 1095-N155

FSC 1095

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:40Z
Check the source to verify that this is the current version before use.