MILITARY SPECIFICATION

RACK, BOMB EJECTOR, AIRCRAFT; AERO 27A

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for the manufacture and inspection of one type of bomb rack capable of carrying and releasing stores having suspension lugs spaced 355.6 millimeters (14 inches) and 762 millimeters (30 inches) apart and weighing from 25 kilograms (55 pounds) to 2,041 kilograms (4,500 pounds). The test limits in this specification define minimum acceptable capabilities.

2. APPLICABLE DOCUMENTS

2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-T-7743	-Testing, Store Suspension and Release Equipment; General Specification for
MIL-H-85042	-Hooks, Bomb Rack, General Specification for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Engineering Specifications and Standards Department (Code 93) Naval Air Engineering Center, Lakehurst, N.J. 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1095

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY (Cont'd)

MIL-STD-100	-Engineering Drawing Practices
MIL-STD-129	-Marking for Shipment and Storage
MIL-STD-130	-Identification Marking of U.S. Military Property
MIL-STD-143	-Standards and Specifications, Order of Precedence for the Selection of
MIL-STD-704	-Electric Power, Aircraft, Characteristics and Utilization of
MIL-STD-794	-Parts and Equipment, Procedures for Packaging and Packing of
MIL-STD-831	-Test Reports, Preparation of
MS3314	-Lug, Suspension, 453.6 kg. (1,000 lb) class, Airborne Equipment

DRAWINGS

NAVAL AIR SYSTEMS COMMAND

1380540	-Lug, Suspension, Mk 3 Mod 0
DL439AS400	-Data List, Test Fixture, AERO 27A Bomb Ejector Rack

(Copies of specifications, standards, drawings, and Publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Order of precedence of specifications and standards. Should a conflict exist between any requirement in this specification and any requirement in the applicable documents referenced herein, the requirements of this specification shall take precedence over the referenced (applicable) document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. The bomb rack furnished under this specification shall be a product which has been inspected and passed the first article inspection specified herein (see 4.3).

3.2 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.3 Interchangeability. All parts having the same part number shall be directly and completely interchangeable with each other with respect to installation and performance.

3.4 Identification of parts. All parts shall be marked as specified on the drawings listed in the data list for the bomb rack being procured, or in accordance with MIL-STD-130, if not specified on the drawings. The item identification and part number requirements of MIL-STD-100 shall govern the part number and changes thereto.

3.5 Bomb rack.

3.5.1 Construction. The construction of the bomb rack shall be in accordance with the drawings listed in the data list for the bomb rack being procured and as specified herein (see 6.2.1f).

3.5.2 Performance. The bomb racks shall satisfy all performance requirements when subjected to the following inspections in the order specified in Tables I and II.

a. Bomb Rack Inspection (see 4.6.1)

b. Functional Test (see 4.6.2)

c. Manual Function (see 4.6.3a)

d. Electrical Characteristics (see 4.6.3b)

e. Lag Determination (see 4.6.3c)

f. High-g Release (see 4.6.3d)

g. Sand (see 4.6.3e)

h. Salt Spray (see 4.6.3f)

i. Vibration (see 4.6.3g)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

j. Shock (see 4.6.3h)

k. Life (see 4.6.3i)

l. Static (see 4.6.3j)

3.6 Bomb rack hooks. The construction and inspection of the bomb rack hooks shall be in accordance with MIL-H-85042.

3.7 Workmanship. The workmanship displayed in fabrication and assembly of the bomb racks shall be such as to assure, within design limitations, the ability of the bomb racks to meet their performance requirements under all applicable environmental conditions specified herein. Unauthorized repair, welding, heavy burrs, or parts assembled by introduction of high-stresses not prescribed in the drawings, are typical signs of inferior workmanship and shall be cause for rejection. The standards of workmanship exhibited in the approved first article sample, subject to any qualification stated in the government's notice of approval, shall be determinative of the requirements of the contract relative to workmanship.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification, where such inspections are deemed necessary to assure that the supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection of the bomb racks shall be classified as follows:

a. First article inspection (see 4.3)

b. Quality conformance inspection (see 4.4)

4.3 First article inspection. First article inspection shall consist of all of the inspections listed in Table 1. First article inspection report format shall be in accordance with MIL-STD-831 (see 6.3).

4.3.1 Sampling for first article inspection. First article bomb rack samples shall consist of the first two bomb racks manufactured on contract. The bomb racks shall be permanently labeled A and B for ease of identification. Failure of the bomb racks to pass any of the first article inspections shall be cause for rejection (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Quality conformance inspection shall consist of the following inspections:

a. Individual Inspections (see 4.4.1)

b. Sampling Inspections (see 4.4.2)

Quality conformance inspection report format shall be in accordance with MIL-STD-831 (see 6.3).

4.4.1 Individual inspections. Individual inspections are those inspections conducted on each bomb rack. Individual inspections for the bomb rack are shown in Table II, Group 1. Failure to pass any of these inspections shall be cause for rejection of the bomb rack.

4.4.2 Sampling inspections. A random sampling of the bomb racks shall be selected by the procuring activity from each production lot in accordance with Table III and shall be subjected to the inspections list in Table II, Group 1 and Group 2. Group 1 inspections shall be conducted prior to Group 2 inspections. Failure to pass any of these inspections shall be cause for rejection of the entire lot (see 6.3).

4.5 Inspection conditions. Unless otherwise specified, all inspections shall be performed under the following conditions:

a. Room temperature. Room ambient of 25±10°C (77±18°F) indicated.

b. Test temperature. All parts of the test item shall be stabilized at the specified temperature ±2.8°C (±5°F) indicated prior to conducting any tests. Unless otherwise specified, temperature stabilization will have been attained when the indicated temperature of the surface of the largest mass of the test item does not change by more than ±2.8°C (±5°F) in a period of 1 hour.

c. Swaybraces. Whenever tests require that a store be mounted to the bomb rack, swaybraces shall be used. The swaybraces shall be adjusted as described in 4.6.2d.

d. Test fixture. During any test requiring that the bomb rack be supported, a fixture manufactured in accordance with DL 439AS400 shall be used.

e. Test stores. The stores, as referenced herein by weight, shall conform to the following parameters. The store suspension lugs shall be in accordance with MS3314 and Drawing 1380540.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

1. The 113 kilogram (250 pound) store shall utilize applicable suspension lugs, spaced 355.6 millimeters (14 inches) apart. Its center of gravity shall be based on the MK 81 L.D.G.P. bomb.

2. The 453 kilogram (1,000 pound) store shall utilize applicable suspension lugs, spaced 355.6 millimeters (14 inches) apart. Its center of gravity shall be based on the MK 83 L.D.G.P. bomb.

3. The 907 kilogram (2,000 pound) store shall utilize applicable suspension lugs, spaced 762 millimeters (30 inches) apart. Its center of gravity shall be based on the MK 84 L.D.G.P. bomb.

4. The 1,621 kilogram (3,575 pound) store shall utilize applicable suspension lugs, spaced 762 millimeters (30 inches) apart. Its center of gravity shall be midway between the suspension lugs and 203 millimeters (8 inches) below the hook bearing surface of each suspension lug.

f. Input power requirements. The bomb rack shall perform satisfactorily under all applicable conditions specified herein from a 28 VDC rated voltage power source with characteristics and limits as defined in MIL-STD-704, except that the bomb rack shall operate over a range of 20 to 30 VDC, measured at the bomb rack's input connector(s).

4.6 Inspection.

4.6.1 Bomb rack inspection. Each bomb rack shall be inspected to ensure that it has been properly assembled and adjusted, that the electrical connections are secure and that the workmanship is as specified herein (see 3.7).

4.6.1.1 Qualification by analysis, inspection, and demonstration. All requirements for the bomb rack not qualified by testing shall be qualified by analysis, inspection or demonstrations approved by the procuring activity.

4.6.1.2 Packaging inspection. Each bomb rack shall be examined to ensure that the preparation for delivery conforms to this specification (see section 5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

4.6.2 Functional test. Each bomb rack mounted in a horizontal position, shall complete the following tests.

WARNING

The bomb rack shall not be fired without a reactive store load imposed on its ejector foot.

a. The rack shall be cocked mechanically and the safety pin installed. The latch sear line shall be visually inspected to determine that each hook is securely latched. Failure of a sear to properly contact and lock the hook shall constitute a critical defect. Apply 28 Newton-meters (250 inch-pounds) maximum torque to the manual release. The release mechanism shall not actuate.

b. Remove the safety pin and actuate the manual release mechanism. The release mechanism shall operate smoothly and the hooks shall open.

c. Repeat a. and b. four times.

d. Suspend a 113 kilogram (250 pound) store from the 355.6 millimeter (14 inch) hooks of the bomb rack, latching the hooks securely. Tighten the forward and aft set of swaybraces as follows:

1. Hand tighten all braces until the pads lightly contact the store.

2. Tighten forward starboard pad 1/4 turn.

3. Tighten aft port pad 1/4 turn.

4. Tighten forward port pad 1/4 turn.

5. Tighten aft starboard pad 1/4 turn.

6. Repeat tightening in order of steps 2 through 5 to attain 3/8 turn total on each swaybrace.

e. Repeat b. The store shall release with a maximum of 28 Newton-meters (250 inch-pounds) torque applied to the manual release.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

f. Repeat b. with a 1,621 kilogram (3,575 pound) store suspended from the 762 millimeter (30 inch) hooks. The store shall release with a maximum of 28 Newton-meters (250 inch-pounds) torque applied to the manual release.

g. With the bomb rack cocked and the hooks latched, apply a 66,723 Newton (15,000 pound) vertical down static load on the 355.6 millimeter (14 inch) hooks using standard bomb lugs conforming to MS3314. Concentrate the load midway between the hooks. The hooks shall hold the load.

h. Repeat g. with an 88,964 Newton (20,000 pound) load on the 762 millimeter (30 inch) hooks.

i. Cock the bomb rack and insert the safety pin. Load the ejector assembly with two applicable impulse cartridges (see 6.2.1k). Suspend a 113 kilogram (250 pound) store from the 355.6 millimeter (14 inch) hooks. Remove the safety pin and apply 28 VDC to the bomb rack. The impulse cartridges shall ignite. and the store shall be ejected. Remove, disassemble, clean and inspect the ejector assembly and surrounding areas of the bomb rack as indicated in the applicable manuals (see 6.2.1g). There shall be no damage to the bomb rack.

Repeat i. with two applicable impulse cartridges (see 6.2.1k) in the ejector assembly and a 1,621 kilogram (3,575 pound) store suspended from the 762 millimeter (30 inch) hooks.

4.6.3 Additional tests. The bomb rack shall pass the following tests of MIL-T-7743 as specified, except as modified herein. When required, the minimum operating voltage shall be as defined herein (see 4.6.3.2). Applicable impulse cartridges shall be used when required (see 6.2.1k).

a. Manual Function (see 4.6.3.1)

b. Electrical Characteristics (see 4.6.3.2)

c. Lag Determination (see 4.6.3.3)

d. High-g Release (see 4.6.3.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

e. Sand

f. Salt Spray

g. Vibration (see 4.6.3.5)

h. Shock (see 4.6.3.6)

i. Life (see 4.6.3.7)

j. Static (see 4.6.3.8)

4.6.3.1 Manual function. This test shall be conducted in accordante with the ground service operation portion of the manual function test.

4.6.3.2 Electrical characteristics. The minimum operating voltage shall be determined by demonstrating that all electrical equipment on the bomb rack operates when 20 VDC is applied to the terminals of the applicable bomb rack connectors.

4.6.3.3 Lag determination. This test shall be conducted in accordance with the lag or time of release determination test for dive bomb (DB) items. A 113 kilogram (250 pound) and 453 kilogram (1,000 pound) store shall be used for 355.6 millimeter (14 inch) suspension tests. The 907 kilogram (2,000 pound) and 1,621 kilogram (3,575 pound) store shall be used for 762 millimeter (30 inch) suspension tests.

4.6.3.4 High-g release. This test shall be conducted with the following conditions:


a. 355.6 millimeter (14 inch) suspension. Perform 12 ejections with the applied load based on a 657 kilogram (1,450 pound) store.

b. 762 millimeter (30 inch) suspension. Perform 13 ejections with the applied load based on a 2,041 kilogram (4,500 pound) store.

4.6.3.5 Vibration. This test shall be conducted in accordance with Procedure 11 of the vibration test. The electric fuze arming unit vibration test shall not be conducted. The minimum weight store used shall be 113 kilograms (250 pounds) for the 355.6 millimeter (14 inch) hooks and the maximum weight store used shall be 1,621 kilograms (3,575 pounds) for the 762 millimeter (30 inch) hooks.

4.6.3.6 Shock. Light load tests shall be conducted with a 113 kilogram (250 pound) store (see 4.6.3.7) for the 355.6 millimeter (14 inch) hooks. Yield load tests shall be conducted with a 1,621 kilogram

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

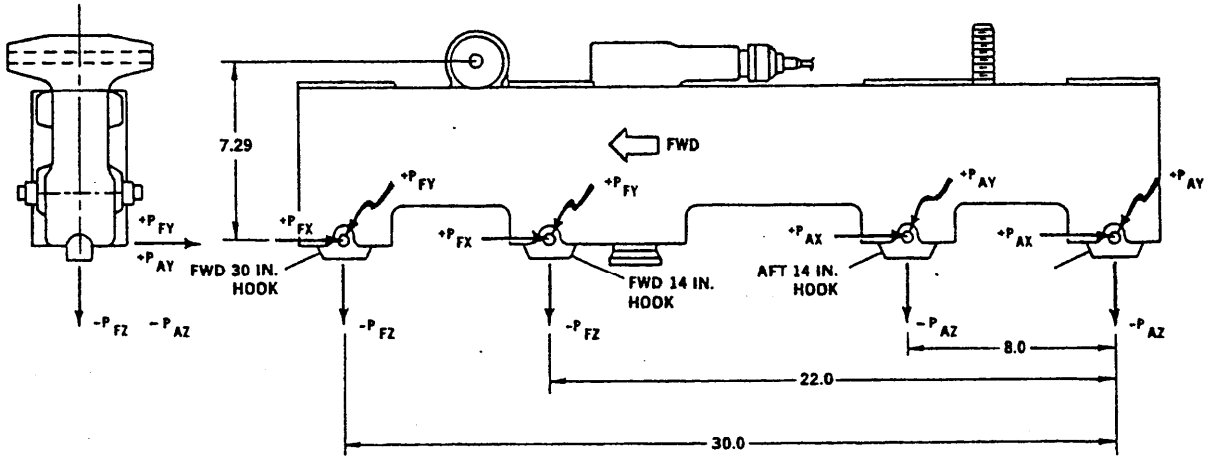

NOTE: ALL DIMENSIONS ARE IN INCHES

Figure 1. Static load application points.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

(3,575 pound) store for the 762 millimeter (30 inch) hooks. Applied shock amplitudes for yield shock tests are given in Table IV.

4.6.3.7 Life. This test shall be conducted in accordance with the life test for explosive items. A 113 kilogram (250 pound) store, for the 355.6 millimeter (14 inch) hooks, shall be used for light store ejections. A 1,621 kilogram (3,575 pound) store, for the 762 millimeter (30 inch) hooks, shall be used for heavy store ejections.

4.6.3.8 Static. This test shall be conducted with the following conditions. The bomb rack shall be loaded to limit, yield and ultimate loads. Yield loads shall be 1.15 times and ultimate loads 1.5 times the limit loads given in Table V. The combined loads shall be applied to a rigid simulated store of negligible weight (91 kilograms, 200 pounds maximum) in accordance with Table V and Figure 1.

4.6.4 Qualification cross reference. Table VI identifies each requirement in Section 3 and correlates the Section 4 paragraphs that qualify it.

5. PACKAGING

5.1 Bomb rack preservation and packaging. Preservation and packaging shall be in accordance with Level A, B or C as specified in MIL-STD-794, as specified in the contract, without the use of preservation compound.

5.2 Packing. Shipping containers shall contain one each packaged bomb rack. The container shall be suitable for Level A, B or C as specified in MIL-STD-794.

5.3 Unitized loading. Unitized loading for the bomb racks is authorized as specified in MIL-STD-794.

5.4 Marking. All shipping containers shall be marked in accordance with the requirements of MIL-STD-129 with the following information:

RACK, BOMB, AIRCRAFT AERO 27A MILITARY SPECIFICATION NO. MIL-R-85325(AS)
PRESERVED (DATE)
DOMESTIC OR EXPORT PACKED (AS APPLICABLE)
GOVERNMENT ORDER NO. (OR CONTRACT NO. IF ORDER NO. IS NOT ASSIGNED)
NAME OF SUPPLIER (AND NAME OF MANUFACTURER IF NOT THE SAME)
MANUFACTURER'S CODE IDENTIFICATION NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The bomb racks covered by this specification are intended for use in all types of bombing. They are mounted on the centerline station of F-4 aircraft. They are intended for use on either land-based or carrier-based aircraft.

6.2 Ordering data. Procurement data shall specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.

b. Selection of applicable levels of preservation, packaging and packing required (see 5.1 and 5.2).

c. Samples subjected to sampling inspection shall not be considered or accepted as part of the contract (see 4.4.2).

d. Sampling inspection selection (see 4.4.2).

e. Number of samples and inspection sequence for production lots in excess of 300 units (see Table III).

f. Applicable drawing package (see 3.5.1).

g. Applicable maintenance manuals (see 4.6.2).

h. Name and location of government representative responsible for random selection of inspection samples (see 4.4.2).

i. Items of data required (see 6.3).

j. Name and location of government approved test laboratory.

k. Number and designation of impulse cartridges required for testing (see 4.6.2 and 4.6.3).

6.2.2 Contract provision. Contracts shall specify the following provision for first article inspection.

6.2.2.1 First article. When a first article is required for inspection and approval (see 3.1, 4.3, 6.2 and 6.3), the contract shall specify the following provision for first article inspection. When a contractor is in continuous production of bomb racks from contract to

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

contract, consideration should be given to waive the first article inspections. If inspection is required, indicate:

a. If first article inspections are conducted at the contractor's plant or a government approved laboratory, an inspection report shall be forwarded to the procuring activity for verification.

b. That the approval of the first article samples or the waiving of the first article inspection shall not relieve the contractor of his obligation to fulfill all other requirements of the specification and contract.

6.3 Contract data requirements. When this specification is used in a procurement which incorporates a DD Form 1423 and invokes the provisions of 7-104.9(n) of the Armed Services Procurement Regulations, the data requirements identified below will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (DD Form 1423) incorporated into the contract. When the provisions of ASPR-7-104.9(n) are not invoked, the data specified below will be delivered by the contractor in accordance with the contract requirements. Deliverable" data required by this specification is cited in the following paragraphs:

Paragraph	Data Requirement	Applicable DID
4.3	First Article Inspection Reports	DI-T-5329-Inspection Test Reports
4.4	Quality Conformance Inspection Reports	DI-T-5329-Inspection Test Reports

(Copies of data item descriptions required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

6.4 Quality assurance definitions. Definitions for quality assurance terms are in accordance with MIL-STD-109.

6.5 International standardization agreement. Certain provisions (3.5.1) of this specification are the subject of international standardization agreements STANAG 3575, AIR STD 20/10 and AIR STD 20/17. When amendment, revision, or cancellation of this specification is proposed which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels including departmental standardization offices, if required.

Preparing Activity
NAVY-AS
DOD Proj. No. 1095-N116

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspections-schedule and sequence 1/

TESTS	TEST PARAGRAPH	SAMPLE	
		A	B
Bomb Rack Inspection	4.6.1	1	1
Functional	4.6.2	2	3
Manual Function	4.6.3a	3	x
Electrical Characteristics	4.6.3b	x	2
Lag Determination	4.6.3c.	4	x
High-g Release	4.6.3d	x	4
Sand	4.6.3e	5	x
Salt Spray	4.6.3f	6	x
Vibration	4.6.3g	x	6
Shock	4.6.3h	x	5
Life	4.6.3i	7	x
Static	4.6.3j	x	7

1/ Inspection sequence is denoted by the numbers in the sample columns. An X denotes inspection not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

TABLE II. Quality conformance inspections-schedule and sequence 1/

TESTS	TEST PARAGRAPH	SAMPLE			
GROUP 1		ALL SAMPLES			
Bomb Rack Inspection	4.6.1	1			
Functional	4.6.2	2			
GROUP 2		A	B	C	D
Manual Function	4.6.3a	1	x	1	x
Electrical Characteristics	4.6.3b	x	1	x	1
Lag Determination	4.6.3c	2	x	x	x
High-g Release	4.6.3d	x	2	x	2
Sand	4.6.3e	3	x	x	x
Salt Spray	4.6.3f	4	x	2	x
Vibration	4.6.3g	x	4	x	x
Shock	4.6.3h	x	3	x	x
Life	4.6.3i	5	x	3	x
Static	4.6.3j	x	5	x	3

1/ Inspection sequence is denoted by the numbers in the sample columns. An X denotes inspection not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

TABLE III. Sampling test items.

ITEM	PRODUCTION LOT SIZE	NUMBER OF SAMPLES
Bomb Racks	100 or less 101 - 200 201 - 300 301 or more	2 3 4 1/

1/ The procuring activity shall specify the number of samples, and the sequence of inspections each unit shall be subjected to for lots in excess of 300 units (see 6.2.le).

TABLE IV. Applied shock loads.

DIRECTION	APPLIED SHOCK LIGHT LOAD (g's) for 113 KG. (250 LB.) STORE	APPLIED SHOCK YIELD LOAD (g's) for 1,621 KG. (3,575 LB.) STORE
Vertical Down	25	7.0
Vertical Up	25	3.8
Longitudinal Forward	25	8.9
Longitudinal Aft	25	8.9
Transverse Port	25	2.5
Transverse Starboard	25	2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

TABLE V. Static test limit loads. 1/

Condition	P_{FZ} Vertical	P_{FY} Side	P_{FX} Longitudinal	P_{AZ} Vertical	P_{AY} Side	P_{AX} Longitudinal
Combined limit loads for 762 millimeter (30 inch) hooks						
1	-32,205 N (-7,240 lbs.)	11,419 N (2,567 lbs.)	- -	-65,833 N (-14,800 lbs.)	-11,534 N (-2,593 lbs.)	-1,010 N (-227 lbs.)
2	-74,374 N (-16,720 lbs.)	- -	60,794 N (13,667 lbs.)	- -	- -	60,794 N (13,667 lbs.)
3	-87,776 N (-19,733 lbs.)	- -	- -	- -	- -	91,335 N (20,533 lbs.)
4	-166,363 N (-37,400 lbs.)	-15,658 N (-3,520 lbs.)	9,310 N (2,093 lbs.)	- -	6,526 N (1,467 lbs.)	9,310 N (2,093 lbs.)
5	-69,690 N (-15,667 lbs.)	-4,862 N (-1,093 lbs.)	- -	-111,205 N (-25,000 lbs.)	6,819 N (1,533 lbs.)	-30,902 N (-6,947 lbs.)
6	-142,044 N (-31,933 lbs.)	-21,142 N (-4,753 lbs.)	7,829 N (1,760 lbs.)	-42,881 N (-9,640 lbs.)	-12,157 N (-2,733 lbs.)	7,829 N (1,760 lbs.)
Combined limit loads for 355.6 millimeter (14 inch) hooks						
7	-85,050 N (-19,120 lbs.)	- -	9,132 N (2,053 lbs.)	- -	- -	9,132 N (2,053 lbs.)
8	-19,928 N (-4,480 lbs.)	- -	21,974 N (4,940 lbs.)	- -	- -	21,974 N (4,940 lbs.)
9	- -	- -	-18,651 N (-4,193 lbs.)	-62,720 N (-14,100 lbs.)	- -	-18,651 N (-4,193 lbs.)

Sign convention

$+P_{FX}$ = Longitudinal Aft
$+P_{FY}$ = Side to Port
$+P_{FZ}$ = Vertical Up

$+P_{AX}$ = Longitudinal Aft
$+P_{AY}$ = Side to Port
$+P_{AZ}$ = Vertical Up

1/ Loads to be applied as shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

TABLE VI. Qualification cross reference.

Paragraph title	Requirement paragraph	Test paragraph
First Article	3.1	4.3
Selection of Spec's & Std's	3.2	4.6.1.1
[interchangeability	3.3	4.6.1.1
Identification of Parts	3.4	4.6.1.1
Construction	3.5.1	4.6.1.1
Bomb Rack Inspection	3.5.2a	4.6.1
Functional Test	3.5.2b	4.6.2
Manual Function	3.5.2c	4.6.3a
Electrical Characteristics	3.5.2d	4.6.3b
Lag Determination	3.5.2e	4.6.3c
High-g Release	3.5.2f	4.6.3d
Sand	3.5.2g	4.6.3e
Salt Spray	3.5.2h	4.6.3f
Vibration	3.5.2i	4.6.3g
Shock	3.5.2j	4.6.3h
Life	3.5.2k	4.6.3i
Static	3.5.2l	4.6.3j
Bomb Rack Hooks	3.6	4.6.1.1
Workmanship	3.7	4.6.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS. This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE. This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-R-85325(AS) - RACK, BOMB EJECTOR, AIRCRAFT; AERO 27A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

[ ] VENDOR [ ] USER [ ] MANUFACTURER

1. [ ] HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? [ ] IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
Navy Department
DOD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department(Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.

MIL-R-85325(AS)
AMENDMENT 1
19 August 1980

MILITARY SPECIFICATION

RACK, BOMB EJECTOR, AIRCRAFT; AERO 27A

This amendment forms a part of Military Specification MIL-R-85325(AS), dated 25 April 1980 and is approved for use by the Naval Air Systems Command, Department of the Navy.

PAGE 2

Paragraph 2.1, Military Standards, Delete "MIL-STD-100" and substitute "DoD-STD-100."

PAGE 3

Paragraph 3.4, Identification of parts, Delete "MIL-STD-100" and substitute "DoD-STD-100."

Preparing activity:
Navy - AS
DoD Proj. No. 1095-N156

FSC 1095

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:41Z
Check the source to verify that this is the current version before use.