MILITARY SPECIFICATION
SLING, BEAM-TYPE: H4266

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers requirements, quality assurance provisions, and the preparation for delivery criteria for one type of sling entitled Sling, Beam-Type: H4266 which is used to transport a Sprint or Spartan warhead.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-H-6088 - Heat Treatment for Aluminum Alloys.
MIL-I-6866 - Inspection, Penetrant Method of.
MIL-T-6117 - Terminal - Cable Assemblies Swaged Type.
MIL-W-1511 - Wire Rope, Steel (Carbon) Flexible, Performed.
MIL-W-22248 - Weldments, Aluminum and Aluminum Alloy.

STANDARD

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-1168 - Lot Numbering of Ammunition.

DRAWINGS

ORDNANCE CORPS

8796522 - Marking, Beam-Type: H4266.
9246642 - Retainer, Cable.
9246644 - Block, cable Positioning.

Beneficial comments (recommendations, additions, deletions), and any pertinent data which may be of use in improving this document, should be addressed to: Commander, US Army Armament Research and Development Command, ATTN: DRDAR-QAN-Q, Dover, New Jersey 07801, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426), appearing at the end of this document, or by letter.

FSC 1190

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

9246646 - Wire Rope Assembly.
9246648 - Ball End.
9357905 - Beam.
9257908 - Sling, Beam-Type H4266.
9274156 - Box, wood, for Sling Beam-Type: H4266.
EL-9246642 - Equipment List.
EL-9246644 - Equipment List.
EL-9242246 - Equipment List.
EL-9246648 - Equipment List.
EL-9257905 - Equipment List.
EL-9257908 - Equipment List.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material complies with the specifications listed on the applicable drawing.

3.2 Assembly. The sling shall comply with all requirements specified on the drawing (dwg) 9257908, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

3.4 Serialization. The contractor shall assign serial numbers as required by drawings. The contractor may select any number which complies with the drawing requirement. These numbers shall not be duplicated.

3.5 Proof load. The sling shall withstand a static load of 18,000 pounds $^{+50}_{-00}$ pounds applied for 3^{+1}_{-0} minutes without damage. Testing shall be as described in 4.4.1.

3.6 Welds. Welding shall be in accordance with MIL-W-22248 Class 3.

3.7 Penetrant. The dye penetrant shall be in accordance with MIL-I-6866, Type I. Testing shall be in accordance with 4.4.2.

3.8 Workmanship.

3.8.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.8.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

3.8.3 Burrs. Parts shall be free from burrs.

3.8.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.8.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.

4.2.1 Quantity to be submitted. When the contract requires first article inspection, the contractor shall submit 2 complete assemblies (see dwg 9257908) for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in Table I. Tests shall be conducted in order specified in Table I.

Table I
First article inspection and tests

Inspection or Test	Dest	Non-Dest
1. Classification of defects/ characteristics (see 4.3.2.1)		X
2. Proof load (see 3.5)		X
3. Welds (see 3.6)		X
4. Penetrant (3.7)		X

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

4.3 Quality conformance inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

4.3.1 Lot formation.

4.3.1.1 Production lot. A lot shall consist of parts and assemblies produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision. Drawing, specification and process changes not affecting safety, performance, storage, or interchangeability, as determined by the Government, shall not necessitate changing the lot interfix number. The criteria and procedures for the assignment of lot numbers shall be in accordance with MIL-STD-1168.

4.3.1.2 Inspection lot. A lot or batch and its formation, size, and presentation is described in MIL-STD-105, Section 5. Accordingly, a lot shall mean an inspection lot and a batch shall mean an inspection batch for the purpose of this specification. The manner in which each inspection lot or batch is to be presented and identified by the contractor, shall be designated or approved by the Government representative.

4.3.2 Product inspection examination. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor defects/characteristics table (see Table II and Table III), and inspected for all defects/characteristics in the applicable classification. Any defects/characteristics in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of defects/characteristics in each classification need not be followed as long as all defects/characteristics inspections are performed.

Table II
Major defects/characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131	38		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

Table III
Minor defects/characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-9	all	14-16	12	28-33	16	77-121	20
10	9	17-18	13	34-41	17	122-273	21
11	10	19-22	14	42-54	18	over 273	22
12-13	11	23-27	15	55-76	19		

4.3.2.1 Classification of defects/characteristics (see 3.2). Critical, major and minor defects/characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 Retainer, cable (see dwg 9246642).

Categories — Defects/Characteristics — Method of Inspection

Critical: None defined.

Major:
101. Rockwell hardness incorrect.....Gage
102. Mislocation of pin hole.....Gage
103. Incorrect profile of cut out.....Gage
104. Cut out mislocated.....Gage
105. Mislocation of pivot hole.....Gage

Minor:
201. Protective finish damaged exposing base metal or improper.....Visual
202. Evidence of poor workmanship (see 3.8).....Visual

4.3.2.1.2 Block, cable positioning (see dwg 9246644).

Categories — Defects/Characteristics — Method of Inspection

Critical: None defined.

Major:
101. Rockwell hardness incorrect.....Gage
102. Location of mounting hole (2) incorrect.....Gage
103. Location of pin hole (1) incorrect..Gage
104. Diameter of pin hole (1) incorrect..Gage
105. Mislocation of pivot holes (Thd)....Gage
106. Diameter of seat incorrect.....Gage
107. Large width of seat incorrect.....Gage
108. Spherical radius incorrect.....Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

109. Location of groove pin hole (1) incorrect.....Gage
110. Diameter of groove pin hole (1) incorrect.....Gage

Minor:
201. Protective finish improper or damaged exposing base metal.....Visual
202. Evidence of poor workmanship (see 3.8).....Visual

4.3.2.1.3 Wire rope assembly (see dwg 9242246).

Categories	Defects/Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	Objective evidence (see 3.1) that wire rope conforms to MIL-W-1511 and safety wire complies with requirements of spec control dwg.....	Visual
102.	Mislocation of ball (14 places).....	Gage
103.	Mislocation ball designated "O" to hook.....	Gage
104.	Swaged diameter of Ferrule improper.....	Gage
105.	Components missing, improper, loose, damaged or improperly assembled.....	Visual
106.	Hook latch fails to return to normal position after opening.....	Manual/Visual
107.	Marking missing, improper, illegible or mislocated.....	Visual
108.	Swaged ball ends cracked or damaged after swaging.....	Visual
109.	Objective evidence (see 3.1) that swaging conforms to MIL-T-6117.....	Visual
110.	Ends of cable improperly fused.....	Visual
Minor:		
201.	Damaged finish exposing base metal..	Visual
202.	Evidence of poor workmanship (see 3.8).....	Visual

4.3.2.1.4 Beam (see dwg 9257905).

Categories	Defects/Characteristics	Method of Inspection
Critical:	None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

Major:

101.	Incorrect length	Gage
102.	Mislocation of numbered hole (12)	Gage
103.	Incorrect diameter of numbered hole (12)	Gage
104.	Mislocation of block mounting hole (24)	Gage
105.	Mislocation of hole (4)	Gage
106.	Incorrect perpendicularity mounting plate to beam edge (after welding)	Gage
107.	Mislocation of mounting plate	Gage
108.	Improper weldments (see 3.6)	Visual
109.	Incorrect fillet	Gage
110.	Objective evidence (see 3.1) that the heat treatment conforms to MIL-H-6088	Visual

Minor:

201.	Protective finish improper or damaged exposing base metal	Visual
202.	Marking, missing, improper illegible or misplaced	Visual
203.	Evidence of poor workmanship (see 3.8)	Visual

4.3.2.1.5 Sling, beam-type, H4266 (see dwg 9257908).

Categories	Defects/Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Torque improper	Gage-Visual
102.	Components missing, damaged, loose or improperly assembled	Visual/Manual
103.	Hook and jaw at end of each wire rope (4) do not function (open and close)	Manual/Visual
104.	Wire rope does not engage freely	Manual/Visual
105.	Retainer does not move freely on block surface	Manual/Visual
106.	Serialization missing or improper (see 3.8)	Visual

Minor:

201.	Marking missing, illegible, improper, or misplaced	Visual
202.	Evidence of poor workmanship (see 3.8)	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

4.3.2.1.6 Ball, end (after swaging) (see dwg 9246648).

Categories	Defects/Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Diameter of ball incorrect	Gage
	102. Incorrect diameter of shank	Gage
	103. Incorrect length of shank	Gage
Minor:		
	201. Evidence of poor workmanship (see 3.8)	Visual

4.3.2.1.7 Box, packing for Sling, Beam Type, H4266 (see dwg 9274156).

Categories	Defects/Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Sling loose or improperly secured	Visual/Manual
	102. Fastening nails not driven from outside	Visual
	103. Any component or bracing missing	Visual
	104. Any operation missing	Visual
	105. Marking missing, improper or illegible	Visual
Minor:		
	201. Evidence of poor workmanship (see 3.8)	Visual

4.3.3 Testing. All tests shall be performed. Tests shall be performed in the order specified below:

Test	Test Classification
a. Proof load	Major
b. Penetrant	Major

None of these tests are considered destructive and samples so tested may be returned to the lot.

4.3.3.1 Proof load, and penetrant. Each sling shall be tested in accordance with 4.4.1 and 4.4.2. If any item fails to comply with 3.5 and 3.7, the item shall be rejected and removed from the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

4.3.4 Acceptance inspection equipment.

4.3.4.1 Major defects/characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions, and calibration instructions specified on the Equipment Lists (EL) (see EL-9246642, 9246644, 9246646, 9246648, 9257905 and 9257908). When either of the conditions listed below exist, the contractor shall design required equipment or specify suitable commerical equipment and obtain approval prior to use on the contract.

a. Any deviation from equipment or procedures specified on the EL is desired (see 6.3).
b. The code "CD" is listed in the "Part or Identifying Number" column on the EL (see 6.1.2).

4.3.4.2 Minor defects/characteristics and tests. Acceptance inspection equipment for minor defects/characteristics is not specified on ELs. The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by the Government representative authorized by the procuring agency.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.4.1 Proof load. The sling, shall be suitably suspended from its designated apparatus and an approved tensile load of 18,000 $+\frac{50}{00}$ pounds shall be gradually applied. The approved load shall remain applied for 3 $+\frac{1}{0}$ minute: The load shall be applied in a manner that the 4 wire ropes are attached to the load per Figure 1. Approved instrumentation to assure that the correct load is applied shall be used. The test shall be conducted for each orientation specified in Table IV. After the specified time has elapsed the load shall be removed and the sling, shall be examined for damaged (see 6.4).

Table IV
Cable and block orientation for proof loading

Test No.	Block Position	Swaged Ball Designation
1	1 and 6	A
2	1 and 6	B
3	1 and 6	C
4	1 and 6	D
5	1 and 6	E
6	2 and 5	F
7	2 and 5	G
8	2 and 5	H
9	2 and 5	I
10	2 and 5	J

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

Test No.	Block Position	Swaged Ball Designation
11	3 and 4	K
12	3 and 4	L
13	3 and 4	M
14	3 and 4	N
15	3 and 4	O

4.4.2 Penetrant. Acceptability criteria to determine conformance to fillet welds, and weldments are defined in MIL-W-22248, Class 3 using the penetrant inspection method. Penetrant inspection shall be in accordance with MIL-I-6866 Type I (fluorescent). Discontinuities if any, cannot be removed or weldments found unacceptable shall not be removed unless the repair method is approved by procuring activity, ATTN: DRDAR-QAN-I.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The sling shall be packaged in accordance with dwg 9274156 using the specified moisture barrier.

5.1.2 Level C. The sling shall be packaged in accordance with dwg 9274156 except that the moisture barrier may be omitted.

5.2 Packing.

5.2.1 Level A and C. The sling shall be packed in accordance with dwg 9274156.

5.3 Marking. Marking shall be as specified in accordance with dwg 8796522.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements.

a. Title, number, and date of this specification.
b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.1.2 Contract data requirements (see 4.3.4.1). Data specified in 4.3.4.1 will be delivered as identified on a numbered DD Form 1664 when required on a DD Form 1423 incorporated in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

6.3 Acceptance inspection equipment (see 4.3.4.1). The contractor shall obtain approval from the Commander, US Army Armament Research and Development Command, ATTN: DRDAR-QAN-I, Dover, New Jersey 07801.

6.4 Damage. A defect that is detectable by visual examination. Typical defects are as follows: *Crack in weldment, damaged threads, deformed or cracked assembly member, damaged finish exposing base metal; marking obliterated.

6.5 Supersession data. This specification supersedes the requirements of Purchase Description PA-PD-2160 dated 30 May 1972 and SCN No. 1 dated 25 September 1973.

*A 5X magnifying glass may be used while examining for damages.

Custodian:
Army - AR

Preparing activity:
Army - AR

Project No. 1190-A106

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

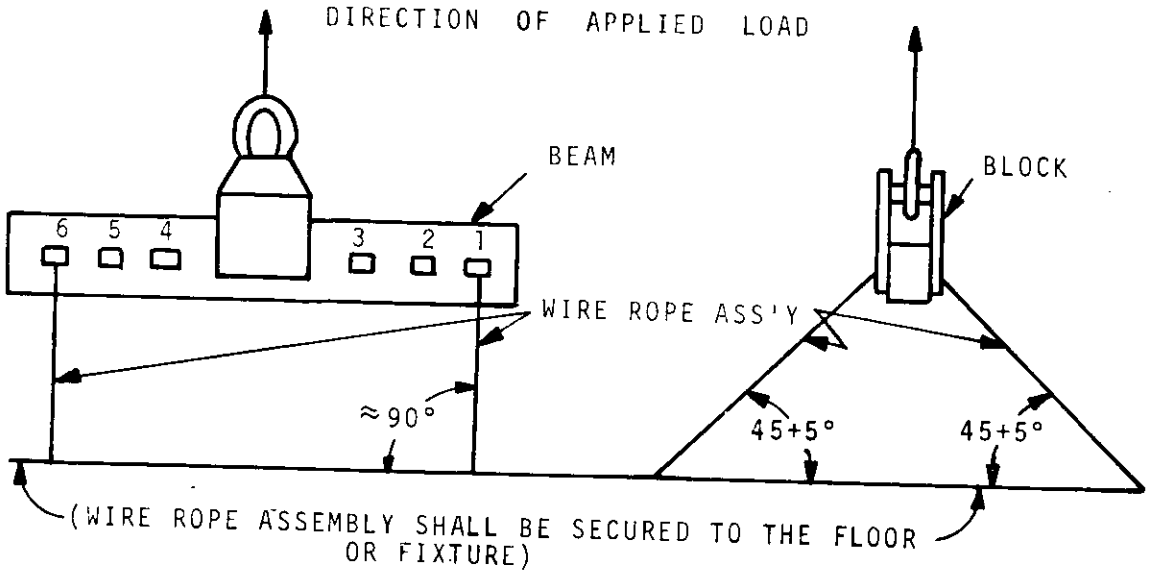


Figure 1. Orientation For Proof Loading of the Beam

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at *reasonable cost and minimum delay, or will* otherwise enhance use of the document. DoD contractors, government activities, or manufacturers vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:43Z
Check the source to verify that this is the current version before use.