
MILITARY SPECIFICATION

SHIP CONTROL CONSOLES AND COMBINATION EQUIPMENTS
(NAVAL SHIPBOARD USE)

* This amendment forms a part of MIL-S-17422(SHIPS), dated 15 November 1952, and is approved for use within the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Add the following after 1.2:

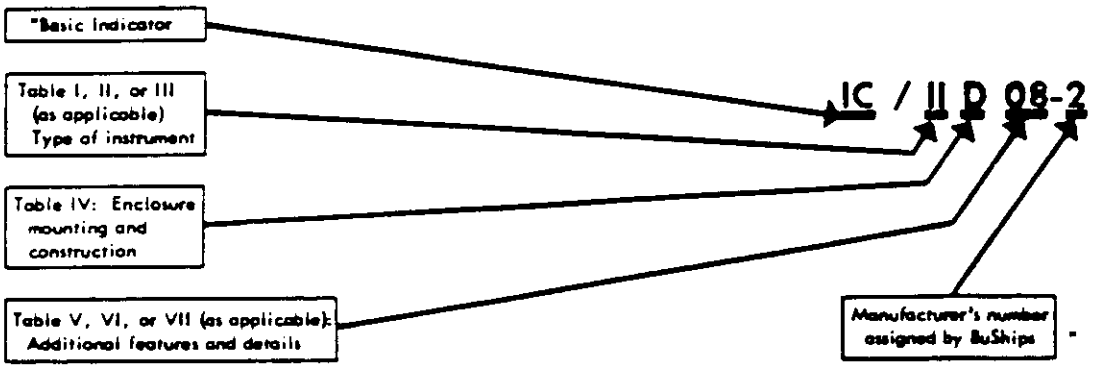

PAGE 5

Table III: Lines 3, 11, and 20, delete "(mechanical)"; lines 7, 16, and 25, delete "cable selector switch"; and lines 8, 17, and 26, delete "potentiometer type" and substitute "control transmitter."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:08Z
Check the source to verify that this is the current version before use.

PAGE 6

Table III: Lines 5, and 14, delete "(mechanical)"; line 11 after "steering" insert "control transmitter"; line 19, delete "cable selector switch"; and line 20, delete "potentiometer type" and substitute "control transmitter."

PAGES 12 and 13

Table VII: Delete and substitute:

"TABLE VII. Additional features and special details of steering control consoles.

Symbol	Additional features and special details of steering control consoles
01	Enclosed deck-type mounting Sheet metal enclosure (brass) Frontal toe space Cover lifting handles - two Steering wheel Access plates One master dimming rheostat for instrument illumination Lever-type emergency steering switch Operating knob rudder order transmitter Pilot light for rudder order circuit power Push switch for rudder order, circuit "L" Pilot light for steering system power supply Type 5G synchro shall be used for rudder order transmitter Type 23TR6A synchros shall be used for all indicators except as indicated Single potentiometer for steering control transmitter
02	Same features as symbol 01 except add: Switch for circuit "LA" power supply IC/B1S4 bell circuit "LA" attention-signal push switch for circuit "LA" acknowledgement signal indicator light for circuit "LA" in parallel with audible signal. A type 5F synchro shall be used for positioning the ring dial of the course steering indicator.
03	Same features as symbol 01 except triple-potentiometer for steering control transmitter.
04	Same features as symbol 01 except double-potentiometer for steering control transmitter.

"

PAGE 15

2.1: Under "NAVY DEPARTMENT" delete "General Specifications for Inspection of Material".

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:08Z
Check the source to verify that this is the current version before use.

PAGES 13 through 15

2.1: Add the following Military standards:

STANDARDS

MILITARY

"MS15571 - Lamp, Incandescent, T-3-1/4, Miniature Bayonet, Single Contact.
"MS15572 - Lamp, Incandescent, G-4-1/4, Miniature Bayonet, Single Contact.
"MS15573 - Lamp, Incandescent, G-3-1/2, Miniature Bayonet, Single Contact."

PAGE 15

2.1: Delete reference to Drawings "S2407-533062", "9000-S6202-73754", and "9-S-4222-L" and under "Drawings, Bureau of Ships," add:

"815-1853053 - Switch, Push.
S6505-1,568,789 - Synchro Hand Electric Control for Steering Gear, General Arrangement for Console Mounting."

PAGE 16

* 3.1: Delete and substitute:

"3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3 and 6.2).

PAGES 16 and 17

3.2.1, column 2: Delete "Shielding and radio frequency noise interference".

PAGE 17

3.2.2.1, line 2: Delete "9000-S6202-73754" and substitute "815-1853053".

PAGE 20

3.3.1.5, line 3: Delete "of each console" and substitute "and right hand side of each console".

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:08Z
Check the source to verify that this is the current version before use.

PAGE 26

3.4.8.6: Delete and substitute:

"3.4.8.6 Instrument pointers shall be of a thermosetting plastic material or acrylic material as specified in 3.4.8.3."

3.4.8.6.1, first and second sentences: Delete.

3.4.8.6.2, line 1: Delete "when used".

3.4.8.7, last sentence: Delete.

3.4.8.8, tabulation: Delete and substitute:

"MS number	Navy type	Volts
15571-1	TB11	6.87
15571-2	TB14	6.87
15573-1	TS53	7.5
15572-1	TS54	6.6"

PAGE 33

3.5.3, line 1: Delete "Type IC/30D02" and substitute "Type IC/30D01".

PAGE 41

3.6.1.2(a): Delete and substitute:

"(a) Steering wheel and steering control transmitter in accordance with Drawing S6501-1,568,789."

3.6.1.3: Delete.

PAGE 42

3.6.1.4.5, line 2: Delete "9000-S6202-73754" and substitute "815-1853053".

PAGE 43

3.6.1.5: Delete and substitute:

"3.6.1.5 Magnesym compass indicator (circuit LM). This instrument shall provide a means for indicating ship's course as determined by the magnetic compass. One repeater will be furnished by the Government or the shipbuilder. The instrument shall be equipped with a means of illumination which is in general accordance with 3.4.8.10."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:08Z
Check the source to verify that this is the current version before use.

3.6.1.5.1: Delete and substitute:

"3.6.1.5.1 Terminal markings. Terminal markings shall be supplied on request to the command or agency concerned for the terminal strips for the magnesym compass system."

3.6.1.6, line 2: After "Government" insert "or the shipbuilder".

3.6.1.8: Delete and substitute:

"3.6.1.8 Helm angle indicator. This instrument shall provide a means of indicating the helm angle as set by the steering control transmitter (item (a) of 3.6.1.2). Illumination shall be provided in accordance with 3.4.8.10. The dial of this indicator shall be 4 inches in diameter in accordance with Specification MIL-I-983. The dial will be supplied blank for engraving by the shipbuilder. The pointer of the instrument shall be white."

PAGE 44

3.6.1.9 and 3.6.1.9.1: Delete and substitute:

"3.6.1.9 Steering control transmitter. This instrument will be furnished by the Government or the shipbuilder for mounting in front of the console. The steering wheel provided with the transmitter will be 12 inches in diameter.

"3.6.1.9.1 Terminal markings. Terminals marked 1LCS, 1LCSS, 1LCS1, 1LCS2 and 1LCS3 shall be provided on the terminal strips of the console for the starboard cable to the steering control transmitter, and terminals marked 2LCS, 2LCS5, 2LCS1, 2LCS2 and 2LCS3 shall be provided for the port cable."

3.6.1.10: Delete.

PAGE 45

3.6.2, lines 3 and 4: Delete "3.6.1.3" and "3.6.1.10".

PAGE 46

3.6.2.2.7, line 2: Delete "9000-S6202-73754" and substitute "815-1853053".

3.6.3, lines 3 and 4: Delete "3.6.1.3" and "3.6.1.10".

PAGE 47

3.6.3.4, line 2: After "Government", insert "or the shipbuilder" and add as fourth sentence "The after ship's course indicator shall be on the left hand side of the instrument panel."

3.6.4, line 1: Delete "Type IC/53D01" and substitute "Type IC/53D03".

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:08Z
Check the source to verify that this is the current version before use.

PAGE 49

3.6.5, line 2: Delete "-Rev. 1." and lines 3 and 4, delete "3.6.1.3" and "3.6.1.10".

PAGE 50

3.6.5.2: Delete and substitute:

"3.6.5.2 Course-to-steer indicator. This indicator and mounting dimension plans will be supplied by the Government or the shipbuiler for mounting in the console. Illumination will be built into the indicator and terminals will be provided for connection to a dimming control system."

Add as paragraph 3.6.6:

"3.6.6 Type IC/54D04. This console shall be identical to the type IC/54D01 console specified in 3.6.5, except that the steering control transmitter shall incorporate a double-potentiometer in lieu of a single-potentiometer."

PAGE 59

3.8.2.7.1.2, line 2: Delete "9000-S6202-73754" and substitute "815-1853053".

PAGE 60

3.9: Delete and substitute:

"3.9 Onboard repair parts. The provisions of Specification MIL-I-983 shall apply. A kit of onboard repair parts shall consist of the following: Test cable assemblies (with plugs) in quantity as necessary, for connecting an instrument to the console when the instrument is removed from the console for servicing. Cables shall be 10 feet in length."

* 4.1: Delete and substitute:

"4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:08Z
Check the source to verify that this is the current version before use.

* 4.1.1: Add new paragraph:

"4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material."

PAGE 61

* 4.2.1: Delete in its entirety.

* 4.2.1.1: Delete in its entirety.

* 4.2.1.2: Delete in its entirety.

PAGES 62 and 63

4.2.3, under group C tests: Delete reference to "Radio frequency noise interference".

PAGE 69

* 6.1: Add the following after (j):

"(k) First article inspection (if required) (see 3.1).

* 6.2: Delete and substitute:

"6.2 First article. When a first article inspection is required, the items should be a first article sample. The first article should consist of two units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:08Z
Check the source to verify that this is the current version before use.

* 6.2.1: Delete in its entirety.

* 6.3: Add the following new paragraph:

"6.3 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue."

LAST PAGE

DD 1426, Standardization Document Improvement Proposal: Delete address and substitute:

"COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362-5101"

Preparing activity:
Navy - SH
(Project 2030-N022)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:08Z
Check the source to verify that this is the current version before use.