MIL-T-17442B(SHIPS)
AMENDMENT - 1
31 May 1968

MILITARY SPECIFICATION

TENSIOMETERS, DIAL INDICATING, HYDRAULIC, REMOTE READING AND MAINTENANCE KIT (MINESWEEPING)

This amendment forms a part of Military Specification MIL-T-17442B(SHIPS), 11 May 1964.

Page 1

2.1, under SPECIFICATIONS, MILITARY: Delete "MIL-D-963 - Drawings, Electrical, Hull and Mechanical Equipment for Naval Shipboard Use."

2.1: Add under SPECIFICATIONS, MILITARY:

"MIL-D-1000 - Drawings Engineering and Associated Lists.
MIL-D-1000/2 - Drawings Engineering and Associated Lists.
MIL-M-9868 - Microfilming of Engineering Documents, 35 MM; Requirements For.
MIL-H-24239 - Hose Assemblies, Hydraulic, Nonmagnetic, For Minesweeping Tensiometers."

Page 4

3 3.3: Delete paragraph in its entirety and substitute:

"3.3.3 Hose assembly. The hose assembly shall be in accordance with MIL-H-24239. It shall be connected to the cylinder and gage by the end fittings. The length of hose shall be as specified in Table V."

3.3.4, line 2: Delete "Modil Arrow" and substitute "Mobil Aero".

FSC 6635

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:10Z
Check the source to verify that this is the current version before use.

Page 6

3.7.1: Delete paragraph in its entirety and substitute·

"3.7.1 Repair parts.

Quantity	Description
1/ 8 each	"O" ring Nos. 23, 27, 39, 41
8 each	"O" ring No. 6 (for gage)
1 each	1/4-inch pipe coupling, 1/4 x 1/8-inch pipe bushing and 1/8-inch pipe nipple 5 inches long.
2 each	Hose coupling, 3/16 inch, with 1/4-inch NPT (opposite end grooved for spring).
2 each	Hose coupling, 1/4 inch, with 1/4-inch NPT (opposite end grooved for spring).
2 each	Spring for 3/16-inch hose.
2 each	Spring for 1/4-inch hose
1/ 4 each	Dust seal (piston), National Seal No. 40059, or equivalent.
1/ 2 each	Vent screw 1/4-20 x 3/8 inch RHMS (brass).
2 each	Vent screw 5/16-18 x 3/8 inch RHMS (brass).
1/ 2 each	Socket set screw, 3/8-16 x 1/2 inch, cone point (CRES).
2 each	Socket set screw, 5/16-18 x 1/2 inch, cut point (CRES)
1/ 8 each	Lock-O-Seal type washer for 1/4-inch vent screw.
8 each	Lock-O-Seal type washer for 5/16-inch vent screw

1/ See figure 5. "

3.7.2, line 1· Delete "Allen type"

Page 7

3.8 2.1, 3.8.2.2 and 3 8.2.3, line 6: Delete "NAVSHIPS NO 250-530."

Page 8

3.9.2, line 7: Delete "Bureau of Ships" and substitute "Naval Ship Engineering Center, Mine Countermeasures Branch "

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:10Z
Check the source to verify that this is the current version before use.

3.10, 3.10.1 and 3.10.2: Delete paragraphs in their entirety and substitute:

"3.10 Drawings. Drawings for the tensiometer and associated equipment are required. The drawings shall be in accordance with category F, form 2 of MIL-D-1000, and type II of MIL-D-1000/2.

3 10.1 Prints for approval. Two sets of preliminary drawings shall be forwarded to the procuring activity for approval.

3.10.2 Final drawings. Two sets of prints shall be furnished, one each to the Naval Ship Engineering Center and to the procuring activity. The prints shall have dark lines and characters in right reading order in accordance with MIL-M-9868 and shall conform to the legibility and reproducibility requirements specified in MIL-D-1000."

4.1: Delete paragraph in its entirety and substitute:

"4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements."

Page 9

4.6.2: Delete paragraph in its entirety and substitute:

"4.6.2 Permeability. The permeability of the tensiometer components, carrying case, repair parts, maintenance equipment (except socket set screw wrenches) and maintenance kit box shall be tested with a permeability indicator conforming to MIL-I-17214 to determine compliance with 3.1.2 The permeability of the hydraulic hose assembly, connecting the cylinder and gage, shall be as specified in MIL-H-24239."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:10Z
Check the source to verify that this is the current version before use.

Figure 5. Delete and substitute attached Figure 5.

Preparing activity:
Navy - SH
(Project 6635-N048)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:10Z
Check the source to verify that this is the current version before use.

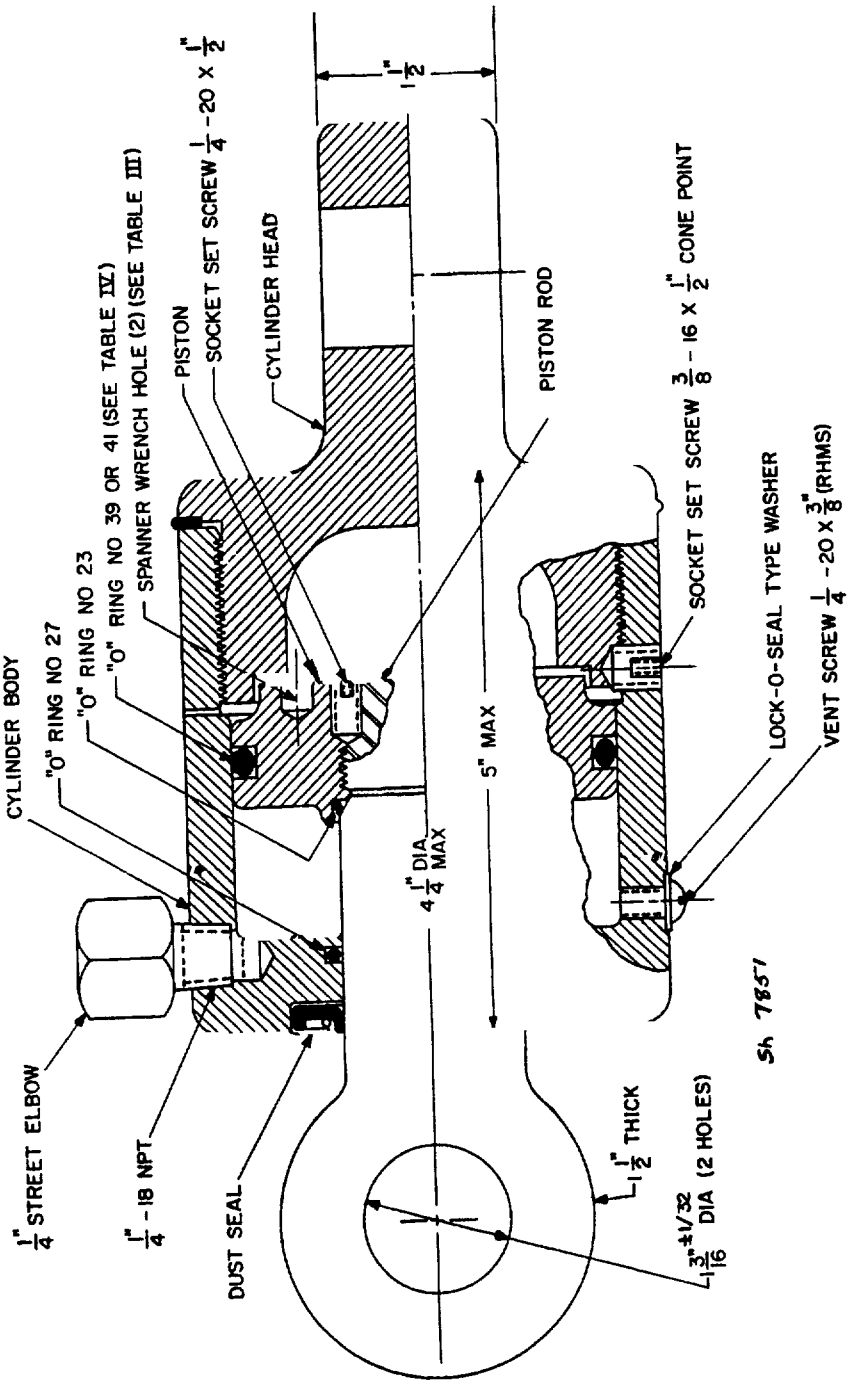


Figure 5 - Cylinder Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:10Z
Check the source to verify that this is the current version before use.