INCH-POUND
MIL-PRF-55182/5L
9 June 1997
SUPERSEDING
MIL-R-55182/5K
20 December 1989

PERFORMANCE SPECIFICATION

RESISTORS, FIXED, FILM, NONESTABLISHED RELIABILITY, ESTABLISHED RELIABILITY, AND SPACE LEVEL, STYLE RNR65

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the associated requirements for style RNR65, nonestablished reliability, established reliability, and space level, film, fixed resistors. 1/

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-55182 - Resistors, Fixed, Film, Nonestablished Reliability, Established Reliability, and Space Level, General Specification for.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Printing Service Detachment Office, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

1/ Third letter is variable, dependent upon lead material or capability.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Communications - Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-LEO-E-EP, Fort Monmouth, NJ 07703-5023 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5905
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:35Z
Check the source to verify that this is the current version before use.

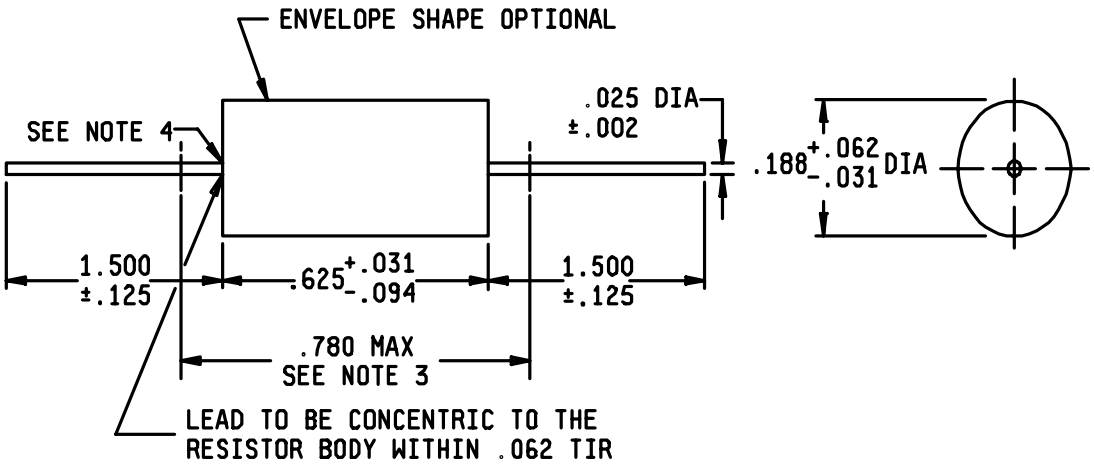

Inches	mm	Inches	mm
.002	0.05	.094	2.39
.016	0.41	.125	3.18
.025	0.64	.188	4.78
.031	0.79	.625	15.88
.062	1.57	.780	19.81
		1.500	38.10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The maximum length is "clean lead" to "clean lead".
4. The end of the body shall be that point at which the body diameter equals the nearest drill size larger than 250 percent of the nominal lead diameter.
5. Lead length for new design and tape and reel packaging shall be 1.00 inch +.625 inch, -.00 inch (25.4 mm +15.80 mm, -0.00 mm).
6. Lead concentric tolerance is to be measured at the point of lead egress from the resistor body.

FIGURE 1. Style RNR65 resistors. 2/

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-PRF-55182, and as specified herein.

3.2 Interface and physical dimensions. Resistors shall meet the interface and physical dimensions specified on figure 1.

3.2.1 Characteristic. Style RNR65 is available in characteristic C, characteristic E, characteristic H, characteristic J, and characteristic K.

3.2.2 Terminal types. Terminal types RNR, RNC, and RNN are available in all characteristics. Terminal RNR is inactive for design with characteristic H, characteristic J, and characteristic K.

3.3 Power rating. The power rating shall be 0.250 watt (see 6.3).

3.4 Voltage rating. The continuous working voltage shall not exceed 300 volts.

2/ Reference footnote 1.

3.5 Resistance. Minimum and maximum resistance values shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:35Z
Check the source to verify that this is the current version before use.

TABLE I. Minimum and maximum resistance values.

Minimum resistance		Maximum resistance	
Characteristic	Ohms	Characteristic	Megohms
H 1/	1.0	H	8.06
J	10.0	J	8.06
K 1/	1.0	K	8.06
C	10.0	C	4.99
E	10.0	E	4.99

1/ For resistance tolerance D and resistance tolerance F only. For resistance tolerance B, the minimum resistance value shall be 10.0 ohms.

3.6 Voltage coefficient (applicable to resistors of 1,000 ohms and above). The voltage coefficient shall not exceed ±0.005 percent per volt.

4. VERIFICATION

4.1 Verification. Verification shall be in accordance with MIL-PRF-55182.

5. PACKAGING

5.1 Packaging requirements. For acquisition purposes, the packaging requirements shall be as specified in the contract or order. When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-55182 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.

b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1).

c. Packaging requirements (see 5.1).

6.3 Power rating at 70°C. The power rating at 70°C for 2,000 hours of life test has been established at 0.5 watt, 350 volts maximum voltage. It should be noted that the failure rate level is established at the condition of 125°C, .250 watt and 10,000-hour duration.

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:35Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AR
Navy - AS, CG, MC, OS
Air Force - 17, 19, 99
DLA - ES

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5905-1458-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:35Z
Check the source to verify that this is the current version before use.