MIL-C-51386A(EA)
13 December 1979
SUPERSEDING
MIL-C-51386(EA)
29 July 1974

MILITARY SPECIFICATION

CASE, DETECTOR UNIT, CHEMICAL AGENT

AUTOMATIC ALARM

This specification is approved for use by US Army Armament Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes requirements for one type of molded plastic case.

1.2 Classification. The molded plastic case shall be furnished in the following forms as specified (see 6.2):

Form	Drawing
Case Top Assembly	D5-15-4530
Case Assembly, Bottom	D5-15-5230
Case Assembly, Bottom	E5-15-8429

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

FSC 6665

: Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn: DRDAR-TSC-S, Aberdeen Proving Ground, MD 21010 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

Fed-Std-123 - Marking for Domestic Shipment (Civil Agencies).

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts.
MIL-STD-252 - Wired Equipment, Classification of Visual and Mechanical Defects for.

DRAWINGS AND TECHNICAL DATA PACKAGE LIST (TDPL)

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

CHEMICAL SYSTEMS LABORATORY

TDPL 5-15-4530 - Case Top Assembly.
TDPL 5-15-5230 - Case Assembly, Bottom.
TDPL 5-15-8429 - Case Assembly, Bottom.
D5-15-4330 - Case Top Subassembly.
D5-15-5293 - Case Subassembly.
E5-15-8429 - Case Assembly, Bottom.

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials and components.

3.1.1 Materials. All materials cited on Drawings TDPL 5-15-4530, TDPL 5-15-8429, and TDPL 5-15-5230 or on the subsidiary drawings shall conform to the specifications listed thereon, or to the specific characteristics set forth on the drawings and in this specification.

3.1.2 Components. All components of the case top assembly or case bottom assembly shall conform to the specifications and drawings listed on Drawings TDPL 5-15-4530, TDPL 5-15-5230, TDPL 5-15-8429 and subsidiary drawings, as applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:05Z
Check the source to verify that this is the current version before use.

3.2 Manufacture and assembly. The case top subassembly or case bottom assembly shall be manufactured and assembled as specified on Drawings D5-15-4530, E5-15-8329 and D5-15-5230, as applicable.

3.3 Weight. When tested as specified in 4.3.3.1, the weight of the case top (Drawing D5-15-4530) shall not exceed 24 ounces (680 grams) and the weight of the case bottom (Drawing D5-15-5230 or E5-15-8429) shall not exceed 26 ounces (737 grams).

3.4 Performance.

3.4.1 Threaded insert torque resistance. The threaded inserts of the case top and case bottom shall not turn or pull-out when subjected to the torques listed in table I when tested as specified in 4.4.4.5.

TABLE I. Threaded insert test torques

Insert thread	Test torque (inch-pounds, ± 5.0%)
2-56	4
4-40	9
6-32	10
6-32 (on case top gasket flange only - 6 places)	5
8-32	15

3.4.2 Air leakage. There shall be no evidence of leakage of the case top and bottom when subjected to an internal air pressure of 50 ± 2 inches (1270 ± 51 mm) of water greater than the ambient pressure and submerged in water to a maximum depth of 1.0 inch below the surface for one minute when tested as specified in 4.4.4.1.

3.4.3 Case heater insulation resistance. The insulation resistance of the integral heater of the case bottom measured between each of the heater circuits, and each heater circuit and the catches and strikes attached to the case bottom, shall be at least 10.0 megohms when tested at a potential of 500 volts direct current (vdc) as specified in 4.3.3.2.

3.4.4 Charring resistance. There shall be no charring, delamination, or other visually discernible deterioration of the case bottom when 24.0 ± 0.5 vdc is applied across both heater circuits for 1.0 ± 0.1 hour at a temperature of -40° ± 5° (-40.0° ± 2.80°C) when tested as specified in 4.3.3.3. The case bottom shall be exposed to the low temperature for a minimum of 15 minutes prior to applying the 24.0 vdc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

3.4.5 Thermal shock and dimensional stability. There shall be no cracking, delamination, discoloration, or other visually discernable deterioration to the case top or case bottom when these subassemblies are subjected to three successive cycles of exposure to temperatures of -65° ± 5° F (-53.9° ± 2.8°C) and 160° ± 5° F (71.1° ± 2.8°C) with each exposure to each temperature being at least 6 hours but less than 16 hours in duration and with the maximum period of time between temperature extremes being 5 minutes. In addition, there shall be no permanent deformation of these subassemblies such that the inside surfaces and dimensions listed in table II of the case top and the case bottom are outside of the drawing limits for these measurements when tested as specified in 4.3.3.4 and 4.4.4.4.

3.4.6 Case top electrical resistance. The case top shall have the resistances specified in table III when tested as specified in 4.4.4.2.

3.4.7 Case bottom heater resistance. The case bottom heater 1A1HR1 shall have a resistance of 67.8 ± 6.8 ohms between terminals 1A1J1 and 1A1J2 when tested as specified in 4.4.4.3. The case bottom heater 1A1HR2 shall have a resistance of 42.6 ± 4.3 ohms between terminals 1A1J3 and 1A1J4 when tested as specified in 4.4.4.3.

3.4.8 Decontamination. The case bottom shall show no cracking when all exposed surfaces are subjected to DS-2 decontaminating agent, conforming to specification MIL-D-50030 for a period of 30 minutes and tested as specified in 4.3.3.5.

3.4.9 Corner impact resistance. No disqualifying structural damage shall result to any of the four corners of the case top, Drawing D5-15-4330, as modified by figure 1, or case bottom Drawing E5-15-8429 or D5-15-5230 from the impact of a 6.0 ± 0.1 pound (2.72 ± 0.05 kilograms) steel weight from a free fall height of 28.0 ± 0.5 inches (71.12 ± 1.27 cm) when tested as specified in 4.3.3.6. Disqualifying structural damage is defined as damage which causes the case top or case bottom to fail the air leakage test, prevent its use with the BA3517 battery assembly or results in cracks, fractures or chipping. Slight surface cracks, fractures, chips or other deformities at the point of impact shall not be considered to be a disqualifying damage.

3.5 Preproduction. Prior to the start of regular production, a preproduction sample of case tops and case bottoms shall be produced in accordance with this specification for examination and test (see 4.3).

3.6 Workmanship. The workmanship of the case tops and case bottoms shall be in accordance with MIL-STD-252.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

TABLE II. Inside surfaces and dimensional checks

Case top subassembly, Drawing D5-15-4330 Sheet 4 of 4 (All dimensions are in inches)
2.05 ± .03 dimension
1.84 ± .03 dimension
0.36 ± .03 dimension
1.61 ± .03 dimension
1.93 ± .03 dimension
1.46 ± .03 dimension
1.74 ± .03 dimension
1.53 ± .02 diameter
0.25 ± .02 dimension
2.25 min typ dimension
0.87 ± .02 dimension
Case top, Drawing E5-15-4334 Sheet 1 of 2
5.280 ± .025 dimension, inside width at flange, surface -B-
6.28 ± .02 dimension, inside length at flange, surface -A-
Case bottom, Drawing D5-15-4344 Sheet 1 of 2 or Drawing D5-15-8429 Sheet 2 of 2
4.975 ± .025 dimension, between ends of heater contacts
Symmetry of ends of heater contact to surface -B- within .020
.188 ± .010 dimension
Symmetry of heater contacts to surface -A- within .020
.47 dimension between centerline of heater contact (2 places)
6.25 - .02 dimension, overall outside length of seal flange
5.31 ± .01 dimension, overall inside length of case at case top
5.25 ± .01 dimension, overall inside length of case at case bottom
Symmetry of inside ends of case at case bottom to surface -B- within .020
3.59 ± .02 dimension, overall inside depth of case
4.25 (+.03 or -.01) dimension, overall inside width of case at case bottom
Symmetry of inside sides of case at case bottom to surface -A- within .020
4.31 ± .01 dimension, overall inside width of case at case top
5.25 - .02 dimension, overall outside width of seal flange

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

TABLE III. Resistance between points

From	To	Resistance (ohms)
A1A1A1P1-A	A1A1E1	Less than 1.0
A1A1A1P1-A	A1J1-D	Less than 1.0
A1A1A1P1-C	A1J1-B	Less than 1.0
A1A1A1P1-D	White meter wire	Less than 1.0
A1A1A1P1-F	A1A1A2-2	Less than 1.0
A1A1A1P1-H	Yellow horn wire	Less than 1.0
A1A1A1P1-K	A1A1A2-1	Less than 1.0
A1A1A1P1-P	A1J1-C	Less than 1.0
A1A1A1P1-P	A1A1E2	Less than 1.0
A1A1A1P1-T	A1J1-A	Less than 1.0
A1A1A1P1-X	White-gray meter wire	Less than 1.0
Violet horn wire	Green horn wire	1000 ± 100
Violet horn wire	White-red horn wire	Less than 10.0 with HORN VOL control fully clockwise.
		1000 ± 100 with HORN VOL control fully counterclockwise
A1A1A1P1-V	Red horn wire	Less than 1.0
A1A1A1P1-V	A1HR1-2	Less than 1.0
A1A1A1P1-V	A1J1-E	Less than 1.0
A1A1A1P1-V	A1J1-B	Infinity

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.

4.1.1 Contractor's responsibility. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.2 Objective evidence. The contractor shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

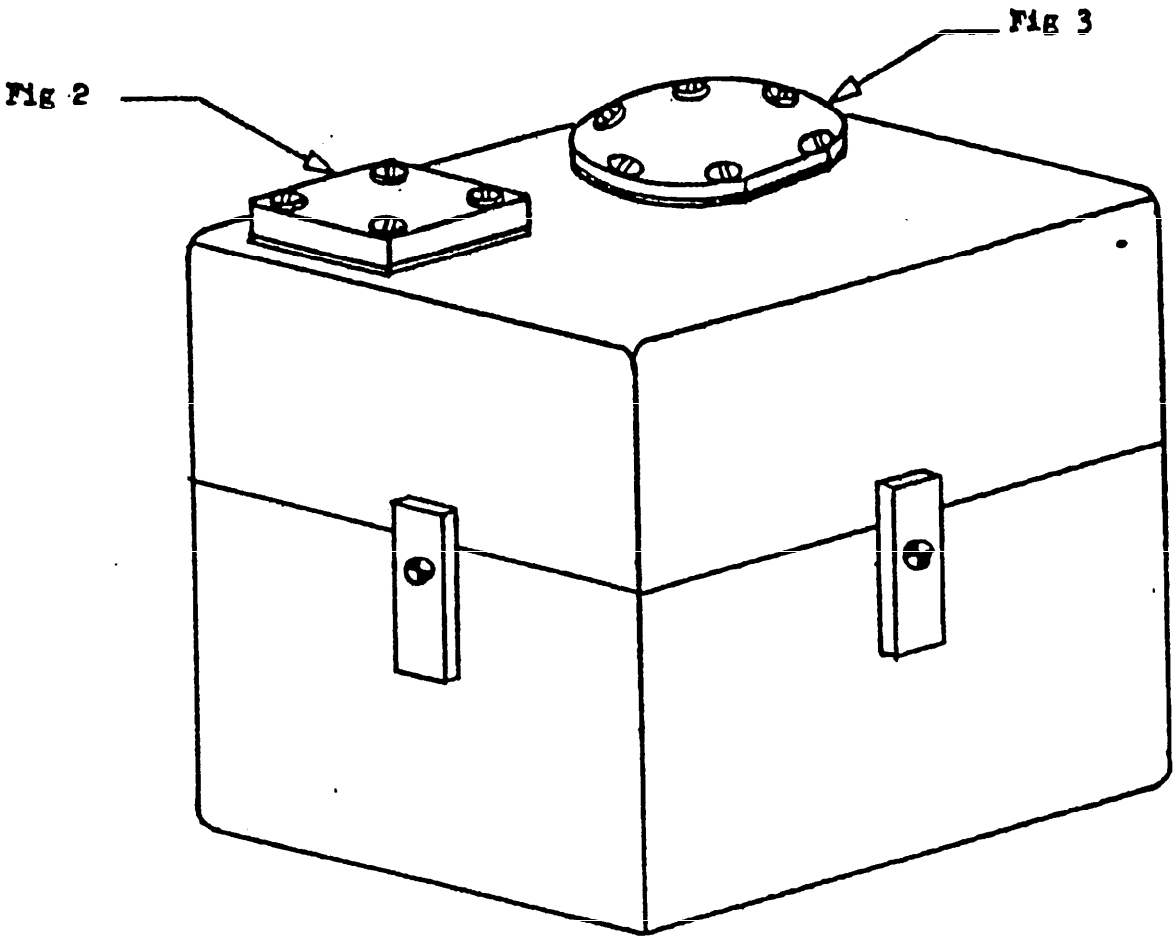


Figure I Corner impact resistance test configuration

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 Preproduction inspection.

4.3.1 Sample. A preproduction sample of six case tops, six case bottoms, or six of each, as specified in the contract, shall be manufactured using the same methods, materials, equipment, and processes as will be used during regular production.

4.3.2 Inspection procedures for examination and test. The preproduction sample of case tops or case bottoms shall be examined in accordance with the classification of defects 4.4.3.3 and shall be tested in accordance with 4.3.3 and 4.4.4 in their entirety.

4.3.3 Tests. Tests shall be conducted as follows:

4.3.3.1 Weight. Determine the weight of the case top or the case bottom with a balance which is accurate to within 0.5 ounce. The weight of the case top or the case bottom shall not exceed that specified in 3.3.

4.3.3.2 Case heater insulation resistance. Determine the insulation resistance between 1A1J1 and 1A1J3, 1A1J1 and all of the catches and strikes (Drawing C5-15-4341-1 and C5-15-4478-3), and 1A1J3 and all of the catches and strikes in accordance with MIL-STD-202, method 302, test condition B. The insulation resistance shall be as required by 3.4.3.

4.3.3.3 Charring resistance. Connect 1A1J1 to 1A1J3, and 1A1J2 to 1A1J4. Connect a pair of leads to 1A1J1 and 1A1J2; the free ends of this pair of leads will later be connected to a power source. Place the case bottom open side up, in a temperature test chamber already at the temperature required by 3.4.4. Permit the case to soak at least 15 minutes, and then invert the case bottom. Using the pair of leads connected earlier, apply the specified voltage across the heaters for the required period of time. Permit the case bottom to return to room temperature, and examine the case bottom for compliance to the requirements of 3.4.4.

4.3.3.4 Thermal shock and dimensional stability. Inspect the case top and case bottom, visually and dimensionally for the dimensions listed in table II, to establish the pre-test condition. The case top and case bottom may now be assembled together to simplify handling during the test. Place the case top and case bottom into a temperature test chamber already

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

at the lower of the temperatures required by 3.4.5. Maintain this temperature for the period of time required by 3.4.5. Then, transfer the case top and case bottom to another temperature test chamber already at the higher of the temperatures required by 3.4.5. This transfer must be completed within the specified period of time after opening the door of the temperature chamber. Maintain this temperature for the period of time required by 3.4.5. Continue this procedure until the case top and case bottom have been subjected to a total of three exposures to both the lower and the higher temperature. Permit the case top and the case bottom to return to a temperature of 75° ± 15°F (23.9 ± 8.3°C). Inspect the case top and case bottom, visually and dimensionally, and evaluate findings against the requirements of 3.4.5.

4.3.3.5 Decontamination. Assemble case top to case bottom and brush DS-2 on all exposed surfaces of case bottom. After 30 minutes remove case top and wash DS-2 from case bottom. Examine case bottom for compliance with 3.4.8.

4.3.3.6 Corner impact resistance. Assemble case as shown in figure 1 and remove strike, catch, Drawing E5-15-8429 item 13 and instruction plate, item 22 or same items from Dwg D5-15-5230. Place test fixture Drawing E136-13-930 on concrete floor or steel plate at least 0.5 inch thick. Place assembly in test fixture so that clamping catches do not rest against the surface of the test fixture. Perform the impact test requirements of 3.4.9 in any convenient order on all four corners of the case top and bottom using a 6.0 ± 0.1 pound carbon steel cylinder of 2.5 ± 0.1 inches diameter held in place by a suitable holding fixture with an electromagnetic release mechanism. The holding fixture shall be positioned so as to assure that the center of the flat surface of the steel cylinder and the case corner shall be aligned within 1/2 inch. The impact surface of the steel cylinder shall have a finish of RMS125, which shall be maintained throughout all impact testing. Any catches opening during the test shall be refastened before the next test. Any damaged strikes or catches may be repaired or replaced prior to performing the leakage test for compliance with 3.4.9.

4.3.4 Acceptance/rejection criteria. The case top and case bottom shall comply with the examination and tests specified in 4.3.2 to be acceptable. The contractor shall obtain written approval from the contracting officer prior to proceeding with regular production.

4.4 Quality conformance inspection.

4.4.1 Lotting. A lot shall consist of the case tops or case bottoms offered for acceptance at one time which have been produced by one manufacturer, at one plant, from the same materials, under essentially the same manufacturing conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

4.4.2 Sampling.

4.4.2.1 For examination. Sampling of case tops or case bottoms shall be conducted in accordance with MIL-STD-105.

4.4.2.2 For test. Sampling of case tops or case bottoms shall be conducted in accordance with table IV.

4.4.3 Inspection procedures.

4.4.3.1 For examination and tests. Sample case tops and case bottoms shall be examined and tested in accordance with the classification of defects (4.4.3.3), MIL-STD-105 and table IV.

4.4.3.2 For air leakage test. Each case top and case bottom shall be tested for air leakage in accordance with 4.4.4.1. Any item found defective shall be rejected.

4.4.3.3 Classification of defects.

(a) Case top assembly (Drawing D5-15-4530) and case bottom assembly (Drawing D5-15-5230).

Categories		Defects
Critical:		None defined
Major:	AQL 4.0 percent defective	
101		Case top, workmanship (applicable defects listed as major in MIL-STD-252, see 3.6)
102		Case bottom, workmanship (applicable defects listed as major in MIL-STD-252, see 3.6)
Minor:	AQL 4.0 percent defective	
201		Case top, workmanship (applicable defects listed as minor in MIL-STD-252, see 3.6)
202		Case bottom, workmanship (applicable defects listed as minor in MIL-STD-252, see 3.6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

TABLE IV. Inspection procedures

INSPECTION UNIT	REQUIREMENT	SAMPLE SIZE	AQL % DEFECTIVE	TEST PARAGRAPH
Case top	Case top electrical resistance 3.4.6	MIL-STD-105	1.0%	4.4.4.2
	Threaded insert torque resistance 3.4.1	MIL-STD-105 inspection level S-4	10.0%	4.4.4.5
*	Thermal shock & dimensional stability 3.4.5	MIL-STD-105 inspection level I	1.5%	4.4.4.4
Case bottom	Case bottom heater resistance 3.4.7	MIL-STD-105	10.0%	4.4.4.3
	Threaded insert torque resistance 3.4.1	MIL-STD-105 inspection level S-4	10.0%	4.4.4.5
*	Thermal shock & dimensional stability 3.4.5	MIL-STD-105 inspection level I	1.5%	4.4.4.4

*May be thermally shocked either separately or as an assembly.

4.4.4 Tests. Tests shall be conducted as follows:

4.4.4.1 Air leakage. Install the plate gaskets, plates, and stoppers described on figures 2 through 4 onto the case top as shown in figure 5. Install the case top (Dwg D5-15-4330) or the case bottom to be tested onto the leak test fixture shown in figure 6. Connect the leak test fixture to a suitable magnehelic gage which is in turn connected to a regulated pneumatic source. The magnehelic gage shall have an accuracy of at least 2.0 percent full scale. Increase the air pressure in the case top or case bottom being tested until the required pressure is indicated on the magnehelic gage. Immerse the item being tested in a tank of water to the specified depth for the required period of time. The water should contain a suitable wetting agent (e.g. 1 gram of Aerosol OT per 500 milliliters of water). Examine the case top or case bottom for evidence of leakage through the surfaces, threaded inserts, or mounted hardware as required by 3.4.2. A leak is defined as a bubble making or breaking from the surface of the case top or case bottom being tested. The leakage shall not exceed that permitted by 3.4.2 for the item being tested. The test air shall be filtered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

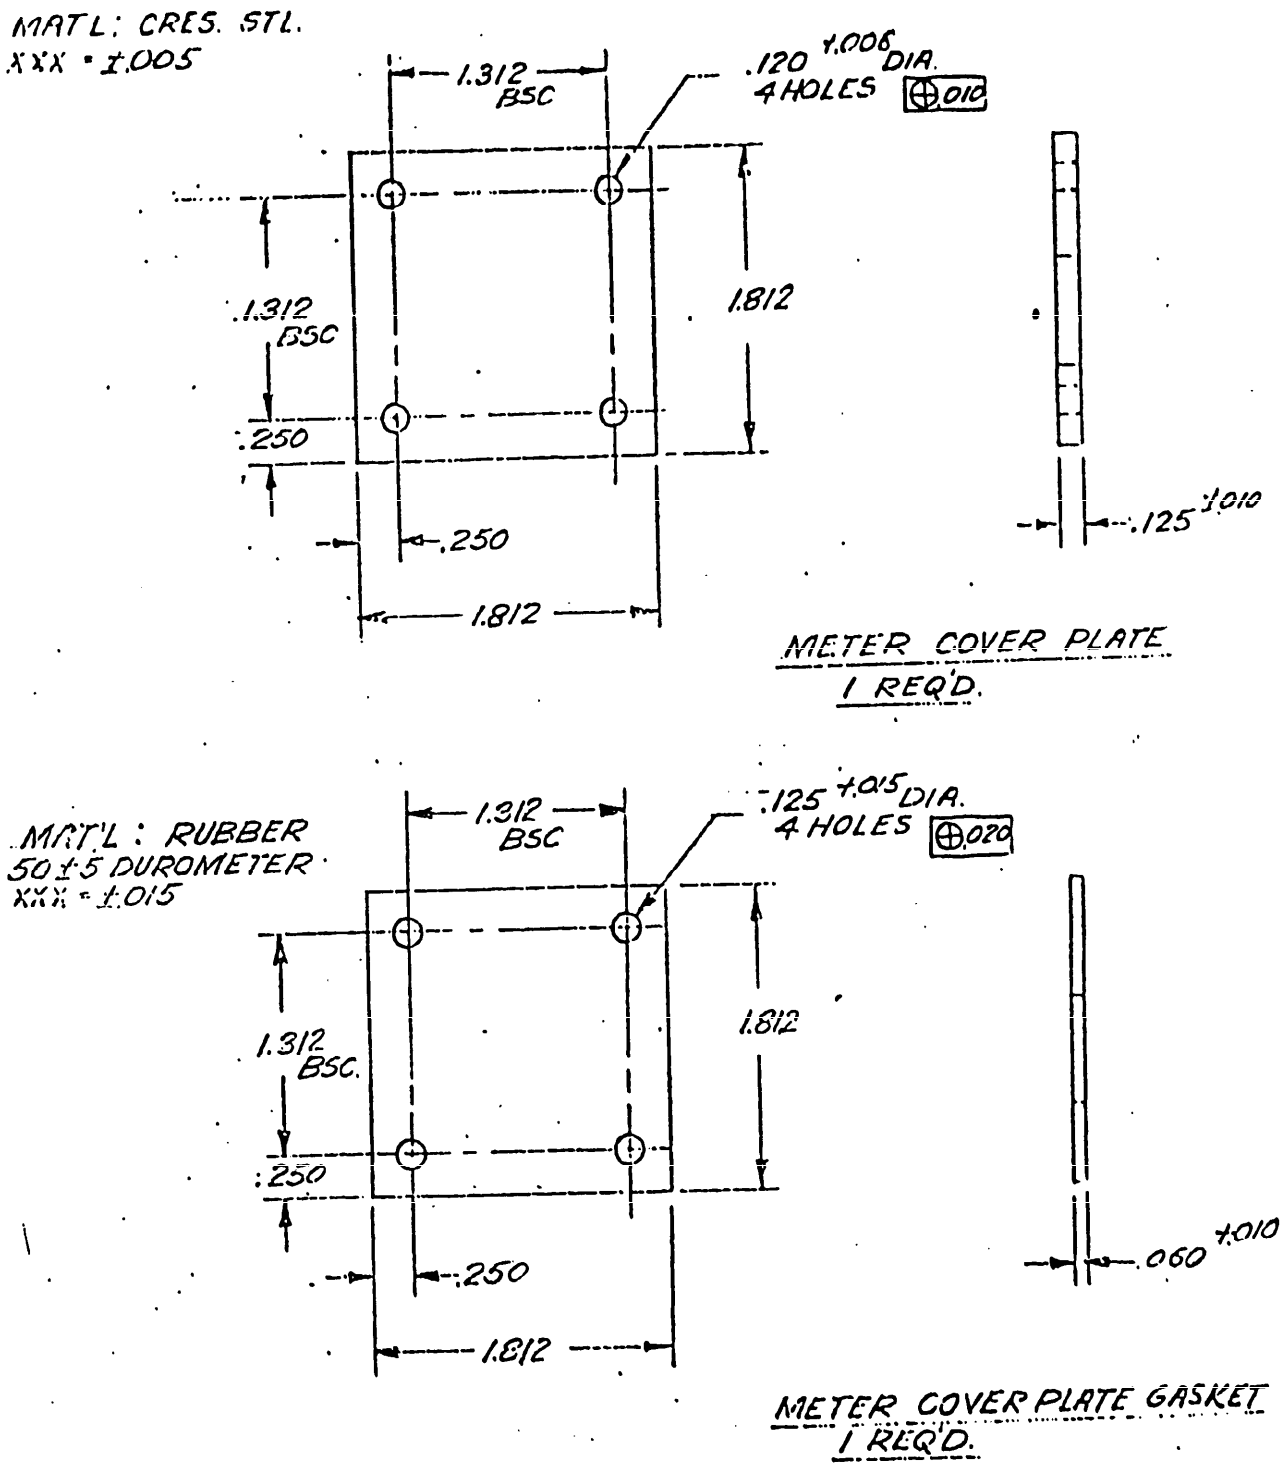


Figure 2. Case top leakage test meter hole plate and gasket

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.



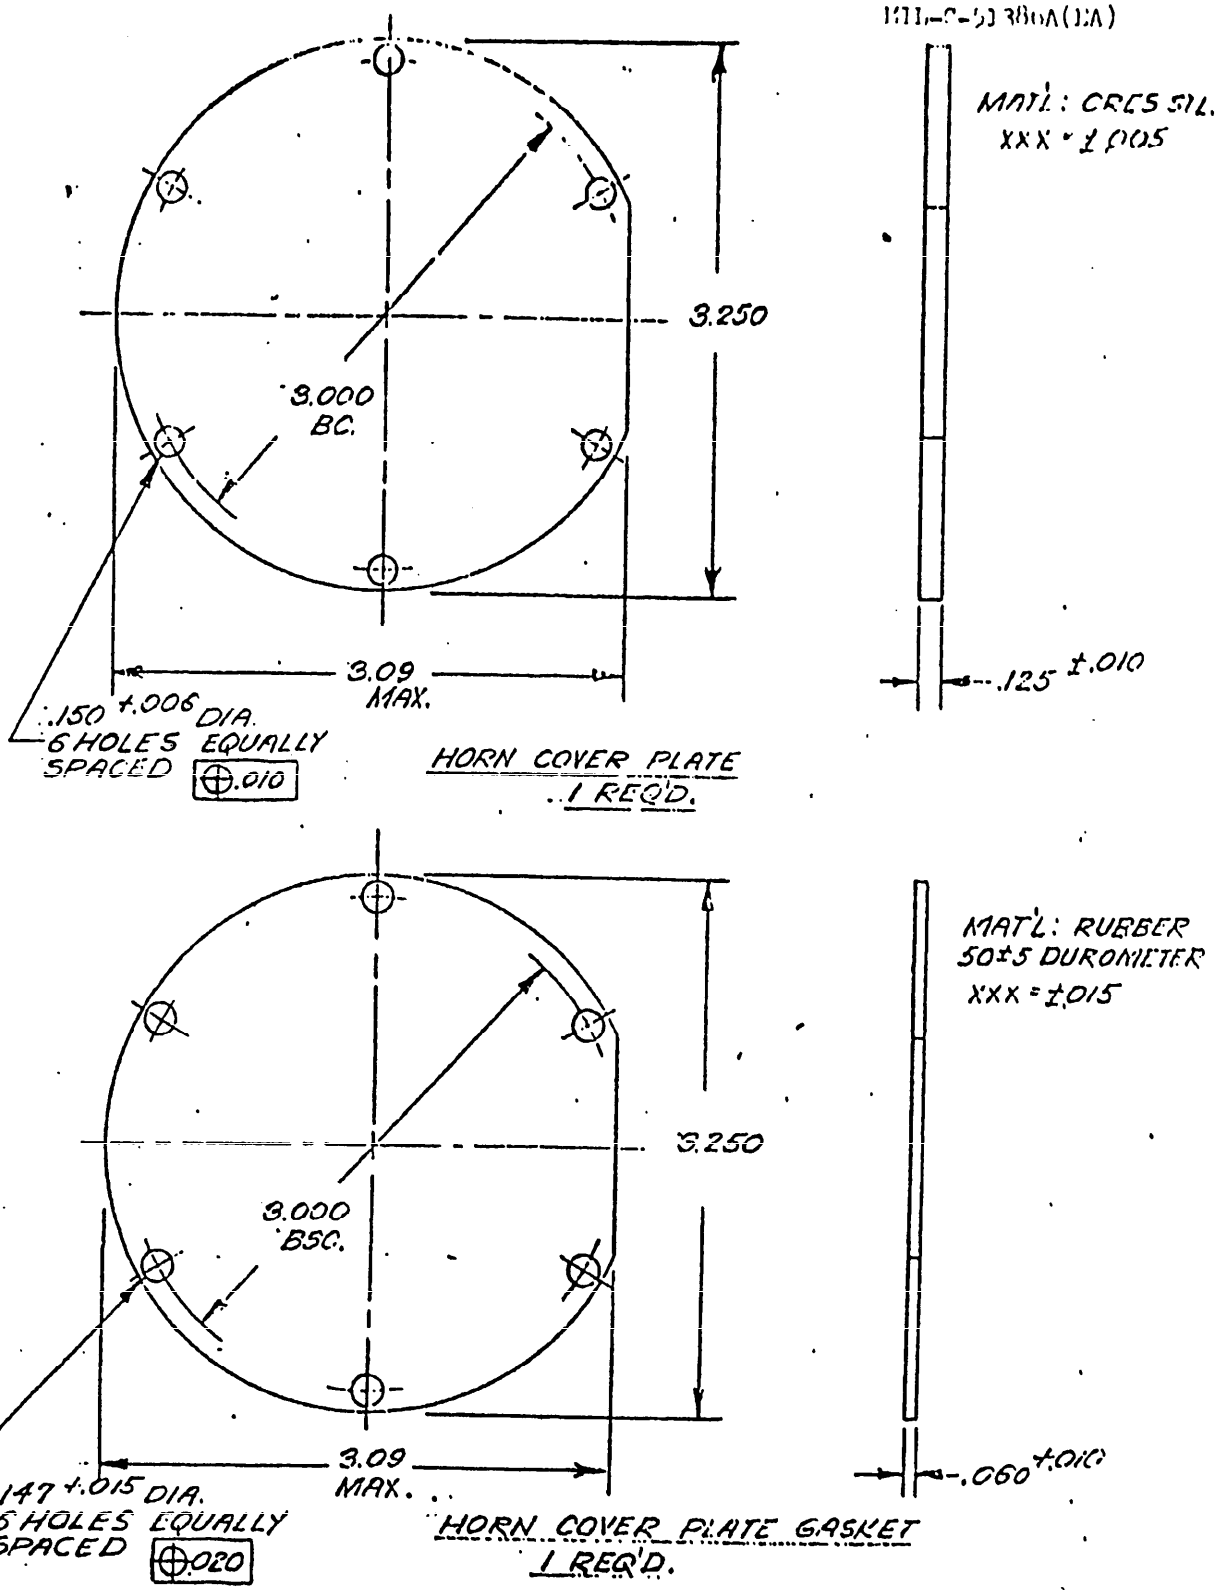


Figure 3. Case top leakage test horn hole plate and gasket

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

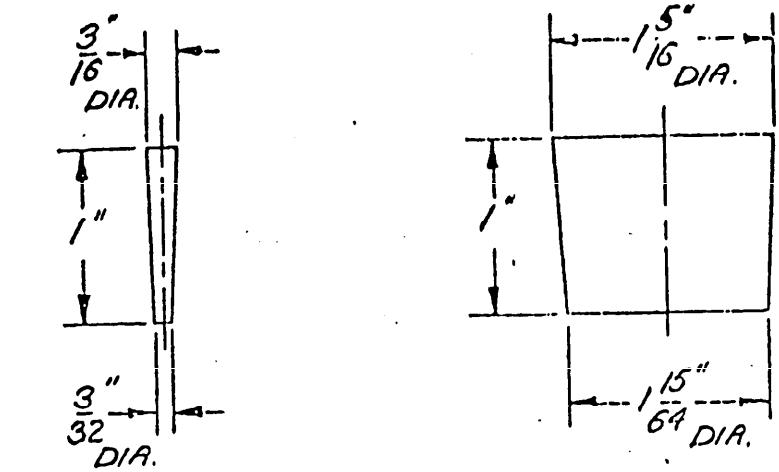

MATL:
GENERAL ELECTRIC CO.
RTV 634 SILICONE FLEXIBLE
MOLD COMPOUND.

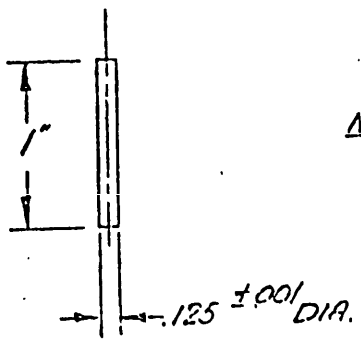

MAT'L:
CRES.

Figure 4. Case top leakage test stoppers

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.


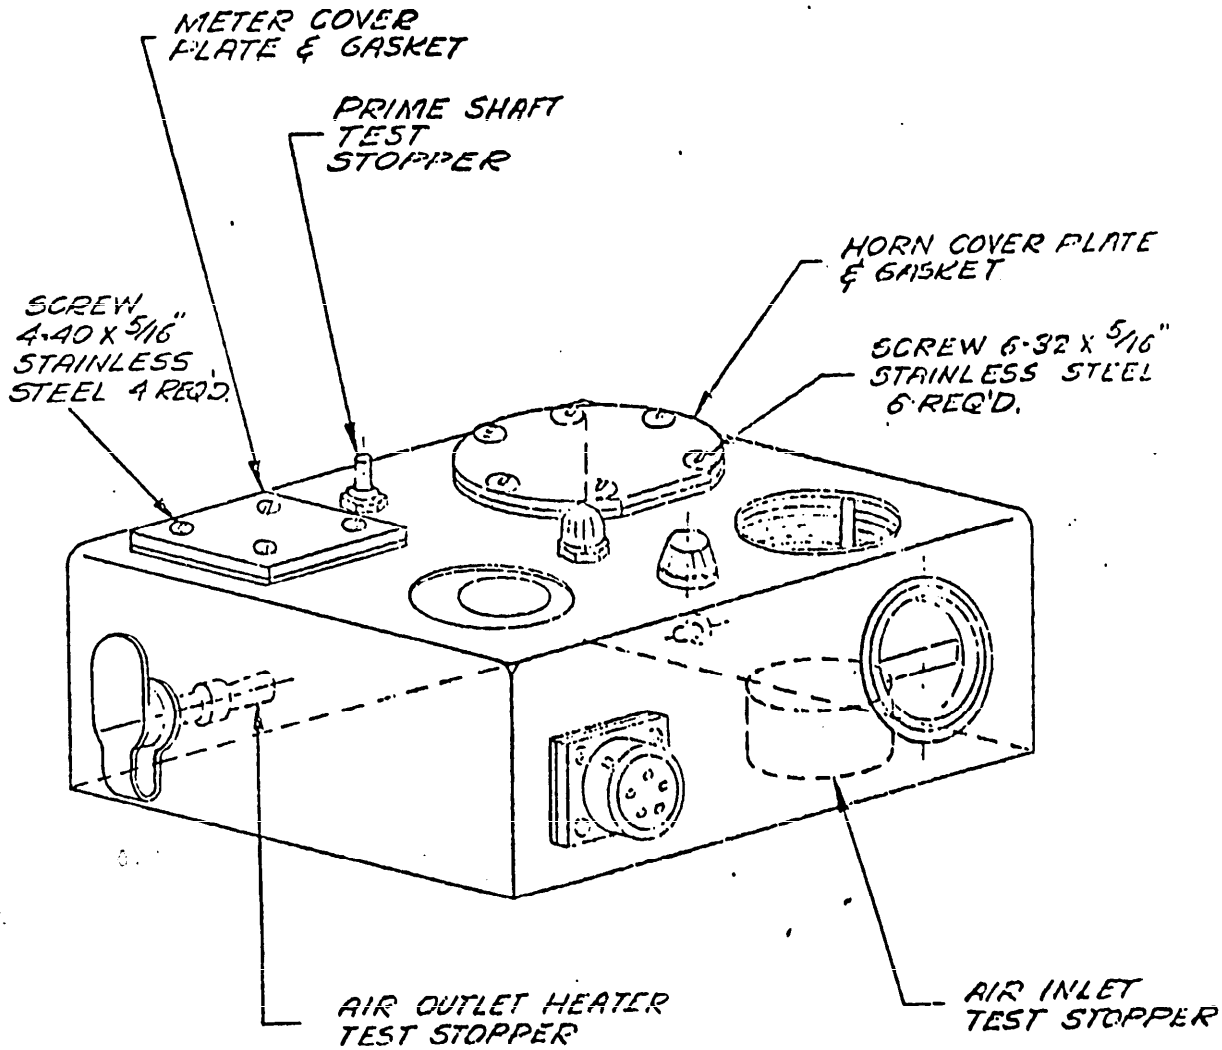


Figure 5. Case top prepared for case top leakage test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

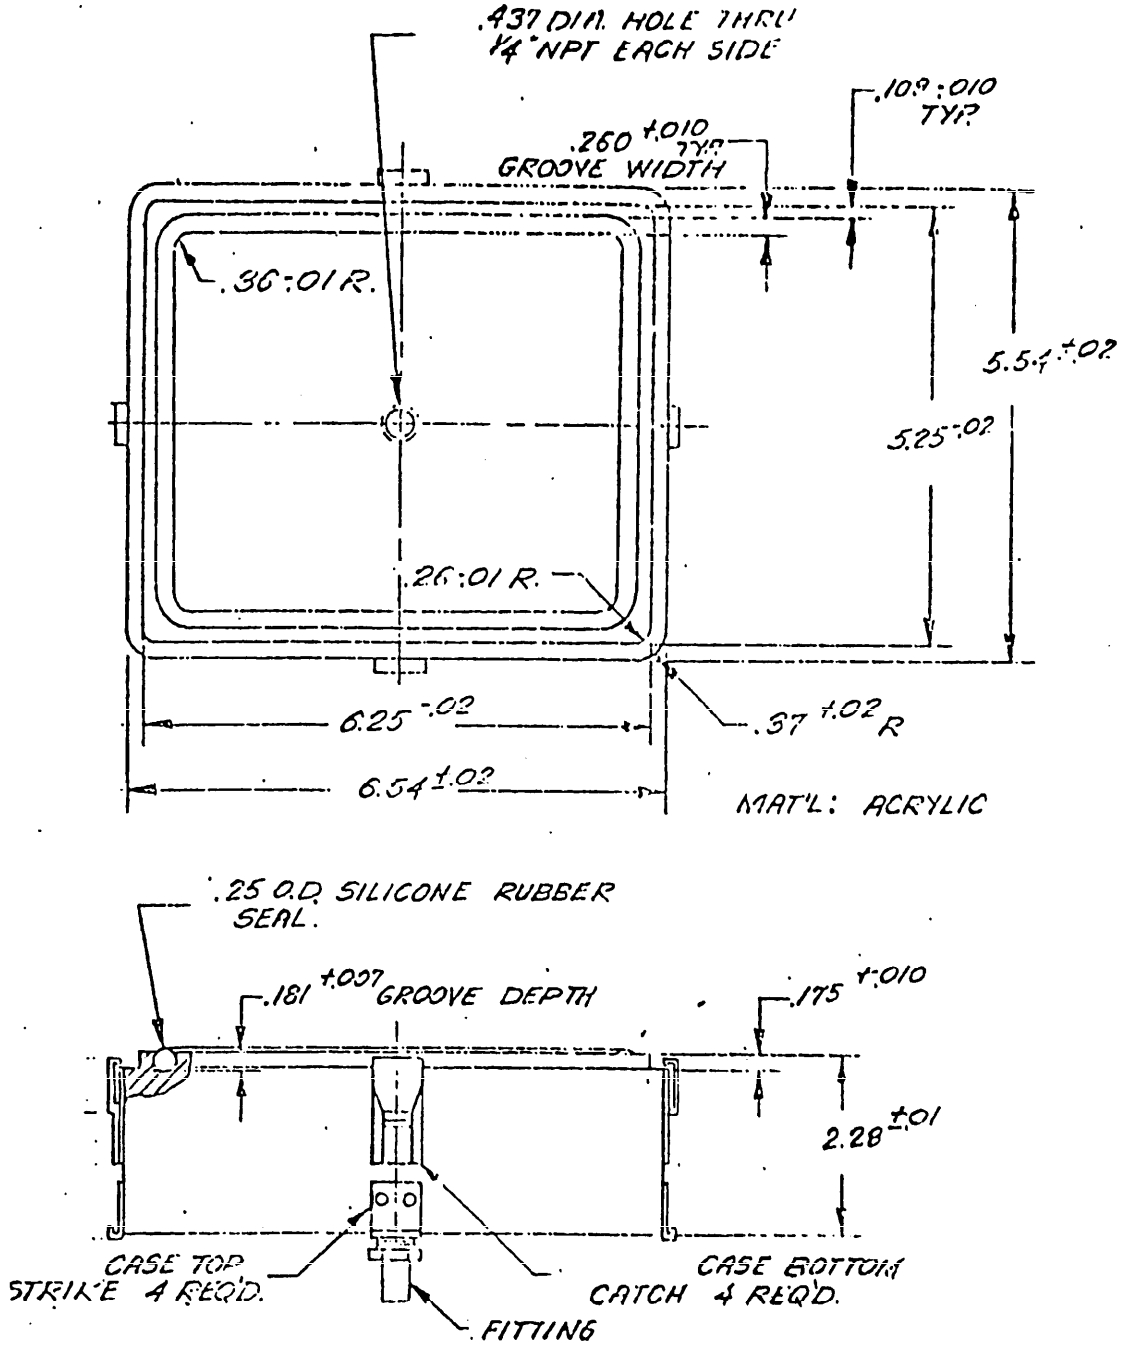

LEAK CHECK FIXTURE
1 REQ'D

Figure 6. Air leakage test fixture

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

4.4.4.2 Case top electrical resistance. Connect an ohmmeter having an accuracy of ± 2° of arc on the R X 1 scale, 1.5° of arc on the R X 100 and R X 10K scale, successively to each pair of test points listed in table III. The resistance measured at each pair of test points shall be as required by 3.4.6.

4.4.4.3 Case bottom heater resistance. Connect an ohmmeter having an accuracy of at least ± 2° of arc on the R X 1 scale, 1.5° of arc on the R X 100 and R X 10K scale, successively to each pair of terminals specified in 3.4.7. The resistance measured at each pair of terminals shall be as specified in 3.4.7.

4.4.4.4 Thermal shock and dimensional stability. Inspect the case top, visually and dimensionally for 1.46 ± 0.03 and 0.36 ± 0.03 dimensions only, to establish the pre-test condition. Inspect case bottom, visually and dimensionally for 5.31 ± .01, 5.25 ± .01, 4.25 + .03 -.01, 4.31 ± .01 and 3.59 ± .02 dimensions only, to establish the pretest condition. Place the assembled case top and bottom into a temperature test chamber already at -65° ± 5° F (-53.9° ± 2.8°C). Maintain this temperature for the period of time required by 3.4.5, then transfer the case top and bottom to another temperature test chamber already at the higher of the temperature required by 3.4.5. This transfer must be completed within the specified time required by 3.4.5. Continue this procedure until the case top and bottom has been subjected to a total of three exposures to both the lower and the higher temperature. Permit the case top and bottom to return to a temperature of 75° ± 15° F (23.9 ± 8.3°C). Inspect the case top and bottom visually and dimensionally, as above, and evaluate findings against the requirements of 3.4.5.

4.4.4.5 Threaded insert torque resistance. Place two flat steel washers, or more if necessary to adjust the length of thread engagement, onto a steel screw of the proper thread size. The holes in these washers must be large enough to permit the insert being tested to pass through the holes. Turn the screw into the insert under test until the washers are just clamped between the screw head and the case. At this point the length of threaded engagement between the screw and the insert must be between 1.5 and 2.0 times the diameter of the screw and the washers must be so positioned that the insert would enter the holes in the washers should the insert be pulled from the case during the test. Apply the torque required by 3.4.1. Remove the screw and examine the insert to determine whether or not the requirements of 3.4.1 have been satisfied.

5. PACKAGING

5.1 Unit packing, packing and marking, interplant shipment (see 6.3). The case tops and case bottoms shall be unit packed and packed to provide adequate protection from physical damage from the supply source to the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

first receiving activity for immediate use or further processing. Shipping containers shall be in compliance with the rules and regulations applicable to the mode of transportation. Marking shall be in conformance with Fed-Std-123 and shall include the contractors name, address and contract number.

5.4 Repair parts. When these items are being procured for storage and issue as repair parts, preservation, unit packing, packing and marking shall be as specified on the packaging data sheets which are identified by the National Stock Numbers for these items.

6. NOTES

6.1 Intended use. The case top and the case bottom together are the case of the detector unit, ABCA-M43.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Form of case required (see 1.2).
(c) Preproduction.

(1) Time allowed for contractor submission of samples for Government test and evaluation after award of contract.
(2) Name and address of test facility and shipping instructions when testing is performed by the Government.
(3) Time required for the Government to notify the contractor whether or not to proceed with production.

6.3 Interplant shipment. Packaging and packing for interplant shipment is for supplies and material that do not enter the military supply system. Typical interplant shipments are shipments from a vendor to a contractor, or from a contractor to a military arsenal or plant.

6.4 International interest. Certain provisions of this specification are the subject of international standardization agreement QSTAG 251. When amendment, revision, or cancellation of this specification is proposed which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconciliation action through international standardization channels including departmental standardizatic officer, if required.

Custodian:

Army - EA

Preparing activity:

Army - EA

Project No. 6665-A406

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-C-51386A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:05Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Armament Research & Development Command
ATTN: DRDAR-TSC-S
Aberdeen Proving Ground, MD 21010

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.